RESPONSIBILITY SCHEDULE

	DIVISION & SCOPE	FURNISHED BY	INSTALLED BY	COMMENTS
01000 GENERAL				
	PLANS AND SPECIFICATIONS	OWNER	GC	
	SHOP DRAWINGS	GC	GC	
	PERMITS & FEES	OWNER	GC	
	OBTAIN ALL APPLICABLE PERMITS AND CERTIFICATE OF OCCUPANCY	GC	GC	APPLIED FOR BY OWNER/ARCH
	SCHEDULE & OBTAIN APPROVED INSPECTIONS	GC	GC	
	DEMOLITION & DISPOSAL OF MATERIAL	GC	GC	
	ASBESTOS ABATEMENT & DISPOSAL OF MATERIAL	3RD PARTY	3RD PARTY	IF REQUIRED
	ALL HAZARDOUS MATERIALS REPORTS	3RD PARTY	3RD PARTY	IF REQUIRED
	DEMOLITION – SITE/BUILDING	GC	GC	
	INTERIOR TENANT BUILD-OUT	GC	GC	
	DEMOLITION – INTERIOR	GC	GC	
	UTILITY FEES (E NEW CONSTRUCTION)	OWNER	MUNICIPALITY	
	UTILITY SERVICE(S) AND METER(S)	OWNER	MUNICIPALITY	
	ROOF (REPAIR)	GC	GC	
	STRUCTURE	GC	GC	REQUIRED IF SHOWN ON PLANS
	EXTERIOR WALLS/REPAIRS	GC	GC	REQUIRED IF SHOWN ON PLANS
	TELEPHONE SERVICE TO BUILDING	LANDLORD	LANDLORD	
	PLUMBING MAIN SERVICE	LANDLORD	LANDLORD	
	SPRINKLER MAINS	LANDLORD	LANDLORD	
	FIRE ALARM PANEL	LANDLORD/GC	GC &/OR LANDLORD	
	CLEAN AIR SPECIFICATIONS	GC	GC	
	CLEANING (INTERIOR)	GC	GC	
	FIRE STOPPING	GC	GC	
	LABELING OF NEW & EXISTING FIRE RATED WALLS	GC	GC	
02000 SITE WORK				
	REQUIRED SITE WORK	GC	GC	
	SITE ACCESSIBILITY	GC	GC	
	SIDEWALK	GC	GC	
	PARKING LOT PAVING AND STRIPING	GC	GC	
03000 CONCRETE				
	CONCRETE SLAB	GC	GC	REQUIRED IF SHOWN ON PLANS
	SLAB - LEAVING BACK 15 FEET OF UNPOURED FOR GC TO PERFORM. IF THERE IS A SLAB LEAVE OUT.	SHELL LL	GC	
	CORE & SHELL	GC	GC	REQUIRED IF SHOWN ON PLANS
	TRENCHING FOR CONDUIT	GC	GC	
04000 MASONRY (IF REQUIRED)				
	CLOSE-UP OPENING & NEW OPENING	GC	GC	REQUIRED IF SHOWN ON PLANS
	DEMISING WALL / GYP	GC	GC	
	GYPSUM BOARD CURTAIN WALL(S), CEILING(S), SOFFIT(S), ACCESS PANELS	GC	GC	
	ALL ADDITIONAL PARTITIONS	GC	GC	
05000 METAL				
	METAL STUDS	GC	GC	
	DEMISING WALL STUDS	GC	GC	
	DEMISING WALL SECURITY MESH	GC	GC	REQUIRED IF SHOWN ON PLANS
	ALL ADDITIONAL PARTITIONS	GC	GC	
06000 WOODS AND PLASTICS				
	MILLWORK/FIXTURES	OWNER	OWNER VENDOR	FIXTURE TRUCK TO BE UNLOADED BY NFI
	ACRYLIC CUBES	OWNER	GC	
	MISC. WOOD BLOCKING, FURRING, ETC.	GC	GC	
	KITCHENETTE, SINK AND FAUCET	OWNER	GC	PROVIDED BY THE MILLWORKER
07000 THERMAL & MOISTURE PROTECTION				
	INSULATION & WATERPROOFING	GC	GC	
08000 DOORS AND HARDWARE				
	METAL DOORS & FRAMES	GC	GC	
	WOOD DOORS, FRAMES, & WOOD TRIM	GC	GC	
	EXIT DOOR (AS REQ'D)	GC	GC	
	TRIDENT EXIT DOOR LOCK	OWNER	OWNER	TO BE DONE BY OWNER VENDOR
	TRILOGY LOCK ON BOH PARTITION	GC	GC	
	INVENTORY ROOM CAGE AND DOOR/HDW	OWNER	GC	
	POLICE LOCK AND LEVER SET ON INVENTORY ROOM DOOR	OWNER	OWNER	
	SALES AREA TO BOH PARTITION AND DOOR/HDW	GC	GC	
	FINISH HARDWARE	GC	GC	
	PANIC HARDWARE	GC	GC	
	PERMANENT REMOVABLE CORES	GC	GC	
	WEATHER STRIPPING	GC	GC	
	180 DEGREE VIEWER	GC	GC	
08400 STOREFRONT				
	STOREFRONT GLASS, FRAMING, & DOORS	GC	GC	REQUIRED IF SHOWN ON PLANS
	STOREFRONT SIGNAGE	OWNER	TDI SIGNS	
	EXTERIOR SIGNAGE BLOCKING	GC	GC	
	WINDOW FILM	OWNER	TDI SIGNS	
	VESTIBULE GLASS, FRAMING, & DOORS (IF NEEDED)	GC	GC	
09000 FINISHES				
	SOFFITS	GC	GC	
	CEILING (ACOUSTIC TILE AND GRID)	GC	GC	
	GYP. BOARD WALLS & CEILING	GC	GC	
	PAINTING	GC	GC	
	RUBBER FLOOR BASE	GC	GC	
	VINYL FLOOR BASE	GC	GC	
	FLOOR PREPARATION	GC	GC	INSPECTED AFTER DEMOLITION OF EXISTING FLOORING

	DIVISION & SCOPE	FURNISHED BY	INSTALLED BY	COMMENTS
	WALK OFF MATS (IF NEEDED)	OWNER	GC	
	LUXURY VINYL TILE (LVT) IN SALES AREA	GC	GC	
	LUXURY VINYL TILE (LVT) IN HALLWAY	GC	GC	
	LUXURY VINYL TILE (LVT) IN RESTROOMS	GC	GC	
	ADHESIVE/ SETTING MATERIALS	GC	GC	
	TRANSITIONS/TRIM	GC	GC	
	FRP IN RESTROOMS AND MOP SINK AREA	GC	GC	
10000 SPECIALTIES				
	TOILET FIXTURES AND ACCESSORIES	GC	GC	
	TELEPHONE SYSTEMS	OWNER	OWNER	
	TELEPHONE CONDUIT	GC	GC	
	TELEPHONE BOARD	GC	GC	
12000 FURNISHINGS				
	TV'S	OWNER	GC	
	COUNTERS	OWNER	OWNER	
	BOH CABINET	OWNER	GC	
	OFFICE FURNITURE	OWNER	OWNER	
	SALES FLOOR FURNITURE	OWNER	OWNER	
	KIOSKS	OWNER	GC	
	RUGS	OWNER	OWNER	
	MILLWORK/FIXTURES	OWNER	OWNER VENDOR	
	BOH FURNITURE (TABLE AND CHAIRS)	OWNER	OWNER	
	REFRIGIRATOR	OWNER	GC	
	MICROWAVE	OWNER	GC	
	LOCKERS	OWNER	GC	
	SHELVES (BOH)	OWNER	GC	
	SHELVES (MOP SINK)	GC	GC	TO BE SOURCED LOCALLY
	MOP HOLDER	GC	GC	TO BE SOURCED LOCALLY
	TRASH CAN (RESTROOM)	GC	GC	
15000 MECHANICAL / PLUMBING				
	SPRINKLER SYSTEM/ MODIFICATIONS	GC	GC	
	SMOKE DETECTORS	GC	GC	
	FIRE EXTINGUISHERS	GC	GC	
	SHOP DRAWINGS	GC	GC	
	WATER METER	LANDLORD	LANDLORD	
	WATER SERVICE TO TENANT	LANDLORD	LANDLORD	
	ROUGH IN FOR EQUIPMENT	GC	GC	
	PLUMBING FIXTURES & FINAL CONNECTION	GC	GC	
	HVAC DUCTWORK & DIFFUSERS	GC	GC	
	HVAC	GC	GC	
	THERMOSTATS	OWNER	GC	
	WATER FILTRATION SYSTEM	GC	GC	
	WATER HEATER	GC	GC	
	HVAC SYSTEM - DISTRIBUTION	GC	GC	
	HVAC SYSTEM - UNIT/T-STAT	OWNER	GC	
	PLUMBING (BRANCH LINES NEW AND\OR MODIFICATIONS)	GC	GC	
	SPRINKLER BRANCH LINES AND HEADS	GC	GC	
16000 ELECTRICAL				
	ELECTRICAL DISTRIBUTION PANELS	GC	GC	REQUIRED IF SHOWN ON PLANS
	DISCONNECT SWITCHES	GC	GC	REQUIRED IF SHOWN ON PLANS
	STEP DOWN TRANSFORMERS	GC	GC	REQUIRED IF SHOWN ON PLANS
	METER	MUNICIPALITY	MUNICIPALITY	ORDER BY OWNER/COORDINATED BY GC
	BALANCED PANEL SCHEDULES	GC	GC	
	WIRING & CONDUIT	GC	GC	
	LIGHTING (CS ILLUMINATION)	OWNER	GC	
	2' X 2' FLOURESCENT LIGHTING	OWNER	GC	
	DECORATIVE LIGHTING	OWNER	GC	
	RECESSED LIGHTING	OWNER	GC	
	EXIT SIGNS	OWNER	GC	
	EMERGENCY LIGHTING	OWNER	GC	
	LED LIGHTS INSIDE FLOOR DISPLAY TABLES	OWNER	GC	
	LED LIGHTS INSIDE SLAT WALL AND LOGO WALL	OWNER	GC	
	ELECTRICAL STUB INS, WHIPS, RECEPTACLES AND COVERS	GC	GC	
	RECEPTACLES	GC	GC	
	P.O.S	OWNER	OWNER	
	ALL ELECTRICAL (WIRING AND OUTLETS)	GC	GC	
	FIRE ALARM DEVICES/CONNECTION TO PANEL	GC	GC	
	EXHAUST FANS	GC	GC	
	FIRE ALARM & DETECTIONS SYSTEM	GC	GC	
	ELECTRICAL TRANSFORMERS	GC	GC	REQUIRED IF SHOWN ON PLANS
	ELECTRICAL SYSTEM - MAIN PANEL	GC	GC	
	ELECTRICAL SYSTEM - SUB PANEL(S)	GC	GC	
	LIGHTING SYSTEM - SALES AREA	GC	GC	
	LIGHTING SYSTEM - BACK OF HOUSE	GC	GC	
	ELECTRICAL WIRING. OUTLETS	GC	GC	
	LIGHTING INVERTER, LCP, SWITCHES, SENSORS, DIMMERS	OWNER	GC	
	ENERGY MANAGEMENT SYSTEM AND SENSORS	GC	GC	
	LOW VOLTAGE CONDUIT	GC	GC	
	LOW VOLTAGE WIRING	OWNER	OWNER	
	TELCO BACKER BOARD	GC	GC	
	JUNCTION BOX FOR SIGNAGE	GC	GC	
	JUNCTION BOX & FINAL CONNECTION (CHECK POINT)	GC	GC	
	WR CONTROL / INTEGRATED SYSTEM	OWNER	OWNER	

SARGENTI
5840 LEGACY CIR - STE D230, PLANO, TX 75024
T|201.316.5491 ■ WWW.SARGARCH.COM

SEAL:

STATE OF COLORADO
ROBERT J. SARGENTI
305929
LICENSED ARCHITECT

DATE SIGNED: 10/15/2026

CONTRACTOR'S NOTES:

WRITTEN DIMENSIONS HOLD PREFERENCE OVER SCALED DIMENSIONS. DO NOT SCALE THE DRAWINGS. THE CONTRACTORS MUST VISIT JOB SITE TO VERIFY ALL EXISTING CONDITIONS AND DIMENSIONS BEFORE SUBMITTING BIDS. REPORT ANY DISCREPANCIES OF ANY CONDITIONS WHICH MAY INTERFERE WITH THE PROPER EXECUTION OF, THE CONTRACT TO THE TENANT'S REPRESENTATIVE. REPORT DISCREPANCIES DURING BIDDING PROCESS AND BEFORE START OF CONSTRUCTION. CHANGE ORDERS NEED TO BE APPROVED BY THE CONSTRUCTION MANAGER FOR ISSUES ARISING FROM THE FIELD CONDITIONS OR CONFLICTS BETWEEN THE PLANS AND THE EXISTING CONDITIONS PRIOR TO THE COMMENCEMENT OF WORK.

	DATE	ISSUE

	DATE	REVISION

LOCATION:

Consumer Cellular

8283 S. AKRON ST.
SUITE #110
CENTENNIAL, CO 80112

STORE NUMBER:

CO2

PROJECT INFORMATION:

DATE: 10/14/2026
PROJECT NUMBER: 15066 - 26
STORE TYPE: TIER 2
DRAWN BY: GV REVIEWED BY: AN

TITLE:

RESPONSIBILITY SCHEDULE

SHEET NUMBER:

G001

GENERAL NOTES

1. CHECK MECHANICAL AND ELECTRICAL DRAWINGS PRIOR TO DEMOLITION WITH REGARD TO UTILIZING ANY EXISTING WIRING, LINES, COMPONENTS, ETC.
2. PROVIDE TRASH CONTAINER AS REQUIRED AT LOCATION TO SUIT LANDLORD. REMOVE DEBRIS DAILY AND HAUL FROM THE SITE AT TIME TO SUIT LANDLORD.
3. NOTIFY ARCHITECTS IMMEDIATELY OF ANY DISCREPANCIES OR UNFORESEEN ITEMS NOT SHOWN ON DRAWINGS.
4. ALL REMOVED MATERIAL AND DEBRIS, NOT OTHERWISE DESIGNATED, BECOMES THE PROPERTY OF THE CONTRACTOR, WHO SHALL REMOVE IT FROM THE SITE.
5. G.C. SHALL NOT DEMOLISH ANY LOAD BEARING WALLS OR CONSTRUCTION THAT WILL COMPROMISE THE STRUCTURAL INTEGRITY OF THE EXISTING SPACE. G.C. TO NOTIFY THE ARCHITECT IMMEDIATELY OF ANY STRUCTURAL CONCERNS DURING DEMOLITION.
6. EXISTING EQUIPMENT NOT BEING USED MUST BE COMPLETELY REMOVED / DISPOSED OF PROPERLY. NOTHING CAN BE ABANDONED ABOVE THE CEILING.
7. REMOVE EXISTING ACOUSTICAL CEILING GRID AND TILES, LIGHT FIXTURES, AND GYPSUM WALLBOARD SOFFITS AS SCHEDULED FOR DEMOLITION AND AS REQUIRED BY PARTITION DEMOLITION AND NEW CONSTRUCTION WORK. MAINTAIN EXISTING CEILING WIRE HANGERS FOR FUTURE USE.
8. REMOVE EXISTING ELECTRICAL DEVICES, OUTLETS, TELEPHONE AND DATA JACKS AND THERMOSTATS IN PARTITIONS SCHEDULED FOR DEMOLITION. MODIFY EXISTING WIRING AS REQUIRED BY NEW CONSTRUCTION OR, IF NOT REQUIRED, TERMINATE AND CAP OFF AT NEAREST PANEL OR SOURCE ABOVE CEILING.
9. REMOVE EXISTING FLOOR FINISHES SCHEDULED FOR REMOVAL AND AS REQUIRED BY PARTITION DEMOLITION AND NEW CONSTRUCTION. PREPARE EXISTING FLOOR SURFACE PER MANUFACTURER FOR INSTALLATION OF NEW FLOORING MATERIAL AS INDICATED IN THESE PLANS. G.C. MAY NEED TO PERFORM A MOISTURE TEST PRIOR TO ANY DEMOLITION OR NEW FLOORING INSTALLATION. NEWLY REPLACED OR LIKE-NEW FINISHES MAY REMAIN AT THE DISCRETION OF THE CONSTRUCTION PM. G.C. TO VERIFY PRIOR TO REMOVAL. PROTECT ALL NEW FLOOR FINISHES UNTIL FINAL CLEANING.
10. REMOVE ALL CONSTRUCTION DEBRIS FROM AREA. REPAIR ALL ADJACENT DAMAGED SURFACES, AS NECESSARY. PREPARE ALL DAMAGED SURFACES FOR FINISHES AS SCHEDULED OR REFINISH TO MATCH EXISTING FINISH.
11. PROVIDE A SMOOTH, NEAT, AND CONTINUOUS APPEARANCE WHERE DEMOLITION WORK MEETS ADJACENT EXISTING WORK. REMOVE EXISTING FINISHES AS REQUIRED TO PROVIDE NEAT, STRAIGHT SEAMS AND TRANSITIONS BETWEEN EXISTING AND MATCHING NEW FINISHES.
12. IN ACCORDANCE WITH LOCAL CODES, REPLACE ALL FIRE SUPPRESSION AND FIRE ALARM EQUIPMENT DISTURBED BY DEMOLITION WORK. MAINTAIN INTEGRITY OF FIRE SUPPRESSION AND FIRE ALARM SYSTEMS.
13. IN THE CASE THAT THE EXISTING CABLE LINE, PHONE LINE AND BLOCK, T-1 LINE AND DATA CABLING ARE PRESENT, G.C. SHALL SALVAGE AND REWORK TO FACILITATE NEW INSTALLATION
14. G.C. SHALL CONSTRUCT A BARRICADE WALL AS REQUIRED. G.C. SHALL COORDINATE REQUIREMENTS WITH MALL PROPERTY MANAGEMENT.
15. BARRICADE GRAPHICS SHALL BE PROVIDED BY MALL UNLESS OTHERWISE REQUESTED. G.C. SHALL ENGAGE CONSUMER CELLULAR'S SIGN VENDOR FOR BARRICADE GRAPHICS AS REQUIRED.
16. FIRE SPRINKLER SYSTEM TO REMAIN - G.C. TO RE-WORK/ MODIFY SYSTEM AS REQUIRED FOR NEW CONSTRUCTION.
17. WHERE REQUIRED BY THE LOCAL JURISDICTION, G.C. SHALL PREPARE A "RECYCLING PLAN" TO DIVERT DEBRIS FOR RECYCLING. G.C. SHALL KEEP RECORDS OF DIVERTED MATERIAL AS REQUIRED. G.C. TO VERIFY REQUIREMENTS WITH JURISDICTION AND TO MALL OPERATIONS/ LANDLORD WHERE APPLICABLE.
18. REMOVE ALL EXISTING INTERIOR PARTITIONS, DOORS, AND DOOR FRAMES SCHEDULED FOR DEMOLITION. REMOVE ALL MILLWORK, EQUIPMENT, ETC. THAT IS ATTACHED TO PARTITIONS SCHEDULED FOR DEMOLITION.
19. REMOVE EXISTING HVAC CEILING DIFFUSERS AND RETURN GRILLES AS SCHEDULED FOR DEMOLITION AND AS REQUIRED BY PARTITION DEMOLITION AND NEW CONSTRUCTION. MODIFY EXISTING DUCTWORK AS REQUIRED BY NEW CONSTRUCTION, OR IF NOT REQUIRED, TERMINATE AND CAP OFF SUPPLY AND RETURN DUCTS AT NEAREST SOURCE ABOVE CEILING.
20. REMOVE ALL EXISTING PLUMBING FIXTURES, FITTINGS, AND PIPING AS SCHEDULED FOR DEMOLITION AND AS REQUIRED BY PARTITION DEMOLITION AND NEW CONSTRUCTION. MODIFY EXISTING PIPING AS REQUIRED BY NEW CONSTRUCTION, OR IF NOT REQUIRED, TERMINATE AND CAP OFF AT WET STACK.
21. REMOVAL/RELOCATION OF ALL CEILING EQUIPMENT (TYCO, FIRE ALARM, SPRINKLER, SHOPPER TRAK, ETC.) MUST BE PERFORMED BY THE REQUIRED VENDORS. CONSUMER CELLULAR'S VENDOR TO RELOCATE SECURITY CAMERAS AS NEEDED PER NEW FIXTURE LAYOUT. COORDINATE WITH CONSUMER CELLULAR'S PROJECT MANAGER.
22. G.C. TO CONFIRM FLOOR SLAB IS SMOOTH AND LEVEL AND NOTIFY CONSTRUCTION PM OF ANY DISCREPANCIES.
23. MAINTAIN EXISTING EXITS, EMERGENCY LIGHTING, AND ILLUMINATION MEANS OF EGRESS DURING DEMOLITION AND CONSTRUCTION AS REQUIRED BY JHA AND ALL GOVERNING CODES.
24. SAW-CUTTING SHOWN ON PLANS IS AN INDICATION OF THE INTENDED WORK FOR BIDDING AND COORDINATION PURPOSES ONLY. IT IS NOT INTENDED TO BE A SPECIFICATION OR METHOD.
25. WHEN EXISTING MECHANICAL SYSTEM IS TO REMAIN, G.C. TO CLEAN DUCTWORK, DIFFUSERS, AND REPLACE HVAC AIR FILTERS AFTER CONSTRUCTION AND CLEANUP IS COMPLETE PRIOR TO TURNING PROJECT OVER TO CONSUMER CELLULAR.
26. DURING CONSTRUCTION, THE G.C. IS TO PROVIDE A PORTABLE FIRE EXTINGUISHER WITH A RATING OF NOT LESS THAN 2-A WITHIN 75 FOOT TRAVEL DISTANCE TO ALL PORTIONS OF THE SPACE.

SHEET SYMBOLS

EXISTING WALL TO BE REMOVED

KEYNOTE

SCOPE SUMMARY


1. GENERAL CONTRACTOR AND/OR SUBCONTRACTORS SHALL REVIEW THE EXISTING FACILITY TO DETERMINE THE EXTENT OF DEMOLITION REQUIRED TO INSTALL THE NEW WORK. A WRITTEN OUTLINE OF ALL REQUIRED DEMOLITION SHALL BE SUBMITTED TO THE CONSUMER CELLULAR DESCRIBING THE FOLLOWING (BUT NOT LIMITED TO):
   1.1. CONDITION OF EXISTING POWER PANELS AND TRANSFORMERS; FEASIBILITY FOR RELOCATION AND REFURBISHING, OR NEED FOR REPLACEMENT DUE TO AGE OR EXISTING CONDITION.
   1.2. CONDITION OF EXISTING GYPSUM BOARD ON EXISTING DEMISING WALLS AND RECOMMENDATION OF WHETHER TO REMOVE EXISTING OR REUSE TO BE DETERMINED IN FIELD.
   1.3. SUMMARIZE RECOMMENDATIONS FOR REUSE OF EXISTING MATERIALS, EQUIPMENT AND ACCESSORIES. ONCE REFURBISHED TO A LIKE-NEW CONDITION, ITEMIZE THE CREDIT TO THE CONTRACT.
   1.4. TENANT G.C. SHALL NOTIFY ARCHITECT OF ANY UN-NOTED EXISTING CONDITION WHICH CONFLICTS WITH THE PROJECT REQUIREMENTS AND MAY REQUIRE MODIFICATION, RELOCATION, OR REMOVAL TO COMPLETE THE PROJECT WITHIN 24 HOURS SO THAT THE NECESSARY DRAWING REVISIONS MAY BE INCORPORATED INTO THE PROJECT REQUIREMENTS.
   1.5. IN ADDITION TO THE ABOVE, REFER TO GENERAL DEMOLITION NOTES INDICATED IN SPECIFICATION DIVISION 2 - DEMOLITION / BUILDING ALTERATION.
   1.6. CONDITION OF EXISTING MECHANICAL SYSTEM; FEASIBILITY OF REUSING, RELOCATION, OR REFURBISHING EXISTING EQUIPMENT AND DUCTWORK; AND RECOMMENDATION OF REPLACEMENT, IF NECESSARY, PRIOR TO BID. SEE MECHANICAL DRAWINGS FOR SCOPE OF MECHANICAL WORK
2. WHEN EXISTING CEILING IS TO REMAIN, REPLACE INDIVIDUAL CEILING TILES IF DAMAGED OR NOT MATCHED TO ADJACENT TILES. IF MORE THAN 25% ARE DAMAGED OR NOT MATCHED TO ADJACENT TILES, G.C. TO REPORT CONDITION AND COORDINATE EXTENT OF REPLACEMENT WITH CONSTRUCTION PM.

KEYED NOTES

##	NOTES
1	LEASE LINE
2	EXISTING STOREFRONT SYSTEM, GLAZING AND ENTRY DOOR(S) TO REMAIN.
3	EXISTING DEMISING WALL TO REMAIN. PATCH AND REPAIR AS REQUIRED.
4	EXISTING EXTERIOR WALL AND/OR CONSTRUCTION TO REMAIN. PATCH AND REPAIR AS REQUIRED TO LIKE-NEW CONDITION.
5	EXISTING FLOOR SURFACE TO BE REMOVED IN ITS ENTIRETY. PREPARE FOR INSTALLATION OF NEW FLOORING MATERIALS AS INDICATED IN THESE PLANS. SEE SPECIFICATIONS FOR ADDITIONAL INFO.
6	EXISTING THRESHOLD TO REMAIN. REPLACE IF IT EXCEEDS 1/2" IN HEIGHT.
7	G.C TO REMOVE EXISTING GYP. BD. & ACT CEILINGS, SOFFIT, FRAMING, LIGHT FIXTURES & ANY UNUSED WIRES/CONDUITS THROUGHOUT. PREP FOR NEW FINISHES AND COORDINATE WITH RCP.
8	G.C TO REMOVE ALL EXISTING HVAC GRILLES, DIFFUSERS AND DUCTWORK THROUGHOUT. COORDINATE WITH MECHANICAL DRAWINGS.
9	EXISTING INTERIOR WALL OR PORTION OF INTERIOR WALL TO BE REMOVED IN ITS ENTIRETY.
10	EXISTING INTERIOR DOOR TO BE REMOVED IN ITS ENTIRETY.
11	EXISTING DOOR(S) TO REMAIN. REFER TO DOOR SCHEDULE FOR ADDITIONAL INFORMATION.
12	EXISTING ELECTRICAL PANEL(S) TO REMAIN. SEE ELECTRICAL DRAWINGS.
13	EXISTING RESTROOM FIXTURES TO BE REMOVED IN THEIR ENTIRETY. GC TO CAP ANY PLUMBING LINES NOT USED.
14	EXISTING COLUMN TO REMAIN.
15	NOT USED.
16	NOT USED.
17	EXISTING INTERIOR WALL OR PORTION OF EXISTING INTERIOR WALL TO REMAIN. GC TO REMOVE ANY EXISTING FINISHES AND PATCH AND REPAIR AS REQUIRED TO RECEIVE NEW FINISHES
18	EXISTING FLOOR DRAIN TO BE REMOVED. G.C TO CAP PLUMBING AT ITS SOURCE. PATCH AND REPAIR FLOORING AS REQUIRED. REFER TO PLUMBING DRAWINGS FOR MORE INFORMATION.
19	EXISTING MOP SINK TO BE REMOVED IN ITS ENTIRETY. GC TO CAP PLUMBING AT SOURCE.
20	EXISTING FURRING TO REMAIN. PATCH AND REPAIR AS REQUIRED.
21	EXISTING PHONE BOARD AND EQUIPMENT TO BE REMOVED IN ITS ENTIRETY.
22	EXISTING SOFFIT TO REMAIN. PATCH AND REPAIR AS REQUIRED TO RECEIVE NEW FINISHES.

KEYED NOTES

##	NOTES
23	EXISTING SECURITY GRILLE TO REMAIN. GC TO CONFIRM GRILLE IS IN PROPER WORKING ORDER.
24	EXISTING STOREFRONT SHADES TO REMAIN.
25	EXISTING WATER METER TO REMAIN. SEE PLUMBING DRAWINGS.
26	EXISTING WATER HEATER TO BE REMOVED IN ITS ENTIRETY. GC TO CAP PLUMBING AT SOURCE.
27	PORTION OF EXISTING FURRING TO BE REMOVED. GC TO PATCH AND REPAIR EXISTING WALL AS REQUIRED.
28	EXISTING WALL MOUNTED FIRE EXTINGUISHER TO BE KEPT AND RELOCATED AS NEEDED. PATCH AND REPAIR WALL AS REQUIRED TO LIKE-NEW CONDITION.
29	GC REMOVE EXISTING FLOOR-MOUNTED SECURITY GRILLE LOCK AND ASSOCIATED HARDWARE. PATCH AND REPAIR FLOOR SURFACE AFTER REMOVAL. COORDINATE WITH EXISTING SECURITY GRILLE INSTALLATION FOR RELOCATION OF LOCK/RELEASE HARDWARE TO ADJACENT WALL.
30	EXISTING ROOF DRAINS TO REMAIN.
31	GC TO CAP AND REMOVE SURFACE MOUNTED ELECTRICAL AND SHUT-OFF WATER VALVE.

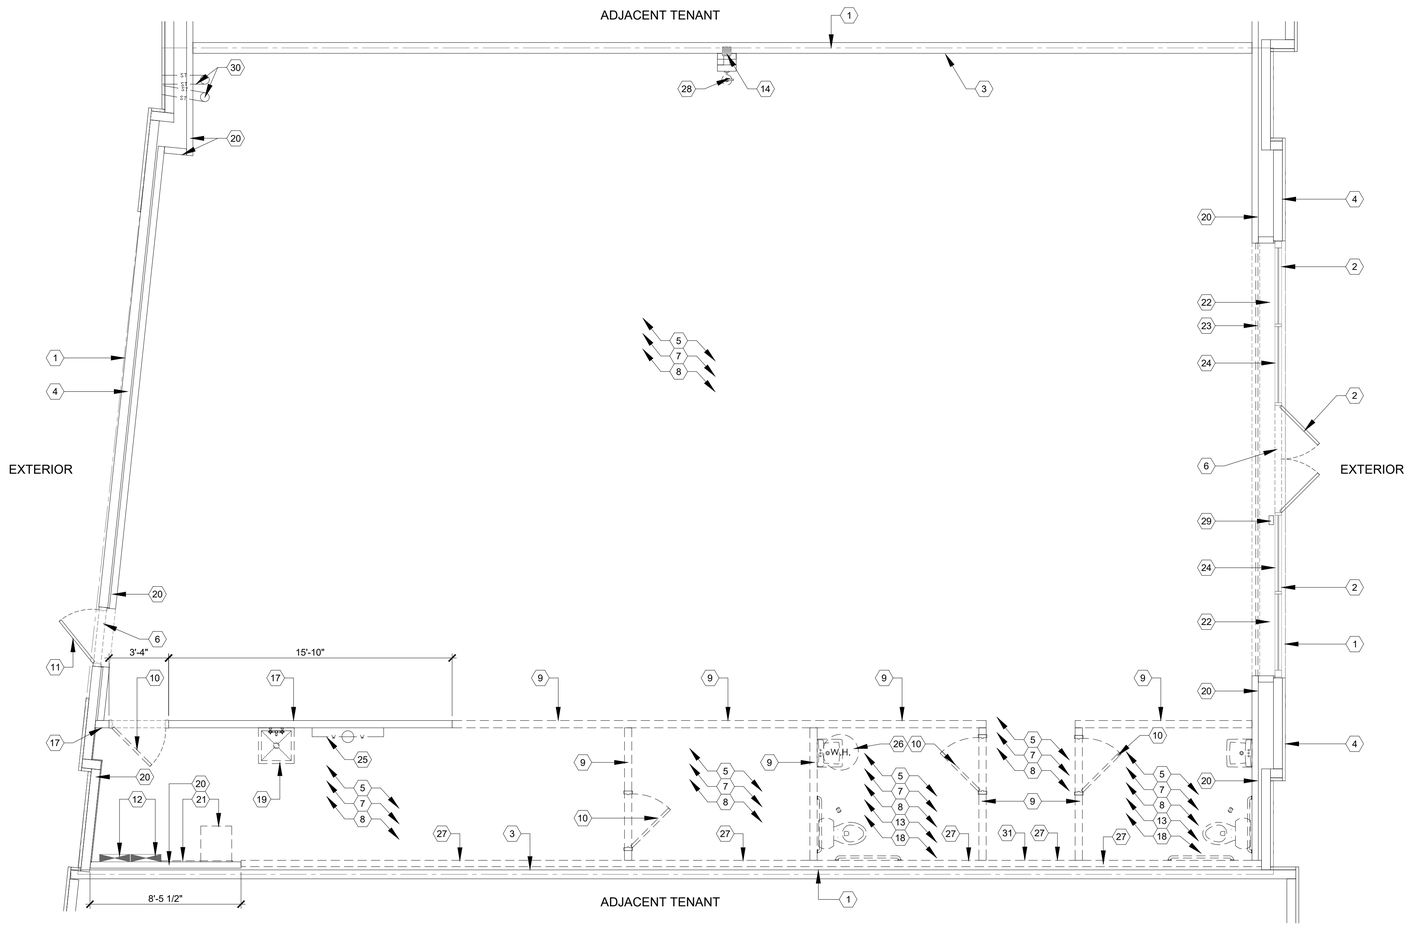

1 EXISTING CONDITIONS AND DEMOLITION PLAN
1/4" = 1'-0"

SARGENTI
5840 LEGACY CIR - STE D230, PLANO, TX 75024
T|201.316.5491 ● WWW.SARGARCH.COM

SEAL:

STATE OF COLORADO
ROBERT J. SARGENTI
305929
LICENSED ARCHITECT

DATE SIGNED: 10/15/2026

CONTRACTOR'S NOTES:

WRITTEN DIMENSIONS HOLD PREFERENCE OVER SCALED DIMENSIONS. DO NOT SCALE THE DRAWINGS. THE CONTRACTORS MUST VISIT JOB SITE TO VERIFY ALL EXISTING CONDITIONS AND DIMENSIONS BEFORE SUBMITTING BIDS. REPORT ANY DISCREPANCIES OF ANY CONDITIONS WHICH MAY INTERFERE WITH THE PROPER EXECUTION OF, THE CONTRACT TO THE TENANT'S REPRESENTATIVE. REPORT DISCREPANCIES DURING BIDDING PROCESS AND BEFORE START OF CONSTRUCTION. CHANGE ORDERS NEED TO BE APPROVED BY THE CONSTRUCTION MANAGER FOR ISSUES ARISING FROM THE FIELD CONDITIONS OR CONFLICTS BETWEEN THE PLANS AND THE EXISTING CONDITIONS PRIOR TO THE COMMENCEMENT OF WORK.

	DATE	ISSUE

△	DATE	REVISION

LOCATION:

Consumer Cellular®

8283 S. AKRON ST.
SUITE #110
CENTENNIAL, CO 80112

STORE NUMBER:

CO2

PROJECT INFORMATION:

DATE: 10/14/2026
PROJECT NUMBER: 15066 - 26
STORE TYPE: TIER 2
DRAWN BY: GV
REVIEWED BY: AN

TITLE:

EXISTING CONDITIONS AND DEMOLITION PLAN

SHEET NUMBER:

D100

SHEET SYMBOLS

ROOM NAME
FLR-#
B-#
PT-#

FLOOR FINISH TAG
BASE FINISH TAG
WALL FINISH TAG

EXISTING AREA N.I.C.


18"X18" VCT

12"X24" LVT

NOTE: ALL EQUIPMENT, FINISHES, FIXTURES AND FURNITURE TO BE INSTALLED PER MANUFACTURER'S RECOMMENDATIONS. SEE SHEET A700 FOR ALL SCHEDULES.

GENERAL NOTES

1. SEE SHEET A502 FOR FLOOR TRANSITION AND BASE DETAILS.
2. PREPARE EXISTING FLOOR SURFACE PER MANUFACTURER SPECIFICATIONS FOR INSTALLATION OF NEW FLOORING MATERIALS AS INDICATED IN THESE PLANS. SEE SPECIFICATIONS AND MANUFACTURER INSTRUCTIONS FOR ADDITIONAL FLOOR INSTALLATION NOTES. CLEAN AND FINISH FLOOR PER MANUFACTURER INSTRUCTIONS.
3. FOR FLOOR FINISHES, COMPLY WITH THESE RECOMMENDATIONS AT MINIMUM OR NOT LESS THAN MANUFACTURER'S WRITTEN INSTRUCTIONS. REFER TO MANUFACTURER'S INSTALLATION SPECIFICATIONS FOR ALL FINISHES INCLUDING FLOOR LEVELING REQUIREMENTS, EXPANSION SPACES, VAPOR BARRIERS, UNDERLAYMENT, SITE CONDITIONS, ETC.
   - 3.1. SUBFLOOR PREPARATION: GRIND HIGH SPOTS AND FILL LOW SPOTS TO PRODUCE A MAXIMUM 1/8" (3-MM) DEVIATION IN ANY DIRECTION WHEN CHECKED WITH A 10' (3-M) STRAIGHT EDGE
   - 3.2. EXPANSION: PROVIDE EXPANSION SPACE AT WALLS AND OTHER OBSTRUCTIONS AND TERMINATIONS OF FLOORING OF NOT LESS THAN DIRECTED BY MANUFACTURER.
   - 3.3. PROTECTION: PROVIDE FLOOR PROTECTION UP UNTIL FINAL CLEANING.
4. CENTER FLOORING WITHIN EACH ROOM. FIRST PLANK SHOULD BE CENTERED BETWEEN THE DEMISING WALLS AND PLACED SO THAT PARTIAL PLANKS ARE NEAR THE DEMISING WALLS AND UNDERNEATH THE SYSTEM WALL UNLESS OTHERWISE NOTED.

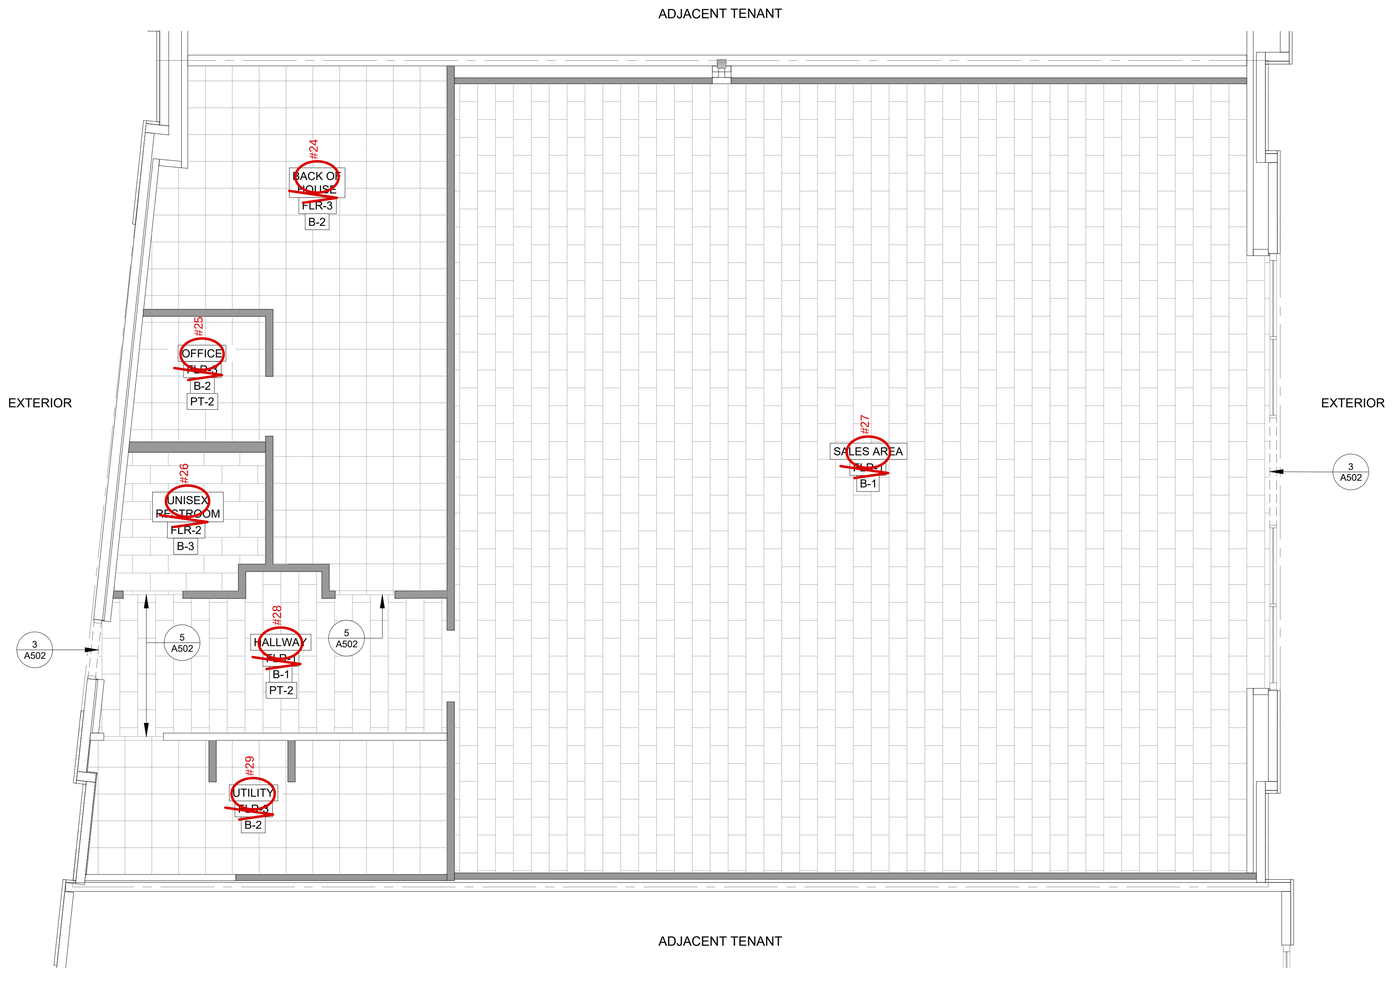

1 FINISH PLAN
1/4" = 1'-0"

SARGENTI
5840 LEGACY CIR - STE D230, PLANO, TX 75024
T|201.316.5491 ★ WWW.SARGARCH.COM

SEAL:

STATE OF COLORADO
ROBERT J. SARGENTI
305929
LICENSED ARCHITECT

DATE SIGNED: 10/15/2026

CONTRACTOR'S NOTES:

WRITTEN DIMENSIONS HOLD PREFERENCE OVER SCALED DIMENSIONS. DO NOT SCALE THE DRAWINGS. THE CONTRACTORS MUST VISIT JOB SITE TO VERIFY ALL EXISTING CONDITIONS AND DIMENSIONS BEFORE SUBMITTING BIDS. REPORT ANY DISCREPANCIES OF ANY CONDITIONS WHICH MAY INTERFERE WITH THE PROPER EXECUTION OF, THE CONTRACT TO THE TENANT'S REPRESENTATIVE. REPORT DISCREPANCIES DURING BIDDING PROCESS AND BEFORE START OF CONSTRUCTION. CHANGE ORDERS NEED TO BE APPROVED BY THE CONSTRUCTION MANAGER FOR ISSUES ARISING FROM THE FIELD CONDITIONS OR CONFLICTS BETWEEN THE PLANS AND THE EXISTING CONDITIONS PRIOR TO THE COMMENCEMENT OF WORK.

	DATE	ISSUE
△	DATE	REVISION

LOCATION:

Consumer Cellular

8283 S. AKRON ST.
SUITE #110
CENTENNIAL, CO 80112

STORE NUMBER:

CO2

PROJECT INFORMATION:


DATE: 10/14/2026
PROJECT NUMBER: 15066 - 26
STORE TYPE: TIER 2
DRAWN BY: GV REVIEWED BY: AN

TITLE:

FINISH PLAN

SHEET NUMBER:


A101

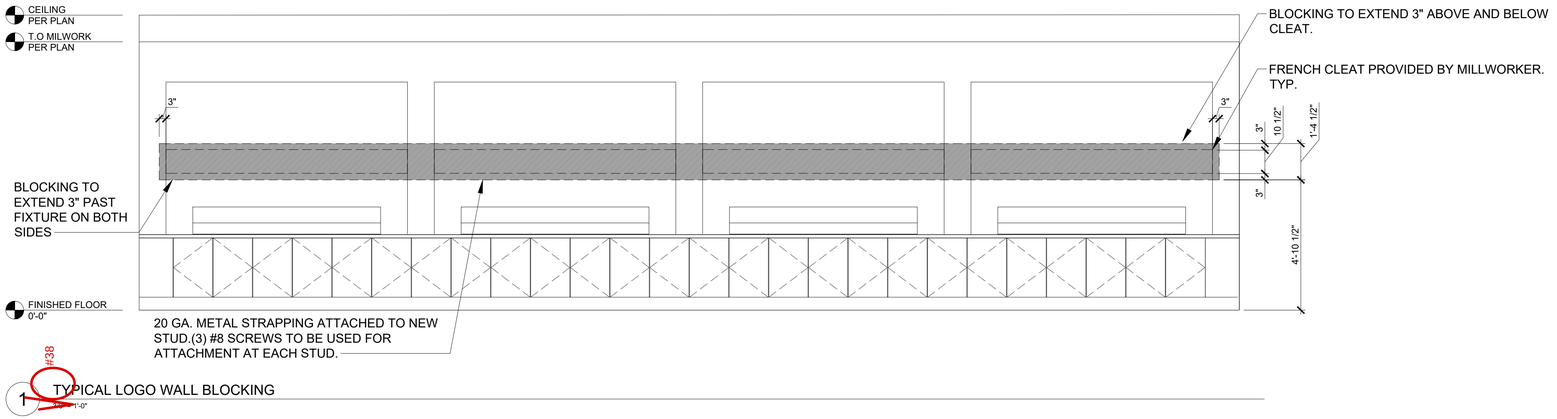

#38

1 TYPICAL LOGO WALL BLOCKING


1"=1'-0"

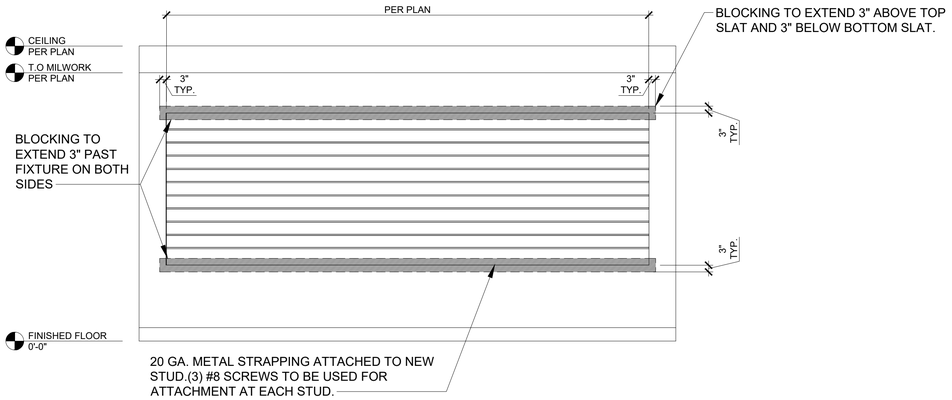

#39

2 TYPICAL SLAT WALL BLOCKING

1"=1'-0"

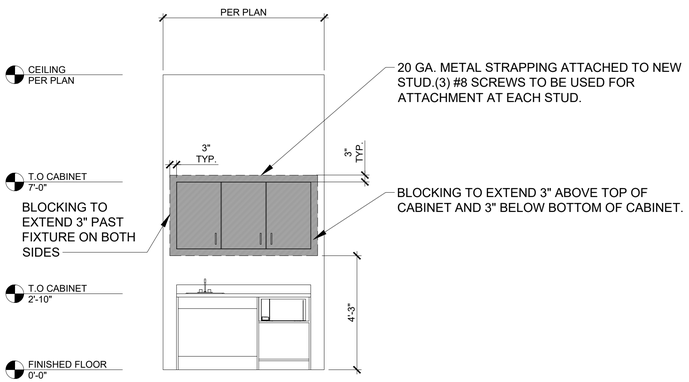


#40

3 TYPICAL KITCHENETTE BLOCKING

1"=1'-0"

GENERAL NOTES

1. ATTACH MILLWORK PER MANUFACTURER'S SPECIFICATIONS.
2. FOR SEISMIC ZONES, CONFIRM SCREWS ARE SUFFICIENT FOR SITE SPECIFIC SEISMIC LOADS.

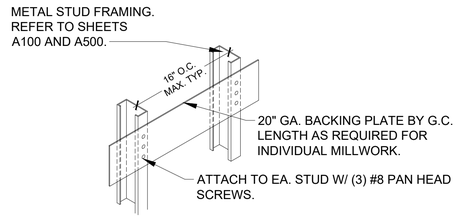

NOTES:

1. THIS BLOCKING IS FOR ELEMENTS WITH A MAXIMUM VERTICAL LOAD OF 40 LBS PER LINEAR FOOT AT A MAXIMUM OF 7" FROM FACE OF WALL.
2. REFER TO INDIVIDUAL DETAILS AND MILLWORK INSTALLATION INSTRUCTIONS FOR REQUIRED SCREW TYPE TO ATTACH ITEMS TO BLOCKING. WHEN NOT SPECIFICALLY INDICATED USE MIN. #8 SELF TAPPING SHEET METAL SCREWS.

#41

4 TYPICAL METAL BLOCKING DETAIL

1"=1'-0"

SARGENTI
5840 LEGACY CIR - STE D230, PLANO, TX 75024
T|201.316.5491 ■ WWW.SARGARCH.COM

SEAL:

STATE OF COLORADO
ROBERT J. SARGENTI
305929
LICENSED ARCHITECT

DATE SIGNED: 10/15/2026

CONTRACTOR'S NOTES:

WRITTEN DIMENSIONS HOLD PREFERENCE OVER SCALED DIMENSIONS. DO NOT SCALE THE DRAWINGS. THE CONTRACTORS MUST VISIT JOB SITE TO VERIFY ALL EXISTING CONDITIONS AND DIMENSIONS BEFORE SUBMITTING BIDS. REPORT ANY DISCREPANCIES OF ANY CONDITIONS WHICH MAY INTERFERE WITH THE PROPER EXECUTION OF, THE CONTRACT TO THE TENANT'S REPRESENTATIVE. REPORT DISCREPANCIES DURING BIDDING PROCESS AND BEFORE START OF CONSTRUCTION. CHANGE ORDERS NEED TO BE APPROVED BY THE CONSTRUCTION MANAGER FOR ISSUES ARISING FROM THE FIELD CONDITIONS OR CONFLICTS BETWEEN THE PLANS AND THE EXISTING CONDITIONS PRIOR TO THE COMMENCEMENT OF WORK.

	DATE	ISSUE
△	DATE	REVISION

LOCATION:

Consumer Cellular

8283 S. AKRON ST.
SUITE #110
CENTENNIAL, CO 80112

STORE NUMBER:

CO2

PROJECT INFORMATION:

DATE: 10/14/2026
PROJECT NUMBER: 15066 - 26
STORE TYPE: TIER 2
DRAWN BY: GV
REVIEWED BY: AN

TITLE:

MILLWORK BLOCKING AND DETAILS

SHEET NUMBER:

A104

GENERAL NOTES

1. G.C. TO VERIFY ALL DIMENSIONS AND NOTIFY ARCHITECTS IMMEDIATELY OF ANY DISCREPANCIES OR UNFORESEEN ITEMS NOT SHOWN ON DRAWINGS, INCLUDING CEILING HEIGHT.
2. UNLESS OTHERWISE NOTED ON PLANS, ALL CEILING EQUIPMENT SHOULD FOLLOW THE LAYOUT GUIDE ON THIS SHEET.
3. G.C. SHALL FIELD VERIFY EXISTING EGRESS LIGHTING AND PROVIDE NEW EMERGENCY LIGHT FIXTURES AS REQUIRED BY FIRE MARSHAL.
4. REFER TO MECHANICAL DRAWINGS FOR FURTHER INFORMATION ON SCOPE AND LOCATION OF MECHANICAL ITEMS
5. REFER TO VENDOR INSTALLATION GUIDE AND MANUFACTURER INSTRUCTIONS FOR FIXTURE INSTALLATION.
6. REFER TO ELECTRICAL DRAWINGS FOR FIXTURE TYPES AND LIGHT FIXTURE SCHEDULE.

SHEET SYMBOLS

#37

C-1
GYP BOARD CEILING

C-2
CEILING - LAY IN TILE

C-3
CEILING - LAY IN TILE

T	X###
F	X###
H	XX'-XX"

CEILING TYPE
CEILING FINISH
CEILING HEIGHT

2' X 2' LIGHT

2' X 2' EMERGENCY LIGHT

2' X 4' LIGHT

2' X 4' EMERGENCY LIGHT

PENDANT LIGHT

PENDANT LIGHT

RECESSED LIGHT

LED STRIP LIGHT

LINEAR PENDANT LIGHT

EXIT SIGNAGE

WALL SCONCE

EM LIGHT

LIGHTING FIXTURES SPECS

L-1
ITEM: 4" FIXED DOWNLIGHT
MFG.: LOTUS
PRODUCT:
LDHR-30K-HO-4R-WR-WT /
LLL-LD20507R / FRP4
FINISH: WHITE
SIZE: 4" DIA

L-2A
ITEM: LINEAR PENDANT LIGHT
MFG.: WAC
PRODUCT: PD-22754-AL
FINISH: BRUSHED ALUMINUM
HEIGHT: 6'-6" A.F.F

L-2B
ITEM: LINEAR PENDANT LIGHT
MFG.: WAC
PRODUCT: PD-22754-AL
FINISH: BRUSHED ALUMINUM
HEIGHT: FLUSH WITH TRELLIS

L-3A
ITEM: LARGE PENDANT LIGHT
MFG.: YLIGHTING
FINISH:WHITE/COPPER
SIZE: LARGE
HEIGHT: 6'-6" A.F.F

L-3B
ITEM: MEDIUM PENDANT LIGHT
MFG.: YLIGHTING
FINISH:WHITE/COPPER
SIZE: MEDIUM
HEIGHT: 7'-6" A.F.F

L-3C
ITEM: SMALL PENDANT LIGHT
MFG.: YLIGHTING
FINISH:WHITE/COPPER
SIZE: SMALL
HEIGHT: 7'-0" A.F.F

L-4
ITEM:LARMES MINI PENDANT
MFG.: ET2 LIGHTING
PRODUCT #: E23111-18
MATERIAL: GLASS, STEEL
FINISH: POLISHED CHROME
HEIGHT: 6'-0"A.F.F

L-5
ITEM: LED STRIP LIGHT
MFG.: DIODE
PRODUCT: DIODE LED
FINISH: ALUMINUM
SIZE: 48",96"

L-6
ITEM: 2'X2' RECESSED FIXTURE
MFG.: VALRIYA
PRODUCT #: VA-TTR-22-30-300K
FINISH: WHITE
SIZE: 24" X 24"

L-6 EM
ITEM:2'X2' RECESSED FIXTURE
MFG.: VALRIYA
PRODUCT #:
VA-TTR-22-30-300K/VA-EDA-L115-50
FINISH: WHITE
SIZE: 24" X 24"

L-6A
ITEM: 2'X4' RECESSED FIXTURE
MFG.: VALRIYA
PRODUCT#:VA-TTR-24-40-3000K
FINISH: WHITE
SIZE: 24" X 48"

L-6A EM
ITEM: 2'X4' RECESSED FIXTURE
MFG.: VALRIYA
PRODUCT #:
VA-TTR-24-40-3000K-VA-EDA-L115-50
FINISH: WHITE
SIZE: 24" X 48"


L-7
ITEM: RECESSED WALL WASHER
MFG.: LUMENTURE
PRODUCT #: RWW160
FINISH:WHITE

L-8
ITEM: BATHROOM SCONCE
MFG.: MAXIM LIGHTING
PRODUCT #: 5200
FINISH: SATIN NICKEL
HEIGHT: 3" ABOVE MIRROR

L-9
ITEM: EMERGENCY LIGHT
MFG.: DUAL-LITE
PRODUCT: LZ SERIES
FINISH:WHITE
HEIGHT: 7'-6" A.F.F

EX1
FINISH: EMERGENCY / EXIT LIGHT
120/277V, 90 MIN. EMERGENCY BATTERY
BACKUP, GREEN LED LETTERS
MFG.: EXITRONIX
PRODUCT: S900C-SM-G-WH-R
FINISH: WHITE


*NOTE: NOT ALL FIXTURES LISTED ARE USED AT THIS LOCATION. REFER TO FIXTURE TAGS ON PLAN.



1 2X2 CEILING GRID
CENTER SPRINKLERS AND CEILING MOUNTED EQUIPMENT

2 EQUIPMENT PLACEMENT IN GRID

1/4" = 1'-0"

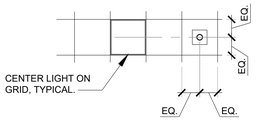

1 LIGHT PLACEMENT IN GRID
GENERAL LIGHTING

3 LIGHT LAYOUT GUIDE

1/4" = 1'-0"



1 REFLECTED CEILING PLAN

1/4" = 1'-0"

SARGENTI

5840 LEGACY CIR - STE D230, PLANO, TX 75024
T|201.316.5491 ■ WWW.SARGARCH.COM

SEAL:

STATE OF COLORADO
ROBERT J. SARGENTI
305929
LICENSED ARCHITECT

DATE SIGNED: 10/15/2026

CONTRACTOR'S NOTES:

WRITTEN DIMENSIONS HOLD PREFERENCE OVER SCALED DIMENSIONS. DO NOT SCALE THE DRAWINGS. THE CONTRACTORS MUST VISIT JOB SITE TO VERIFY ALL EXISTING CONDITIONS AND DIMENSIONS BEFORE SUBMITTING BIDS. REPORT ANY DISCREPANCIES OF ANY CONDITIONS WHICH MAY INTERFERE WITH THE PROPER EXECUTION OF, THE CONTRACT TO THE TENANT'S REPRESENTATIVE. REPORT DISCREPANCIES DURING BIDDING PROCESS AND BEFORE START OF CONSTRUCTION. CHANGE ORDERS NEED TO BE APPROVED BY THE CONSTRUCTION MANAGER FOR ISSUES ARISING FROM THE FIELD CONDITIONS OR CONFLICTS BETWEEN THE PLANS AND THE EXISTING CONDITIONS PRIOR TO THE COMMENCEMENT OF WORK.

	DATE	ISSUE
△	DATE	REVISION

LOCATION:

Consumer Cellular

8283 S. AKRON ST.
SUITE #110
CENTENNIAL, CO 80112

STORE NUMBER:

CO2

PROJECT INFORMATION:


DATE: 10/14/2026
PROJECT NUMBER: 15066 - 26
STORE TYPE: TIER 2
DRAWN BY: GV REVIEWED BY: AN

TITLE:

REFLECTED CEILING PLAN


SHEET NUMBER:

A200

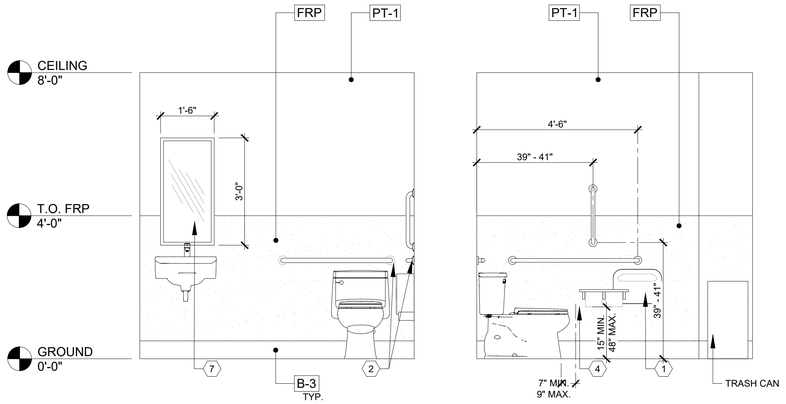


A

B

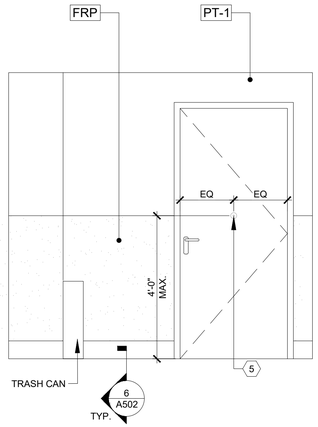


C

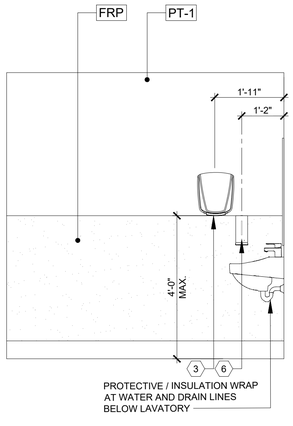

D


1 RESTROOM ELEVATIONS

1/2" = 1'-0"

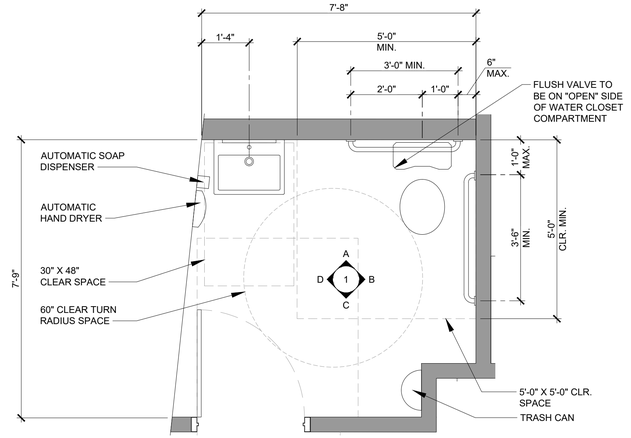


2 ENLARGED UNISEX RESTROOM PLAN

1/2" = 1'-0"

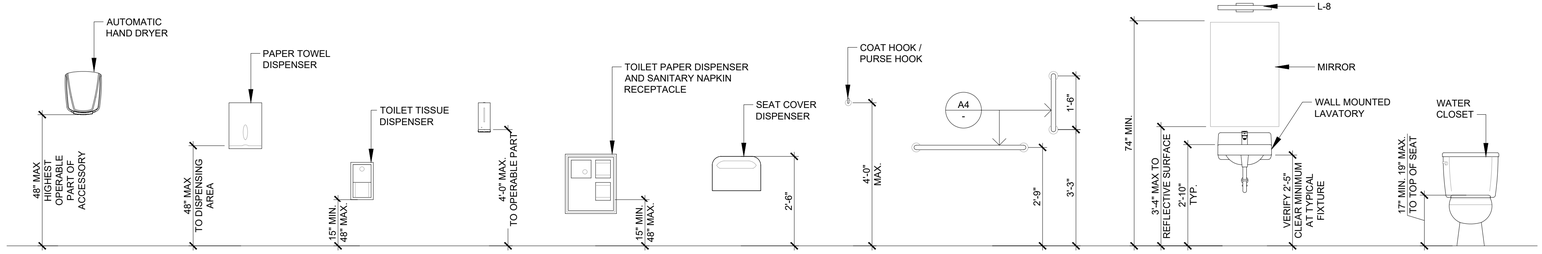

3 TYPICAL MOUNTING HEIGHTS

1/2" = 1'-0"

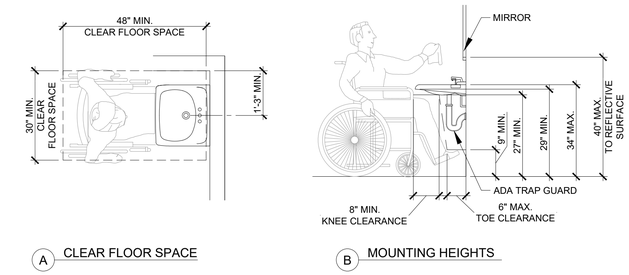


A CLEAR FLOOR SPACE

B MOUNTING HEIGHTS

4 LAVATORY DETAIL

1/2" = 1'-0"

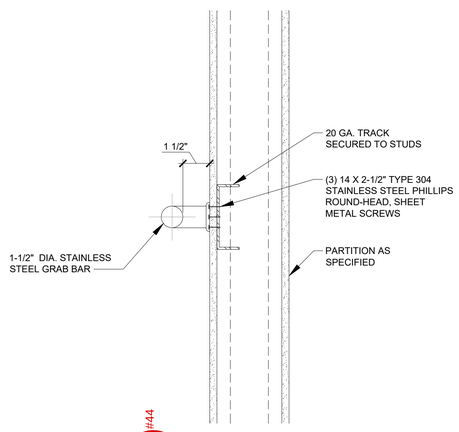

5 GRAB BAR DETAIL

3" = 1'-0"

GRAB BAR NOTES

1) GC TO INSTALL WITH MOUNTING KIT # 252-30.

2) THE STRUCTURAL STRENGTH OF GRAB BARS SHALL MEET THE FOLLOWING SPECIFICATIONS:

(A) BENDING STRESS IN A GRAB BAR INDUCED BY THE MAXIMUM BENDING MOMENT FROM THE APPLICATION OF 250 lbf (1112N) SHALL BE LESS THAN THE ALLOWABLE STRESS FOR THE MATERIAL OF THE GRAB BAR.

(B) SHEAR STRESS INDUCED IN A GRAB BAR BY THE APPLICATION OF 250 lbf (1112N) SHALL BE LESS THAN THE ALLOWABLE SHEAR STRESS FOR THE MATERIAL OF THE GRAB BAR. IF THE CONNECTIONS BETWEEN THE GRAB BAR AND ITS MOUNTING BRACKET OR OTHER SUPPORT IS CONSIDERED TO BE FULLY RESTRAINED, THEN DIRECT AND TORSIONAL SHEAR STRESSES SHALL BE TOTALED FOR THE COMBINED SHEAR STRESS, WHICH SHALL NOT EXCEED THE ALLOWABLE SHEAR STRESS.

(C) SHEAR FORCE INDUCED IN A FASTENER OR MOUNTING DEVICE FROM THE APPLICATION OF 250 lbf (1112N) SHALL BE LESS THAN THE ALLOWABLE LATERAL LOAD OF EITHER THE FASTENER OR MOUNTING DEVICE OR THE SUPPORTING STRUCTURE, WHICHEVER IS THE SMALLER ALLOWABLE LOAD.

(D) TENSILE FORCE INDUCED IN A FASTENER BY A DIRECT TENSION FORCE OF 250 lbf (1112N) PLUS THE MAXIMUM MOMENT FROM THE APPLICATION OF 250 lbf (1112N) SHALL BE LESS THAN THE ALLOWABLE WITHDRAWAL LOAD BETWEEN THE FASTENER AND THE SUPPORTING STRUCTURE.

(E) GRAB BARS SHALL NOT ROTATE WITHIN THEIR FITTINGS.

ACCESSIBLE SIGNAGE

ADA SIGN DESCRIPTION	MODEL#	SIGNAGE
WINDOW / COUNTER DECAL SYMBOL OF ACCESSIBILITY - SIZE: 6" X 6"	ADA-1006	
"EXIT" - SIZE: 6" X 6"; W/ ADA/CBC BRAILLE	ADA-1242	
"EXIT ROUTE" - SIZE: 6" X 6"; W/ ADA/CBC BRAILLE	ADA-1243	
WHEELCHAIR ACCESSIBLE ENTRANCE - SIZE: 6" X 8"	ADA-1070	
"WOMEN" WHEELCHAIR ACCESSIBLE RESTROOM - WALL - SIZE: 6" X 8"	ADA-1024	
"MEN" WHEELCHAIR ACCESSIBLE RESTROOM - WALL - SIZE: 6" X 8"	ADA-1025	
"ALL GENDER" WHEELCHAIR ACCESSIBLE RESTROOM - WALL - SIZE: 8" X 8"	ADA-1026	
"ALL GENDER" ACCESSIBLE RESTROOM - TACTILE BRAILLE - WALL - 8" X 9"	ADA-1245	
"WOMEN" ACCESSIBILE RESTROOM - DOOR - SIZE: 12" DIA. CIRCLE	T24-1001	
"MEN" ACCESSIBLE RESTROOM - DOOR - SIZE: 12" TRIANGLE	T24-1000	
"ALL GENDER" WHEELCHAIR ACCESSIBLE RESTROOM - DOOR - 12" TRIANGLE / CIRCLE	T24-1003	
"ALL GENDER" WHEELCHAIR ACCESSIBLE RESTROOM - DOOR - 12' X 12"	ADA-1251	

G.C IS RESPONSIBLE FOR PROVIDING AND INSTALLING ALL ACCESSIBLE SIGNAGE. SIGNAGE TO BE ADA WHITE ON BLUE AVAILABLE FROM WWW.ADASIGNDEPOT.COM
*NOT ALL USED AT THIS LOCATION

GENERAL NOTES

1. DISPENSERS THAT CONTROL DELIVERY OR THAT DO NOT PERMIT CONTINUOUS PAPER FLOW SHALL NOT BE USED.
2. INTERIOR SURFACES - TOILET ROOM FLOORS SHALL HAVE A SMOOTH, HARD, NON-ABSORBENT SURFACE, SUCH AS PORTLAND CEMENT, CONCRETE, CERAMIC TILE, OR OTHER APPROVED MATERIALS WHICH EXTEND UPWARD ONTO THE WALLS AT LEAST 5".
3. THERE SHALL BE NO SHARP OR ABRASIVE SURFACES UNDER LAVATORIES OR SINKS.
4. PROVIDE BLOCKING AT ALL WALL MOUNTED FIXTURES AND ACCESSORIES.

ACCESSORY KEY NOTES

(##)	NOTES
1	SEAT COVER DISPENSER: BOBRICK - #B-221 - STAINLESS STEEL
2	GRAB BAR: AMERICAN SPECIALTIES - STAINLESS STEEL
3	SURFACE-MOUNTED HAND DRYER: WORLD DRYER - Q-973A2 - BRUSHED STAINLESS STEEL
4	TOILET PAPER DISPENSER: SURFACE-MOUNTED MULTI ROLL TISSUE DISPENSER W/ SHELF BOBRICK - B2840
5	DOOR COAT HOOK: ROCKWOOD - MODEL: RW 828 - STAINLESS STEEL
6	AUTOMATIC SOAP DISPENSER: BOBRICK - #B-2013 - STAINLESS STEEL
7	FRAMES MIRROR: ASI #0600 - STAINLESS STEEL

SARGENTI
5840 LEGACY CIR - STE D230, PLANO, TX 75024
T|201.316.5491 ★ WWW.SARGARCH.COM

SEAL:

STATE OF COLORADO ★ ROBERT J. SARGENTI 305929 ★ LICENSED ARCHITECT

DATE SIGNED: 10/15/2026

CONTRACTOR'S NOTES:

WRITTEN DIMENSIONS HOLD PREFERENCE OVER SCALED DIMENSIONS. DO NOT SCALE THE DRAWINGS. THE CONTRACTORS MUST VISIT JOB SITE TO VERIFY ALL EXISTING CONDITIONS AND DIMENSIONS BEFORE SUBMITTING BIDS. REPORT ANY DISCREPANCIES OF ANY CONDITIONS WHICH MAY INTERFERE WITH THE PROPER EXECUTION OF, THE CONTRACT TO THE TENANT'S REPRESENTATIVE. REPORT DISCREPANCIES DURING BIDDING PROCESS AND BEFORE START OF CONSTRUCTION. CHANGE ORDERS NEED TO BE APPROVED BY THE CONSTRUCTION MANAGER FOR ISSUES ARISING FROM THE FIELD CONDITIONS OR CONFLICTS BETWEEN THE PLANS AND THE EXISTING CONDITIONS PRIOR TO THE COMMENCEMENT OF WORK.

	DATE	ISSUE
△	DATE	REVISION

LOCATION:

Consumer Cellular

8283 S. AKRON ST.
SUITE #110
CENTENNIAL, CO 80112

STORE NUMBER:

CO2

PROJECT INFORMATION:


DATE: 10/14/2026
PROJECT NUMBER: 15066 - 26
STORE TYPE: TIER 2
DRAWN BY: GV REVIEWED BY: AN

TITLE:

ENLARGED UNISEX RESTROOM

SHEET NUMBER:

A402

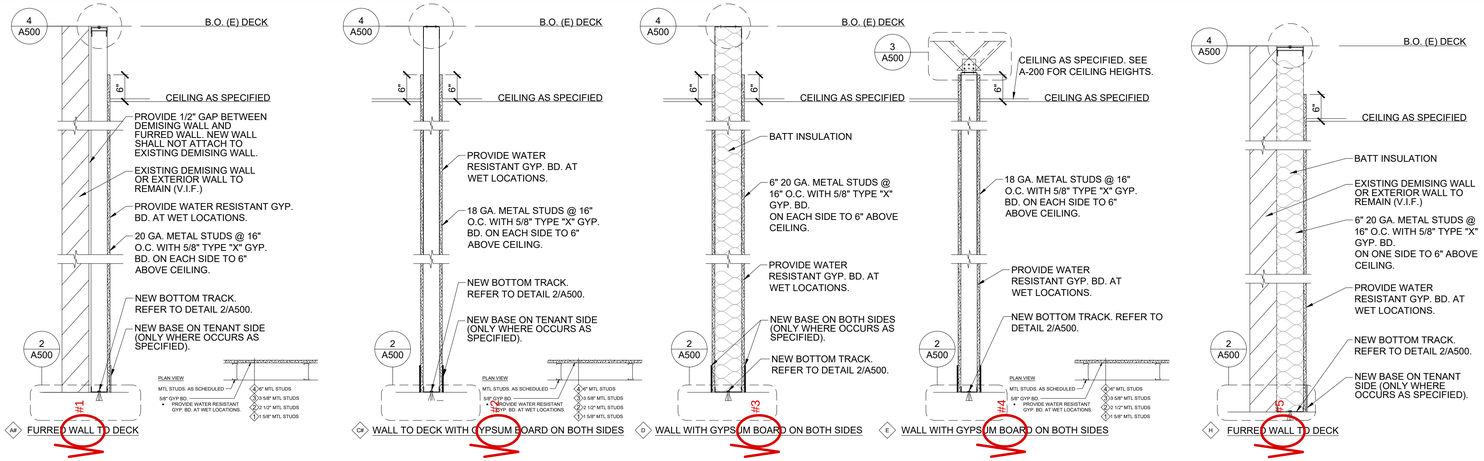


1 PARTITION TYPES

3/4"=1'-0"

FASTENERS:
AT PLYWOOD FLOOR (MIN. 3/4" CDX):
PROVIDE (2) NO. 8 X 3/4" WOOD SCREWS AT 24" O.C. MAX. STAGGERED FOR (1) LAYER GYP. BD. EACH SIDE, 16" O.C. MAX. STAGGERED FOR (2) LAYERS GYP. BD. EACH SIDE.

AT CIP CONCRETE FLOOR:
PROVIDE HILTI X-DNI .145Ø X 1" EMBED (POWDER-ACTUATED FASTENERS PER ES REPORT ESR-1663) AT 24" O.C. MAX. STAGGERED FOR (1) LAYER GYP. BD. EACH SIDE, 16" O.C. MAX. STAGGERED FOR (2) LAYERS GYP. BD. EACH SIDE.

AT POST-TENSIONED CONCRETE FLOOR:
PROVIDE HILTI X-DNI .145Ø X 3/4" EMBED (POWER-ACTUATED FASTENERS PER ES REPORT ESR-1663) AT 24" O.C. MAX. STAGGERED FOR (1) LAYER GYP. BD. EACH SIDE, 16" O.C. MAX. STAGGERED FOR (2) LAYERS GYP. BD. EACH SIDE.

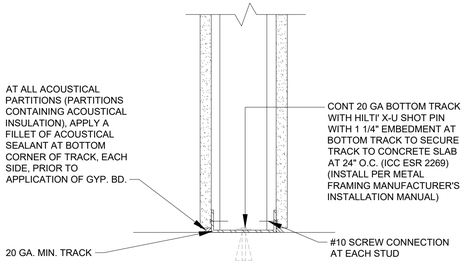


2 PARTITION FLOOR CONNECTION

3" = 1'-0"


FOR WALLS TO 10'-0" - BRACE WITH 362S137-33 AT 48" O.C. MAX. ALTERNATE DIRECTION OF BRACES ALONG LENGTH OF WALL WHERE POSSIBLE.

FOR WALLS TO 15'-0" - BRACE WITH DOUBLED 362S137-33 AT 48" O.C. MAX. ALTERNATE DIRECTION OF BRACES ALONG LENGTH OF WALL. FASTEN DOUBLED STUDS TOGETHER WITH NO. 8 SCREWS AT 24" O.C. MAX.

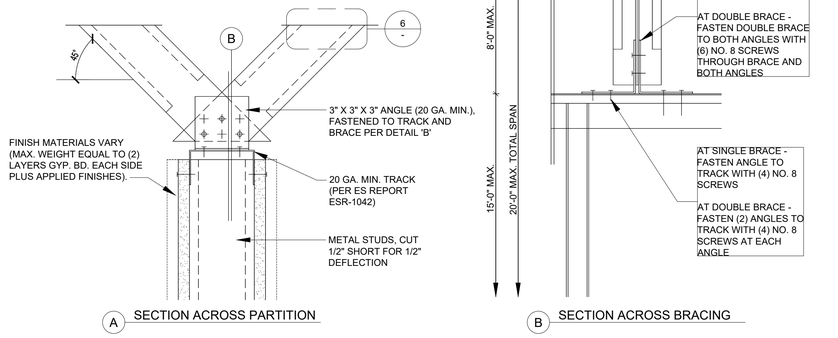


3 TOP OF WALL BRACING DETAIL

3" = 1'-0"

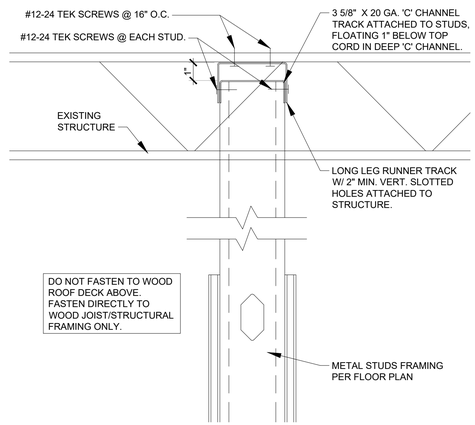


4 ATTACHMENT TO STRUCTURE

3" = 1'-0"

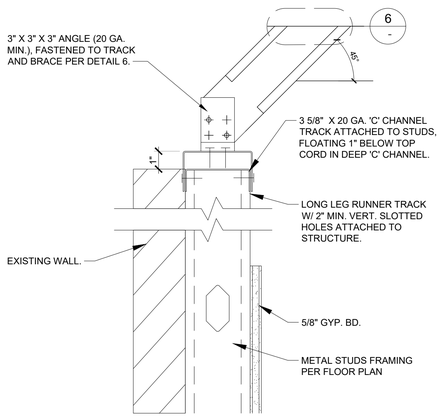

5 ATTACHMENT TO STRUCTURE

3" = 1'-0"

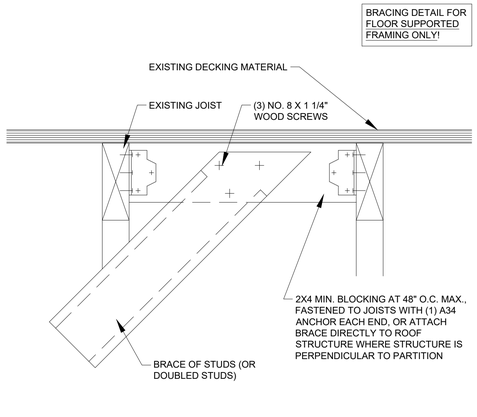

6 ATTACHMENT TO STRUCTURE

3" = 1'-0"

SARGENTI
5840 LEGACY CIR - STE D230, PLANO, TX 75024
T|201.316.5491 ★ WWW.SARGARCH.COM

SEAL:

STATE OF COLORADO ★ ROBERT J. SARGENTI 305929 ★ LICENSED ARCHITECT

DATE SIGNED: 10/15/2026

CONTRACTOR'S NOTES:

WRITTEN DIMENSIONS HOLD PREFERENCE OVER SCALED DIMENSIONS. DO NOT SCALE THE DRAWINGS. THE CONTRACTORS MUST VISIT JOB SITE TO VERIFY ALL EXISTING CONDITIONS AND DIMENSIONS BEFORE SUBMITTING BIDS. REPORT ANY DISCREPANCIES OF ANY CONDITIONS WHICH MAY INTERFERE WITH THE PROPER EXECUTION OF, THE CONTRACT TO THE TENANT'S REPRESENTATIVE. REPORT DISCREPANCIES DURING BIDDING PROCESS AND BEFORE START OF CONSTRUCTION. CHANGE ORDERS NEED TO BE APPROVED BY THE CONSTRUCTION MANAGER FOR ISSUES ARISING FROM THE FIELD CONDITIONS OR CONFLICTS BETWEEN THE PLANS AND THE EXISTING CONDITIONS PRIOR TO THE COMMENCEMENT OF WORK.

	DATE	ISSUE

△	DATE	REVISION

LOCATION:

Consumer Cellular®

8283 S. AKRON ST.
SUITE #110
CENTENNIAL, CO 80112

STORE NUMBER:

CO2

PROJECT INFORMATION:


DATE: 10/14/2026
PROJECT NUMBER: 15066 - 26
STORE TYPE: TIER 2
DRAWN BY: GV REVIEWED BY: AN

TITLE:

PARTITION TYPES & DETAILS

SHEET NUMBER:

A500

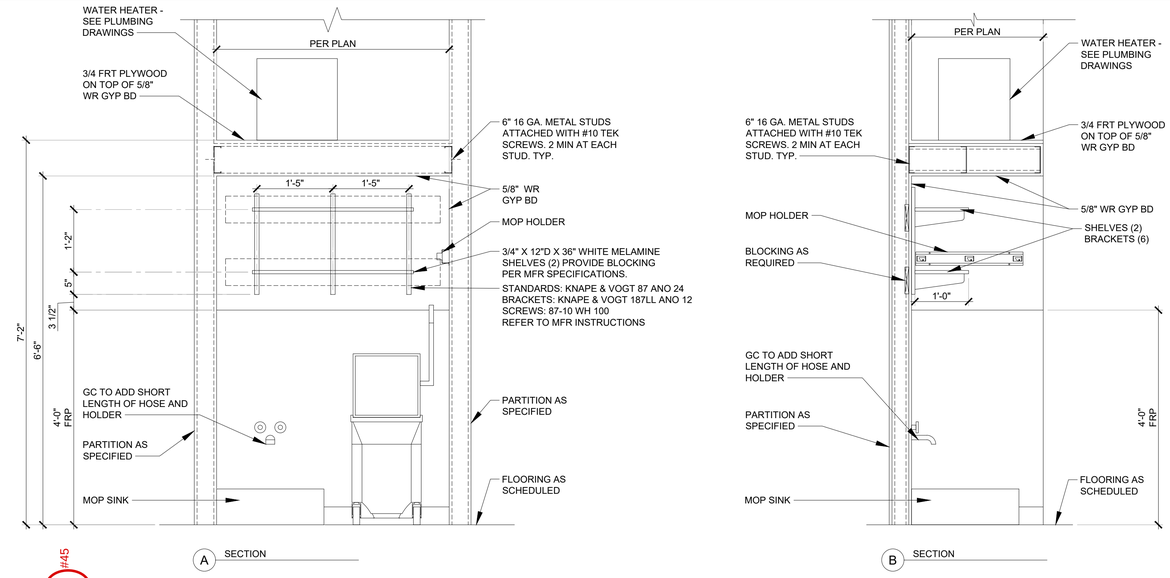

1 #45 MOP SINK DETAILS (FOR REFERENCE ONLY)

3/4"=1'-0"

SARGENTI

5840 LEGACY CIR - STE D230, PLANO, TX 75024
T|201.316.5491 ★ WWW.SARGARCH.COM

SEAL:

STATE OF COLORADO ★ ROBERT J. SARGENTI 305929 ★ LICENSED ARCHITECT

DATE SIGNED: 10/15/2026

CONTRACTOR'S NOTES:

WRITTEN DIMENSIONS HOLD PREFERENCE OVER SCALED DIMENSIONS. DO NOT SCALE THE DRAWINGS. THE CONTRACTORS MUST VISIT JOB SITE TO VERIFY ALL EXISTING CONDITIONS AND DIMENSIONS BEFORE SUBMITTING BIDS. REPORT ANY DISCREPANCIES OF ANY CONDITIONS WHICH MAY INTERFERE WITH THE PROPER EXECUTION OF, THE CONTRACT TO THE TENANT'S REPRESENTATIVE. REPORT DISCREPANCIES DURING BIDDING PROCESS AND BEFORE START OF CONSTRUCTION. CHANGE ORDERS NEED TO BE APPROVED BY THE CONSTRUCTION MANAGER FOR ISSUES ARISING FROM THE FIELD CONDITIONS OR CONFLICTS BETWEEN THE PLANS AND THE EXISTING CONDITIONS PRIOR TO THE COMMENCEMENT OF WORK.

	DATE	ISSUE

△	DATE	REVISION

LOCATION:

Consumer Cellular®

8283 S. AKRON ST.
SUITE #110
CENTENNIAL, CO 80112

STORE NUMBER:

CO2

PROJECT INFORMATION:

DATE: 10/14/2026

PROJECT NUMBER: 15066 - 26

STORE TYPE: TIER 2

DRAWN BY: GV REVIEWED BY: AN

TITLE:

MOP SINK DETAILS

SHEET NUMBER:


A504

DOOR SCHEDULE


DOOR #	DESCRIPTION	DOOR				FRAME		DETAILS			FIRE RATING	HARDWARE	FURNISHED BY	INSTALLED BY	NOTES
		SIZE	TYPE	MATERIAL	FINISH	MATERIAL	FINISH	SILL	JAMB	HEAD					
1A	(E) EXTERIOR MAIN ENTRY/EXIT	(2) 3'-0"X7'-0"X1 3/4" V.I.F.	A	EXISTING	EXISTING	EXISTING	EXISTING	EXISTING	EXISTING	EXISTING	-	EXISTING	EXISTING	EXISTING	1, 2, 3, 4, 5, 6, 29, 30, 31,32, 33
2B	(E) EXTERIOR HALLWAY	3'-0"X7'-0"X1 3/4" V.I.F.	B	EXISTING	PAINT PT-2	EXISTING	PAINT PT-2	EXISTING	EXISTING	EXISTING	-	A6, C2, H1, P1	EXISTING	EXISTING	3, 5, 6, 7, 8, 9, 10, 26, 34
3C	UTILITY	3'-0"X7'-0"X1 3/4"	C	WOOD (WHITE BIRCH)	CLEAR SATIN STAIN	HOLLOW METAL	P-2 SEMI GLOSS	A502	3/A600	2/A600	-	A10, C3, G2, H1, L6	G.C	G.C	
4C	UNISEX RESTROOM	3'-0"X7'-0"X1 3/4"	C	WOOD (WHITE BIRCH)	CLEAR SATIN STAIN	HOLLOW METAL	P-2 SEMI GLOSS	A502	3/A600	2/A600	-	A10, C3, G2, H1, L6	G.C	G.C	
5C	BOH	3'-0"X7'-0"X1 3/4"	C	WOOD (WHITE BIRCH)	CLEAR SATIN STAIN	HOLLOW METAL	P-2 SEMI GLOSS	A502	3/A600	2/A600	-	A10, C3, E3, G2, H1	G.C	G.C	
6C	OFFICE	3'-0"X7'-0"X1 3/4"	C	WOOD (WHITE BIRCH)	CLEAR SATIN STAIN	HOLLOW METAL	P-2 SEMI GLOSS	A502	3/A600	2/A600	-	A10, C3, G2, H1, L6	G.C	G.C	

DOOR HARDWARE LEGEND


ACCESSORIES				CLOSERS		ELECTRONIC HARDWARE		GASKETS		HINGES		LOCKSET		PANIC ALARM	
A1	PUSH/PULL BARS - ROCKWOOD BF 15847-1	A9	IVES 10 X 34 8400 KICK PLATE	C1	LCN 6030	E1	SECURITECH TEL-210S*	G1	IVES FS436 DOORSTOP	H1	MCKINNEY TA2714 NRP 4.5X4.5 HINGE	L1	BEST CYLINDER LOCK	P1	YALE 6100ED A-ALR 36 BSP 6000 SERIES
A2	INTERMEDIATE PIVOT - RIXON #M19 - OFFSET	A10	IVES #20 SILENCERS	C2	LCN 5010	E2	SECURITECH 4850-TTBG-37 5-POINT LOCK	G2	IVES WS406 CCV DOORSTOP	H2	HAGER 253** 4 1/2 " WIDE PIVOT HINGE	L2	QMI CYLINDER SILVER SHUTTER CURTAIN - LOCK OUTSIDE		
A3	TOP PIVOT - RIXON #180 - OFFSET	A11	TOP PIVOT - RIXSON 340	C3	LCN 4000 SERIES	E3	TRILOGY DL2700IC-26D	G3	DOOR SWEEP	H3	HAGER BB1191 NRP HINGE	L3	QMI CYLINDER SILVER SHUTTER CURTAIN - LOCK INSIDE-OUTSIDE		
A4	BOTTOM PIVOT - RIXON #147 - OFFSET	A12	CENTER HUNG PIVOT SET - RIXSON 370	C4		E4	SECURITECH DETEX V40-EB-HD-AL-REW-IC7-99	G4		H4	BOTTOM PIVOT - RIXSON #147 - OFFSET	L4	FALCON ND10S RHODES PASSAGE LATCH SET		
A5	NATIONAL GUARD US32D, US28, US15 FINISH THRESHOLD	A13	IVES U696 PEEP HOLE	C5		E5		G5		H5		L5	FALCON T581 AVALON STOREROOM LOCKSET		
A6	NATIONAL GUARD MILL FINISH THRESHOLD	A14	CRL BRUSHED STAINLESS 48" EXTRA LENGTH LADDER STYLE BACK-TO-BACK PULL	C6		E6		G6		H6		L6	FALCON TM301S AVALON PRIVACY LATCH SET		
A7	NATIONAL GUARD CRL8010ADJ THRESHOLD	A15	DOOR CLOSERS USA - STOREFRONT DOOR ADA COMPLIANT OFFSET PULL HANDLE AND SINGLE BEND PUSH BAR SET, CLEAR ANODIZED FINISH	C7		E7		G7		H7		L7	SCHLAGE D70PD RHODES OFFICE LOCKSET		
A8	IVES SR-64 SILENCERS	A16	BEA 10PBS451 STAINLESS STEEL PUSH PLATE, 4.5 IN. SQUARE, BLUE HANDICAP LOGO AND TEXT	C8		E8		G8		H8		L8	FALCON 8242-AL AUTOMATIC DOOR OPENER		

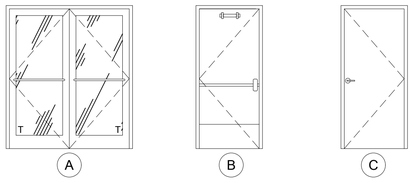

1 DOOR TYPES

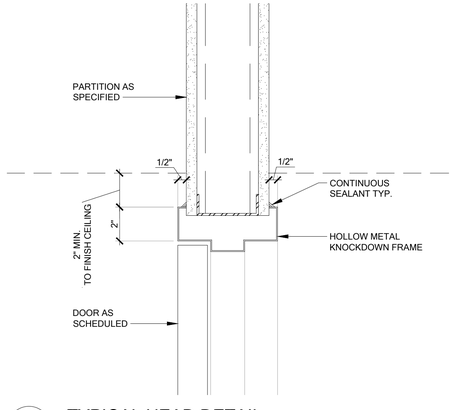

2 TYPICAL HEAD DETAIL
3" = 1'-0"

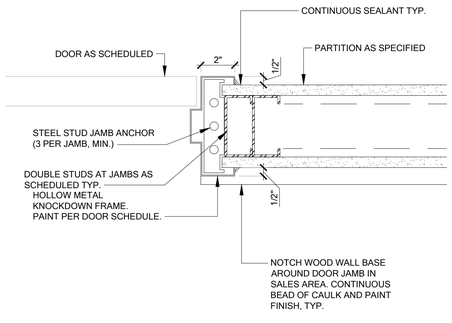

3 TYPICAL JAMB DETAIL
3" = 1'-0"

DOOR NOTES LEGEND

1. SIGNAGE BY G.C.; PROVIDE SIGNAGE ABOVE DOOR(S), SEE SHEET G002.
2. POSTAL ADDRESS NUMBERS PER LANDLORD REQUIREMENTS.
3. ADA PANIC HARDWARE TO BE INSTALLED ON INSIDE WHEN REQUIRED BY LOCAL JURISDICTION.
4. LOCKS SHALL BE KEY-OPERATED WITH INDICATOR TO BE READILY DISTINGUISHABLE AS LOCKED.
5. WEATHER STRIPPING AND SWEEPS TO BE INSTALLED AS REQUIRED.
6. EXISTING DOOR - VERIFY EXISTING HARDWARE MEETS REQUIREMENTS OF, OR IS EQUAL TO SPECIFIED HARDWARE. REPLACE WITH SPECIFIED HARDWARE AS REQUIRED.
7. KICK PLATE TO BE PROVIDED ON PUSH SIDE. IF NOT, PROVIDE AND INSTALL NEW KICK PLATE ON PUSH SIDE OF DOOR: IVES 8400 10"X2" LDW630.
8. VERIFY ALL EXISTING DOOR HARDWARE TO COMPLY WITH CURRENT CODE.
9. HARDWARE PURCHASED AND INSTALLED BY G.C., DOOR PREP BY G.C..
10. PROVIDE NON REMOVABLE PINS (NRP), PIANO TYPE HINGE OR GEARED HINGE (ROTON) AS APPROVED BY CONSUMER CELLULAR ON IN-SWINGING DOOR.
11. ROLL DOWN SHUTTER SHALL BE OPERABLE FROM INSIDE WITHOUT THE USE OF A KEY OR SPECIAL KNOWLEDGE OR EFFORT WHILE THE SPACE IS OCCUPIED.
12. SHUTTER SHALL REMAIN SECURED IN THE FULL OPEN POSITION DURING THE PERIOD OF OCCUPANCY BY THE GENERAL PUBLIC.
13. MAX SHUTTER SIZE: 160 SF OR 150" HIGH.
14. PROVIDE RISER AS REQUIRED FOR CARPET INSTALLATION.
15. PROVIDE LATCH GUARD USE "BG" GUARD PLATE.
16. PROVIDE 5 1/2" THROAT.
17. VERTICALLY STIFFED HOLLOW METAL DOOR RECOMMENDED FOR SECURITY AND EASE OF INSTALLATION.
18. LOCK HARDWARE PURCHASED AND INSTALLED BY G.C. THROUGH APPROVED VENDOR, SECURITY SOURCE.
19. MOUNT AT UPPER CORNER OF DOOR AND JAMB.
20. PROVIDE APPROPRIATE RESTROOM SIGNAGE, SEE SHEET G002 & THE ENLARGED RESTROOMS PLANS.
21. LOCK HARDWARE PURCHASED AND INSTALLED BY SECURITY SOURCE (VENDOR), DOOR PREP BY G.C..
22. ORDER 6" BOTTOM BAR WITH 60° BEVEL (ALTERNATE OPTION: 10" BOTTOM BAR), 7-PIN KEYED CYLINDERS (CONSTRUCTION CORES) WITH THUMBTURNS ON INSIDE, AND PATCH HINGES WITH DOOR.
23. PROVIDE LOUVRE VENT IN DOOR U.O.N. SEE MECHANICAL SHEETS.
24. G.C. TO PAINT 4 INCH "NO STORAGE" ON DOOR.
25. PROVIDE IC-7PIN MORTISE HOUSING AND INSTAKEY CORE.
26. G.C. TO ADD HAGER 1756 PEEPHOLE TO REAR EXIT DOOR WHEN NONE IS EXISTING. VIEWER TO BE INSTALLED APPROXIMATELY 60" AFF, CENTERED HORIZONTALLY ON DOOR AND SUITABLE FOR METAL DOOR INSTALLATION WITH WIDE ANGLE LENS. SEAL AND SECURE VIEWER TIGHTLY TO MAINTAIN DOOR INTEGRITY. UL LISTED FOR 90 MINUTE FIRE DOOR (UL10B).
27. SELF-LATCHING LOCK HARDWARE PURCHASED AND INSTALLED THROUGH SECURITY SOURCE (VENDOR) BY G.C. DOOR PREP BY G.C.
28. SUPPLY COMPLETE EXIT DEVICE PART NUMBER BASED ON DOOR SIZE AS REQUIRED. 36" DOOR = 36, NARROW STILE = NS, DOUBLE DOOR = 94. FOR NARROW STILE, ADD NARROW STILE KIT #101879-1.
29. PROVIDE ADDITIONAL INTERMEDIATE PIVOT FOR DOORS 8'-0" AND TALLER.
30. DO NOT PROVIDE HOLD OPEN DEVICE ON DOOR IF TACTILE SIGNAGE IS MOUNTED TO DOOR.
31. G.C. TO FIELD VERIFY CONDITION OF EXISTING DOOR HARDWARE AND COORDINATE WITH OWNER IF REPLACEMENT IS REQUIRED.
32. G.C. TO CLEAN EXISTING DOORS TO LIKE NEW CONDITION. G.C. TO INSTALL BOTTOM RAIL ADAPTER (CRL #10AD, DOOR CLOSERS USA #SF-ADA-36KIT-A OR EQ) TO EXTEND BOTTOM RAIL TO 10" MIN. TO MEET CODE WHEN REQUIRED.
33. GC TO ADD ADDRESS/SUITE NUMBERS TO ENTRY/ EXIT DOORS WHEN NOT EXISTING. NUMBERS HAVE HIGH CONTRAST WITH DOOR SURFACE. NUMBER TO BE 4" IN HEIGHT AND INSTALLED 60" AFF CENTERED ON DOOR.
34. GC TO INSTALL BLANK PLATE TO EXTERIOR SIDE OF DOOR AT HARDWARE LOCATION, IF REQUIRED.

GENERAL NOTES

A. HARDWARE FINISHES SHALL BE SATIN CHROME 626 UNLESS NOTED OTHERWISE.
B. ALL LOCKSETS AND LATCH SETS SHALL BE LEVER HANDLES.
C. VERIFY ALL EXISTING DOOR HARDWARE TO COMPLY WITH CURRENT CODE. SHALL NOT REQUIRE TIGHT GRASPING, TIGHT PINCHING OR TWISTING OF THE WRIST TO OPERATE. VERIFY EXISTING DOOR HANDLES, PULLS, LATCHES, LOCKS AND OTHER OPERATING DEVICES ARE INSTALLED BETWEEN 34" - 48" AFF.
D. G.C. TO PURCHASE AND INSTALL CORES PER HARDWARE SCHEDULE FROM CONSUMER CELLULAR'S VENDOR AT TIME OF STORE TURNOVER.
E. AT EXISTING DOORS TO REMAIN, VERIFY THAT EXISTING DOOR AND HARDWARE MEETS OR EXCEEDS THE REQUIREMENTS OF THESE SPECIFICATIONS. REPLACE AS REQUIRED.
F. DOORS WITH CLOSERS SHALL COMPLY WITH THE FOLLOWING:
   1. 5LBF MAXIMUM FORCE FOR OPENING DOOR
   2. FROM AN OPEN POSITION OF 70°, DOOR SHALL TAKE AT LEAST 3 SECONDS TO MOVE TO A POINT 3 INCHES FROM THE LATCH, MEASURED TO THE LEADING EDGE OF THE DOOR.
G. DOORS/FRAMES SHALL BE "TIMELY" (OR EQUAL) FACTORY FINISH TO MATCH P1.
H. LEVER SETS TO BE FALCON GRADE 1 WITH INTERCHANGEABLE CORES. T-SERIES OR APPROVED EQUAL LEVER TO BE AVALON STYLE.
I. SECURITECH TRIDENT EXIT DEVICES SUPPLIED BY LP NETWORK INC., DBA SECURITY SOURCE (888) 836-2137
J. EXIT DOORS SHALL BE READILY OPENABLE FROM THE EGRESS SIDE, WITHOUT THE USE OF A KEY OR SPECIAL KNOWLEDGE OR EFFORT. THE UNLATCHING OF ANY EXIT DOOR SHALL NOT REQUIRE MORE THAN ONE OPERATION. INSTALL ALL PANIC HARDWARE PER PLANS.
K. ALL DOORS EXCEPT THE MAIN ENTRANCE DOORS SHALL COMPLY WITH ICC / ANSI A-117.1 2009 SECTION 309.4 AND 404 2.6, AND IBC SECTION 1008.1.9. THE OPERABLE PARTS OF THE DOOR HARDWARE SHALL HAVE A SHAPE THAT IS EASY TO GRASP WITH ONE HAND AND DOES NOT REQUIRE TIGHT GRASPING, PINCHING OR THE TWISTING OF THE WRIST. THE FORCE TO ACTIVATE THE DOOR HARDWARE SHALL BE 5.0 POUNDS MAXIMUM.

SARGENTI
5840 LEGACY CIR - STE D230, PLANO, TX 75024
T|201.316.5491 ★ WWW.SARGARCH.COM

SEAL:

STATE OF COLORADO ★ ROBERT J. SARGENTI 305929 ★ LICENSED ARCHITECT

DATE SIGNED: 10/15/2026

CONTRACTOR'S NOTES:

WRITTEN DIMENSIONS HOLD PREFERENCE OVER SCALED DIMENSIONS. DO NOT SCALE THE DRAWINGS. THE CONTRACTORS MUST VISIT JOB SITE TO VERIFY ALL EXISTING CONDITIONS AND DIMENSIONS BEFORE SUBMITTING BIDS. REPORT ANY DISCREPANCIES OF ANY CONDITIONS WHICH MAY INTERFERE WITH THE PROPER EXECUTION OF, THE CONTRACT TO THE TENANT'S REPRESENTATIVE. REPORT DISCREPANCIES DURING BIDDING PROCESS AND BEFORE START OF CONSTRUCTION. CHANGE ORDERS NEED TO BE APPROVED BY THE CONSTRUCTION MANAGER FOR ISSUES ARISING FROM THE FIELD CONDITIONS OR CONFLICTS BETWEEN THE PLANS AND THE EXISTING CONDITIONS PRIOR TO THE COMMENCEMENT OF WORK.

	DATE	ISSUE
△	DATE	REVISION

LOCATION:

Consumer Cellular

8283 S. AKRON ST.
SUITE #110
CENTENNIAL, CO 80112

STORE NUMBER:

CO2

PROJECT INFORMATION:

DATE: 10/14/2026
PROJECT NUMBER: 15066 - 26
STORE TYPE: TIER 2
DRAWN BY: GV REVIEWED BY: AN

TITLE:

DOOR SCHEDULE AND DETAILS

SHEET NUMBER:

A600

FINISH SCHEDULE

	TAG	LOCATION USED	PRODUCT #/ NAME	DESCRIPTION	MANUFACTURER	COLOR/FINISH	SIZE	CONTACT		NOTES
PAINT	PT-1	SEE ELEVATIONS	SW 6070	PAINT	SHERWIN WILLIAMS	HERON PLUME / EGGSHELL		BRETT HUCKELBERRY	O | 214.553.3940 C | 214.728.6695	REFER TO ELEVATIONS
	PT-2	SEE ELEVATIONS	SW 7650	PAINT	SHERWIN WILLIAMS	ELLIE GRAY / EGGSHELL				REFER TO ELEVATIONS
	PT-3	SEE ELEVATIONS	SW 7674	PAINT	SHERWIN WILLIAMS	PEPPERCORN / EGGSHELL				REFER TO ELEVATIONS
	PT-4	SEE ELEVATIONS	SW 6885	PAINT	SHERWIN WILLIAMS	KNOCKOUT ORANGE / EGGSHELL				REFER TO ELEVATIONS
FLOORING/ SURFACES	FLR-1	SALES FLOOR & HALLWAY	EARTHEN I834V	LVT	PATCRAFT	DUSK 00520	12"X24"	BRAD TORNABENE	O | 800-241-4014 C | 480.276.8355 brad.tornabene@patcraft.com	4MM 20 MIL
	FLR-2	RESTROOMS	STONES 2.5 C2119	LVT	MOHAWK GROUP	989 VALLE DE BOVE	12"X24"	SHANAN KOPLAN	C | 561.866.5973 shanan_koplan@mohawkind.com	HALF LAP INSTALLATION
	FLR-3	BOH	CHALK 930 IND	VINYL TILE	EMSER	CHALK 930 IND	18" X 18"	MICHELLE OSBORNE	O | 480-443-8453 C | 480.285.9716 michelleosborne@emser.com	GC TO SUBSTITUTE WITH SLAB 921 IF CHALK 930 IND IS NOT IN STOCK.
	T-6	SALES, BOH	243150 / DEKTON NATURA	SOLID SURFACE COUNTERTOP	COSENTINO	NATURA 18		213.265.0756	213.265.0756	
LAMINATE	LAM-1	SEE ELEVATIONS	7197-58	LAMINATE	FORMICA	DOVER WHITE/ MATTE		SCOTT PETRO	623.225.8941	
	LAM-3	SEE ELEVATIONS	2297-PX	LAMINATE	FORMICA	TERRIL / PLEX		SCOTT PETRO	623.225.8943	
	LAM-4	SEE ELEVATIONS	8208K-16	LAMINATE	WILSONART	FAWN CYPRESS / MATTE		JOSEPH KLUGER	469.616.4958	
	LAM-6	SEE ELEVATIONS	1573-60	LAMINATE	WILSONART	FROSTY WHITE MATTE				
BASE & TRIM	BT-1	SALES	MANDALAY MW-40-H6	VINYL BASE	TARKETT	BLACK	6"			
	BT-2	BOH	700 SERIES WALL BASE	RUBBER COVE BASE	ROPPE	193 BLACK BROWN	4"			
	BT-3	RESTROOMS	WALL BASE MOLDING - 820NA1 / 76174	THERMOPLASTIC COVE BASE	GRAINGER	SNOW WHITE	6"			GC TO SUBSTITUTE BLACK 6" TRIM IF WHITE IS OUT OF STOCK
	FRP	MOP SINK AREA / RESTROOMS	P100	PEBBLED FRP	MARLITE	WHITE				FRP TRIM TO BE: EDGE M370, OUTSIDE CORNER M360 AND INSIDE CORNER M350
CEILING	ACT-1	SEE PLANS		GYP BOARD CEILING						
	ACT-2	SEE PLANS	GRID: 15/16" STANDARD / TILE: CANYON 1492	ACT CEILING TILE	ARMSTRONG	WHITE / SMOOTHE	24"		1.877.276.7876	BEVELED TEGULAR EDGE

FURNITURE, FIXTURES AND EQUIPMENT SCHEDULE

	TAG	LOCATION USED	PRODUCT #/ NAME	DESCRIPTION	MANUFACTURER	COLOR/FINISH	SIZE	CONTACT		NOTES
FURNITURE	F-1	SALES AREA	SF0726	ELEMENT SOFA	ANDREU WORLD	FAB-3	67.32W" X 31.10" D X 32.28" H	MARY BLANCHARD	602.515.2736	
	F-2	SALES AREA	783	LOUNGE CHAIR	ACCERAY	FAB-1	31'' H x 27.5'' W x 27.5'' D	MELANINE VINDIVICH	MELANIE@SALESWESTGROUP.COM	
	F-3	SALES AREA	SOLO N CHAIR	LOUNGE CHAIR	ACCERAY	SEE NOTES	29"W x 31" D x 34" H	MELANINE VINDIVICH	MELANIE@SALESWESTGROUP.COM	
	F-4	SALES AREA	109592	COUNTER STOOL	ZUO	VINTAGE BLACK	18.9" W x 22.4" D x 36.2" H			
	F-5	SALES AREA	109590	BARSTOOL	ZUO	VINTAGE BLACK	18.9" W x 22.4" D x 40.2" H			
	F-6	SALES AREA	GTAB1025MTB	RECTANGULAR COFFEE TABLE	NOIR	BLACK STEEL WITH WHITE MARBLE TOP	64" W x 32"D x18" H	PEGGY HICKLIN	PEGGYH@BASSMANBAINE.COM	
	F-7	SALES AREA	11537/11269-CTB	ROUND COFFEE TABLE	MITCHELL GOLD + BOBBY WILLIAMS	VIENNA ROUND WHITE MARBLE PEWTER BASE	38" W x 38" D x 12" H			
	F-8	BOH AREA	TACHIC PARSONS CHAIR	BREAK ROOM CHAIRS	LATITUDE RUN	BLACK	21.1"D x 20.1" x 30.1 H			
	F-9	BOH AREA	PEDESTAL DINING TABLE	BREAK ROOM TABLE	ORREN ELLIS	WHITE	29.75" H x 41.38" D x 41.38" L			
	F-10	SALES AREA	SF2067	RAGLAN SOFA	ANDREU WORLD	FAB-3	76.77" W x 29.53" D x 28.35" H	MARY BLANCHARD	602.515.2736	
	F-11	SALES AREA	SPEC TBD BY OWNER	TABLE	SPEC TBD BY OWNER	SPEC TBD BY OWNER	SPEC TBD BY OWNER			
FABRICS	FAB-1	LOUNGE CHAIR	PATTERN: VECTOR	FABRIC	CONCERTEX	CHARCOAL / GRAFFITI-FREE	54"W	KRISTEN BENKO		
	FAB-3	SOFA	PATTERN: LYON	FABRIC	CONCERTEX	SADDLE	54"W	KRISTEN BENKO		
B.O.H FIXTURES	SHELVES	BOH AREA	H-3913	HEAVY-DUTY STEEL SHELVING	ULINE	TOUGH-POWDER COAT FINISH	48" X 24" X 72"			SHELVING ABOVE MOP SINK IS ON DETAIL 6/A500
	CABINET	BOH AREA	H-1871GR	JUMBO HEAVY DUTY STORAGE CABINET	ULINE	GRAY	48" X 24" X 78"			
	LOCKERS	BOH AREA	H-4808GR	DOUBLE TIER LOCKERS- 3 WIDE	ULINE	GRAY	36" x 12" x 72"			
	RACK	BOH AREA	SR18UB	SMARTRACK 18U MID-DEPTH HALF-HEIGHT RACK ENCLOSURE	TRIPP.LITE	BLACK				
	CAGE	BOH AREA	H-8297-4	WIRE SECURITY ROOM WITH ROOF (4 SIDED)	ULINE		8'X8', 4 SIDED			BUILT IN CYLINDER LOCK WITH KEYS INCLUDED. GC TO INSTALL SPACERS DOWN THE CENTER OF THE CAGE ON THE ROOF AND BACK WALL OF THE CAGE TO ACCOMMODATE A 1" GAP FROM THE DOOR TO THE DOOR JAMB TO ALLOW FOR THE ELECTRONIC STRIKE.
RUGS	RUG-1	SALES FLOOR	CT47977 / PATINA	AREA RUG WITH ADA EDGING	PATCRAFT	COLORWAY : CUSTOM	8' X 10'	CHANTEL WOLTERS	702.888.2071	Colors: ZF1507, 57900, C1726, CI553, C1752
	RUG-2	SALES FLOOR	YF83331 1095388	AREA RUG WITH ADA EDGING	PATCRAFT	COLORWAY : CUSTOM	8' X 10'	CHANTEL WOLTERS	702.888.2071	
	RUG-3	SALES FLOOR	CUBE AND COLOUR	ROUND AREA RUG WITH ADA EDGING	PATCRAFT	TANGERINE 00650	10' DIAMETER	CHANTEL WOLTERS	702.888.2071	INSTALL: HERRINBONE PATTERN
	RUG-4	SALES FLOOR	YF83331 1095388	AREA RUG WITH ADA EDGING	PATCRAFT	COLORWAY : CUSTOM	10' X 16'	CHANTEL WOLTERS	702.888.2071	Colors: A:CI752, B:CJ553, C:CB216, D:CI726
	MAT-1	SALES FLOOR		WALK OFF MAT	MAD MATTER INC.	291 RICH CHARCOAL-BACKGROUND/ 233 MANDARIN ORANGE-LETTERS	5'X6'	BEN STORZ	benjamin@madmatter.com	
RESTROOM FIXTURES	P-1	RESTROOM	0356.421 / LUCERNE WALL-HUNG LAVATOTY	WALL MOUNTED SINK	AMERICAN STANDARD	WHITE				
	P-2	RESTROOM	K-97282-4-CP	LAVATORY FAUCET	KOHLER	SINGLE HOLE COMMERCIAL FAUCET	POLISHED CHROME			
	P-4	RESTROOM	B-2013	SOAP DISPENSER	BOBRICK	STAINLESS STEEL / SATIN	10" X 4-1/4"			
	P-5	RESTROOM	0600 / INTEROLOK STAINLESS STEEL FRAMED MIRROR	MIRROR	ASI	STAINLESS STEEL				
	P-6	RESTROOM	K-3505-0 / WELLWORTH CLASSIC	TOILET	KOHLER	WHITE		DANNY HOWE	DANNY.HOWE@KOHLER.COM	
	P-7	RESTROOM	VERDEDRI Q-973A2	SURFACE MOUNTED ADA COMPLIANT HAND DRYER	WORLD DRYER	BRUSHED STAINLESS STEEL				
	P-8	RESTROOM	780929	8 GALLON HALF ROUND TRASH CAN	COMMERCIAL ZONE	STAINLESS STEEL				
HARDWARE	LOCK-1	SEE ELEVATIONS	C8053 SERIES / C SERIES	CAM LOCK	HAFELE	NICKEL	30MM		800.423.3531	PROVIDE KEYED FLUSH MOUNT LOCKS
	PULL-1	SALES AREA	BP98988030	CABINET PULLS	RICHELIEU	WHITE			1.800.619.5446	

LIGHTING SCHEDULE

	TAG	LOCATION USED	MFG	PRODUCT #/ NAME	DESCRIPTION	COLOR/FINISH	SIZE	CONTACT		NOTES
LIGHTING SCHEDULE	L-1	SALES / REF. TO PLANS	LOTUS	LD4R-30K-HO-4R-WR-WT / LLL-LD2050TR / FRP4	4" RECESSED DOWNLIGHT	WHITE	4" DIA	CS ILLUMINATION	O | 760-477-1244x2230 D | 860.968.3879 alewis@csillumination.com	ADD ELV DIMMER
	L-2A	SALES / REF. TO PLANS	WAC LIGHTING	PD-22754-AL	LED LINEAR PENDANT	BRUSHED ALUMINUM	54"	CS ILLUMINATION	O | 760-477-1244x2230 D | 860.968.3879 alewis@csillumination.com	6'-6" A.F.F
	L-2B	SALES / REF. TO PLANS	WAC LIGHTING	PD-22754-AL	LED LINEAR PENDANT	BRUSHED ALUMINUM	54"	CS ILLUMINATION	O | 760-477-1244x2230 D | 860.968.3879 alewis@csillumination.com	FLUSH WITH TRELLIS
	L-3A	SALES / REF. TO PLANS	Y-LIGHTING	HERE COMES THE SUN MEDIUM PENDANT LIGHT/SIZE LARGE	PENDANT LIGHT	WHITE/COPPER				
	L-3B	SALES / REF. TO PLANS	Y-LIGHTING	HERE COMES THE SUN MEDIUM PENDANT LIGHT/SIZE MEDIUM	PENDANT LIGHT	WHITE/COPPER				
	L-3C	SALES / REF. TO PLANS	Y-LIGHTING	HERE COMES THE SUN MEDIUM PENDANT LIGHT/SIZE SMALL	PENDANT LIGHT	WHITE/COPPER	6.88", 9.84", 13.77"	CS ILLUMINATION	O | 760-477-1244x2230 D | 860.968.3879 alewis@csillumination.com	
	L-4	SALES / REF. TO PLANS	ET2 LIGHTING	E23111-18 / LARMES LINEAR	PENDANT LIGHT	POLISHED CHROME	5"W X 8"H	CS ILLUMINATION	O | 760-477-1244x2230 D | 860.968.3879 alewis@csillumination.com	
	L-5	SALES / REF. TO PLANS	DIODE	D1-24V-BLBSC2-30 / LED TAPE LIGHT	LED STRIP		CUTTING SIZE: EVERY 2.8"	CS ILLUMINATION	O | 760-477-1244x2230 D | 860.968.3879 alewis@csillumination.com	
	L-6	SALES / REF. TO PLANS	VALRIYA	VA-BPL-22-30-3000K	RECESSED 2'X2' AREA LIGHT GRID			CS ILLUMINATION	O | 760-477-1244x2230 D | 860.968.3879 alewis@csillumination.com	
	L-6 EM	SALES / REF. TO PLANS	VALRIYA	VA-BPL-22-30-3000K / VA EDA-LI15-50	RECESSED 2'X2' AREA LIGHT GRID 90 MINUTE BATTERY BACKUP			CS ILLUMINATION	O | 760-477-1244x2230 D | 860.968.3879 alewis@csillumination.com	
	L-6A	SALES / REF. TO PLANS	VALRIYA	VA-TTR-24-40-3000K	RECESSED 2'X4' AREA LIGHT GRID			CS ILLUMINATION	O | 760-477-1244x2230 D | 860.968.3879 alewis@csillumination.com	
	L-6A EM	SALES / REF. TO PLANS	VALRIYA	VA-TTR-24-40-3000K-VA-EDA-L115-50	RECESSED 2'X4' AREA LIGHT GRID 90 MINUTE BATTERY BACKUP			CS ILLUMINATION	O | 760-477-1244x2230 D | 860.968.3879 alewis@csillumination.com	
	L-7	SALES / REF. TO PLANS	LUMENTURE	RWW160-30H-W-W	RECESSED WALL WASHER		3-1/8" X 7-3/8"	CS ILLUMINATION	O | 760-477-1244x2230 D | 860.968.3879 alewis@csillumination.com	
	L-8	RESTROOM / REF. TO PLANS	MAXIM LIGHTING	52000	WALL SCONCE	SATIN NICKEL	18"W x 1.75"H x 2.25"	CS ILLUMINATION	O | 760-477-1244x2230 D | 860.968.3879 alewis@csillumination.com	
	L-9	SALES / REF. TO PLANS	DUAL LITE	LZ-2-03L	SURFACE MOUNT EM FIXTURE	WHITE		CS ILLUMINATION	O | 760-477-1244x2230 D | 860.968.3879 alewis@csillumination.com	
	EX	EXTERIOR/ REF. TO PLANS	BEST	2RL52-WH	DUAL LED REMOTE HEAD	WHITE		CS ILLUMINATION	O | 760-477-1244x2230 D | 860.968.3879 alewis@csillumination.com	90 MIN. EMERGENCY BATTERY BACKUP
	EX1	SALES / REF. TO PLANS	EXITRONIX	S900C-SM-G-WH-R	LED EXIT SIGN	GREEN LETTERS, WHITE HOUSING		CS ILLUMINATION	O | 760-477-1244x2230 D | 860.968.3879 alewis@csillumination.com	90 MIN. EMERGENCY BATTERY BACKUP

NOTE:
NOT ALL ITEMS LISTED ARE USED AT THIS LOCATION. PLEASE REFER TO SHEETS A101, A102 & THE INTERIOR ELEVATIONS FOR SITE SPECIFIC FINISHES.

SARGENTI

5840 LEGACY CIR - STE D230, PLANO, TX 75024
T|201.316.5491 ■ WWW.SARGARCH.COM

SEAL:

STATE OF COLORADO ★ ROBERT J. SARGENTI 305929 ★ LICENSED ARCHITECT

DATE SIGNED: 10/15/2026

CONTRACTOR'S NOTES:

WRITTEN DIMENSIONS HOLD PREFERENCE OVER SCALED DIMENSIONS. DO NOT SCALE THE DRAWINGS. THE CONTRACTORS MUST VISIT JOB SITE TO VERIFY ALL EXISTING CONDITIONS AND DIMENSIONS BEFORE SUBMITTING BIDS. REPORT ANY DISCREPANCIES OF ANY CONDITIONS WHICH MAY INTERFERE WITH THE PROPER EXECUTION OF, THE CONTRACT TO THE TENANT'S REPRESENTATIVE. REPORT DISCREPANCIES DURING BIDDING PROCESS AND BEFORE START OF CONSTRUCTION. CHANGE ORDERS NEED TO BE APPROVED BY THE CONSTRUCTION MANAGER FOR ISSUES ARISING FROM THE FIELD CONDITIONS OR CONFLICTS BETWEEN THE PLANS AND THE EXISTING CONDITIONS PRIOR TO THE COMMENCEMENT OF WORK.

	DATE	ISSUE
△	DATE	REVISION

LOCATION:

Consumer Cellular®

8283 S. AKRON ST.
SUITE #110
CENTENNIAL, CO 80112

STORE NUMBER:

CO2

PROJECT INFORMATION:

DATE: 10/14/2026
PROJECT NUMBER: 15066 - 26
STORE TYPE: TIER 2
DRAWN BY: GV REVIEWED BY: AN

TITLE:

ARCHITECTURAL SPECIFICATIONS

SHEET NUMBER:

A700