BANK OF AMERICA

Broomfield Center
Financial Center 2.0

IF Schematic Design Review	08-30-2023
IF Schematic Design Final	09-29-2023
IF COE Package	11-09-2023
IF Design Development Review	07-19-2024
IF Design Development Final	08-19-2024
IF Construction Document Review	09-20-2024
IF Construction Document Final	12-05-2024
IF CD 90	08-15-2025
IF Permit	08-26-2025

CO1-111
NWC Hwy 7 and Palisade Pkwy
Broomfield CO, 80023

Client Representative

CUSHMAN & WAKEFIELD
Attn: Bill Arnold
Tel: 330.931.6977
Email: Bill.Arnold@cushwake.com

Architect

NELSON
Nelco Architecture, Inc.

Attn: Harry Houtsis
Tel: 310.693.5271
Email: hkoutsis@nelsonww.com

AOR Contact: Robert J. Sullivan Jr.
Tel: 216.830.1561
Email: rsullivan@nelsonww.com
License No: AR-987677

COLORADO LICENSED ROBERT JOHN SULLIVAN 60405443 ARCHITECT
09/04/2025

Civil:

LANGAN
Attn: Ben Henry
Tel: (817) 328-3217
Email: bhenry@langan.com

Structural:

Salas O'Brien
Attn: Julie Bolding, PE
Tel: 469.782.9753
Email: julie.bolding@salasobrien.com

MEP:

Salas O'Brien
Attn: Robert Zendejas
Tel: 404.434.7373
Email: robert.zendejas@salasobrien.com

FACILITY PARTNER PROJECT NUMBER: 36867P41D848
NELSON Project Number: 23.0002261.000

© NELSON WORLDWIDE, LLC 2023 ALL RIGHTS RESERVED

9/3/2025 4:19:21 PM C:\Users\cgosler\Revit_Locals\2023\CO1-111 Broomfield_for SDP_cgosler5372S.rvt

LIFE SAFETY AND EGRESS INFORMATION

EXITING	REQUIRED	PROVIDED
OCCUPANCY LOAD: **TABLE 1004.5**	150 GROSS SF PER OCCUPANT: 4,260 SF / 150 =	29 OCCUPANTS
EXIT WIDTH - OTHER EGRESS COMPONENTS: **ARTICLE 1005.3.2**	0.2" X **29 OCC** (NON SPRINKLED) = **6 OCC**	**33" *+ 66"* = 99"** **99/0.2 = 495 PERSONS**
NUMBER OF EXITS: GROUP **B** **TABLE 1006.2.1**	0-49 OCC LOAD = 1 EXIT 50-500 OCC LOAD = 2 EXITS	**2 EXITS**
COMMON PATH OF EGRESS: GROUP **B**	100' MAX. < 29 OCC LOAD W/O SPR	**SEE PLAN**
SEPARATION OF EXITS: **SECTION 1007.1.1**	MIN 1/2 MAX OVERALL DIAGONAL DIM OF SPACE SERVED W/O SPR	**SEE PLAN**
EXIT ACCESS TRAVEL DISTANCE: GROUP B **TABLE 1017.2**	200' W/O SPRINKLERS	**SEE PLAN**
DEAD END CORRIDORS: GROUP B **SECTION 1020.5**	20' W/O SPRINKLERS	**NO DEAD END CORRIDORS - SEE PLAN**
PROTECTION:	FIRE ALARM: YES SPRINKLERED: NO	
FIRE EXTINGUISHERS: **TABLE 906.3(1)**	LIGHT HAZARD OCCUPANCY: MINIMUM RATED SINGLE EXTINGUISHER = 2-A MAXIMUM FLOOR AREA PER UNIT OF A = 3,000 SF MAXIMUM DISTANCE OF TRAVEL TO EXTINGUISHER = 75' PROVIDED EXTINGUISHERS: (2) 2-A EXTINGUISHERS WITHIN 75' OF TRAVEL	

EGRESS AND LIFE SAFETY NOTES GENERAL NOTES

1. TACTILE SIGNS SHALL BE MATTE FINISH, WITH CHARACTERS THAT CONTRAST WITH THE BACKGROUND. SUBMIT SIGN SAMPLE TO ARCHITECT FOR APPROVAL. FINISHES: 1/4" PIS BACKPAINTED ACRYLIC PAINT: MANUFACTURER, COLOR. COLOR (ROWMARK) APPLIQUE WITH CLASSIC RASTER BRAILLE. EACH GRADE-LEVEL EXTERIOR EXIT DOOR SHALL BE IDENTIFIED BY A TACTILE SIGN WITH THE WORD "EXIT". REFER TO TACTILE SIGNAGE DETAIL ON SHEET A00.41.
2. EXIT SIGNAGE SHALL BE INTERNALLY ILLUMINATED AT ALL TIMES WITH TWO POWER SOURCES, ONE FROM THE PREMISES WIRING SYSTEM AND THE OTHER FROM BATTERIES. EXIT SIGN ILLUMINATION SHALL NOT BE LESS THAN 5 FOOT CANDLES.
3. FINAL PLACEMENT OF EXIT SIGNS IS SUBJECT TO APPROVAL AND MODIFICATION BY THE FIRE DEPARTMENT FIELD INSPECTOR.

EGRESS LEGEND

EGRESS PATH

TRAVEL DISTANCE:

EXIT SIGNS:

SURFACE-MOUNTED DIRECTIONAL

CEILING-MOUNTED SINGLE SIDED DIRECTIONAL

CEILING-MOUNTED DUAL SIDED DIRECTIONAL

FIRE EXTINGUISHERS:

FEC — FIRE EXTINGUISHER CABINET (FEC)

FE — FIRE EXTINGUISHER (FE)

1 TACTILE EGRESS SIGNAGE LOCATION. SEE A00.41 FOR MORE INFORMATION

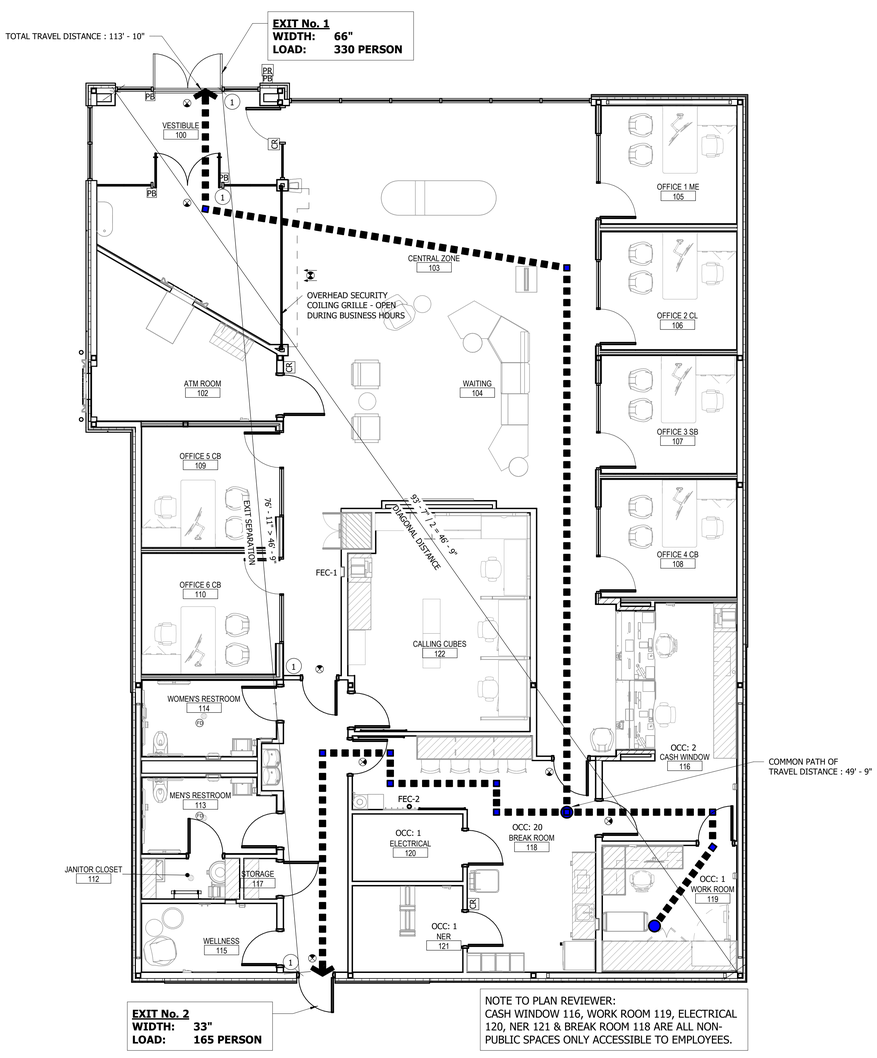

3 A00.00 LIFE SAFETY PLAN
3/16" = 1'-0"

ABBREVIATIONS

A/C	AIR CONDITIONING
A/C UNIT	AIR CONDITIONING UNIT
A/E	ARCHITECT/ENGINEER
A/V	AUDIO VISUAL
ACT	ACOUSTICAL CEILING TILE
ADJ	ADJACENT
AFF	ABOVE FINISH FLOOR
AHU	AIR HANDLING UNIT
ALT	ALTERNATE(ING)
ALUM	ALUMINUM
ANOD	ANODIZED
APPROX	APPROXIMATE
ARCH	ARCHITECT
AUTO	AUTOMATIC
AVG	AVERAGE
AWB	AIR & WATER BARRIER
B	
BETW	BETWEEN
BEV	BEVELED
BIT	BITUMINOUS
BLDG	BUILDING
BLK	BLOCK
BLKG	BLOCKING
BOS	BACK OF STUD
BSMT	BASEMENT
BTM	BOTTOM
BTU	BRITISH THERMAL UNIT
BUR	BUILT UP ROOFING
C	
CER	CERAMIC
CF	CUBIC FEET
CJ	CONTROL JOINT
CL	CENTERLINE
CLG	CEILING
CLOS	CLOSET
CLR	CLEAR
CMU	CONCRETE MASONRY UNIT
COL	COLUMN
CONC	CONCRETE
CONSTR	CONSTRUCTION
CONT	CONTINUNOUS
CONTR	CONTRACTOR
CORR	CORRIDOR
CPT	CARPET
CT	CERAMIC TILE
CTR	CENTER
CU FT	CUBIC FEET
D	
D	DEPTH
DBL	DOUBLE
DEG	DEGREES
DEMO	DEMOLISH
DEPT	DEPARTMENT
DF	DRINKING FOUNTAIN
DH	DOUBLE HUNG
DIAG	DIAGONAL
DIAM	DIAMETER
DISP	DISPENSER
DN	DOWN
DR	DOOR(S)
DS	DOWN SPOUT
DTL	DETAIL
DWG	DRAWING
DWR	DRAWER
E	
E	EAST
EA	EACH
EF	EXHAUST FAN
EJ	EXPANSION JOIN
EL	ELEVATION
ELEC	ELECTRIC(AL)
ELEV	ELEVATOR
EMERG	EMERGENCY
ENCL	ENCLOSURE
ENGR	ENGINEER
ENTR	ENTRANCE
EQ	EQUAL
EQUIP	EQUIPMENT
EW	EACH WAY
EWC	ELECTRIC WATER COOLER
EXH	EXHAUST
EXIST	EXISTING
EXP	EXPANSION
EXT	EXTERNAL or EXTERIOR
F	
FC	FOOT CANDLES
FCO	FLOOR CLEAN OUT
FD	FLOOR DRAIN
FDN	FOUNDATION
FE	FIRE EXTINGUISHER
FEC	FIRE EXTINGUISHER CABINET
FF	FINISH FLOOR
FHC	FIRE HOSE CABINET
FIG	FIGURE
FIN	FINISH
FIXT	FIXTURE
FLEX	FLEXIBLE
FLR	FLOOR
FOM	FACE OF MASONRY
FOS	FACE OF STUD
FP	FIRE PROTECTIONS
FPL	FABRIC PANEL
FRTWD	FIRE RETARDENT TREATED WOOD
FT	FOOT or FEET
FTG	FOOTING
FURR	FURRING
FWC	FABRIC WALLCOVERING
G	
GALV	GALVANIZED
GC	GENERAL CONTRACTOR
GEN	GENERAL
GENR	GENERATOR
GFI	GROUND FAULT INTERRUPTER
GL	GLAZING
GRD	GROUND
GWB	GYPSUM WALL BOARD
GYP	GYPSUM
H	
H	HIGH
HB	HOSE BIB
HC	HOLLOW CORE
HDW	HARDWARE
HEX	HEXAGONAL
HID	HIGH INTENSITY DISCHARGE
HM	HOLLOW METAL
HORIZ	HORIZONTAL
HR	HOUR
HT	HEIGHT
HTG	HEATING
HTR	HEATER
HVAC	HEATING VENTILATION & AIR COND.
HW	HOT WATER
HWY	HIGHWAY
I	
IC	IN CONTRACT
IN	INCHES
INCAND	INCANDESCENT
INCL	INCLUSIVE
INCLDG	INCLUDING
INFO	INFORMATION
INSUL	INSULATION
INT	INTERIOR
INV	INVERT
J	
JAN CLOS	JANITOR'S CLOSET
JB	JUNCTION BOX
JST	JOIST
JT	JOINT
K	
KD	KNOCK DOWN
KIT	KITCHEN
L	
L	LOW
LAM	LAMINATE(D)
LAV	LAVATORY
LF	LINEAR FEET
LH	LEFT HAND
LHR	LEFT HAND REVERSE
LL	LIVE LOAD
LONG	LONGITUDINAL
LVL	LEVEL
M	
M HAL	METAL HALIDE
MAINT	MAINTENANCE
MAS	MASONRY
MATL	MATERIAL
MAX	MAXIMUM
MECH	MECHANICAL
MED	MEDIUM
MEZZ	MEZZANINE
MFR	MANUFACTURER
MIN	MINIMUM
MISC	MISCELLANEOUS
MO	MASONRY OPENING
MTG	MOUNTING
MTL	METAL
N	
N	NORTH
N/A	NOT APPLICABLE
NE	NORTHEAST
NEC	NATIONAL ELECTRIC CODE
NEG	NEGATIVE
NIC	NOT IN CONTRACT
NO	NUMBER
NOM	NOMINAL
NRC	NOISE REDUCTION COEFFICIENT
NTS	NOT TO SCALE
NW	NORTHWEST
O	
OC	ON CENTER
OCC	OCCUPANCY
OFF	OFFICE
OH	OVERHEAD
OPG	OPENING
OPP	OPPOSITE
OZ	OUNCE(S)
P	
# lb	POUND
%	PERCENT
PART	PARTIAL
PASS	PASSAGE
PC	PRECAST
PED	PEDESTAL
PERF	PERFORATED
PERP	PERPENDICULAR
PL	PROPERTY LINE
PLAM	PLASTIC LAMINATE
PLAS	PLASTIC
PLT	PLATE
PLYWD	PLYWOOD
POS	POSITIVE
PR	PAIR
PREFAB	PREFABRICATED
PROJ	PROJECT or PROJECTED
PROP	PROPERTY
PSF	POUNDS PER SQUARE FOOT
PSI	POUNDS PER SQUARE INCH
PT	PAINT
PTN	PARTITION
Q	
QT	QUARRY TILE
QTY	QUANTITY
R	
RAD	RADIUS
RB	RUBBER BASE
RBR	RUBBER
RCP	REFLECTED CEILING PLAN
RD	ROOF DRAIN
REBAR	REINFORCING BAR
RECEPT	RECEPTACLE
RECT	RECTANGULAR
REF	REFERENCE
REINF	REINFORCEMENT
REQ'D	REQUIRED
RET	RETURN
REV	REVISE or REVISION
RH	RIGHT HAND
RHR	RIGHT HAND REVERSE
RM	ROOM
RO	ROUGH OPENING
ROW	RIGHT OF WAY
RPM	REVOLUTIONS PER MINUTE
RSF	RENTABLE SQUARE FEET
RT	RUBBER TILE
RTU	ROOF TOP UNIT
RWC	RAINWATER CONDUCTOR
S	
S	SOUTH
SAN	SANITARY
SB	STONE BASE
SC	SOLID CORE
SCHED	SCHEDULE
SCHEM	SCHEMATIC
SE	SOUTHEAST
SECT	SECTION
SF	SQUARE FOOTAGE
SHWR	SHOWER
SIM	SIMILIAR
SPEC	SPECIFICATION(S)
SPKR	SPEAKER
SQ	SQUARE
SQ FT	SQUARE FOOT
SSTL	STAINLESS STEEL
ST	STREET
STD	STANDARD
STL	STEEL
STOR	STORAGE
STRUCT	STRUCTURAL
SUSP	SUSPENDED
SW	SOUTHWEST
SYMB	SUMBOL
SYS	SYSTEM
T	
T	TILE
T&B	TOP & BOTTOM
T&G	TONGUE & GROOVE
TSTAT	THERMOSTAT
TB	TILE BASE
TDB	TO BE DETERMINED
TEL	TELEPHONE
TEMP	TEMPORARY
TERR	TERRAZZO
THK	THICK
THRES	THRESHOLD
THRU	THROUGH
TOC	TOP OF CONCRETE/CURB
TOS	TOP OF STEEL
TOW	TOP OF WALL
TRANSF	TRANSFORMER
TYP	TYPICAL
U	
UC	UNDERCUT
UL	UNDERWRITER'S LABORATORY
UNEXCAV	UNEXCAVATED
UNO	UNLESS NOTED OTHERWISE
UPS	UNINTERRUPTABLE POWER SUPPLY
UR	URINAL
USF	USABLE SQUARE FOOTAGE
UTIL	UTILITY
V	
V	VOLT
VAP RET	VAPOR RETARDER
VAR	VARIES
VB	VINYL BASE
VCT	VINYL COMPOSITION TILE
VENT	VENTILITATION
VERT	VERTICAL
VEST	VESTIBULE
VIF	VERIFY IN FIELD
VOL	VOLUME
VTR	VENT THROUGH ROOF
VWC	VINYL WALL COVERING
W	
W	WEST
W/	WITH
W/O	WITHOUT
WB	WOOD BASE
WC	WATER CLOSET (TOILET)
WD	WOOD (SOFTWOOD)
WF	WIDE FLANGE
WH	WATER HEATER
WP	WATERPROOF
WPT	WORKING POINT
WT	WEIGHT
WWF	WELDED WIRE FABRIC
Y	
YD	YARD

GRAPHIC SYMBOLS

MATERIAL SYMBOLS (ELEVATION)

- STONE
- BRICK/ CONCRETE BLOCK
- FINISHED WOOD
- GLASS
- PLASTER/ STUCCO

MATERIAL SYMBOLS (SECTION)

- SAND OR GYPSUM BOARD
- UNDISTURBED EARTH
- GRAVEL OR CRUSHED STONE
- CAST STONE
- CONCRETE
- BRICK
- CONCRETE MASONRY UNIT
- METAL
- NON-FERROUS ALUMINUM
- PLYWOOD
- FINISH WOOD
- WOOD FRAMING (CONTINUOUS)
- WOOD BLOCKING (DISCONTIN.)
- BATT INSULATION
- RIGID INSULATION
- ACOUSTICAL TILE
- CARPET

PROJECT INFORMATION

SITE ADDRESS:	NWC HWY 7 AND PALISADE PKWY BROOMFIELD CO, 80023
PROJECT NAME:	BANK OF AMERICA
PROJECT TYPE:	GROUND UP - NEW FINANCIAL CENTER
PROJECT DESCRIPTION:	SINGLE STORY, SLAB ON GRADE, STEEL FRAME STRUCTURE, STUCCO/COMPOSITE CLAD EXTERIOR WITH AN EXTERIOR COVERED DRIVE-UP ATM SERVICE FOR TRADITIONAL BANKING AND FINANCIAL SERVICES.
PROJECT OCCUPANCY:	GROUP B - BUSINESS
CONSTRUCTION TYPE:	TYPE II-B
PROJECT SIZE:	BUILDING GROSS SQ.FT.: 4,260 SF DRIVE THROUGH SQ.FT.: 850 SF TOTAL GROSS SQ.FT.: 5,110 SF BUILDING HEIGHT: 20'-0" SINGLE STORY

APPLICABLE BUILDING CODES:

BUILDING:	2021 INTERNATIONAL BUILDING CODE W/ LOCAL AMENDMENTS
ACCESSIBILITY:	ADA - US DEPT OF JUSTICE 2017 ICC/ANSI A117.1 (JURISDICTION - LOCAL AMMENDMENT)
PLUMBING:	2021 INTERNATIONAL PLUMBING CODE W/ LOCAL AMENDMENTS
MECHANICAL:	2021 INTERNATIONAL MECHANICAL CODE W/ LOCAL AMENDMENTS
ELECTRICAL:	2023 NATIONAL ELECTRICAL CODE
FIRE PROTECTION:	2021 INTERNATIONAL FIRE CODE, <NFPA 101 - LIFE SAFETY CODE>
ENERGY:	2021 INTERNATIONAL ENERGY CODE W/ LOCAL AMENDMENTS

PLUMBING REQUIREMENTS:

PER TABLE 2902.1 (2021 IBC)
29 OCCUPANTS
29 TOTAL/2 - 15 OCC OF EACH SEX

MINIMUM NUMBER OF PLUMBING FIXTURES

	MALE	FEMALE
WATER CLOSET 1 PER 25 MALE & FEMALE	(1) REQUIRED (1) PROVIDED	(1) REQUIRED (1) PROVIDED
LAVATORIES 1 PER 40 MALE & FEMALE	(1) REQUIRED (1) PROVIDED	(1) REQUIRED (1) PROVIDED
DRINKING FOUNTAINS (1 PER 100)	(1) REQUIRED (2) PROVIDED	
MOP SINK (1 PER FLOOR)	(1) REQUIRED (1) PROVIDED	

VICINITY MAP

PROVIDED BY GOOGLE

NORTH

LOCATION MAP

PROVIDED BY GOOGLE

NORTH

DRAWING INDEX

Sheet Number	Sheet Name
GENERAL	
----	COVER SHEET
A00.00	DRAWING INDEX, LOCATION MAP & PROJECT INFORMATION
CIVIL	
C1.0	COVER SHEET
C1.1	GENERAL NOTES
C1.2	ALTA LAND TITLE
C1.3	ALTA LAND TITLE
C1.4	ALTA LAND TITLE
C2.0	DEMOLITION AND EROSION CONTROL PLAN
C3.0	SITE PLAN
C4.0	GRADING PLAN
C5.0	DRAINAGE PLAN
C5.1	DRAINAGE PROFILE
C6.0	UTILITY PLAN
C7.0	EROSION CONTROL DETAILS
C7.1	WATER DETAILS
C7.2	SANITARY SEWER DETAILS
C7.3	DRAINAGE DETAILS
C7.4	PAVING DETAILS
L1.0	LANDSCAPE PLAN
L1.1	LANDSCAPE DETAILS
ARCHITECTURAL	
A00.30	DOOR, HARDWARE & MILLWORK SCHEDULES
A00.40	EQUIPMENT & FINISH LEGENDS
A00.41	ACCESSIBILITY DETAILS
A00.60	ARCHITECTURAL SITE PLAN
A02.01	CONSTRUCTION PLAN
A02.02	ROOF PLAN
A03.01	POWER & COMMUNICATION PLAN
A04.01	REFLECTED CEILING PLAN
A05.01	FINISH PLAN
A06.01	FURNITURE PLAN
A08.01	ENLARGED RESTROOM PLANS AND ELEVATIONS
A08.11	ATM DETAILS
A08.21	COILING GRILLE DETAILS
A09.01	EXTERIOR ELEVATIONS
A09.02	EXTERIOR ELEVATIONS
A09.21	WALL SECTIONS
A09.22	WALL SECTIONS
A09.23	WALL SECTIONS
A09.25	PLAN DETAILS
A09.26	SECTION DETAILS
A09.27	SECTION DETAILS
A09.30	EXTERIOR DETAILS
A09.31	EXTERIOR TRANSITION DETAILS
A09.33	TYPICAL CEILING DETAILS
A11.01	INTERIOR ELEVATIONS
A11.02	INTERIOR ELEVATIONS
A11.03	INTERIOR ELEVATIONS
A11.04	INTERIOR ELEVATIONS
A12.01	PARTITION TYPES AND DETAILS
A12.02	DETAILS
A12.03	MILLWORK DETAILS - MW01
A12.04	MILLWORK DETAILS - MW05, MW06 & MW08
A12.05	MILLWORK DETAILS - MW07,MW11 & MW12
A12.06	MILLWORK DETAILS - MW13 & MW21
A12.08	CSR LINE
A12.10	24 HR VESTIBULE DETAILS
A12.11	DOOR AL-2C HARDWARE
STRUCTURAL	
S1.10	STRUCTURAL INFORMATION
S1.11	STRUCTURAL INFORMATION
S1.14	LOAD MAPS
S2.10	FOUNDATION PLAN
S2.20	ROOF FRAMING PLAN
S3.10	TYPICAL CONCRETE DETAILS
S3.20	TYPICAL FOUNDATION DETAILS
S3.21	TYPICAL SITE DETAILS
S5.10	TYPICAL STEEL DETAILS
S5.11	TYPICAL STEEL DETAILS
S5.20	COLD FORM STEEL FRAMING DETAILS
S5.30	BRACED FRAME DETAILS
MECHANICAL	
M00.01	MECHANICAL GENERAL
M00.02	MECHANICAL DETAILS
M00.03	MECHANICAL SCHEDULES
M00.04	MECHANICAL LOAD CALCULATIONS
M00.05	MECHANICAL LOAD CALCULATIONS
M01.01	MECHANICAL NEW WORK PLAN
M01.02	MECHANICAL ZONING PLAN
M02.01	MECHANICAL ROOF PLAN
M03.01	MECHANICAL CONTROLS
ELECTRICAL	
E00.01	ELECTRICAL GENERAL
E01.01	SITE PLAN - ELECTRICAL
E02.01	FLOOR PLAN - LIGHTING
E02.02	FLOOR PLAN - ELECTRICAL
E02.03	FLOOR PLAN - FIRE ALARM
E02.04	FLOOR PLAN - MECH. EQUIPMENT
E02.05	FLOOR PLAN - PHOTOMETRIC
E03.01	ROOF PLAN - MECH. EQUIPMENT
E04.01	ELECTRICAL RISER DIAGRAM AND SCHEDULES
E04.02	ELECTRICAL DETAILS
PLUMBING	
P00.01	PLUMBING GENERAL
P01.01	PLUMBING FLOOR PLAN - SANITARY
P01.02	PLUMBING FLOOR PLAN - SUPPLY
P02.01	PLUMBING ROOF PLAN
P03.01	PLUMBING RISER DIAGRAMS

NELSON
Nelco Architecture, Inc.

12400 Coit Road, Suite 510
Dallas, TX. 75251
Phone: (972) 644-8830
Fax: (972) 644-8496

Client Representative:
CUSHMAN & WAKEFIELD
Attn: Paul Hurchanik
Tel: 720.582.6073
Email: paul.hurchanik@cushwake.com

Architect:
Nelco Architecture, Inc.
Attn: Harry Koutsis
Tel: 310.693.5271
Email: hkoutsis@nelsonww.com

AOR Contact
Robert J. Sullivan Jr.
Tel: 216.830.1561
Email:rsullivan@nelsonww.com
License No. ARC.00405343

Civil:
LANGAN
Attn: Ben Henry
Tel: (817) 328-3217
Email: bhenry@langan.com

Structural:
Salas O'Brien
Attn: Julie Bolding
Tel: 469-782-9753
Email: julie.bolding@salasobrien.com

MEP:
Salas O'Brien
Attn: Carly Wood
Tel: 727-804-7626
Email: carly.wood@salasobrien.com

Description:	No:	Date:
IF Schematic Design Final		09/29/2023
IF COE Package		11/09/2023
IF Design Development 90%		07/19/2024
IF Design Development Final		08/19/2024
IF Construction Document Review		09/20/2024
IF Construction Document Final		12/05/2024
IF CD 90		08/15/2025
IF Permit		08/26/2025

BANK OF AMERICA
Broomfield

CO1-111
NWC Hwy 7 and Palisade Pkwy
Broomfield CO, 80023

PROPERTY ID:	CO1-111
NSRP VERSION:	2.0
BULLETIN:	2-2025

DRAWING INDEX, LOCATION MAP & PROJECT INFORMATION

COLORADO LICENSED
ROBERT JOHN SULLIVAN JR.
00405343
ARCHITECT
09/04/2025

Project No: 23.0002261.000 Reviewed By: --

A00.00

9/3/2025 4:19:35 PM C:\Users\cgosier\Revit_Locals\2023\CO1-111 Broomfield_for SDP_cgosier53725.rvt

SITEWORK CONSTRUCTION PLANS

To Serve

BANK OF AMERICA

PALISADE PARK FILING NO. 1, REPLAT F LOT 1

IN THE CITY OF BROOMFIELD,
BROOMFIELD COUNTY, COLORADO

SITE DATA			
DESCRIPTION	REQUIRED	PROPOSED	
PRIMARY LAND USE	FINANCIAL INSTITUTION W/ DRIVE THROUGH		
ACCESSORY LAND USE	N/A		
SITE AREA		51,052 SF	100%
BUILDING COVERAGE	Unlimited (restricted by building height)	4,320 SF	8%
DRIVE, PARKING	65% max.	15,170 SF	30%
OPEN AREA, WALKS	25% min.	31,562 SF	62%
MINIMUM SETBACKS			
North	10'	121'	
East	10'	35'	
South	75' (Building) & 40' (Parking)	96' (Building) & 75' (Parking)	
West	0'	79' (Building)	
FLOOR AREA RATIO	0.10:1.0 to 4.0:1	0.08:1.0	
MAXIMUM BUILDING HEIGHT	13 Stories (180')	20' - 0"	

PARKING		
TYPE	REQUIRED SPACES MIN/MAX	TOTAL SPACES PROVIDED
STANDARD SPACES	10/13	17
ADA SPACES	1	2 (1 VAN ACCESSIBLE)
EV INSTALLED SPACES	1	1
EV READY SPACES	2	2
EV CAPABLE SPACES	4	4
EV CAPABLE LIGHT SPACES	0	0
BICYCLE PARKING SHORT TERM	2	2
BICYCLE PARKING LONG TERM (SECURE)	0	0

OWNERSHIP AND MAINTENANCE					
DESCRIPTION	AREA (SQ.FT./ACRES)	OWNERSHIP	MAINTENANCE RESPONSIBILITY	LAND USE	MEANS OF DEDICATION
PALISADE PARK FILING NO. 1, REPLAT F LOT 1	51,052 SQ. FT. OR 1.172 ACRES	PRIVATE PROPERTY OWNER	REFER TO MAINTENANCE RESPONSIBILITY LINES ON LANDSCAPE PLAN	FINANCIAL INSTITUTION W/ DRIVE THROUGH	N/A

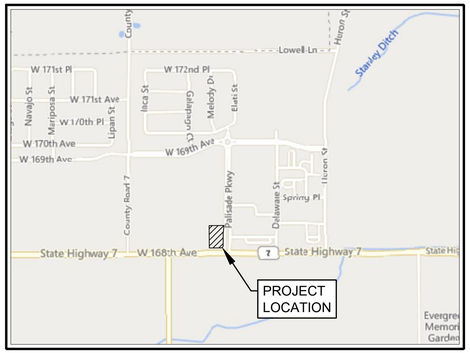

VICINITY MAP

SCALE 1" = 1000'

Sheet List Table	
Sheet Number	Sheet Title
C1.0	COVER SHEET
C1.1	GENERAL NOTES
C1.2	ALTA LAND TITLE
C1.3	ALTA LAND TITLE
C1.4	ALTA LAND TITLE
C2.0	DEMOLITION AND EROSION CONTROL PLAN
C3.0	SITE PLAN
C4.0	GRADING PLAN
C5.0	DRAINAGE PLAN
C5.1	DRAINAGE PROFILE
C6.0	UTILITY PLAN
C7.0	EROSION CONTROL DETAILS
C7.1	WATER DETAILS
C7.2	SANITARY SEWER DETAILS
C7.3	DRAINAGE DETAILS
C7.4	PAVING DETAILS
L1.0	LANDSCAPE PLAN
L1.1	LANDSCAPE DETAILS

PROPERTY OWNER

KEVAMRA, LLC
1515 MARKET STREET, STE 200
DENVER, CO 80202
CONTACT: GARRETT BAUM
PHONE: (303) 884-7300
EMAIL: GBAUM@URBANFRONTER.COM

ONSITE DEVELOPER

BANK OF AMERICA CORPORATION
ATTN: AUSTIN MITSCH
PHONE: (720) 471-3803
EMAIL: AUSTIN.MITSCH@CUSHWAKE.COM

DEVELOPER (DISTRICT)

PALISADE PARK METROPOLITAN DISTRICT NO. 2
450 E. 17TH AVE., SUITE 400
DENVER, CO 80203
PHONE: (303) 592-4385

ARCHITECT

NELCO ARCHITECTURE, INC.
CONTACT: HARRY KOUTSIS
PHONE: (310) 693-5271
EMAIL: HKOUTSIS@NELSONWW.COM

CIVIL ENGINEERING

LANGAN
CONTACT: SHAWN HILL
PHONE: (903) 324-8400
EMAIL: SHILL@LANGAN.COM

LANDSCAPE ARCHITECTURE

LANGAN
CONTACT: BEN HENRY
PHONE: (817) 328-3200
EMAIL: BHENRY@LANGAN.COM

SURVEYOR

FLATIRONS, INC. LAND SURVEYING SERVICES
7000 N. BROADWAY, SUITE 209
DENVER, CO 80221
CONTACT: JAMIE STEPHENSON
PHONE: (303) 936-6997
EMAIL: JSTEPHENSON@FLATIRONSINC.COM

BASIS OF BEARING

A BEARING OF N00°19'00"W ALONG THE WEST LINE OF THE SOUTHWEST QUARTER OF SAID SECTION 34 AS SHOWN ON THE PLAT OF PALISADE PARK FILING NO. 1 REPLAT D, AS RECORDED IN THE CITY AND COUNTY OF BROOMFIELD AT REC. NO. 2021018035, BETWEEN A FOUND 3 1/4" ALUMINUM CAP IN RANGE BOX STAMPED "BASELINE ENG 2016 T1N S33 LS 38285" AT THE SOUTHWEST CORNER OF SAID SECTION 34 AND A FOUND 3 1/2" ALUMINUM CAP IN RANGE BOX STAMPED "COLO DEPT OF TRANSPORTATION T1N 1/4 S33-S34 R68W 1997 PLS 18482" AT THE WEST QUARTER CORNER OF SAID SECTION 34 AS SHOWN HEREON. ALL BEARINGS SHOWN HEREON ARE RELATIVE THERETO.

BENCHMARK INFORMATION

SMARTNET NORTH AMERICA CONTINUOUSLY OPERATING REFERENCE STATIONS (CORS) NETWORK WAS USED TO ESTABLISH A GPS DERIVED ELEVATION ON AN ON-SITE BENCHMARK AT THE NORTHEASTERLY CORNER OF LOT 2, BEING A FOUND 1" BRASS TAG STAMPED "FLAT SURV LS 38409" WITH AN ELEVATION OF 5,189.82 FEET (NAD 88). NGS POINT LUCY, BEING A CITY OF BROOMFIELD SURVEY DISK STAMPED "LUCY 15" LOCATED NEAR THE SOUTHWESTERLY CORNER OF THE INTERSECTION OF HIGHWAY 7 AND SHERIDAN PARKWAY, WITH PUBLISHED ELEVATION OF 5,297 FEET, WAS CHECKED INTO WITH AN AS-MEASURED ELEVATION OF 5,296.83 FEET. NO DIFFERENTIAL LEVELING WAS PERFORMED TO ESTABLISH THE ELEVATION OF THE ON-SITE BENCHMARK.

COLORADO 811
KNOW WHAT'S BELOW. CALL BEFORE YOU DIG.
CALL 811 2-BUSINESS DAYS IN ADVANCE
BEFORE YOU DIG, GRADE OR EXCAVATE FOR
MARKING OF UNDERGROUND MEMBER UTILITIES

PZ-24-00180

CITY ENGINEER STATEMENT

All work shall be constructed to City and County of Broomfield STANDARDS AND SPECIFICATIONS. This drawing has been reviewed and found to be in general compliance with these STANDARDS AND SPECIFICATIONS and other Broomfield requirements. **THE ENGINEERING DESIGN AND CONCEPT REMAINS THE RESPONSIBILITY OF THE PROFESSIONAL ENGINEER WHOSE STAMP AND SIGNATURE APPEAR HEREON.**

City Engineer (or Designee) _____ Date _____

Date	Description	No.
08/26/25	IF CD100	2
08/12/25	IF CD90	1

Revisions

COLORADO LICENSED
ROBERT A. HAHN
51524
PROFESSIONAL ENGINEER
08/26/25

LANGAN
Langan Engineering and Environmental Services, LLC.
300 Union Boulevard, Suite 405
Lakewood, CO 80228
T: 303.262.2000 www.langan.com

PALISADE PARK FILING NO. 1, REPLAT F LOT 1
LOCATED IN THE SOUTHWEST QUARTER OF SECTION 34, TOWNSHIP 1 NORTH, RANGE 68 WEST OF THE 6TH P.M., CITY AND COUNTY OF BROOMFIELD, STATE OF COLORADO

CITY OF BROOMFIELD
BROOMFIELD COUNTY COLORADO

Drawing Title

COVER SHEET

Project No.	Drawing No.
532039301	C1.0
Date: AUGUST 2025	
Drawn By: NF	
Checked By: BH	

© 2025 Langan

CCOB GENERAL CONSTRUCTION NOTES:

1. DEFINITIONS
   - A. OWNER – PROPERTY OWNER, FOR BROOMFIELD OWNED PROPERTY THE CAPITAL IMPROVEMENT PROGRAM (CIP) MANAGER WILL SERVE AS THE OWNER'S REPRESENTATIVE.
   - B. CONTRACTOR – AS DETERMINED BY BID.
   - C. ENGINEER – PROFESSIONAL ENGINEER OF RECORD.
   - D. BROOMFIELD – AUTHORIZED REPRESENTATIVE(S) OF THE CITY AND COUNTY OF BROOMFIELD COMMUNITY DEVELOPMENT AND PUBLIC WORKS DEPARTMENTS; THE AGENCY OF JURISDICTION.
2. CONSTRUCTION DOCUMENTS
   - A. ALL DESIGN AND CONSTRUCTION SHALL COMPLY WITH THE 2022 EDITION OF THE CITY AND COUNTY OF BROOMFIELD STANDARDS AND SPECIFICATIONS.
   - B. CONTRACTOR SHALL HAVE IN CONTRACTOR'S POSSESSION AT ALL TIMES ONE (1) COPY OF CONSTRUCTION DOCUMENTS STAMPED AND SIGNED BY ENGINEER AND BROOMFIELD AND ONE (1) COPY OF THE APPLICABLE EDITION OF THE BROOMFIELD STANDARDS AND SPECIFICATIONS.
   - C. CONTRACTOR SHALL VERIFY ACCURACY BETWEEN WORK SET FORTH ON THESE CONSTRUCTION DOCUMENTS AND WORK REQUIRED IN THE FIELD. ANY DISCREPANCIES SHALL BE BROUGHT TO THE ATTENTION OF ENGINEER, AND BROOMFIELD, AND CIP MANAGER, WHEN APPLICABLE, PRIOR TO START OF CONSTRUCTION OR IMMEDIATELY UPON DISCOVERY.
   - D. ENGINEER SHALL COORDINATE ANY PROPOSED CHANGES WITH BROOMFIELD. FOR BROOMFIELD ADMINISTERED CIP PROJECTS, CONTRACTOR SHALL COORDINATE ANY PROPOSED CHANGES WITH ENGINEER AND BROOMFIELD.
   - E. THE ENGINEERING DESIGN AND CONCEPT REMAINS THE RESPONSIBILITY OF THE PROFESSIONAL ENGINEER WHOSE STAMP AND SIGNATURE APPEAR ON THE CONSTRUCTION DOCUMENTS.
3. PERMITS
   - A. FOR DEVELOPMENT WORK, OWNER SHALL, OBTAIN AT OWNER'S EXPENSE, ALL PERMITS NECESSARY TO PERFORM THE PROPOSED WORK. REFER TO SECTION 150.00, "PERMITS AND INSPECTIONS" OF BROOMFIELD STANDARDS AND SPECIFICATIONS. THERE ARE NO BROOMFIELD PERMIT FEES FOR CIP PROJECTS.
4. WORK HOURS
   - A. ALL WORK ON THE PROJECT SHALL BE PERFORMED DURING REGULAR WORK HOURS, 7:00 A.M. UNTIL 7:00 P.M., MONDAY THROUGH FRIDAY. RESTRICTED HOURS MAY BE INCLUDED WITH CONDITIONS OF THE CITY COUNCIL RESOLUTION APPROVING THE PROJECT, OR WITHIN THE WORK PERMIT. ALL WORK ON THE PROJECT SHALL COMPLY WITH BROOMFIELD MUNICIPAL CODE CHAPTER 9-36; REFER ALSO TO SECTION 131.00, "WORKING CONDITIONS" OF THE BROOMFIELD STANDARDS AND SPECIFICATIONS.
   - B. CONTRACTOR SHALL NOT PERFORM WORK OUTSIDE REGULAR WORK HOURS OR ON SATURDAY, SUNDAY OR ANY BROOMFIELD OBSERVED HOLIDAY WITHOUT RECEIVING WRITTEN CONSENT FROM THE CITY ENGINEER OR DESIGNATED REPRESENTATIVE.
   - C. BROOMFIELD OBSERVED HOLIDAYS INCLUDE: NEW YEAR'S DAY, MARTIN LUTHER KING DAY, PRESIDENT'S DAY, MEMORIAL DAY, JUNETEENTH, INDEPENDENCE DAY, LABOR DAY, VETERAN'S DAY, THANKSGIVING DAY, FRIDAY FOLLOWING THANKSGIVING, CHRISTMAS EVE, CHRISTMAS DAY.
   - D. REQUESTS FOR WORK OUTSIDE REGULAR WORK HOURS SHALL BE SUBMITTED BY THE OWNER OR CONTRACTOR BY 12:00 P.M. ON THE WEDNESDAY PRIOR TO THE PROPOSED DATE OF THE WORK. REFER TO SECTION 152.00, "SATURDAY, HOLIDAY AND AFTER HOURS WORK PERMIT" OF THE BROOMFIELD STANDARDS AND SPECIFICATIONS.
5. PRECONSTRUCTION MEETINGS
   - A. OWNER, SHALL REQUEST A PRECONSTRUCTION MEETING WITH BROOMFIELD AT LEAST 3 BUSINESS DAYS PRIOR TO THE START OF CONSTRUCTION. BROOMFIELD SHALL SCHEDULE SAID PRECONSTRUCTION MEETING. THOSE IN ATTENDANCE SHALL INCLUDE:
     - i. OWNER
     - ii. CONTRACTOR
     - iii. ENGINEER
     - iv. BROOMFIELD
     - V. GEOTECHNICAL ENGINEER
     - Vi. SURVEYOR Vii. ANY OTHER AFFECTED AGENCIES
   - B. CONSTRUCTION DOCUMENTS IN AN ELECTRONIC FORMAT WITH THE BROOMFIELD REVIEW STAMP AND SIGNATURE SHALL BE PROVIDED TO THE OWNER AND ENGINEERPRIOR TO THE PRECONSTRUCTION MEETING. IT IS THE OWNER'S AND ENGINEER'S RESPONSIBILITY TO DISTRIBUTE THESE PLANS TO THEIR TEAM.
   - C. CONTRACTOR SHALL REQUEST A SEPARATE ONSITE PRECONSTRUCTION CONFERENCE WITH BROOMFIELD PUBLIC WORKS AT LEAST 48 HOURS PRIOR TO CONNECTING TO EXISTING BROOMFIELD UTILITIES.
6. UTILITY NOTIFICATIONS
   CONTRACTOR SHALL BE RESPONSIBLE FOR THE FOLLOWING NOTIFICATIONS:
   - A. UTILITY NOTIFICATION CENTER OF COLORADO, 1-800-922-1987 AND/OR 811. CALL FIVE (5) BUSINESS DAYS PRIOR (NOT INCLUDING THE DAY OF THE CALL) TO DIGGING, GRADING OR EXCAVATING FOR THE MARKING OF UNDERGROUND MEMBER UTILITIES.
     - i. LOCATION OF EXISTING UTILITIES SHALL BE VERIFIED BY CONTRACTOR PRIOR TO CONSTRUCTION. CONTRACTOR SHALL BE RESPONSIBLE FOR LOCATION, SUPPORT, PROTECTION, AND RESTORATION OF ALL EXISTING UTILITIES AND APPURTENANCES, WHETHER SHOWN OR NOT SHOWN ON THE APPROVED CONSTRUCTION DOCUMENTS.
     - ii. PROVIDING NOTIFICATION AND RECEIVING MARKINGS OF UNDERGROUND MEMBER UTILITIES IN NO WAY CONSTITUTES PERMISSION TO PERFORM CONSTRUCTION.
   - B. BROOMFIELD UTILITY CUSTOMERS FOR POTENTIAL SERVICE OUTAGES AND COORDINATION WITH BROOMFIELD PUBLIC WORKS FOR DETERMINATION OF MINIMUM TIME REQUIREMENT. BROOMFIELD PUBLIC WORKS SHALL BE NOTIFIED TWO BUSINESS DAYS (48 HOURS) IN ADVANCE TO SCHEDULE AN OUTAGE.
   - C. BROOMFIELD 24 HOURS IN ADVANCE FOR OBSERVATIONS OF WORK IN PROGRESS. OBSERVATION AND ONSITE VISITS ARE NOT TO BE CONSTRUED AS A GUARANTEE OR APPROVAL BY BROOMFIELD OF CONTRACTOR'S WORK OR CONTRACTUAL COMMITMENT. IF WORK IS SUSPENDED FOR LONGER THAN 5 DAYS AFTER INITIAL START-UP, CONTRACTOR SHALL NOTIFY THE BROOMFIELD CONSTRUCTION INSPECTION SUPERVISOR ONE (1) BUSINESS DAYS (24 HOURS) PRIOR TO RESTART OF CONSTRUCTION.
   - D. BROOMFIELD IN THE EVENT OF AN EMERGENCY, AT (303) 438-6380 DURING REGULAR WORK HOURS OR (303) 438-6400 AFTER HOURS. THE CIP MANAGER SHALL ALSO BE NOTIFIED, WHEN APPLICABLE.
   - E. BROOMFIELD AT (303) 438-6380 AND NORTH METRO FIRE RESCUE AT (720) 887-8217, EX. 2221 FOR ANY STREET CLOSURES AND EXISTING FIRE HYDRANTS TAKEN OUT OF SERVICE, AT LEAST 2 BUSINESS DAYS (48 HOURS) PRIOR TO THE START OF CONSTRUCTION.
7. TRAFFIC CONTROL
   - A. CONTRACTOR SHALL BE RESPONSIBLE FOR ALL TRAFFIC CONTROL DURING CONSTRUCTION. REFER TO SECTION 141.13, "TRAFFIC CONTROL, BARRICADES AND WARNING SIGNS" OF BROOMFIELD STANDARDS AND SPECIFICATIONS.
     - i. CONTRACTOR SHALL SUBMIT TRAFFIC CONTROL PLANS TO BROOMFIELD FOR APPROVAL PRIOR TO CONSTRUCTION.
     - ii. ALL SIGNS, STRIPING AND TRAFFIC CONTROL DEVICES SHALL CONFORM TO AND PLACEMENT SHALL BE PERFORMED IN ACCORDANCE WITH THE LATEST EDITIONS OF THE MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES (MUTCD) AND CDOT M&S STANDARDS.
     - iii. CONTRACTOR SHALL BE RESPONSIBLE FOR MAINTENANCE AND CLEANING OF TRAFFIC CONTROL DEVICES.
     - iv. CONTRACTOR SHALL MAINTAIN EXISTING PAVEMENT MARKINGS DURING CONSTRUCTION OPERATIONS IN CONFORMANCE WITH THE CONSTRUCTION DOCUMENTS AND BROOMFIELD STANDARDS AND SPECIFICATIONS.
     - v. REMOVAL OF EXISTING PAVEMENT MARKINGS SHALL BE ACCOMPLISHED BY A METHOD THAT DOES NOT MATERIALLY DAMAGE THE SURFACE OR TEXTURE OF THE PAVEMENT OR EXISTING SURFACING. THE PAVEMENT MARKINGS SHALL BE REMOVED TO THE EXTENT THAT THEY ARE NOT VISIBLE UNDER DAY OR NIGHT CONDITIONS.
8. GROUNDWATER
   - A. WHEN DISCHARGING GROUNDWATER, ALL DEWATERING METHODS SHALL BE IN CONFORMANCE WITH ALL LAWS AND REGULATIONS OF THE STATE—INCLUDING OBTAINING A COLORADO DISCHARGE PERMIT SYSTEM FOR CONSTRUCTION DEWATERING WASTEWATER DISCHARGE—AND SUBJECT TO THE APPROVAL OF BROOMFIELD.
   - B. CONTRACTOR SHALL TAKE ALL NECESSARY AND PROPER PRECAUTIONS TO PROTECT ADJACENT PROPERTIES FROM ANY AND ALL DAMAGE THAT MAY OCCUR FROM STORMWATER RUNOFF AND/OR DEPOSITION OF DEBRIS RESULTING FROM ANY AND ALL WORK.
9. SURVEY MONUMENTS AND MARKERS
   - A. CONTRACTOR SHALL CAREFULLY PRESERVE BENCHMARKS, PROPERTY CORNERS, REFERENCE POINTS, STAKES AND OTHER SURVEY REFERENCE MONUMENTS OR MARKERS. REFER TO SECTION 141.09, "PROTECTION AND RESTORATION OF PROPERTY AND SURVEY MONUMENTS" OF THE BROOMFIELD STANDARDS AND SPECIFICATIONS.
     - i. IN CASES OF WILLFUL OR CARELESS DESTRUCTION, CONTRACTOR SHALL BE RESPONSIBLE FOR RESTORATION OF SAID MARKERS.
     - ii. RESETTING OF MARKERS SHALL BE PERFORMED PER ARTICLES 51 AND 53 OF TITLE 38 OF THE COLORADO REVISED STATUTES, AS REQUIRED BY THE BYLAWS AND RULES OF PROCEDURE OF THE COLORADO STATE BOARD OF REGISTRATION FOR PROFESSIONAL ENGINEERS AND PROFESSIONAL LAND SURVEYORS, AND AS APPROVED BY BROOMFIELD.
   - B. PRIOR TO CONSTRUCTION ACCEPTANCE, ENGINEER SHALL SUBMIT A PLAN OF PROPOSED LOCATIONS FOR INSTALLATION OF RANGE POINTS TO BROOMFIELD FOR APPROVAL.
     - i. RANGE POINTS SHALL BE SET IN ACCORDANCE WITH THE REQUIREMENTS OF ARTICLES 51 AND 53 OF TITLE 38 OF THE COLORADO REVISED STATUTES, AND AS REQUIRED BY THE BYLAWS AND RULES OF PROCEDURE OF THE COLORADO STATE BOARD OF REGISTRATION FOR PROFESSIONAL ENGINEERS AND PROFESSIONAL LAND SURVEYORS.
     - ii. RANGE POINTS SHALL BE SET IN VALVE BOXES THAT COMPLY WITH THE BROOMFIELD STANDARDS AND SPECIFICATIONS WITH BOX LIDS MARKED "SURVEY POINT", OR AS OTHERWISE APPROVED BY THE CITY ENGINEER.
10. CONSTRUCTION ACCESS AND ACTIVITIES
    - A. CONTRACTOR SHALL IMMEDIATELY REMOVE ANY CONSTRUCTION DEBRIS AND MUD TRACKED ONTO EXISTING ROADWAYS.
    - B. CONTRACTOR SHALL REPAIR ANY EXCAVATION OR PAVEMENT FAILURES CAUSED BY THE CONSTRUCTION.
    - C. CONTRACTOR SHALL BE RESPONSIBLE FOR COMPLYING WITH ALL STATE AND BROOMFIELD DUST AND EROSION CONTROL ORDINANCES. CONSTRUCTION VEHICLES SHALL USE TRUCK ROUTES DESIGNATED BY BROOMFIELD AND AS APPROVED WITH THE CONSTRUCTION PERMIT.
    - D. ALL CONCRETE AND ASPHALT MIXTURE DESIGNS SHALL BE APPROVED BY BROOMFIELD PRIOR TO PLACEMENT OF CONCRETE AND ASPHALT. REFER TO SECTION 900.00, "ASPHALT MIX DESIGN AND CONSTRUCTION" OF THE BROOMFIELD STANDARDS AND SPECIFICATIONS.
    - E. WORK IN PUBLIC STREETS SHALL BE PERFORMED IN A MANNER THAT PROVIDES MINIMUM INCONVENIENCE TO ADJACENT PROPERTY OWNERS AND THE GENERAL PUBLIC.
    - F. CONTRACTOR SHALL RESTRICT CONSTRUCTION ACTIVITY TO PUBLIC RIGHT-OF-WAY (R.O.W.) AND AREAS DEFINED AS PERMANENT AND/OR TEMPORARY CONSTRUCTION EASEMENTS, AND AREAS UNDER OWNERSHIP OF OWNER, UNLESS OTHERWISE AUTHORIZED BY THE AFFECTED PROPERTY OWNER AND ACKNOWLEDGED BY BROOMFIELD.
    - G. PRIOR TO BEGINNING CONSTRUCTION ACTIVITIES, CONTRACTOR SHALL OBTAIN WRITTEN AGREEMENTS FOR INGRESS AND EGRESS TO THE WORK SITE FROM ADJACENT PRIVATE PROPERTY OWNERS. ACCESS TO ANY ADJACENT PRIVATE PROPERTY SHALL BE MAINTAINED THROUGHOUT THE CONSTRUCTION PERIOD.
11. PAVEMENT CUTS AND POTHOLES
    - A. ALL PAVEMENT CUTS AND EXPLORATORY POTHOLES SHALL BE REPAIRED AS REQUIRED BY BROOMFIELD. REFER TO SECTION 141.02.01, "EXPLORATORY POTHOLING REQUIRED FOR EXISTING UTILITY SYSTEMS" OF THE BROOMFIELD STANDARDS AND SPECIFICATIONS.
    - B. NO ROADWAY SHALL BE OPEN CUT UNLESS APPROVED BY BROOMFIELD. REFER TO SECTION 143.00, "PAVEMENT CUTS" OF THE BROOMFIELD STANDARDS AND SPECIFICATIONS.
12. RESTORATION
    - A. CONTRACTOR SHALL RESTORE ANY DISTURBED AREAS TO EQUAL OR BETTER CONDITION THAN EXISTED BEFORE CONSTRUCTION. DRAINAGE DITCHES OR WATERCOURSES THAT ARE DISTURBED BY CONSTRUCTION SHALL BE RESTORED TO THE GRADES AND CROSS-SECTIONS THAT EXISTED BEFORE CONSTRUCTION, UNLESS OTHERWISE SHOWN ON THE CONSTRUCTION DOCUMENTS. REFER TO SECTION 360.00, "RESTORATION AND CLEANUP" OF THE BROOMFIELD STANDARDS AND SPECIFICATIONS.
13. ACCEPTANCE PROCEDURES
    - A. OWNER OR CONTRACTOR FOR CIP PROJECTS, SHALL SUBMIT A PAPER COPY OF REDLINED RECORD CONSTRUCTION DOCUMENTS TO BROOMFIELD PRIOR TO THE CONSTRUCTION ACCEPTANCE INSPECTION. REFER TO SECTION 200.00, "ACCEPTANCE PROCEDURES" OF THE BROOMFIELD STANDARDS AND SPECIFICATIONS FOR ADDITIONAL RECORD DOCUMENT SUBMITTAL REQUIREMENTS.

GRADING NOTES:

1. NO EARTH-DISTURBING ACTIVITIES SHALL COMMENCE UNTIL ALL PERMITS HAVE BEEN OBTAINED AND PERIMETER EROSION CONTROL MEASURES HAVE BEEN INSTALLED. THE CONTRACTOR SHALL ADHERE TO ALL TERMS & CONDITIONS AS OUTLINED IN THE STATE OR FEDERAL GENERAL PERMIT FOR STORM WATER DISCHARGES ASSOCIATED WITH CONSTRUCTION ACTIVITY.
2. CONTRACTOR SHALL NOTIFY ALL UTILITY COMPANIES HAVING UNDERGROUND UTILITIES ON SITE OR IN RIGHT-OF-WAY PRIOR TO EXCAVATION. CONTRACTOR SHALL CONTACT UTILITY LOCATING COMPANY AND LOCATE ALL UTILITIES PRIOR TO GRADING START.
3. CONTRACTOR SHALL VERIFY HORIZONTAL AND VERTICAL LOCATION OF ALL EXISTING STORM SEWER STRUCTURES, PIPES, AND ALL UTILITIES PRIOR TO CONSTRUCTION.
4. THE EARTHWORK FOR ALL BUILDING FOUNDATIONS AND SLABS SHALL BE IN ACCORDANCE WITH ARCHITECTURAL BUILDING PLANS AND SPECIFICATIONS, AND THE GEOTECHNICAL REPORT.
5. UNDERCUT AND REPLACEMENT WITH SELECT FILL BENEATH ALL BUILDING SLABS, IF REQUIRED, SHALL BE IN ACCORDANCE WITH THE SITEWORK SPECIFICATIONS AND GEOTECHNICAL REPORT.
6. CONTRACTOR SHALL REFER TO ARCHITECTURAL PLANS FOR EXACT SIZE, NUMBER & LOCATION OF BUILDING ROOF DRAINS.
7. ALL PIPES ENTERING STORM SEWER STRUCTURES SHALL BE GROUTED WITH NON-SHRINK GROUT TO ASSURE A WATER-TIGHT FIT.
8. ALL DRAINAGE STRUCTURES AND STORM SEWER PIPES LOCATED IN PAVED OR OTHER VEHICULAR AREAS SHALL MEET HEAVY DUTY TRAFFIC (H20) LOADING AND BE INSTALLED ACCORDINGLY.
9. PROPOSED SPOT GRADES SHOWN ARE TO TOP OF PAVEMENT UNLESS OTHERWISE NOTED.
10. EXISTING AND PROPOSED GRADE CONTOURS INTERVALS SHOWN AT ONE FOOT (1').
11. ACCESSIBLE ROUTES SHALL HAVE A RUNNING SLOPE OF MAX. 5.0% AND CROSS SLOPE OF MAX. 2.0%, PER ADA REQUIREMENTS.
12. ACCESSIBLE SPACES SHALL HAVE A MAX. OF 2.0% SLOPE IN ANY DIRECTION.
13. ADJUST PAVEMENT AND/OR CURB ELEVATIONS AS NECESSARY TO ASSURE A SMOOTH FIT AND CONTINUOUS GRADE WITH EXISTING, WHERE APPLICABLE.
14. CONTRACTOR SHALL PLACE 4" OF TOPSOIL (LOOSE) ON ALL UNSURFACED AREAS DISTURBED BY GRADING OPERATIONS. PLACE STABILIZATION FABRIC ON ALL SLOPES STEEPER THAN 3H:1V. SEED OR SOD ALL DISTURBED AREAS IN ACCORDANCE WITH THE SPECIFICATIONS AND MAINTAIN SAME UNTIL A HEALTHY STAND OF GRASS IS OBTAINED.
15. RIPRAP GRADATION SHALL BE IN ACCORDANCE WITH THE SITEWORK SPECIFICATIONS & DETAILS.
16. IF THE CONTRACTOR RELOCATES BENCHMARK WITH A NEW BENCHMARK, IT SHALL BE LOCATED WITHIN A TOLERANCE OF 0.010'.

DEMOLITION NOTES:

1. NO EARTH-DISTURBING ACTIVITIES SHALL COMMENCE UNTIL ALL PERIMETER EROSION CONTROL MEASURES ARE IN PLACE IN ACCORDANCE WITH THE EROSION CONTROL PLAN AND THE SPECIFICATIONS.
2. INGRESS AND EGRESS POINTS MUST BE APPROVED BY CITY OFFICIALS PRIOR TO REMOVAL OF DEMOLITION DEBRIS OFF-SITE. REFER TO SITE PLAN FOR LOCATION OF INGRESS AND EGRESS POINTS.
3. CONTRACTOR SHALL COMPLY TO THE FULLEST EXTENT WITH ALL REGULATIONS GOVERNING THE DEMOLITION, REMOVAL, TRANSPORTATION AND DISPOSAL OF ALL DEMOLITION DEBRIS.
4. THE CONTRACTOR SHALL COMPLY WITH ALL OSHA REQUIREMENTS FOR DEMOLITION OF STRUCTURES.
5. NOTES SHOWN HEREON REGARDING SPECIFIC ITEMS OF DEMOLITION ARE GENERAL IN NATURE, AND ARE NOT INTENDED TO BE WHOLLY INCLUSIVE.
6. THE CONTRACTOR SHALL BE RESPONSIBLE FOR VISITING THE SITE AND DETERMINING THE EXTENT OF EXISTING IMPROVEMENTS TO BE REMOVED FROM THE SITE.
7. THE CONTRACTOR SHALL LOCATE, REMOVE AND/OR RELOCATE ALL UNDERGROUND UTILITY PIPING, CONDUIT, AND CABLES, REGARDLESS OF DEPTH, IN THE AREA OF THE PROPOSED BUILDING(S) PER THE SITEWORK SPECIFICATIONS.
8. THE CONTRACTOR SHALL BE RESPONSIBLE FOR COORDINATING WITH THE APPROPRIATE UTILITY COMPANIES ON THE DISCONNECTION OR TERMINATION OF ANY UTILITIES SERVING THIS SITE, AND SHALL OBTAIN APPROVAL FROM SAME PRIOR TO CUTTING, PLUGGING OR REMOVING ANY ON-SITE UTILITY PIPES, LINES AND/OR APPURTENANCES.
9. ALL FENCING, TREES, AND ETC., WITHIN CONSTRUCTION AREA SHALL BE REMOVED AND DISPOSED OF OFF SITE. ANY BURNING ON SITE SHALL BE SUBJECT TO LOCAL ORDINANCES AND SITEWORK SPECIFICATIONS.
10. REMOVAL OF ANY TREES OTHER THAN THOSE SPECIFIED IN THESE PLANS SHALL BE COORDINATED WITH THE OWNER.
11. THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING ANY REQUIRED DEMOLITION PERMITS.
12. REFER TO THE SITEWORK SPECIFICATIONS FOR ADDITIONAL INFORMATION REGARDING DEMOLITION, SITE PREPARATION AND EARTHWORK FOR THIS PROJECT.

UTILITY NOTES:

1. CONTRACTOR SHALL REFER TO ARCHITECTS PLANS AND SPECIFICATIONS FOR ACTUAL LOCATION OF ALL UTILITY ENTRANCES TO INCLUDE: SANITARY SEWER LATERALS, DOMESTIC AND FIRE PROTECTION WATER SERVICE, ELECTRICAL, AND TELEPHONE SERVICE.
2. MATERIALS AND INSTALLATION FOR ALL PROPOSED UTILITY LINES AND APPURTENANCES SHALL COMPLY WITH THE REQUIREMENTS IN THE SITE WORK SPECIFICATIONS.
3. CONTRACTOR SHALL COMPLY COMPLETELY WITH THE LATEST STANDARDS OF OSHA DIRECTIVES OR ANY OTHER AGENCY HAVING JURISDICTION FOR EXCAVATION AND TRENCHING PROCEDURE. THE CONTRACTOR SHALL USE SUPPORT SYSTEMS, SLOPING, BENCHING, AND OTHER MEANS OF PROTECTION. THIS IS TO INCLUDE, BUT NOT LIMITED FOR ACCESS AND EGRESS FROM ALL EXCAVATION AND TRENCHING. CONTRACTOR IS RESPONSIBLE FOR COMPLYING WITH PERFORMANCE CRITERIA AS OUTLINED BY OSHA.
4. CONTRACTOR SHALL ON ALL UTILITIES, COORDINATE INSPECTION WITH APPROPRIATE AUTHORITIES PRIOR TO COVERING TRENCHES AT INSTALLATION. THE CONTRACTOR SHALL CONDUCT ALL REQUIRED TESTS TO THE SATISFACTION OF THE UTILITY COMPANIES AND OWNERS INSPECTING AUTHORITIES.
5. CONTRACTOR SHALL COORDINATE INSTALLATION OF UTILITIES IN SUCH A MANNER AS TO AVOID CONFLICTS AND ASSURE PROPER DEPTHS ARE ACHIEVED AS WELL AS COORDINATING WITH THE CITY UTILITY DEPARTMENT AS TO LOCATION AND SCHEDULING OF TIE-INS/CONNECTIONS PRIOR TO CONNECTING TO EXISTING UTILITIES.
6. THE MINIMUM HORIZONTAL SEPARATION BETWEEN PARALLEL WATER AND SEWER LINES SHALL BE 10 (TEN) FEET, AND MINIMUM VERTICAL SEPARATION BETWEEN CROSSING WATER AND SEWER LINES SHALL BE TWENTY-FOUR (24) INCHES.
7. DIMENSIONS SHOWN ARE TO CENTER LINE OF PIPE OR FITTING OR TO CENTER OF MANHOLE.
8. THE TOP ELEVATION OF MANHOLES CONSTRUCTED IN PAVED AREAS SHALL MATCH FINISHED GRADE. THE TOP ELEVATION OF MANHOLES CONSTRUCTED IN GRASSED AREAS SHALL BE SIX (6) INCHES ABOVE FINISHED GRADE, UNLESS OTHERWISE NOTED.
9. CONTRACTOR SHALL GROUT AROUND ALL PIPE ENTRANCES TO SANITARY SEWER MANHOLES WITH NON-SHRINKING GROUT TO ASSURE CONNECTION IS WATERTIGHT.
10. CONTRACTOR SHALL PROVIDE 2' x 2' x 8" THICK CONCRETE APRON AT ALL CLEANOUTS OUTSIDE OF BUILDING.
11. ALL WATER LINES SHALL BE INSTALLED AT DEPTHS AS REQUIRED BY THE SITEWORK SPECIFICATIONS. MINIMUM DEPTH REQUIREMENTS SHALL BE MAINTAINED FROM PROPOSED GRADES, NOT EXISTING GRADES.
12. ALL WATER LINES SHALL BE INSTALLED WITH A MINIMUM VERTICAL SEPARATION BETWEEN STORM SEWER OF 18 INCHES. CONTRACTOR SHALL BE RESPONSIBLE FOR ADDING 45-DEG. BENDS WHERE NECESSARY TO ROUTE PROPOSED WATER LINES AROUND PROPOSED SANITARY OR STORM SEWERS.
13. REFER TO THE ARCH. PLANS FOR SITE LIGHTING ELECTRICAL PLAN.
14. CONTRACTOR SHALL BE RESPONSIBLE FOR INSTALLING THE ELECTRICAL CONDUIT W/PULL STRING. CONTRACTOR SHALL BE RESPONSIBLE FOR INSTALLING THE TRANSFORMER PAD, PER ELECTRIC COMPANY REQUIREMENTS AND DETAILS, AND SECONDARY LINES FROM THE TRANSFORMER TO THE BUILDING.
15. THE ELECTRIC COMPANY WILL BE RESPONSIBLE FOR THE DESIGN OF THE ELECTRIC SERVICE TO THE TRANSFORMER PAD AND INSTALLING ALL PRIMARY ELECTRIC LINES AND TRANSFORMER.
16. CONTRACTOR SHALL CONTACT THE ELECTRIC COMPANY PRIOR TO BEGINNING CONSTRUCTION TO OBTAIN A COPY OF THE PROPOSED DESIGN AND COORDINATE ALL INSTALLATION.
17. CONTRACTOR SHALL BE RESPONSIBLE FOR INSTALLING THE TELEPHONE CONDUIT WITH PULL STRING. ALL BENDS SHALL BE SWEEPING BENDS. CONTRACTOR SHALL BE RESPONSIBLE FOR COORDINATING ALL TELEPHONE INSTALLATION WITH THE TELEPHONE COMPANY.
18. THE TELEPHONE COMPANY WILL INSTALL THE UNDERGROUND TELEPHONE CABLE FROM THE END OF THE CONTRACTOR-INSTALLED CONDUIT AT THE BUILDING TO THE CONNECTION AT THE EXISTING LINES.
19. THE CONTRACTOR SHALL BE RESPONSIBLE FOR INSTALLING ALL GAS LINE PAST THE GAS METER, AND BOLLARD PROTECTION FOR THE METER (IF LOCATED IN VEHICULAR AREA). THE GAS COMPANY WILL INSTALL THE METER AND ALL LINES FROM THE SERVICE MAIN TO THE METER.
20. CONTRACTOR SHALL BE RESPONSIBLE FOR COORDINATING THE INSTALLATION OF ALL LINES TO BE INSTALLED BY THE UTILITY COMPANIES. IT SHALL BE THE CONTRACTOR'S RESPONSIBILITY TO ASSURE THAT ALL TRENCHES ARE BACKFILLED AND COMPACTED IN ACCORDANCE WITH THE PLANS AND SPECIFICATIONS.

SITE NOTES:

1. CONTRACTOR IS RESPONSIBLE FOR REPAIRS OF DAMAGE TO ANY EXISTING IMPROVEMENTS DURING CONSTRUCTION, SUCH AS (BUT NOT LIMITED TO) DRAINAGE, UTILITIES, PAVEMENT, STRIPING, CURB, ETC. REPAIRS SHALL BE EQUAL TO OR BETTER THAN EXISTING CONDITIONS.
2. CONTRACTOR IS RESPONSIBLE FOR PROTECTION & REPLACEMENT OF ALL PROPERTY CORNERS.
3. CONTRACTOR SHALL REFER TO ARCHITECTURAL PLANS FOR PRECISE BUILDING DIMENSIONS, BUILDING ENTRANCE LOCATIONS, BUILDING UTILITY ENTRY LOCATIONS, DOWSPOUT LOCATIONS, ETC.
4. ALL PAVING DIMENSIONS ARE TO BACK OF CURB, WHERE APPLICABLE, OR TO THE EDGE OF PAVEMENT WHEN NO CURB IS PROPOSED, UNLESS OTHERWISE NOTED.
5. ALL CURB RADII ARE 2.5' UNLESS OTHERWISE SHOWN.
6. CONTRACTOR SHALL MATCH EXISTING PAVEMENT IN GRADE AND ALIGNMENT, WHERE APPLICABLE.
7. CONTRACTOR SHALL MATCH EXISTING CURB AND GUTTER IN GRADE, SIZE, TYPE AND ALIGNMENT AT ADJACENT ROADWAYS.
8. ALL SIDEWALK/FLATWORK TO BE DETAILED BY ARCHITECT (REF. ARCH. PLANS AND SPECIFICATIONS).
9. ALL TRAFFIC CONTROL SIGNS SHALL BE FABRICATED AS SHOWN IN THE NATIONAL MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES FOR STREETS AND HIGHWAYS.
10. ALL SIGNS PLACED IN AREAS ACCESSIBLE BY VEHICLE TRAFFIC SHALL BE PLACED IN PIPE BOLLARD.
11. ALL PARKING LOT STRIPING SHALL BE 4-INCH WIDE WHITE TRAFFIC PAINT, UNLESS NOTED OTHERWISE HEREIN.

CITY ENGINEER STATEMENT

All work shall be constructed to City and County of Broomfield STANDARDS AND SPECIFICATIONS. This drawing has been reviewed and found to be in general compliance with these STANDARDS AND SPECIFICATIONS and other Broomfield requirements. **THE ENGINEERING DESIGN AND CONCEPT REMAINS THE RESPONSIBILITY OF THE PROFESSIONAL ENGINEER WHOSE STAMPAND SIGNATURE APPEAR HEREON**.

City Engineer (or Designee) _____ Date _____

Date	Description	No.
08/26/25	IF CD100	2
08/12/25	IF CD90	1

Revisions

COLORADO LICENSED
ROBERT ALAN HOWE
51524
PROFESSIONAL ENGINEER
08/26/25

LANGAN
Langan Engineering and Environmental Services, LLC.
300 Union Boulevard, Suite 405
Lakewood, CO 80228
T: 303.262.2000 www.langan.com

PALISADE PARK FILING NO. 1, REPLAT F LOT 1
LOCATED IN THE SOUTHWEST QUARTER OF SECTION 34, TOWNSHIP 1 NORTH, RANGE 68 WEST OF THE 6TH P.M., CITY AND COUNTY OF BROOMFIELD, STATE OF COLORADO

CITY OF BROOMFIELD
BROOMFIELD COUNTY COLORADO

Drawing Title

GENERAL NOTES

Project No. 532039301	Drawing No. C1.1
Date AUGUST 2025	
Drawn By NF	
Checked By BH	

© 2025 Langan

ALTA/NSPS LAND TITLE SURVEY

LOT 2, PALISADE PARK FILING NO. 1 REPLAT D, LOCATED IN THE SOUTHWEST QUARTER OF SECTION 34, TOWNSHIP 1 NORTH, RANGE 68 WEST OF THE 6TH P.M., CITY AND COUNTY OF BROOMFIELD, STATE OF COLORADO

SHEET 1 OF 3

TOTAL AREA = 164,924 SQ. FT., OR 3.79 ACRES, MORE OR LESS

Parcel Description

(PROVIDED BY FIDELITY NATIONAL TITLE INSURANCE COMPANY)

LOT 2, PALISADE PARK FILING NO. 1 REPLAT D,
CITY AND COUNTY OF BROOMFIELD, STATE OF COLORADO.

Notes

1. FIDELITY NATIONAL TITLE INSURANCE COMPANY NUMBER 5509-4159290, DATED APRIL 24, 2024 AT 8:00 A.M., WAS ENTIRELY RELIED UPON FOR RECORDED INFORMATION REGARDING RIGHTS-OF-WAY, EASEMENTS AND ENCUMBRANCES IN THE PREPARATION OF THIS SURVEY. THE PROPERTY SHOWN AND DESCRIBED HEREON IS ALL OF THE PROPERTY DESCRIBED IN SAID TITLE COMMITMENT.

2. ACCORDING TO COLORADO LAW YOU MUST COMMENCE ANY LEGAL ACTION BASED UPON ANY DEFECT IN THIS SURVEY WITHIN THREE YEARS AFTER YOU FIRST DISCOVER SUCH DEFECT. IN NO EVENT MAY ANY ACTION BASED UPON ANY DEFECT IN THIS SURVEY BE COMMENCED MORE THAN TEN YEARS FROM THE DATE OF THE CERTIFICATION SHOWN HEREON.

3. THIS ALTA/NSPS LAND TITLE SURVEY WAS PREPARED FOR THE EXCLUSIVE USE OF LANGAN ENGINEERING & ENVIRONMENTAL CONSULTANTS, NAMED IN THE STATEMENT HEREON. SAID STATEMENT DOES NOT EXTEND TO ANY UNNAMED PERSON WITHOUT AN EXPRESS STATEMENT BY THE SURVEYOR NAMING SAID PERSON.

4. THIS SURVEY IS VALID ONLY IF PRINT HAS SEAL AND SIGNATURE OF SURVEYOR.

5. BASIS OF BEARINGS: A BEARING OF N00°19'00"W ALONG THE WEST LINE OF THE SOUTHWEST QUARTER OF SAID SECTION 34 AS SHOWN ON THE PLAT OF PALISADE PARK FILING NO. 1 REPLAT D, AS RECORDED IN THE CITY AND COUNTY OF BROOMFIELD AT REC. NO. 2021018035, BETWEEN A FOUND 3 1/4" ALUMINUM CAP IN RANGE BOX STAMPED "BASELINE ENG 2016 T1N S33 LS 38285" AT THE SOUTHWEST CORNER OF SAID SECTION 34 AND A FOUND 3 1/2" ALUMINUM CAP IN RANGE BOX STAMPED "COLO DEPT OF TRANSPORTATION T1N 1/4 S33-S34 R68W 1997 PLS 18482" AT THE WEST QUARTER CORNER OF SAID SECTION 34 AS SHOWN HEREON. ALL BEARINGS SHOWN HEREON ARE RELATIVE THERETO.

6. WITH REGARD TO TABLE A, ITEM 11, INFORMATION FROM PLANS AND MARKINGS HAVE BEEN COMBINED WITH OBSERVED EVIDENCE OF UTILITIES PURSUANT TO SECTION 5.E.iv. TO DEVELOP A VIEW OF THE UNDERGROUND UTILITIES. HOWEVER LACKING EXCAVATION, THE EXACT LOCATION OF UNDERGROUND FEATURES CANNOT BE ACCURATELY, COMPLETELY AND RELIABLY DEPICTED. IN ADDITION, IN SOME JURISDICTIONS, 811 OR OTHER SIMILAR UTILITY LOCATE REQUESTS FROM SURVEYORS MAY BE IGNORED OR RESULT IN AN INCOMPLETE RESPONSE. A PRIVATE UTILITY LOCATOR WAS HIRED FOR THE PREPARATION OF THIS SURVEY. NO EXCAVATIONS WERE MADE DURING THE PROGRESS OF THIS SURVEY TO LOCATE BURIED UTILITIES AND STRUCTURES. ALL UNDERGROUND UTILITIES MUST BE FIELD LOCATED BY THE APPROPRIATE AGENCY OR UTILITY COMPANY PRIOR TO ANY EXCAVATION, PURSUANT TO C.R.S. SEC. 9-1.5-103. (ALTA/NSPS LAND TITLE SURVEY TABLE A, OPTIONAL SURVEY RESPONSIBILITIES AND SPECIFICATIONS, ITEM 11a & 11b)

7. ANY PERSON WHO KNOWINGLY REMOVES, ALTERS OR DEFACES ANY PUBLIC LAND SURVEY MONUMENT AND/OR BOUNDARY MONUMENT OR ACCESSORY, COMMITS A CLASS TWO (2) MISDEMEANOR PURSUANT TO STATE STATUTE C.R.S. SEC 18-4-508. WHOEVER WILLFULLY DESTROYS, DEFACES, CHANGES, OR REMOVES TO ANOTHER PLACE ANY SECTION CORNER, QUARTER-SECTION CORNER, OR MEANDER POST, ON ANY GOVERNMENT LINE OF SURVEY, OR WILLFULLY CUTS DOWN ANY WITNESS TREE OR ANY TREE BLAZED TO MARK THE LINE OF A GOVERNMENT SURVEY, OR WILLFULLY DEFACES, CHANGES, OR REMOVES ANY MONUMENT OR BENCH MARK OF ANY GOVERNMENT SURVEY, SHALL BE FINED UNDER THIS TITLE OR IMPRISONED NOT MORE THAN SIX MONTHS, OR BOTH. 18 U.S.C. § 1858.

8. THE DISTANCE MEASUREMENTS SHOWN HEREON ARE U.S. SURVEY FOOT.

9. THE CONTOURS REPRESENTED HEREON WERE INTERPOLATED BY AUTOCAD CIVIL 3D (DIGITAL TERRAIN MODELING) SOFTWARE BETWEEN ACTUAL MEASURED SPOT ELEVATIONS. DEPENDING ON THE DISTANCE FROM A MEASURED SPOT ELEVATION AND LOCAL VARIATIONS IN TOPOGRAPHY, THE CONTOUR SHOWN MAY NOT BE AN EXACT REPRESENTATION OF THE SITE TOPOGRAPHY. THE PURPOSE OF THIS TOPOGRAPHIC MAP IS FOR SITE EVALUATION AND TO SHOW SURFACE DRAINAGE FEATURES. ADDITIONAL TOPOGRAPHIC OBSERVATIONS MAY BE NECESSARY IN SPECIFIC AREAS OF DESIGN. TOPOGRAPHY SHOWN HEREON COMPLIES WITH NATIONAL MAP ACCURACY STANDARDS.

10. BENCHMARK INFORMATION: SMARTNET NORTH AMERICA CONTINUOUSLY OPERATING REFERENCE STATIONS (CORS) NETWORK WAS USED TO ESTABLISH A GPS DERIVED ELEVATION ON AN ON-SITE BENCHMARK AT THE NORTHEASTERLY CORNER OF LOT 2, BEING A FOUND 1" BRASS TAG STAMPED "FLAT SURV LS 38409" WITH AN ELEVATION OF 5,189.82 FEET (NAVD 88). NGS POINT LUCY, BEING A CITY OF BROOMFIELD SURVEY DISK STAMPED "LUCY 15" LOCATED NEAR THE SOUTHWESTERLY CORNER OF THE INTERSECTION OF HIGHWAY 7 AND SHERIDAN PARKWAY, WITH A PUBLISHED ELEVATION OF 5,297 FEET, WAS CHECKED INTO WITH AN AS-MEASURED ELEVATION OF 5,296.83 FEET. NO DIFFERENTIAL LEVELING WAS PERFORMED TO ESTABLISH THE ELEVATION OF THE ON-SITE BENCHMARK.

11. SUBSURFACE BUILDINGS, IMPROVEMENTS OR STRUCTURES ARE NOT NECESSARILY SHOWN. BUILDINGS AND OTHER IMPROVEMENTS OR STRUCTURES ON ADJACENT PROPERTIES THAT ARE MORE THAN FIVE (5) FEET FROM ANY OF THE PROPERTY LINES OF THE SUBJECT PROPERTY ARE NOT NECESSARILY SHOWN.

12. FLOOD INFORMATION: THE SUBJECT PROPERTY IS LOCATED IN ZONE X UNSHADED, AREAS DETERMINED TO BE OUTSIDE THE 0.2% ANNUAL CHANCE FLOODPLAIN, ACCORDING TO THE FEMA FLOOD INSURANCE RATE MAP; COMMUNITY-PANEL NO. 085073-0040 F, DATED AUGUST 18, 2004. FLOOD INFORMATION IS SUBJECT TO CHANGE (ALTA/NSPS LAND TITLE SURVEY TABLE A, OPTIONAL SURVEY RESPONSIBILITIES AND SPECIFICATIONS, ITEM 3).

13. DATES OF FIELDWORK: MARCH 20 & 27, 2024

14. THE WORD "CERTIFY" AS SHOWN AND USED HEREON MEANS AN EXPRESSION OF PROFESSIONAL OPINION REGARDING THE FACTS OF THIS SURVEY AND DOES NOT CONSTITUTE A WARRANTY OR GUARANTEE, EXPRESSED OR IMPLIED.

15. THE TOTAL AREA OF THE SUBJECT PROPERTY IS 164,924 SQ. FT. OR 3.79 ACRES, MORE OR LESS. AREA AS SHOWN HEREON IS A RESULTANT FACTOR, NOT A DETERMINATIVE FACTOR, AND MAY CHANGE SIGNIFICANTLY WITH MINOR VARIATIONS IN FIELD MEASUREMENTS OR THE SOFTWARE USED TO PERFORM THE CALCULATIONS. FOR THIS REASON, THE AREA IS SHOWN AS A "MORE OR LESS" FIGURE, AND IS NOT TO BE RELIED UPON AS AN ACCURATE FACTOR FOR REAL ESTATE SALES PURPOSES (ALTA/NSPS LAND TITLE SURVEY TABLE A, OPTIONAL SURVEY RESPONSIBILITIES AND SPECIFICATIONS, ITEM 4).

16. OWNERSHIP INFORMATION IS PER CITY AND COUNTY OF BROOMFIELD WEBSITE AS RESEARCHED ON APRIL 16, 2024 AND IS SUBJECT TO CHANGE (ALTA/NSPS LAND TITLE SURVEY TABLE A, OPTIONAL SURVEY RESPONSIBILITIES AND SPECIFICATIONS, ITEM 13).

17. THE SUBJECT PROPERTY IS LOCATED AT THE INTERSECTION OF PALISADE PARKWAY AND HIGHWAY 7 AS SHOWN HEREON (ALTA/NSPS LAND TITLE SURVEY TABLE A, OPTIONAL SURVEY RESPONSIBILITIES AND SPECIFICATIONS, ITEM 14).

18. THERE WAS NO EVIDENCE OF RECENT EARTH MOVING WORK, BUILDING CONSTRUCTION OR BUILDING ADDITIONS OBSERVED IN THE PROCESS OF CONDUCTING THE FIELDWORK (ALTA/NSPS LAND TITLE SURVEY TABLE A, OPTIONAL SURVEY RESPONSIBILITIES AND SPECIFICATIONS, ITEM 16).

19. THE FOLLOWING DOCUMENTS ARE MENTIONED IN THE ABOVE REFERENCED TITLE DOCUMENT AND ARE SHOWN GRAPHICALLY HEREON. THE FOLLOWING LIST CONTAINS THE TITLE DOCUMENT EXCEPTION NUMBER, DATE RECORDED, RECEPTION NUMBER AND/OR BOOK AND PAGE.

#28	JULY 02, 2008	REC. NO. 2008008132	UNITED POWER UTILITY EASEMENT
#30	JAN. 27, 2009	REC. NO. 2009000754	QWEST UTILITY EASEMENT
#32	MAR. 30, 2009	REC. NO. 2009003650	QWEST UTILITY EASEMENT
#40	DEC. 18, 2019	REC. NO. 2019015925	ESMTS. PER PLAT OF PALISADE PARK FILING NO. 1 REPLAT C
#43	APR. 08, 2021	REC. NO. 2021007043	UTILITY EASEMENT
#44	SEPT. 20, 2021	REC. NO. 2021018035	PLAT OF PALISADE PARK FILING NO. 1 REPLAT D

20. THE FOLLOWING DOCUMENTS ARE MENTIONED IN THE ABOVE REFERENCED TITLE DOCUMENT AND APPEAR TO AFFECT THE SUBJECT PROPERTY BUT CANNOT BE SHOWN GRAPHICALLY. THE FOLLOWING LIST CONTAINS THE TITLE DOCUMENT EXCEPTION NUMBER, DATE RECORDED, RECEPTION NUMBER AND/OR BOOK AND PAGE.

#9	APR. 20, 1939	BOOK 1041, PAGE 98	RIGHT TO VEIN OR LODE EXTRACTION & DITCH OR CANAL RIGHTS-OF-WAY PER PATENT
#10	JULY 23, 1980	REC. NO. 1830912	OIL & GAS LEASE (BLANKET OVER QUARTER SECTION)
#10	OCT. 04, 1985	REC. NO. 02027443	PRODUCTION AFFIDAVIT
#11	JULY 29, 1980	REC. NO. 1831444	OIL & GAS LEASE (BLANKET OVER QUARTER SECTION)
#11	OCT. 04, 1985	REC. NO. 02027443	PRODUCTION AFFIDAVIT
#12	AUG. 13, 1980	REC. NO. 1832857	OIL & GAS LEASE (BLANKET OVER QUARTER SECTION)
#12	OCT. 04, 1985	REC. NO. 02027443	PRODUCTION AFFIDAVIT
#13	AUG. 20, 1980	REC. NO. 1833490	OIL & GAS LEASE (BLANKET OVER QUARTER SECTION)
#13	OCT. 04, 1985	REC. NO. 02027443	PRODUCTION AFFIDAVIT
#14	SEPT. 02, 1980	REC. NO. 1834647	OIL & GAS LEASE (BLANKET OVER QUARTER SECTION)
#14	SEPT. 02, 1980	REC. NO. 1834648	OIL & GAS LEASE (BLANKET OVER QUARTER SECTION)
#14	OCT. 04, 1985	REC. NO. 02027443	PRODUCTION AFFIDAVIT
#16	JUNE 25, 1999	REC. NO. 2702825	OIL, GAS & MINERAL RIGHTS IN MINERAL DEED
#16	JUNE 25, 1999	REC. NO. 2702826	OIL, GAS & MINERAL RIGHTS IN MINERAL DEED
#16	JUNE 25, 1999	REC. NO. 2702827	OIL, GAS & MINERAL RIGHTS IN MINERAL DEED
#16	JUNE 25, 1999	REC. NO. 2702828	OIL, GAS & MINERAL RIGHTS IN MINERAL DEED
#16	JUNE 25, 1999	REC. NO. 2702829	OIL, GAS & MINERAL RIGHTS IN MINERAL DEED
#16	JUNE 25, 1999	REC. NO. 2702830	OIL, GAS & MINERAL RIGHTS IN MINERAL DEED
#16	JUNE 25, 1999	REC. NO. 2702831	OIL, GAS & MINERAL RIGHTS IN MINERAL DEED
#17	DEC. 17, 1999	REC. NO. 2739276	ANNEXATION AGREEMENT
#18	OCT. 20, 1999	REC. NO. 2895963	ORDER OF INCLUSION IN NORTH METRO FIRE RESCUE DISTRICT
#19	APR. 04, 2006	REC. NO. 2006003955	PALISADE PARK PUD PLAN
#19	MAY 15, 2009	REC. NO. 2009006134	FIRST AMENDMENT
#19	JULY 12, 2011	REC. NO. 2011006795	SECOND AMENDMENT
#19	NOV. 15, 2013	REC. NO. 2013015973	THIRD AMENDMENT
#19	MAY 15, 2019	REC. NO. 2019005028	EIGHTH AMENDMENT
#20	AUG. 16, 2007	REC. NO. 2007010614	ORDER CREATING METROPOLITAN DISTRICT
#20	FEB. 18, 2009	REC. NO. 2009001703	FACILITIES FEE RESOLUTION FOR METROPOLITAN DISTRICT
#20	JULY 29, 2010	REC. NO. 2010007480	AMENDMENT TO FEE RESOLUTION
#20	MAR. 11, 2015	REC. NO. 2015002733	SECOND AMENDMENT TO FEE RESOLUTION
#24	OCT. 10, 2007	REC. NO. 2007013123	PLAT OF PALISADE PARK FILING NO. 1
#24	OCT. 16, 2007	REC. NO. 2007013296	RATIFICATION & CONFIRMATION OF PLAT
#25	OCT. 10, 2007	REC. NO. 2007013124	PALISADE PARK FLG. NO. 1 SITE DEVELOPMENT PLAN/ URBAN RENEWAL PLAN
#25	NOV. 15, 2013	REC. NO. 2013015974	AMENDMENT TO SITE DEVELOPMENT PLAN/ URBAN RENEWAL PLAN
#26	NOV. 05, 2007	REC. NO. 2007014194	SUBDIVISION IMPROVEMENT AGREEMENT
#26	MAY 22, 2014	REC. NO. 2014004368	FIRST AMENDMENT TO AGREEMENT
#26	MAY 27, 2015	REC. NO. 2015006277	SECOND AMENDMENT TO AGREEMENT
#26	OCT. 05, 2018	REC. NO. 2018011156	RERECORDED SECOND AMENDMENT
#27	NOV. 05, 2007	REC. NO. 2007014195	REIMBURSEMENT AGREEMENT
#29	AUG. 25, 2008	REC. NO. 2008010227	ORDER OF INCLUSION IN WATER DISTRICT
#31	MAR. 27, 2009	REC. NO. 3613172	ORDER OF INCLUSION IN WATER CONSERVATION DISTRICT
#33	JULY 21, 2011	REC. NO. 2011007129	ACCESS EASEMENT (BLANKET IN NATURE)
#34	JUNE 04, 2014	REC. NO. 2014004790	DECLARATION OF DESIGN COVENANTS
#35	DEC. 19, 2014	REC. NO. 2014012449	SPECIAL DISTRICT PUBLIC DISCLOSURE
#36	JAN. 08, 2018	REC. NO. 2018000294	OIL, GAS & MINERAL RIGHTS IN MINERAL DEED
#37	OCT. 09, 2018	REC. NO. 4437213	OIL, GAS & MINERAL RIGHTS IN MINERAL DEED
#37	OCT. 22, 2018	REC. NO. 4440333	CORRECTION MINERAL DEED
#37	OCT. 22, 2018	REC. NO. 2018011795	CORRECTION MINERAL DEED
#37	JULY 19, 2018	REC. NO. 4416583	AFFIDAVIT OF AGREEMENT COVERING MINERAL INTEREST
#38	OCT. 11, 2018	REC. NO. 4437974	OIL, GAS & MINERAL RIGHTS IN MINERAL DEED
#39	JUNE 28, 2019	REC. NO. 2019000050645	REQUEST FOR NOTIFICATION OF SURFACE DEVELOPMENT
#42	DEC. 18, 2019	REC. NO. 2019015927	SUBDIVISION IMPROVEMENT AGREEMENT
#45	MAR. 31, 2022	REC. NO. 4814783	OIL, GAS & MINERAL RIGHTS IN MINERAL DEED
#46	JULY 26, 2023	REC. NO. 2023005821	METROPOLITAN DISTRICT DISCLOSURE TO PURCHASERS
#47	AUG. 23, 2023	REC. NO. 2023006629	MATTERS SHOWN ON ALTA/NSPS LAND TITLE SURVEY PREPARED BY FLATIRONS, INC.

21. THE FOLLOWING DOCUMENTS ARE MENTIONED IN THE ABOVE REFERENCED TITLE DOCUMENT AND DO NOT APPEAR TO AFFECT THE SUBJECT PROPERTY. THE FOLLOWING LIST CONTAINS THE TITLE DOCUMENT EXCEPTION NUMBER, DATE RECORDED, RECEPTION NUMBER AND/OR BOOK AND PAGE.

#10	AUG. 28, 2007	REC. NO. 2007011148	SURFACE USE AGREEMENT (DESCRIBES PROPERTY NEAR THE NORTH LINE OF SW1/4)
#11	AUG. 28, 2007	REC. NO. 2007011148	SURFACE USE AGREEMENT (DESCRIBES PROPERTY NEAR THE NORTH LINE OF SW1/4)
#12	AUG. 28, 2007	REC. NO. 2007011148	SURFACE USE AGREEMENT (DESCRIBES PROPERTY NEAR THE NORTH LINE OF SW1/4)
#13	AUG. 28, 2007	REC. NO. 2007011148	SURFACE USE AGREEMENT (DESCRIBES PROPERTY NEAR THE NORTH LINE OF SW1/4)
#14	AUG. 28, 2007	REC. NO. 2007011148	SURFACE USE AGREEMENT (DESCRIBES PROPERTY NEAR THE NORTH LINE OF SW1/4)
#15	JAN. 05, 1987	REC. NO. 02083325	MOUNTAIN STATES TELEPHONE & TELEGRAPH COMPANY ESMT (AFFECTS ADJACENT PROPERTY TO THE WEST)
#21	AUG. 28, 2007	REC. NO. 2007011151	ACCESS ROAD EASEMENT (AFFECTS ADJACENT PROPERTY TO THE WEST)
#22	AUG. 28, 2007	REC. NO. 2007011153	EASEMENT AGREEMENT (AFFECTS ADJACENT PROPERTY TO THE WEST)
#23	AUG. 28, 2007	REC. NO. 2007011155	PIPELINE RELOCATION AGREEMENT (AFFECTS ADJACENT PROPERTY TO THE WEST)
#34	SEPT. 11, 2015	REC. NO. 2015011687	FIRST NOTICE OF ANNEXATION (AFFECTS ADJACENT PROPERTY TO THE EAST)
#34	APR. 21, 2017	REC. NO. 2017004873	SECOND NOTICE OF ANNEXATION (AFFECTS LOT 2, PALISADE PARK FLG. NO. 2)
#41	DEC. 18, 2019	REC. NO. 2019015926	PALISADE PARK FLG. NO. 1 REPLAT C SDP (AFFECTS ADJACENT PROPERTY)
#44	MAY 09, 2022	REC. NO. 2022005823	AFFIDAVIT OF CORRECTION (AFFECTS ADJACENT RIGHT-OF-WAY OF WEST 168TH PLACE)

22. THE FIBEROPTIC LINE APPEARS TO EXTEND OUTSIDE OF THE 10' UTILITY, ACCESS & DRAINAGE EASEMENT AS SHOWN HEREON.

23. THE FIBEROPTIC LINE APPEARS TO EXTEND OUTSIDE OF THE QWEST UTILITY EASEMENT & 30' UTILITY EASEMENT AS SHOWN HEREON.

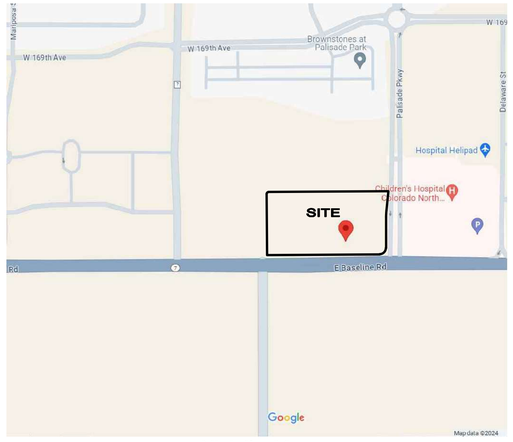

Vicinity Map
NOT TO SCALE

Depositing Certificate

DEPOSITED THIS ____ DAY OF _____, 20__ AT __O'CLOCK __ M. IN BOOK _____ OF LAND SURVEY PLATS AT PAGE _____, OF THE RECORDS OF BROOMFIELD COUNTY, COLORADO.

SIGNED: _____

TITLE: _____

BY: _____

Surveyor's Certificate

TO LANGAN ENGINEERING & ENVIRONMENTAL CONSULTANTS:

THIS IS TO CERTIFY THAT THIS MAP OR PLAT AND THE SURVEY ON WHICH IT IS BASED WERE MADE IN ACCORDANCE WITH THE 2021 MINIMUM STANDARD DETAIL REQUIREMENTS FOR ALTA/NSPS LAND TITLE SURVEYS, JOINTLY ESTABLISHED AND ADOPTED BY ALTA AND NSPS, AND INCLUDES ITEMS 1, 2, 3, 4, 5, 8, 11(A), 11(B), 13, 14 & 16 OF TABLE A THEREOF. THE FIELDWORK WAS COMPLETED ON MARCH 27, 2024.

DATE OF PLAT OR MAP: AUGUST 28, 2025

PURSUANT TO COLORADO STATE BOARD OF LICENSURE FOR PROFESSIONAL LAND SURVEYORS RULE 1.6(B)(2) THE UNDERSIGNED FURTHER CERTIFIES THAT THIS MAP OR PLAT WAS PREPARED BY ME OR UNDER MY RESPONSIBLE CHARGE, IS ACCURATE TO THE BEST OF MY KNOWLEDGE, INFORMATION AND BELIEF, IS IN ACCORDANCE WITH APPLICABLE STANDARDS OF PRACTICE AND IS NOT A GUARANTY OR WARRANTY, EITHER EXPRESSED OR IMPLIED.

DAVID A. WILSON
COLORADO P.L.S. #38280
FLATIRONS, INC.

David Wilson
Digitally signed by David Wilson
Date: 2025.08.28 10:04:07 -06'00'

REVISION	DATE
1 -FINALIZE SURVEY	08/28/2025 JS
2	
3	
4	
5	
6	
7	
8	

ALTA/NSPS LAND TITLE SURVEY
PREPARED FOR
LANGAN ENGINEERING & ENVIRONMENTAL CONSULTANTS

Flatirons, Inc.
Land Surveying Services
www.FlatironsInc.com
3825 IRIS AVE, SUITE 395, BOULDER, CO 80301 (303) 443-7001
655 FOURTH AVE, LONGMONT, CO 80501 (303) 776-1733
7000 N. BROADWAY, SUITE 209, DENVER, CO 80221 (303) 936-6997

COPYRIGHT 2025 FLATIRONS, INC.

COLORADO LICENSED
DAVID A. WILSON
38280
8/28/25
PROFESSIONAL LAND SURVEYOR
SEAL

JOB NUMBER:	24-80,960
DATE:	05-09-2024
DRAWN BY:	J. STEPHENSON
CHECKED BY:	BO/JMB/DW

SHEET 1 OF 3

BY:JSTEPHENSON FILE:80960-ALTA_REV1-C21.DWG DATE:8/28/2025 9:59 AM

ALTA/NSPS LAND TITLE SURVEY

LOT 2, PALISADE PARK FILING NO. 1 REPLAT D, LOCATED IN THE SOUTHWEST QUARTER
OF SECTION 34, TOWNSHIP 1 NORTH, RANGE 68 WEST OF THE 6TH P.M.,
CITY AND COUNTY OF BROOMFIELD, STATE OF COLORADO

SHEET 2 OF 3

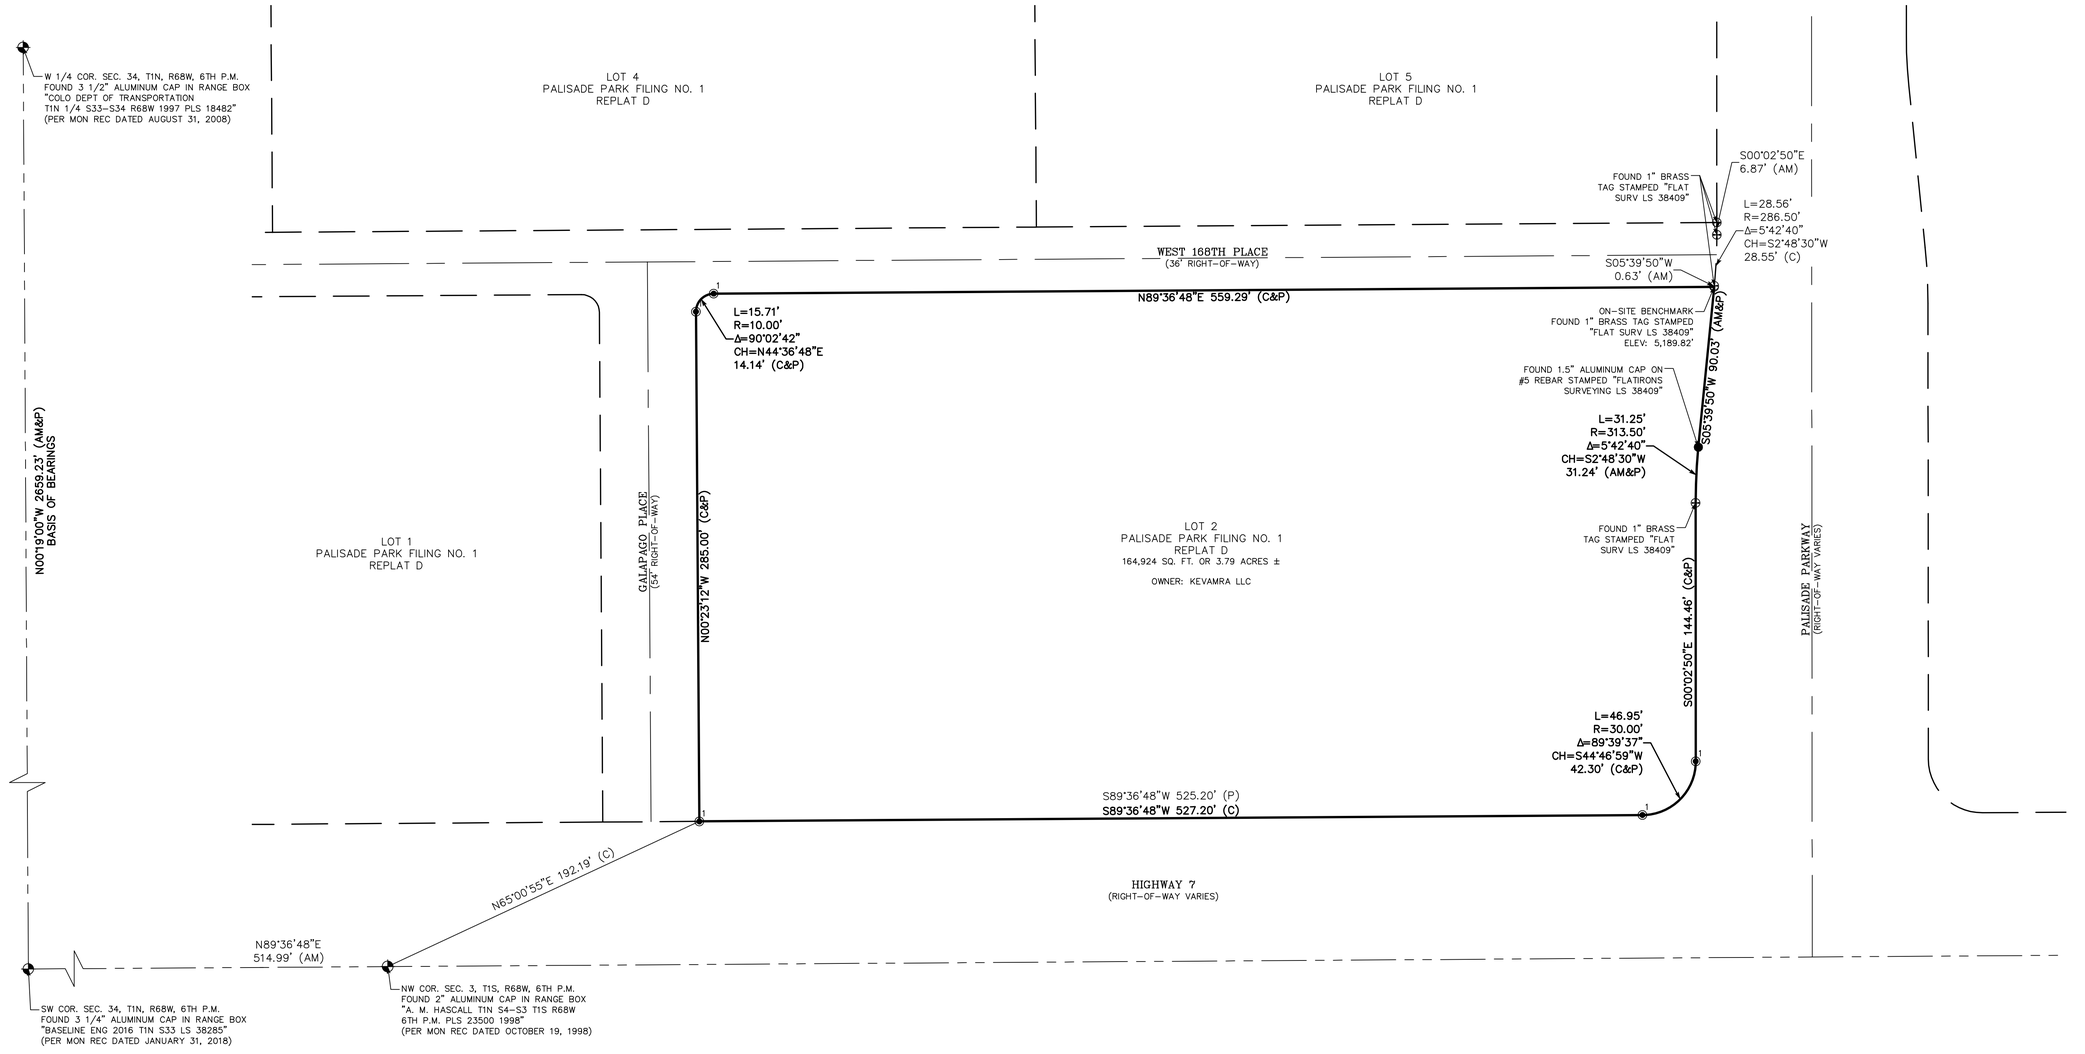

Legend

⊕	FOUND ALIQUOT MONUMENT AS DESCRIBED
●	FOUND MONUMENT AS DESCRIBED
⊕	FOUND BRASS TAG AS DESCRIBED
◉¹	FOUND 1" BRASS TAG "LS 38174"
(AM)	AS MEASURED AT TIME OF SURVEY
(C)	CALCULATED FROM RECORD AND AS MEASURED INFORMATION
(P)	AS PER THE PLAT OF PALISADE PARK FLG. NO. 1 REPLAT D
ELEV	ELEVATION

Boundary Closure Report

COURSE: N00°23'12"W LENGTH: 285.00'
LENGTH: 15.71' RADIUS: 10.00'
DELTA: 090°02'42" TANGENT: 10.00'
CHORD: 14.14' COURSE: N44°36'48"E
COURSE: N89°36'48"E LENGTH: 559.29'
COURSE: S05°39'50"W LENGTH: 90.03'
LENGTH: 31.25' RADIUS: 313.50'
DELTA: 005°42'40" TANGENT: 15.64'
CHORD: 31.24' COURSE: S02°48'30"W
COURSE: S00°02'50"E LENGTH: 144.46'
LENGTH: 46.95' RADIUS: 30.00'
DELTA: 089°39'37" TANGENT: 29.82'
CHORD: 42.30' COURSE: S44°46'59"W
COURSE: S89°36'48"W LENGTH: 527.20'

AREA: 164,924 SQ. FT.
ERROR CLOSURE: 0.00 COURSE: S74°38'44"E
ERROR NORTH: -0.001 EAST: 0.003

PRECISION 1: 1693660000

GRAPHIC SCALE

40 0 20 40 80
(IN FEET)
1 inch = 40 ft.

REVISION	DATE
1 FINALIZE SURVEY	08/28/2025 JS
2	
3	
4	
5	
6	
7	
8	

ALTA/NSPS LAND TITLE SURVEY
PREPARED FOR
LANGAN ENGINEERING & ENVIRONMENTAL CONSULTANTS

COPYRIGHT 2025 FLATIRONS, INC.

Flatirons, Inc.
Land Surveying Services
www.FlatironsInc.com
3825 IRIS AVE, SUITE 395 BOULDER, CO 80301 (303) 443-7001
655 FOURTH AVE. LONGMONT, CO 80501 (303) 776-1733
7000 N. BROADWAY, SUITE 209 DENVER, CO 80221 (303) 936-6997

COLORADO LICENSED
38280
08/28/25
PROFESSIONAL LAND SURVEYOR

JOB NUMBER:	24-80,960
DATE:	05-09-2024
DRAWN BY:	J. STEPHENSON
CHECKED BY:	BO/JMB/DW

SHEET 2 OF 3

BY:JSTEPHENSON FILE:80960-ALTA_REV.1-C2.DWG DATE:8/28/2025 9:58 AM

ALTA/NSPS LAND TITLE SURVEY

LOT 2, PALISADE PARK FILING NO. 1 REPLAT D, LOCATED IN THE SOUTHWEST QUARTER
OF SECTION 34, TOWNSHIP 1 NORTH, RANGE 68 WEST OF THE 6TH P.M.,
CITY AND COUNTY OF BROOMFIELD, STATE OF COLORADO

SHEET 3 OF 3

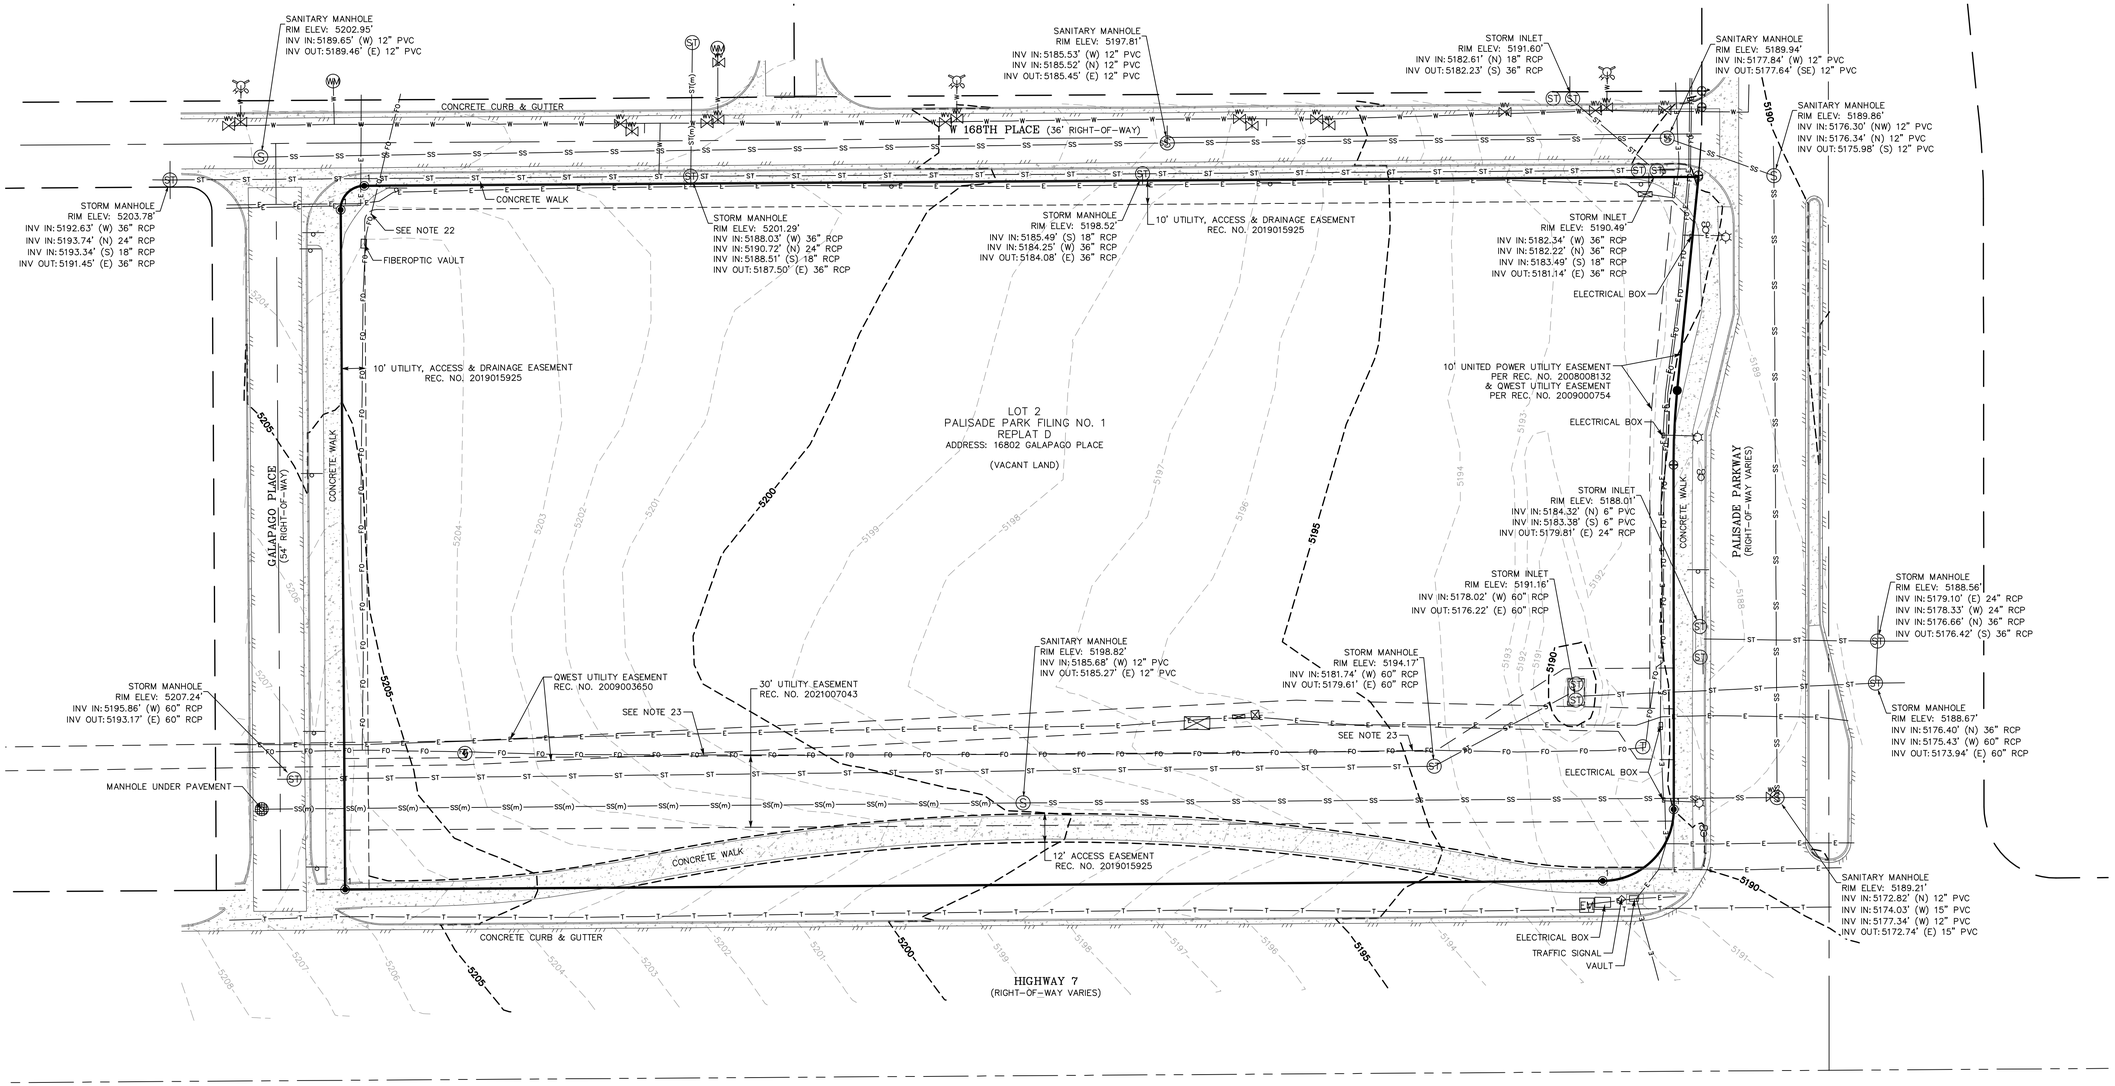

GRAPHIC SCALE

30 0 15 30 60

(IN FEET)
1 inch = 30 ft.

Legend

- FOUND ALIQUOT MONUMENT AS DESCRIBED ON SHEET 2
- FOUND MONUMENT AS DESCRIBED ON SHEET 2
- FOUND BRASS TAG AS DESCRIBED ON SHEET 2
- FOUND 1" BRASS TAG "LS 38174"
- CONCRETE
- EDGE OF ASPHALT
- SIGN
- WATER LINE
- WATER VALVE
- WATER METER
- FIRE HYDRANT
- SANITARY SEWER LINE
- SANITARY SEWER LINE SCALED FROM MAPS
- SANITARY SEWER MANHOLE
- CLEANOUT
- STORM SEWER LINE
- STORM SEWER LINE SCALED FROM MAPS
- STORM SEWER MANHOLE
- ELECTRIC LINE
- TRANSFORMER
- ELECTRIC METER
- LIGHT POLE
- FIBEROPTIC LINE
- TELEPHONE MANHOLE
- UNIDENTIFIED MANHOLE
- ELEV ELEVATION
- INV INVERT

REVISION	DATE
1 FINALIZE SURVEY	08/28/2025 JS

ALTA/NSPS LAND TITLE SURVEY
PREPARED FOR
LANGAN ENGINEERING & ENVIRONMENTAL CONSULTANTS

Flatirons, Inc.
Land Surveying Services
www.FlatironsInc.com
3825 IRIS AVE, SUITE 395, BOULDER, CO 80301 (303) 443-7001
655 FOURTH AVE LONGMONT, CO 80501 (303) 776-1733
7000 N. BROADWAY, SUITE 209 DENVER, CO 80221 (303) 936-6997

COPYRIGHT 2025 FLATIRONS, INC.

COLORADO LICENSED LAND SURVEYOR 38280 08/28/25 PROFESSIONAL LAND SURVEYOR

JOB NUMBER:	24-80,960
DATE:	05-09-2024
DRAWN BY:	J. STEPHENSON
CHECKED BY:	BO/JMB/DW

SHEET 3 OF 3

BY:JSTEPHENSON FILE:80960-ALTA_REV1-C21.DWG DATE:8/28/2025 10:00 AM

*** CAUTION: NOTICE TO CONTRACTOR ***

THE CONTRACTOR SHALL NOTE ON SITE PLAN THE LOCATION OF ALL MATERIAL STORAGE AREAS, EQUIPMENT STORAGE AREAS, PETROLEUM TANKS, SOLID WASTE RECEPTACLES, SANITARY FACILITIES, CONCRETE WASHOUT PIT, ANY ON-SITE OR OFF-SITE BORROW OR STOCKPILE AREA, ANY ON-SITE OR OFF-SITE SUPPORT ACTIVITIES (SUCH AS ASPHALT OR CONCRETE PLANTS). CONTRACTOR SHALL ALSO PREPARE, KEEP ON SITE, AND MAINTAIN CURRENT A LIST OF MATERIALS WITH APPROXIMATE QUANTITIES, WHICH ARE STORED ON SITE.

BMP IMPLEMENTATION SCHEDULE

BMP	WHEN IMPLEMENTED
SILT FENCE	PRIOR TO CLEARING/GRUBBING
INLET PROTECTION	PRIOR TO CLEARING/GRUBBING
CONSTRUCTION EXIT	PRIOR TO CLEARING/GRUBBING
ROCK CHECK DAM	AFTER DETENTION POND HAS BEEN GRADED
INLET PROTECTION OF NEW PIPES/MANHOLES	DURING UTILITY INSTALLATION
PERMANENT VEGETATIVE STABILIZATION	AFTER FINAL GRADING AND PAVING

EROSION CONTROL MAINTENANCE NOTES

1. ALL MEASURES STATED ON THIS EROSION AND SEDIMENT CONTROL PLAN, AND IN THE STORM WATER POLLUTION PREVENTION PLAN, SHALL BE MAINTAINED IN FULLY FUNCTIONAL CONDITION UNTIL NO LONGER REQUIRED FOR A COMPLETED PHASE OF WORK OR FINAL STABILIZATION OF THE SITE. ALL EROSION AND SEDIMENTATION CONTROL MEASURES SHALL BE CHECKED BY A QUALIFIED PERSON ON A SCHEDULE WHICH COMPLIES WITH THE GENERAL PERMIT REQUIREMENTS AND CLEANED AND REPAIRED WITHIN 48 HOURS OF THE INSPECTION IN ACCORDANCE WITH THE FOLLOWING:
   - 1.A. INLET PROTECTION DEVICES AND BARRIERS SHALL BE REPAIRED OR REPLACED IF THEY SHOW SIGNS OF UNDERMINING, OR DETERIORATION.
   - 1.B. ALL SEEDED AREAS SHALL BE CHECKED REGULARLY TO SEE THAT A GOOD STAND IS MAINTAINED. AREAS SHOULD BE FERTILIZED, WATERED AND RESEEDED AS NEEDED.
   - 1.C. SILT FENCES SHALL BE REPAIRED TO THEIR ORIGINAL CONDITIONS IF DAMAGED. SEDIMENT SHALL BE REMOVED FROM THE SILT FENCES WHEN IT REACHES ONE-HALF THE HEIGHT OF THE SILT FENCE.
   - 1.D. THE TEMPORARY PARKING AND STORAGE AREA (IF PRESENT) SHALL BE KEPT IN GOOD CONDITION (SUITABLE FOR PARKING AND STORAGE). THIS MAY REQUIRE PERIODIC TOP DRESSING OF THE TEMPORARY PARKING AS CONDITIONS DEMAND.
   - 1.E. OUTLET STRUCTURES IN THE SEDIMENTATION BASINS OR SEDIMENT TRAPS (IF PRESENT) SHALL BE MAINTAINED IN OPERATIONAL CONDITION AT ALL TIMES. SEDIMENT SHALL BE REMOVED FROM SEDIMENT BASINS OR TRAPS WHEN THE DESIGN CAPACITY HAS BEEN REDUCED BY 50%.
   - 1.F. MAINTENANCE PROCEDURES FOR THE EROSION AND SEDIMENTATION CONTROL SYSTEMS SPECIFIED ARE GIVEN IN SECTION 5 OF THE STORM WATER POLLUTION PREVENTION PLAN.

NOTICE TO CONTRACTORS - UTILITIES

THE CONTRACTOR IS SPECIFICALLY CAUTIONED THAT THE LOCATION AND/OR ELEVATION OF ANY EXISTING UTILITIES AS SHOWN ON THESE PLANS ARE BASED ON RECORDS OF THE VARIOUS UTILITY COMPANIES, THE GOVERNING MUNICIPALITY, AND WHERE POSSIBLE, MEASUREMENTS TAKEN IN THE FIELD. THE INFORMATION PROVIDED IS NOT TO BE RELIED ON AS BEING EXACT OR COMPLETE. THE CONTRACTOR MUST CALL THE APPROPRIATE UTILITY COMPANY AT LEAST 48 HOURS BEFORE ANY EXCAVATION TO REQUEST EXACT FIELD LOCATION OF UTILITIES. IT SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR TO RELOCATE ALL EXISTING UTILITIES WHICH CONFLICT WITH THE PROPOSED IMPROVEMENTS SHOWN ON THESE PLANS.

** NOTICE TO CONTRACTORS - TOPOGRAPHIC SURVEY **

TOPOGRAPHIC INFORMATION TAKEN FROM A TOPOGRAPHIC SURVEY PERFORMED BY FLATIRONS, INC. LAND SURVEYING SERVICES. THE CONTRACTOR SHALL NOTIFY THE ENGINEER IMMEDIATELY, IN WRITING, OF ANY DISCREPANCIES OR OMISSIONS TO THE TOPOGRAPHIC INFORMATION. THE CONTRACTOR(S) SHALL BE RESPONSIBLE FOR CONFIRMING THE LOCATION (HORIZONTAL/VERTICAL) OF ANY BURIED CABLES, CONDUITS, PIPES, AND STRUCTURES (STORM SEWER, SANITARY SEWER, WATER, GAS, TELEVISION, TELEPHONE, ETC.) WHICH IMPACT THE CONSTRUCTION SITE. THE CONTRACTOR(S) SHALL NOTIFY THE OWNER AND ENGINEER IF ANY DISCREPANCIES ARE FOUND BETWEEN THE ACTUAL CONDITIONS VERSUS THE DATA CONTAINED IN THE CONSTRUCTION PLANS. ANY COSTS INCURRED AS THE RESULT OF NOT CONFIRMING THE ACTUAL LOCATION (HORIZONTAL/VERTICAL) OF SAID CABLES, CONDUITS, PIPES, AND STRUCTURES SHALL BE BORNE BY THE CONTRACTOR. ADDITIONALLY, THE CONTRACTOR(S) SHALL NOTIFY THE OWNER AND ENGINEER IF ANY ERRORS OR DISCREPANCIES ARE FOUND ON THE CONSTRUCTION DOCUMENTS (PS&E), WHICH NEGATIVELY IMPACT THE PROJECT. THE ENGINEER AND OWNER SHALL BE INDEMNIFIED OF PROBLEMS AND/OR COST WHICH MAY RESULT FROM CONTRACTOR'S FAILURE TO NOTIFY ENGINEER AND OWNER.

EROSION CONTROL SEQUENCE

1. INSTALL SILT FENCES & TRIANGULAR SEDIMENT FILTER DIKES AROUND PERIMETER OF PROPERTY AND DISTURBED AREAS AS SHOWN.
2. INSTALL INLET PROTECTION FOR ALL EXISTING GRATE INLETS, CURB INLETS AND AT THE ENDS OF ALL EXPOSED STORM SEWER PIPES, IF PRESENT.
3. CONSTRUCT TEMPORARY CONSTRUCTION EXIT.
4. COMMENCE GRUBBING AND REMOVAL OF VEGETATION IN AREA TO RECEIVE CUT OR FILL.
5. COMMENCE GRADING OPERATION FOR BUILDING PAD PREPARATION.
6. INSTALL ALL UNDERGROUND UTILITIES.
7. FINALIZE PAVEMENT SUBGRADE PREPARATION.
8. INSTALL ALL PROPOSED STORM SEWER PIPES AND INSTALL INLET PROTECTION SILT FENCES AT ENDS OF EXPOSED PIPES.
9. CONSTRUCT ALL GRATE INLETS AND DRAINAGE STRUCTURES. INLET PROTECTION SILT FENCES MAY BE REMOVED TEMPORARILY FOR THIS CONSTRUCTION.
10. REMOVE SILT FENCES AROUND INLETS AND MANHOLES NO MORE THAN 48 HOURS PRIOR TO PLACING STABILIZED BASE COURSE.
11. INSTALL BASE MATERIAL AS REQUIRED FOR PAVEMENT, CURB & GUTTER.
12. INSTALL ALL PAVING, CURB & GUTTER.
13. COMPLETE PLANTING AND/OR SEEDING OF VEGETATED AREAS TO ACCOMPLISH STABILIZATION, IN ACCORDANCE WITH THE LANDSCAPING PLAN.
14. REMOVE TEMPORARY CONSTRUCTION EXIT, SILT FENCES & TRIANGULAR SEDIMENT FILTER DIKES.

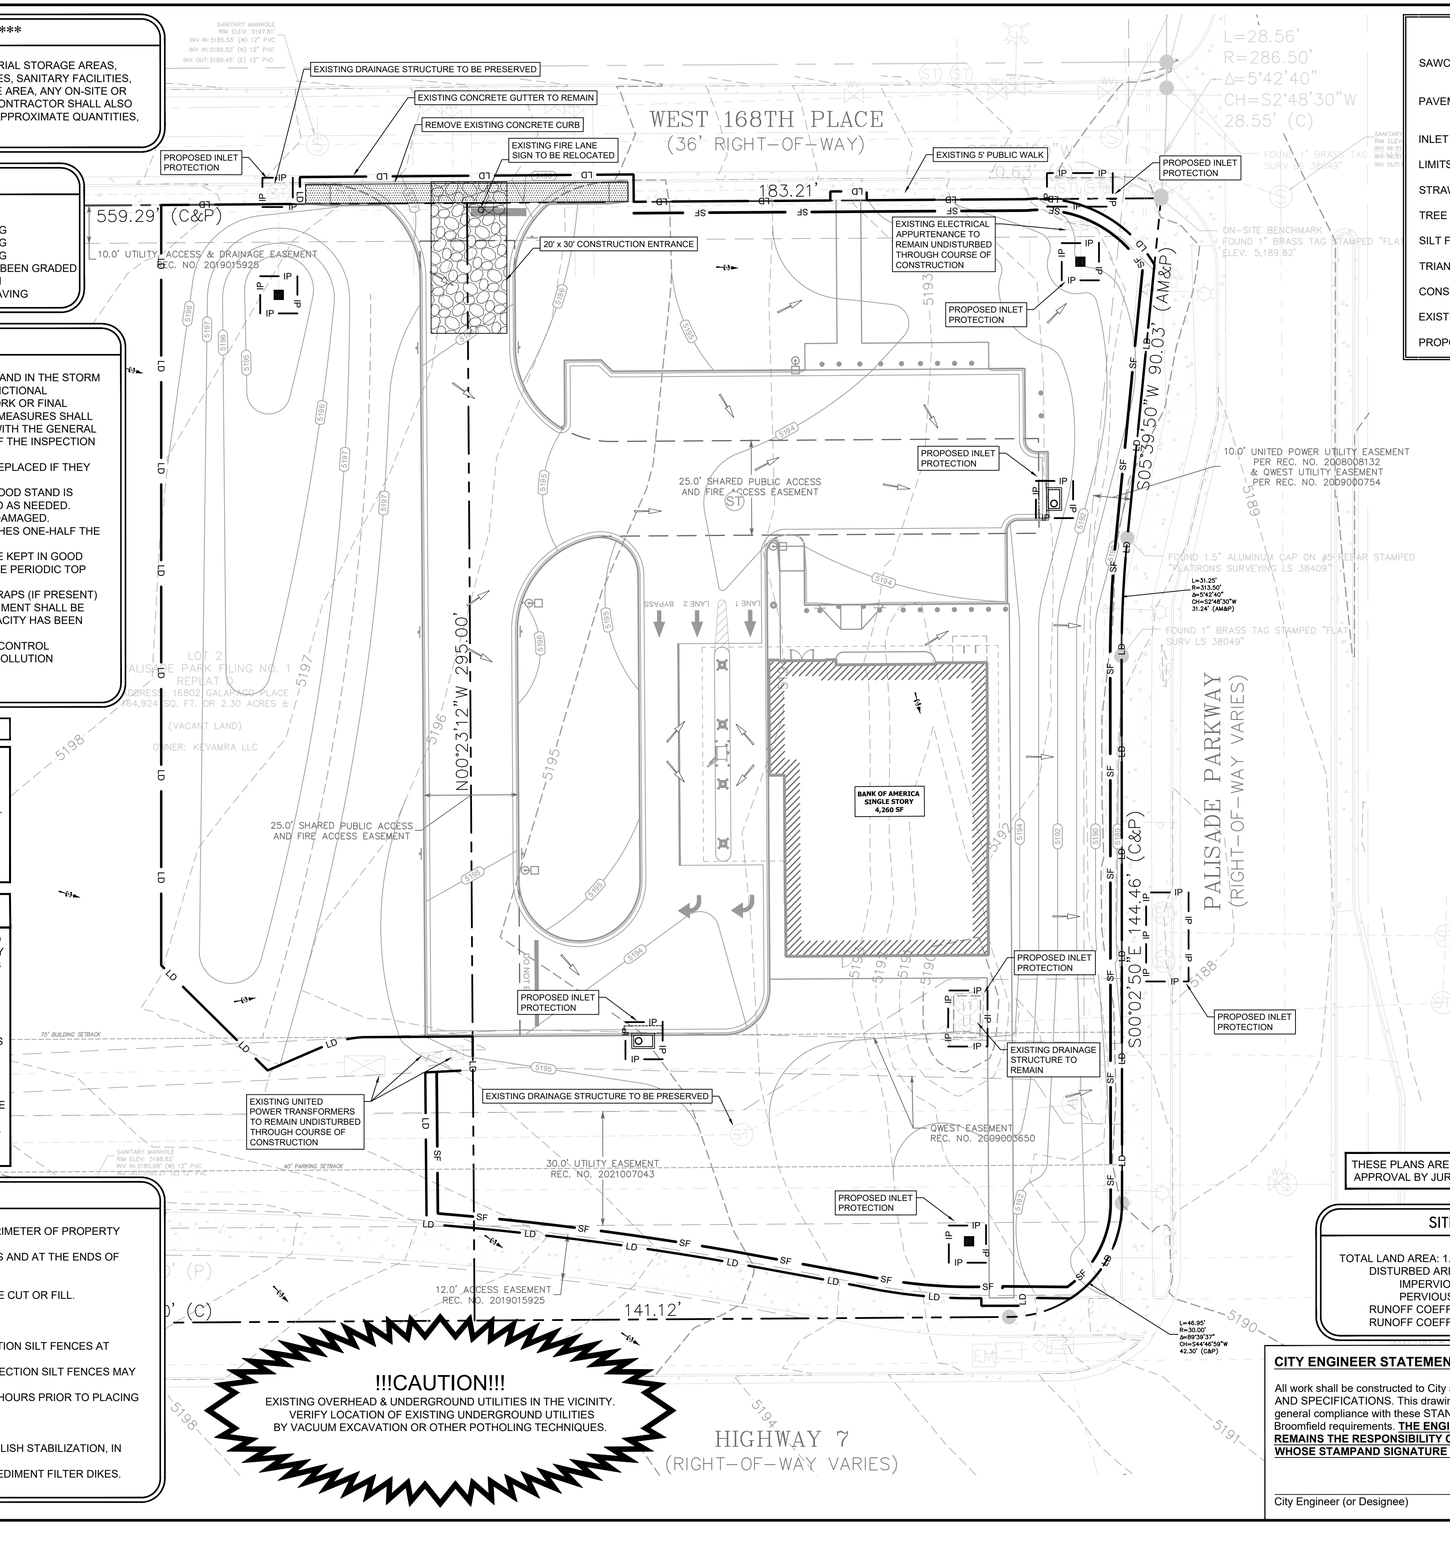

!!!CAUTION!!!
EXISTING OVERHEAD & UNDERGROUND UTILITIES IN THE VICINITY.
VERIFY LOCATION OF EXISTING UNDERGROUND UTILITIES
BY VACUUM EXCAVATION OR OTHER POTHOLING TECHNIQUES.

LEGEND

- SAWCUT
- PAVEMENT REMOVAL
- INLET PROTECTION — IP — IP
- LIMITS OF DISTURBANCE — LD
- STRAW WATTLE — SW
- TREE PROTECTION FENCE — TP
- SILT FENCE — SF
- TRIANGULAR FILTER DIKE — TFD
- CONSTRUCTION EXIT
- EXISTING FLOW ARROW
- PROPOSED FLOW ARROW

GRAPHIC SCALE
0 20 40 FEET
1" = 20'

Date	Description	No.
08/26/25	IF CD100	2
08/12/25	IF CD90	1

Revisions

08/26/25

COLORADO LICENSED
ROBERT ALAN HOWE
51524
PROFESSIONAL ENGINEER

LANGAN
Langan Engineering and Environmental Services, LLC.
300 Union Boulevard, Suite 405
Lakewood, CO 80228
T: 303.262.2000 www.langan.com

Know what's below. Call before you dig.

THESE PLANS ARE SUBJECT TO REVIEW & APPROVAL BY JURISDICTIONAL ENTITIES.

SITE DATA

TOTAL LAND AREA: 1.17 AC
DISTURBED AREA: 1.56 AC
IMPERVIOUS: 0.60 AC
PERVIOUS: 0.96 AC
RUNOFF COEFF. PRE-DEV: 0.75
RUNOFF COEFF. POST-DEV: 0.63

CITY ENGINEER STATEMENT

All work shall be constructed to City and County of Broomfield STANDARDS AND SPECIFICATIONS. This drawing has been reviewed and found to be in general compliance with these STANDARDS AND SPECIFICATIONS and other Broomfield requirements. **THE ENGINEERING DESIGN AND CONCEPT REMAINS THE RESPONSIBILITY OF THE PROFESSIONAL ENGINEER WHOSE STAMPAND SIGNATURE APPEAR HEREON**.

City Engineer (or Designee) Date

PALISADE PARK FILING NO. 1, REPLAT F LOT 1
LOCATED IN THE SOUTHWEST QUARTER OF SECTION 34, TOWNSHIP 1 NORTH, RANGE 68 WEST OF THE 6TH P.M., CITY AND COUNTY OF BROOMFIELD, STATE OF COLORADO

CITY OF BROOMFIELD
BROOMFIELD COUNTY COLORADO

Drawing Title
DEMOLITION AND EROSION CONTROL PLAN

Project No.	532039301
Date	AUGUST 2025
Drawn By	NF
Checked By	BH
Drawing No.	C2.0

© 2025 Langan

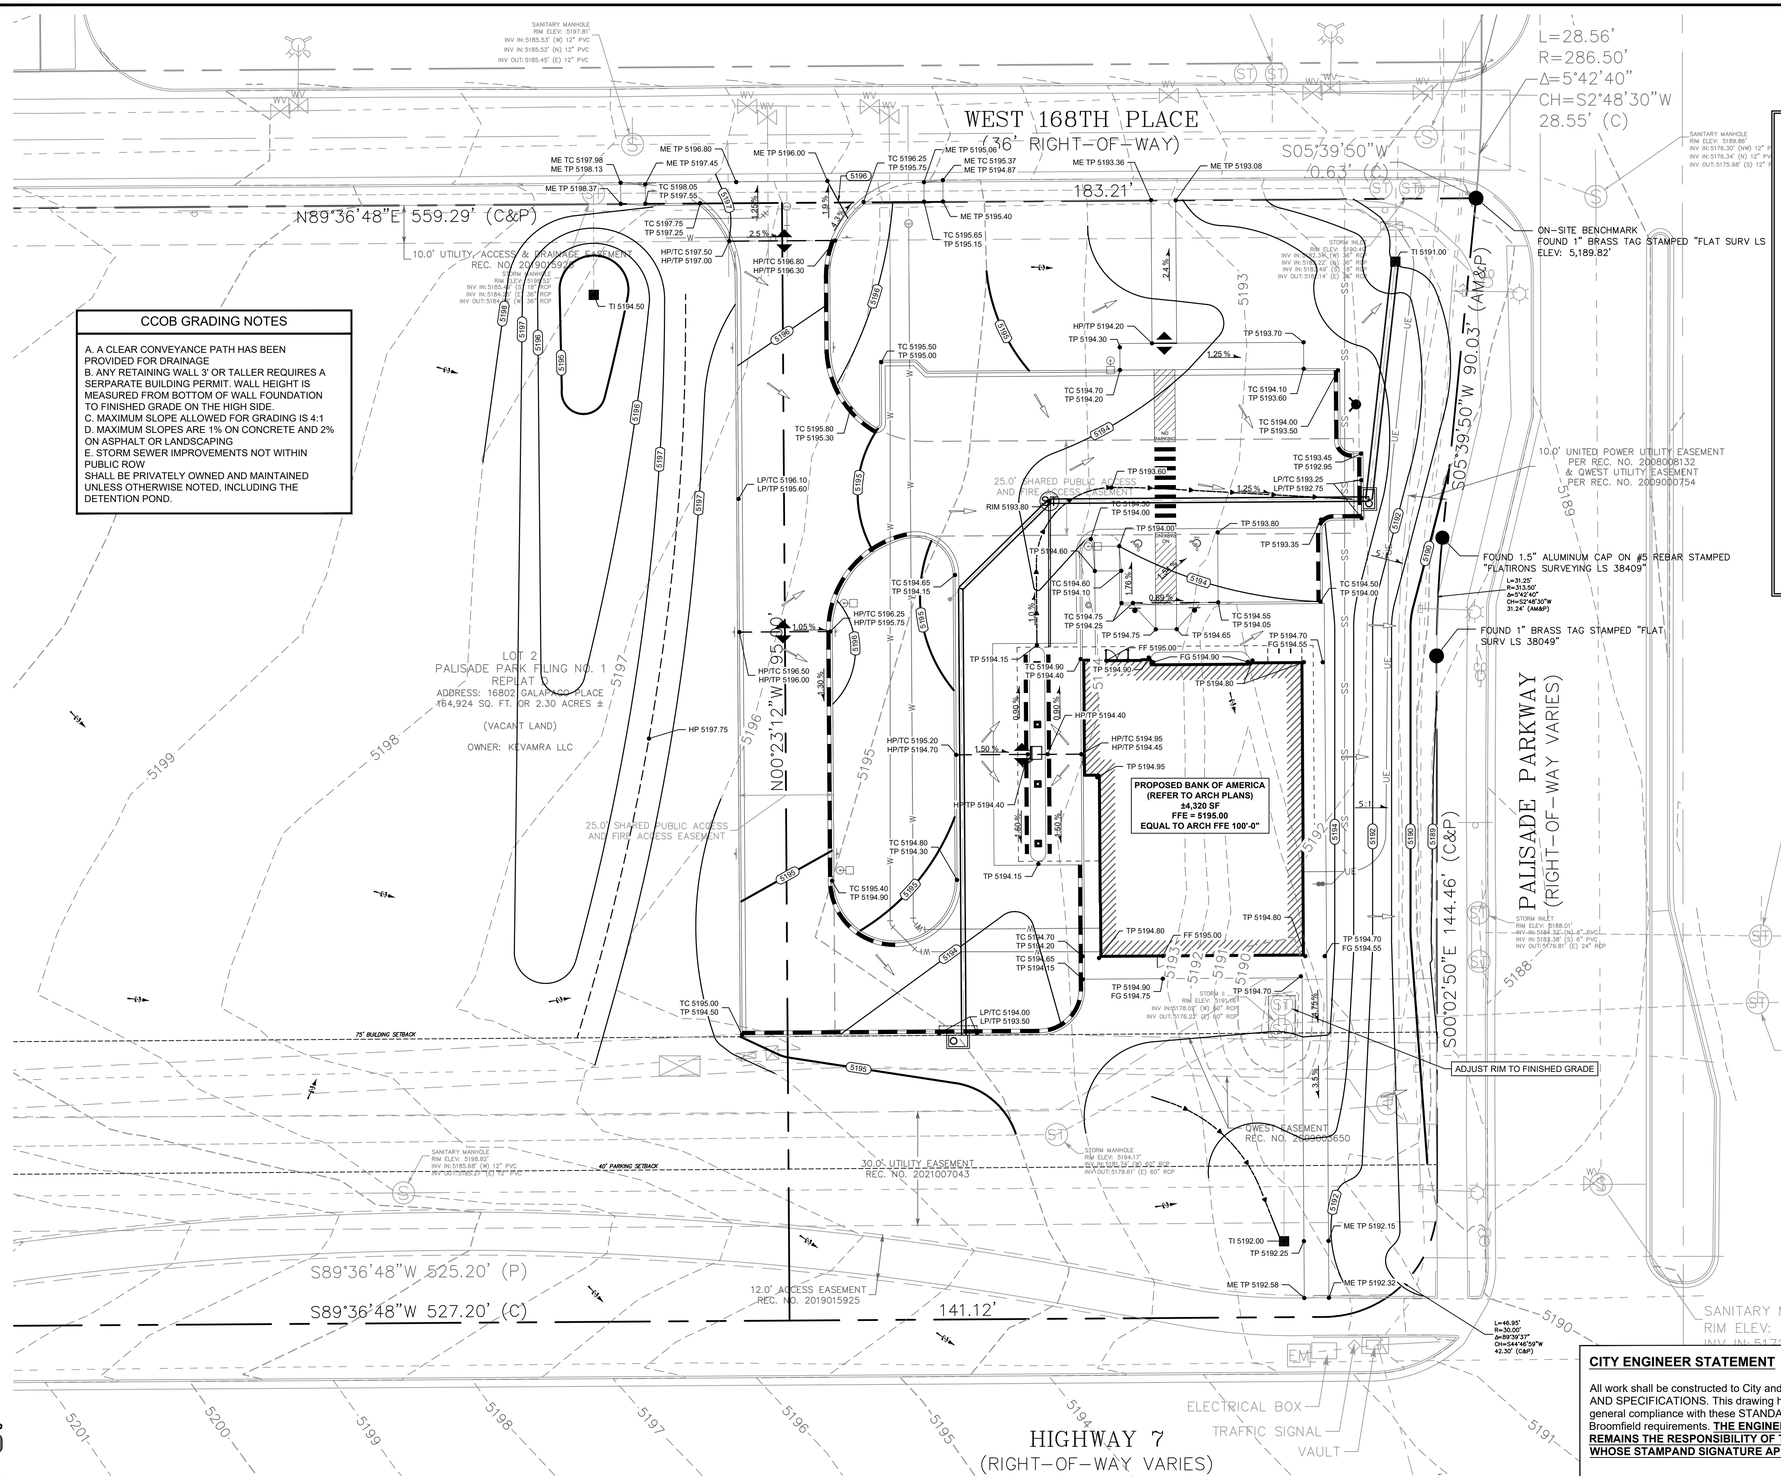

CCOB GRADING NOTES

A. A CLEAR CONVEYANCE PATH HAS BEEN PROVIDED FOR DRAINAGE
B. ANY RETAINING WALL 3' OR TALLER REQUIRES A SERPARATE BUILDING PERMIT. WALL HEIGHT IS MEASURED FROM BOTTOM OF WALL FOUNDATION TO FINISHED GRADE ON THE HIGH SIDE.
C. MAXIMUM SLOPE ALLOWED FOR GRADING IS 4:1
D. MAXIMUM SLOPES ARE 1% ON CONCRETE AND 2% ON ASPHALT OR LANDSCAPING
E. STORM SEWER IMPROVEMENTS NOT WITHIN PUBLIC ROW SHALL BE PRIVATELY OWNED AND MAINTAINED UNLESS OTHERWISE NOTED, INCLUDING THE DETENTION POND.

LEGEND

PROPOSED CONTOUR	2573
EXISTING CONTOUR	2573
GRADE BREAK	
SPOT GRADE	100.00 TP
EXISTING FLOW ARROW	
PROPOSED FLOW ARROW	
FLOWLINE	
SPILL CURB AND GUTTER	
CATCH CURB AND GUTTER	
FG	FINISHED GRADE
TP	TOP OF PAVEMENT
FFE	FINISHED FLOOR ELEVATION
TI	TOP INLET
TC	TOP OF CURB
ME	MATCH EXISTING
HP	HIGH POINT
LP	LOW POINT

GRAPHIC SCALE
0 20 40 FEET
1" = 20'

Date	Description	No.
08/26/25	IF CD100	2
08/12/25	IF CD90	1

Revisions

08/26/25

LANGAN
Langan Engineering and Environmental Services, LLC.
300 Union Boulevard, Suite 405
Lakewood, CO 80228
T: 303.262.2000 www.langan.com

PALISADE PARK FILING NO. 1, REPLAT F LOT 1
LOCATED IN THE SOUTHWEST QUARTER OF SECTION 34, TOWNSHIP 1 NORTH, RANGE 68 WEST OF THE 6TH P.M., CITY AND COUNTY OF BROOMFIELD, STATE OF COLORADO

CITY OF BROOMFIELD
BROOMFIELD COUNTY COLORADO

Drawing Title

GRADING PLAN

CITY ENGINEER STATEMENT

All work shall be constructed to City and County of Broomfield STANDARDS AND SPECIFICATIONS. This drawing has been reviewed and found to be in general compliance with these STANDARDS AND SPECIFICATIONS and other Broomfield requirements. **THE ENGINEERING DESIGN AND CONCEPT REMAINS THE RESPONSIBILITY OF THE PROFESSIONAL ENGINEER WHOSE STAMPAND SIGNATURE APPEAR HEREON.**

City Engineer (or Designee) Date

Project No.	532039301
Date	AUGUST 2025
Drawn By	NF
Checked By	BH
Drawing No.	C4.0

Know what's below. Call before you dig.

© 2025 Langan

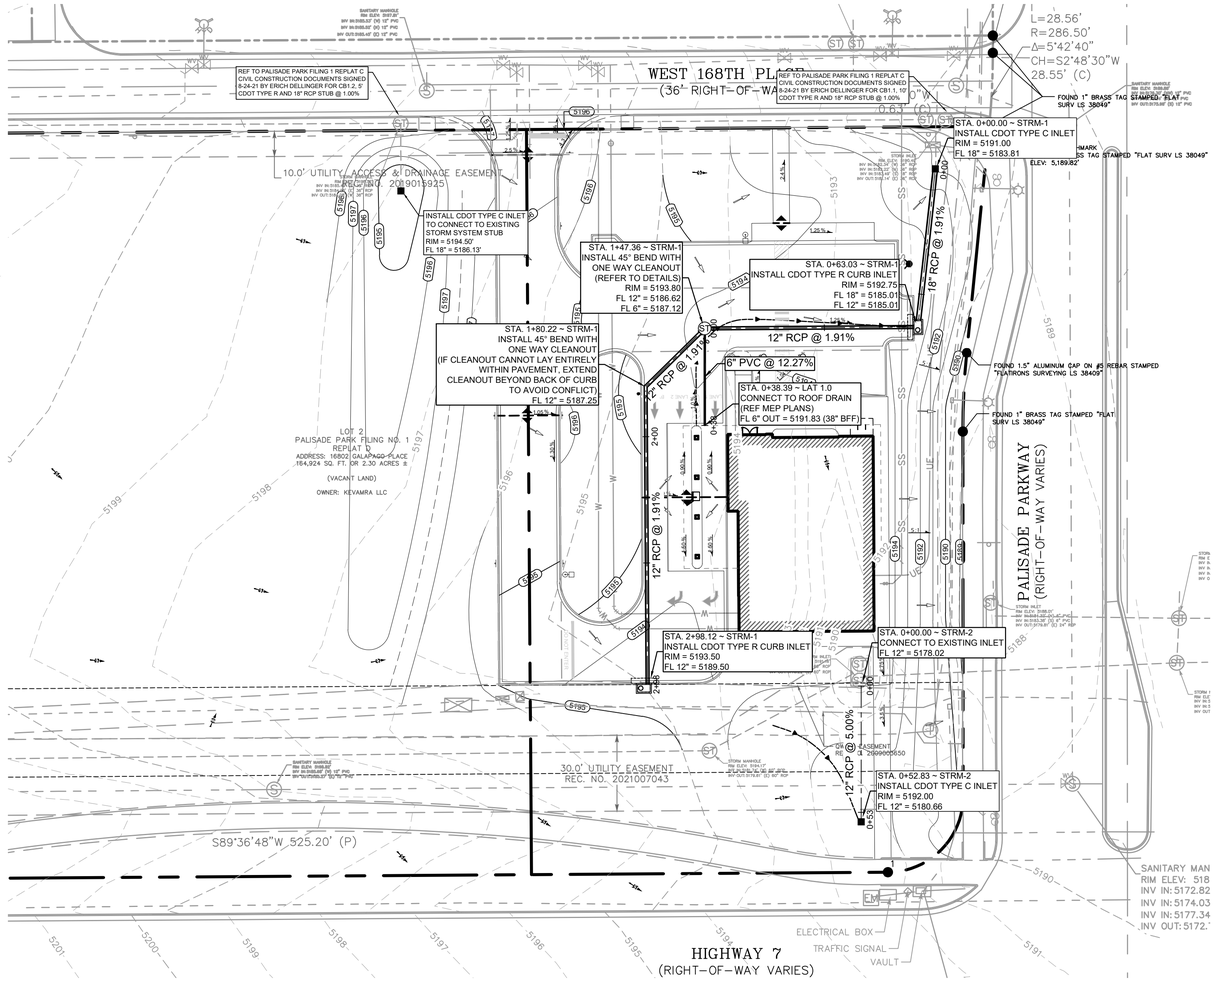

GRAPHIC SCALE

0 30 60 FEET

1" = 30'

!!!CAUTION!!!

EXISTING OVERHEAD & UNDERGROUND UTILITIES IN THE VICINITY.
VERIFY LOCATION OF EXISTING UNDERGROUND UTILITIES
BY VACUUM EXCAVATION OR OTHER POTHOLING TECHNIQUES.

NOTICE TO CONTRACTORS - UTILITIES

THE CONTRACTOR IS SPECIFICALLY CAUTIONED THAT THE LOCATION AND/OR ELEVATION OF ANY EXISTING UTILITIES AS SHOWN ON THESE PLANS ARE BASED ON RECORDS OF THE VARIOUS UTILITY COMPANIES, THE GOVERNING MUNICIPALITY, AND WHERE POSSIBLE, MEASUREMENTS TAKEN IN THE FIELD. THE INFORMATION PROVIDED IS NOT TO BE RELIED ON AS BEING EXACT OR COMPLETE. THE CONTRACTOR MUST CALL THE APPROPRIATE UTILITY COMPANY AT LEAST 48 HOURS BEFORE ANY EXCAVATION TO REQUEST EXACT FIELD LOCATION OF UTILITIES. IT SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR TO RELOCATE ALL EXISTING UTILITIES WHICH CONFLICT WITH THE PROPOSED IMPROVEMENTS SHOWN ON THESE PLANS.

** NOTICE TO CONTRACTORS - TOPOGRAPHIC SURVEY **

TOPOGRAPHIC INFORMATION TAKEN FROM A TOPOGRAPHIC SURVEY PERFORMED BY FLATIRONS, INC. LAND SURVEYING SERVICES. THE CONTRACTOR SHALL NOTIFY THE ENGINEER IMMEDIATELY, IN WRITING, OF ANY DISCREPANCIES OR OMISSIONS TO THE TOPOGRAPHIC INFORMATION. THE CONTRACTOR(S) SHALL BE RESPONSIBLE FOR CONFIRMING THE LOCATION (HORIZONTAL/VERTICAL) OF ANY BURIED CABLES, CONDUITS, PIPES, AND STRUCTURES (STORM SEWER, SANITARY SEWER, WATER, GAS, TELEVISION, TELEPHONE, ETC.) WHICH IMPACT THE CONSTRUCTION SITE. THE CONTRACTOR(S) SHALL NOTIFY THE OWNER AND ENGINEER IF ANY DISCREPANCIES ARE FOUND BETWEEN THE ACTUAL CONDITIONS VERSUS THE DATA CONTAINED IN THE CONSTRUCTION PLANS. ANY COSTS INCURRED AS THE RESULT OF NOT CONFIRMING THE ACTUAL LOCATION (HORIZONTAL/VERTICAL) OF SAID CABLES, CONDUITS, PIPES, AND STRUCTURES SHALL BE BORNE BY THE CONTRACTOR. ADDITIONALLY, THE CONTRACTOR(S) SHALL NOTIFY THE OWNER AND ENGINEER IF ANY ERRORS OR DISCREPANCIES ARE FOUND ON THE CONSTRUCTION DOCUMENTS (PS&E), WHICH NEGATIVELY IMPACT THE PROJECT. THE ENGINEER AND OWNER SHALL BE INDEMNIFIED OF PROBLEMS AND/OR COST WHICH MAY RESULT FROM CONTRACTOR'S FAILURE TO NOTIFY ENGINEER AND OWNER.

LEGEND

PROPOSED STORM LINE	
PROPOSED STORM CENTERLINE	
PROPOSED GRATE INLET	■
FL	FLOWLINE
TI	TOP OF INLET
BFF	BELOW FINISHED FLOOR

100-YEAR RATIONAL METHOD STORM SEWER CALCULATIONS

Line ID	Upstream Station	Downstream Station	Pipe Length	Pipe Slope	Drainage Area Designation	Incremental Drainage Area	Cumulative Drainage Area	Runoff Coefficient	Incremental	Cumulative	Time at Inlet	Time in Pipe	Cumulative Time	Rainfall Intensity	Peak Flow	Pipe Material	Pipe Capacity	Pipe Diameter	Friction Slope	Hydraulic Gradient		Velocity In	Velocity Out	V1^2/2g	V2^2/2g	Upstream Junction Type	Loss Coefficient	Velocity Head Loss	Upstream Invert Elev.	Downstream Invert Elev.	Comments
																				Upstream	Downstream									
-	-	-	(ft)	(ft/ft)	-	(ac)	(ac)	"C"	"CA"	"CA"	(min)	(min)	(min)	(in/hr)	(cfs)	-	(cfs)	(in)	(ft/ft)	-	-	(ft/sec)	(ft/sec)	(ft)	(ft)	-	"Kj"	(ft)	(ft)	(ft)	
STRM-1	2+98.12	1+80.22	117.90	0.0191	DA-3	0.38	0.38	0.54	0.20	0.20	5.00	0.69	5.69	11.09	2.2	RCP	4.9	12	0.0040	5189.99	5187.83	0.00	2.86	0.00	0.13	Begin Line	1.25	0.16	5189.51	5187.26	
	1+80.22	1+47.36	32.86	0.0191		0.00	0.38	0.00	0.00	0.20	5.69	0.20	5.88	10.79	2.2	RCP	4.9	12	0.0038	5187.73	5187.20	2.86	2.78	0.13	0.12	45 Bend	0.35	0.10	5187.26	5186.63	
	1+47.36	0+63.03	84.33	0.0191		0.00	0.38	0.00	0.00	0.20	5.88	0.51	6.39	10.70	2.2	RCP	4.9	12	0.0037	5187.10	5185.75	2.78	2.76	0.12	0.12	MH	1.00	0.10	5186.63	5185.02	
	0+63.03	0+00.00	63.03	0.0191	DA-2	0.37	0.74	0.80	0.29	0.50	6.39	0.36	6.75	10.50	5.2	RCP	14.5	18	0.0024	5185.65	5185.32	2.76	2.94	0.12	0.13	Inlet	0.50	0.10	5185.02	5183.81	
LAT-1.0	0+38.39	0+00.00	38.39	0.1227	R-1	0.07	0.07	0.95	0.07	0.07	5.00	0.17	5.17	11.09	0.7	PVC	2.8	6	0.0083	5188.70	5187.20	0.00	3.76	0.00	0.22	Begin Line	1.25	0.27	5188.52	5183.81	
STRM-2	0+52.83	0+00.00	52.83	0.0500	DA-4	0.16	0.16	0.38	0.06	0.06	5.00	1.02	6.02	11.09	0.7	RCP	8.0	12	0.0004	5180.86	5179.02	0.00	0.86	0.00	0.01	Begin Line	1.25	0.10	5180.66	5178.02	

Know what's below. Call before you dig.

THESE PLANS ARE SUBJECT TO REVIEW & APPROVAL BY JURISDICTIONAL ENTITIES.

CITY ENGINEER STATEMENT

All work shall be constructed to City and County of Broomfield STANDARDS AND SPECIFICATIONS. This drawing has been reviewed and found to be in general compliance with these STANDARDS AND SPECIFICATIONS and other Broomfield requirements. **THE ENGINEERING DESIGN AND CONCEPT REMAINS THE RESPONSIBILITY OF THE PROFESSIONAL ENGINEER WHOSE STAMPAND SIGNATURE APPEAR HEREON**.

City Engineer (or Designee) Date

Date	Description	No.
08/26/25	IF CD100	2
08/12/25	IF CD90	1

Revisions

COLORADO LICENSED
GREGORY A. FLATIRONS
51624
PROFESSIONAL ENGINEER
08/26/25

LANGAN
Langan Engineering and Environmental Services, LLC.
300 Union Boulevard, Suite 405
Lakewood, CO 80228
T: 303.262.2000 www.langan.com

PALISADE PARK FILING NO. 1, REPLAT F LOT 1
LOCATED IN THE SOUTHWEST QUARTER OF SECTION 34, TOWNSHIP 1 NORTH, RANGE 68 WEST OF THE 6TH P.M., CITY AND COUNTY OF BROOMFIELD, STATE OF COLORADO

CITY OF BROOMFIELD
BROOMFIELD COUNTY COLORADO

Drawing Title

DRAINAGE PLAN

Project No.	532039301
Date	AUGUST 2025
Drawn By	NF
Checked By	BH
Drawing No.	C5.0

© 2025 Langan

STRM-1 STA. 0+00 TO END

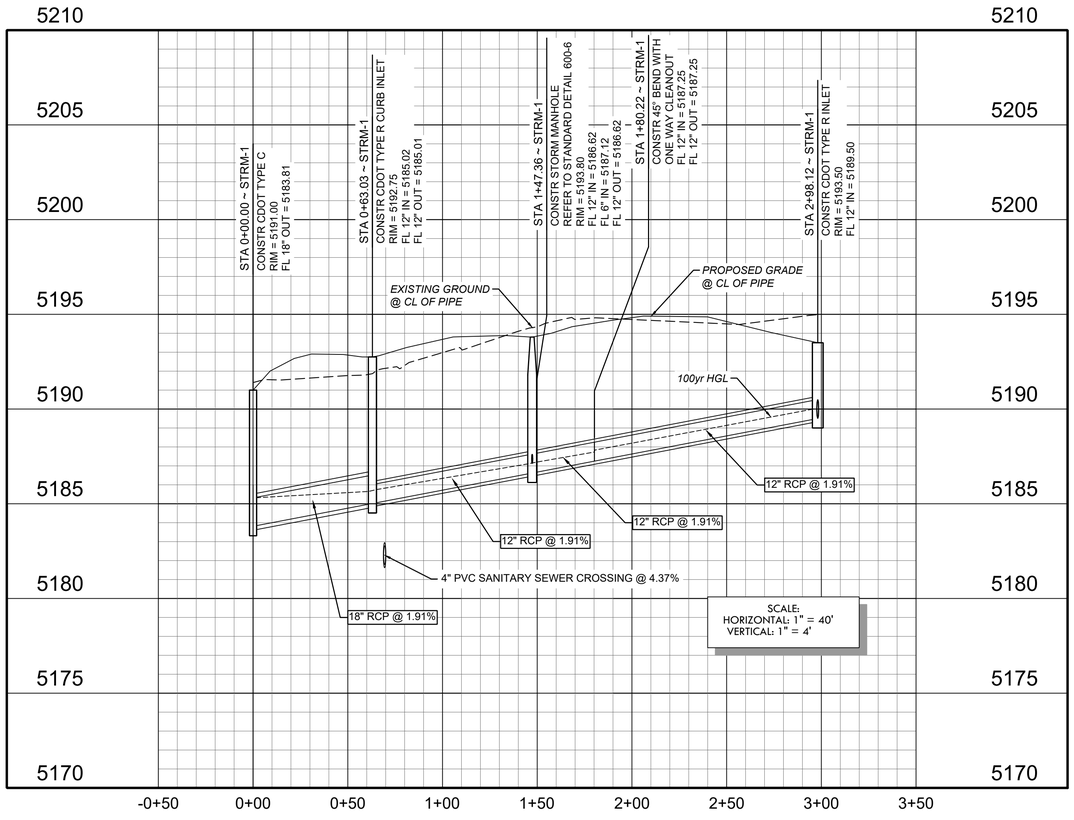

STRM-2 STA. 0+00 TO END

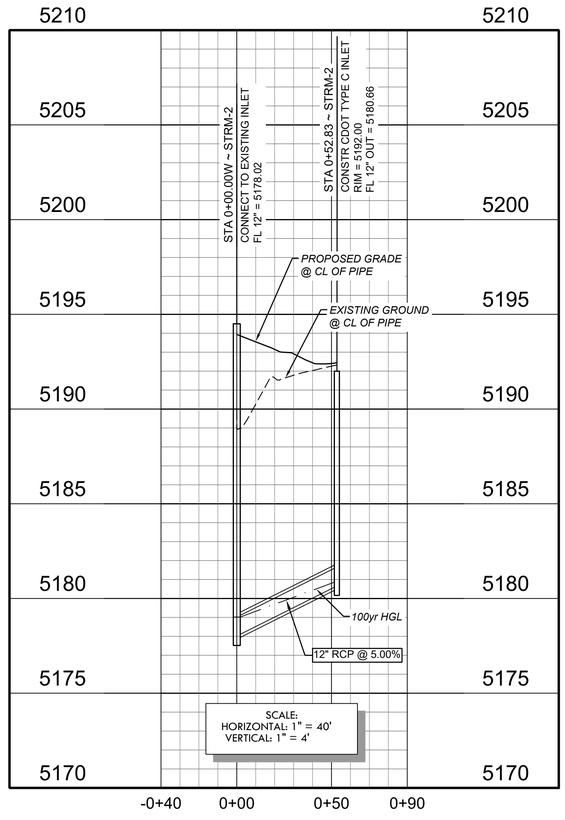

Date	Description	No.
08/26/25	IF CD100	2
08/12/25	IF CD90	1

Revisions

08/26/25

LANGAN

Langan Engineering and
Environmental Services, LLC.

300 Union Boulevard, Suite 405
Lakewood, CO 80228

T: 303.262.2000 www.langan.com

PALISADE PARK FILING NO. 1, REPLAT F LOT 1
LOCATED IN THE SOUTHWEST QUARTER OF SECTION 34,
TOWNSHIP 1 NORTH, RANGE 68 WEST OF THE 6TH P.M.,
CITY AND COUNTY OF BROOMFIELD, STATE OF COLORADO

CITY OF BROOMFIELD
BROOMFIELD COUNTY **COLORADO**

Drawing Title

DRAINAGE PROFILE

CITY ENGINEER STATEMENT

All work shall be constructed to City and County of Broomfield STANDARDS AND SPECIFICATIONS. This drawing has been reviewed and found to be in general compliance with these STANDARDS AND SPECIFICATIONS and other Broomfield requirements. **THE ENGINEERING DESIGN AND CONCEPT REMAINS THE RESPONSIBILITY OF THE PROFESSIONAL ENGINEER WHOSE STAMPAND SIGNATURE APPEAR HEREON**.

City Engineer (or Designee) Date

Project No.	Drawing No.
532039301	C5.1
Date: AUGUST 2025	
Drawn By: NF	
Checked By: BH	

© 2025 Langan

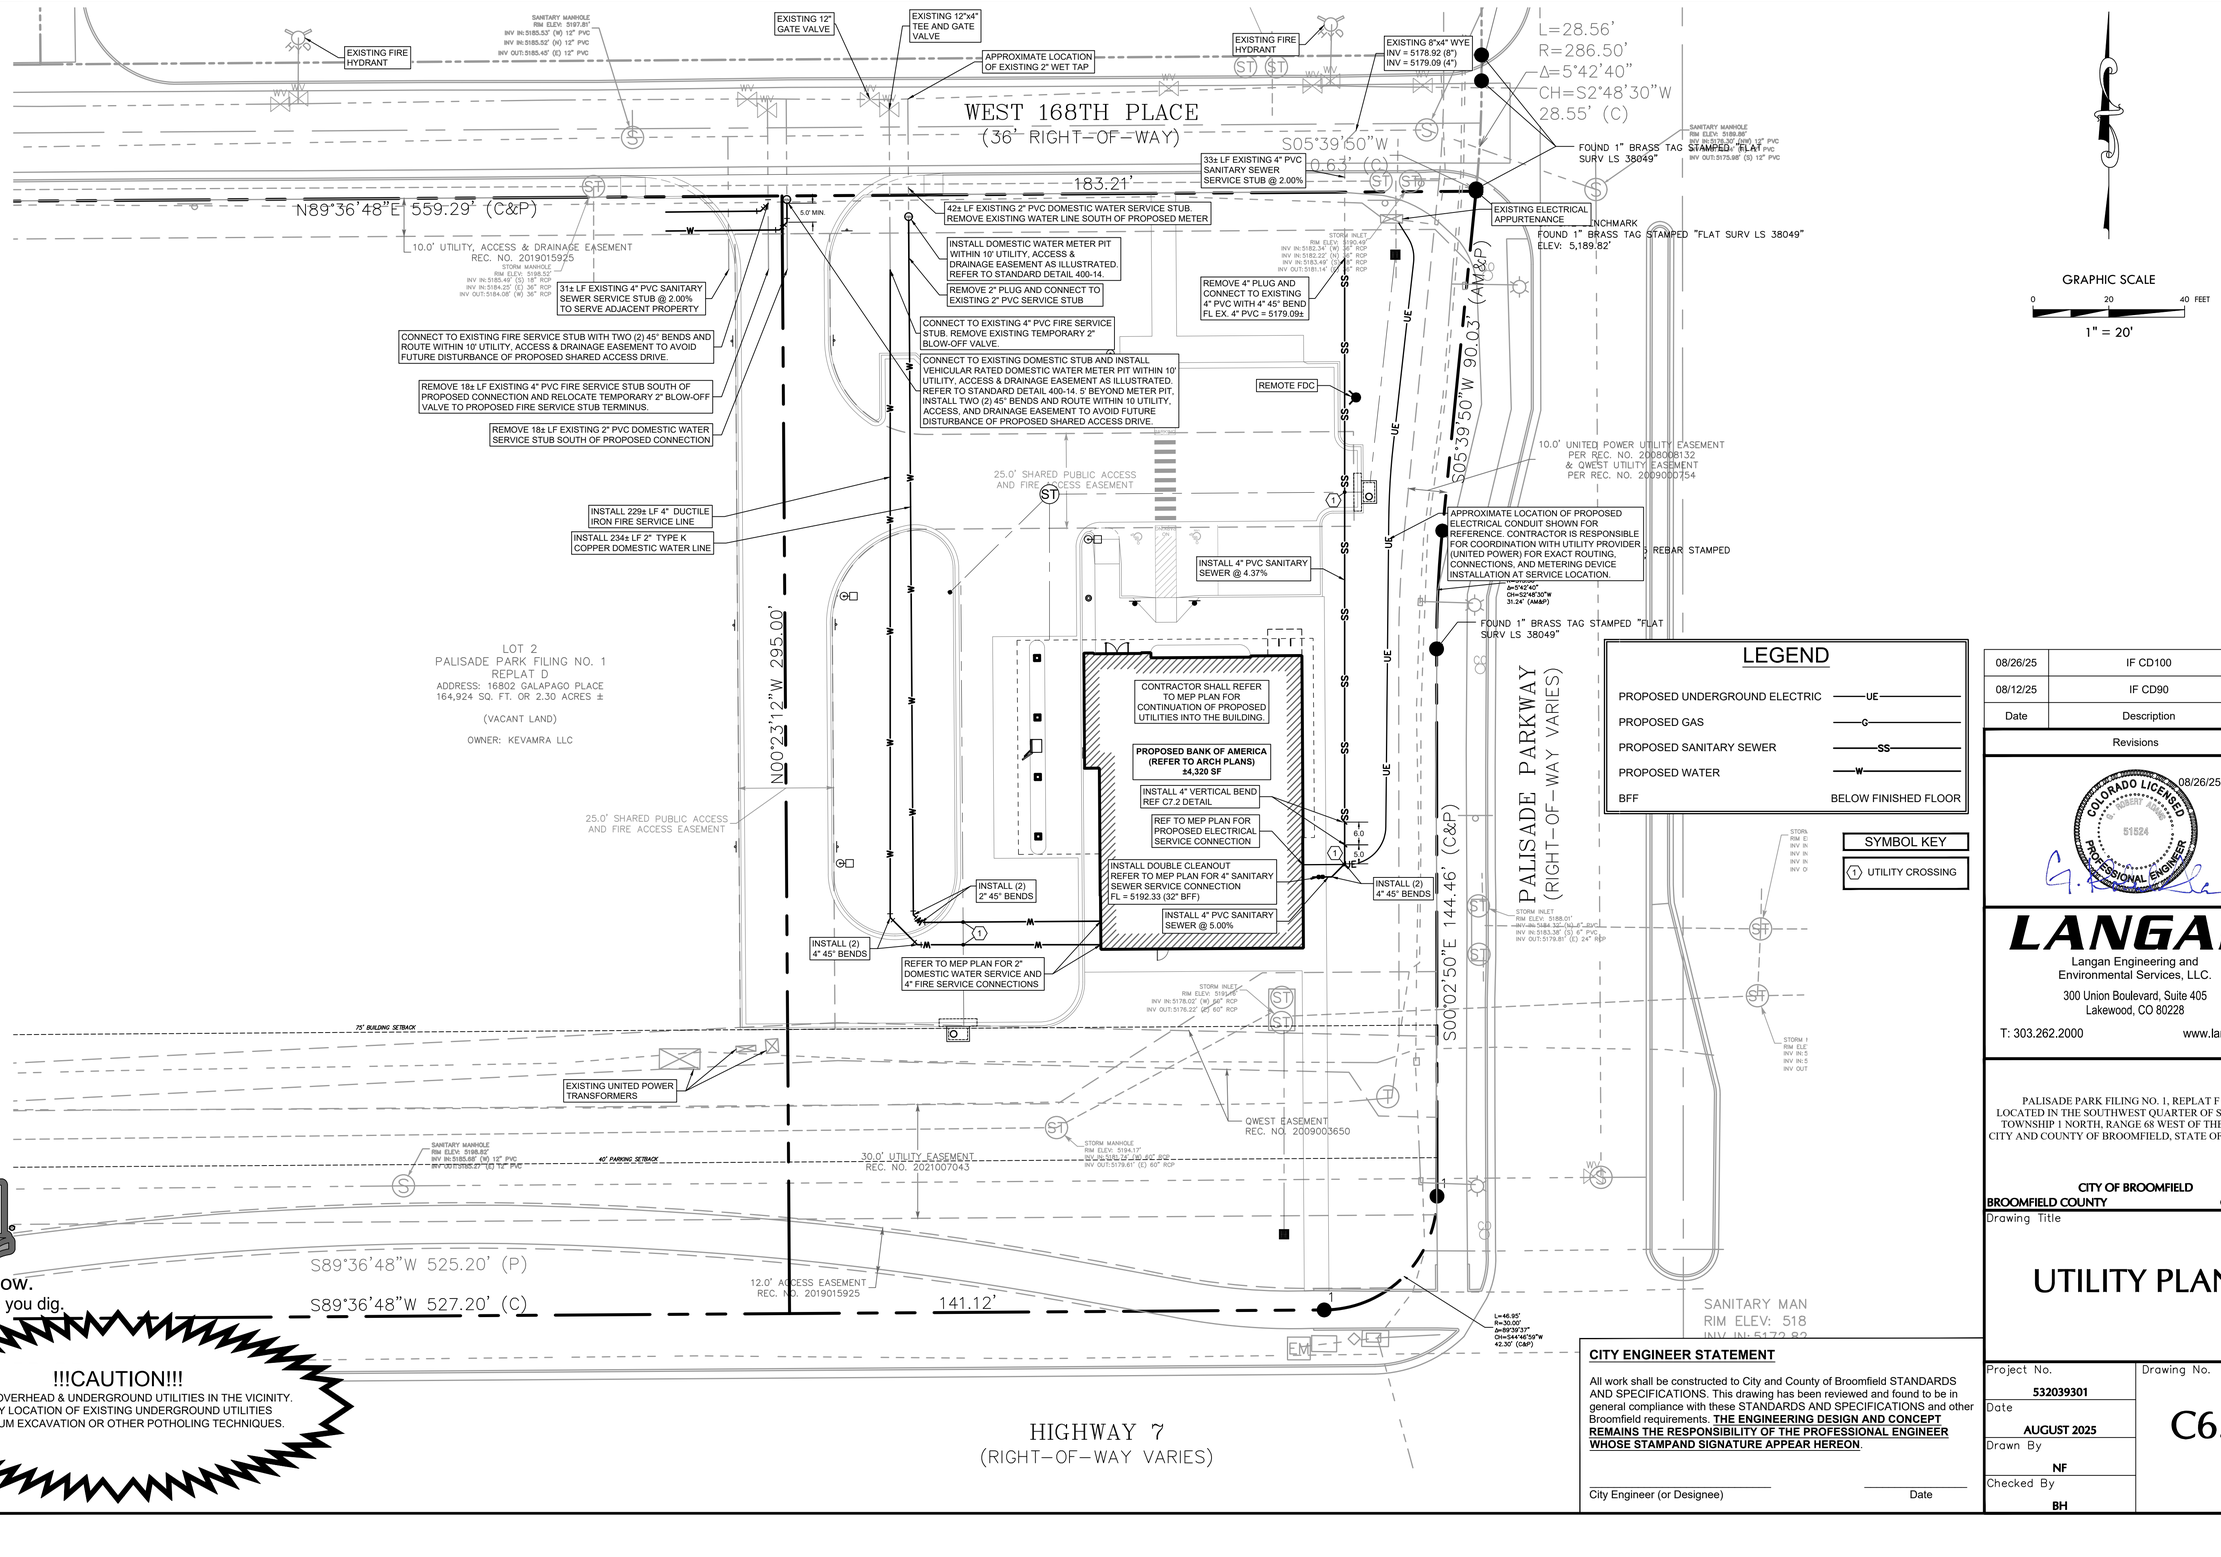

GRAPHIC SCALE

0 20 40 FEET

1" = 20'

LEGEND

PROPOSED UNDERGROUND ELECTRIC	UE
PROPOSED GAS	G
PROPOSED SANITARY SEWER	SS
PROPOSED WATER	W
BFF	BELOW FINISHED FLOOR

SYMBOL KEY

(1) UTILITY CROSSING

LOT 2
PALISADE PARK FILING NO. 1
REPLAT D
ADDRESS: 16802 GALAPAGO PLACE
164,924 SQ. FT. OR 2.30 ACRES ±

(VACANT LAND)

OWNER: KEVAMRA LLC

Know what's below.
Call before you dig.

!!!CAUTION!!!
EXISTING OVERHEAD & UNDERGROUND UTILITIES IN THE VICINITY.
VERIFY LOCATION OF EXISTING UNDERGROUND UTILITIES
BY VACUUM EXCAVATION OR OTHER POTHOLING TECHNIQUES.

CITY ENGINEER STATEMENT

All work shall be constructed to City and County of Broomfield STANDARDS AND SPECIFICATIONS. This drawing has been reviewed and found to be in general compliance with these STANDARDS AND SPECIFICATIONS and other Broomfield requirements. **THE ENGINEERING DESIGN AND CONCEPT REMAINS THE RESPONSIBILITY OF THE PROFESSIONAL ENGINEER WHOSE STAMPAND SIGNATURE APPEAR HEREON**.

City Engineer (or Designee) Date

Date	Description	No.
08/26/25	IF CD100	2
08/12/25	IF CD90	1

Revisions

08/26/25

COLORADO LICENSED
GREGORY HANK
51524
PROFESSIONAL ENGINEER

LANGAN
Langan Engineering and Environmental Services, LLC.
300 Union Boulevard, Suite 405
Lakewood, CO 80228
T: 303.262.2000 www.langan.com

PALISADE PARK FILING NO. 1, REPLAT F LOT 1
LOCATED IN THE SOUTHWEST QUARTER OF SECTION 34, TOWNSHIP 1 NORTH, RANGE 68 WEST OF THE 6TH P.M., CITY AND COUNTY OF BROOMFIELD, STATE OF COLORADO

CITY OF BROOMFIELD
BROOMFIELD COUNTY COLORADO

Drawing Title

UTILITY PLAN

Project No.	532039301
Date	AUGUST 2025
Drawn By	NF
Checked By	BH

Drawing No. C6.0

© 2025 Langan

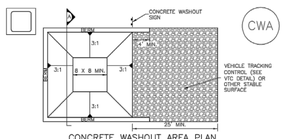

CWA–1. CONCRETE WASHOUT AREA

CWA INSTALLATION NOTES

1. SEE PLAN VIEW FOR:
   –CWA INSTALLATION LOCATION.

2. DO NOT LOCATE AN UNLINED CWA WITHIN 400' OF ANY NATURAL DRAINAGE PATHWAY OR WATERBODY. DO NOT LOCATE WITHIN 1,000' OF ANY WELLS OR DRINKING WATER SOURCES. IF SITE CONSTRAINTS MAKE THIS INFEASIBLE, OR IF HIGHLY PERMEABLE SOILS EXIST ON SITE, LINE THE CWA WITH A MINIMUM 10 MIL (0.010 INCH) THICK (18 MIL MIN. THICKNESS) OR SURFACE STORAGE ALTERNATIVES USING PREFABRICATED CONCRETE WASHOUT DEVICES OR A LINED ABOVE GROUND STORAGE ARE SHOULD BE USED.

3. THE CWA SHALL BE INSTALLED PRIOR TO CONCRETE PLACEMENT ON SITE.

4. CWA SHALL INCLUDE A FLAT SUBSURFACE PIT THAT IS AT LEAST 8' BY 8' SLOPES LEADING OUT OF THE SUBSURFACE PIT SHALL BE 3:1 OR FLATTER. THE PIT SHALL BE AT LEAST 3' DEEP.

5. BERM SURROUNDING SIDES AND BACK OF THE CWA SHALL HAVE MINIMUM HEIGHT OF 1'.

6. VEHICLE TRACKING PAD SHALL BE SLOPED 2% TOWARDS THE CWA.

7. SIGNS SHALL BE PLACED AT THE CONSTRUCTION ENTRANCE, AT THE CWA, AND ELSEWHERE AS NECESSARY TO CLEARLY INDICATE THE LOCATION OF THE CWA TO OPERATORS OF CONCRETE TRUCKS AND PUMP RIGS.

8. USE EXCAVATED MATERIAL FOR PERIMETER BERM CONSTRUCTION.

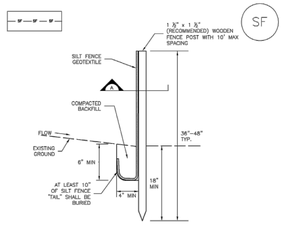

SF–1. SILT FENCE

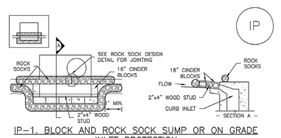

IP–1. BLOCK AND ROCK SOCK SUMP OR ON GRADE INLET PROTECTION

BLOCK AND CURB SOCK INLET PROTECTION INSTALLATION NOTES

1. SEE ROCK SOCK DESIGN DETAIL FOR INSTALLATION REQUIREMENTS.

2. CONCRETE "CINDER" BLOCKS SHALL BE LAID ON THEIR SIDES AROUND THE INLET IN A SINGLE ROW, ABUTTING ONE ANOTHER WITH THE OPEN END FACING AWAY FROM THE CURB.

3. GRAVEL BAGS SHALL BE PLACED AROUND CONCRETE BLOCKS, CLOSELY ABUTTING ONE ANOTHER AND JOINTED TOGETHER IN ACCORDANCE WITH ROCK SOCK DESIGN DETAIL.

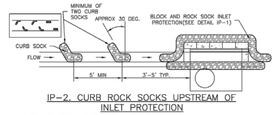

IP–2. CURB ROCK SOCKS UPSTREAM OF INLET PROTECTION

CURB ROCK SOCK INLET PROTECTION INSTALLATION NOTES

1. SEE ROCK SOCK DESIGN DETAIL INSTALLATION REQUIREMENTS.

2. PLACEMENT OF THE SOCK SHALL BE APPROXIMATELY 30 DEGREES FROM PERPENDICULAR IN THE OPPOSITE DIRECTION OF FLOW.

3. SOCKS ARE TO BE FLUSH WITH THE CURB AND SPACED A MINIMUM OF 5 FEET APART.

4. AT LEAST TWO CURB SOCKS IN SERIES ARE REQUIRED UPSTREAM OF ON–GRADE INLETS.

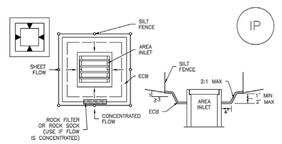

IP–5. OVEREXCAVATION INLET PROTECTION

OVEREXCAVATION INLET PROTECTION INSTALLATION NOTES

1. THIS FORM OF INLET PROTECTION IS PRIMARILY APPLICABLE FOR SITES THAT HAVE NOT YET REACHED FINAL GRADE AND SHOULD BE USED ONLY FOR INLETS WITH A RELATIVELY SMALL CONTRIBUTING DRAINAGE AREA.

2. WHEN USING FOR CONCENTRATED FLOWS, SHAPE BASIN IN 2:1 RATIO WITH LENGTH ORIENTED TOWARDS DIRECTION OF FLOW.

3. SEDIMENT MUST BE PERIODICALLY REMOVED FROM THE OVEREXCAVATED AREA.

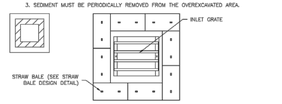

IP–6. STRAW BALE FOR SUMP INLET PROTECTION

STRAW BALE BARRIER INLET PROTECTION INSTALLATION NOTES

1. SEE STRAW BALE DESIGN DETAIL FOR INSTALLATION REQUIREMENTS.

2. BALES SHALL BE PLACED IN A SINGLE ROW AROUND THE INLET WITH ENDS OF BALES TIGHTLY ABUTTING ONE ANOTHER.

CWA MAINTENANCE NOTES

1. INSPECT BMPs EACH WORKDAY, AND MAINTAIN THEM IN EFFECTIVE OPERATING CONDITION. MAINTENANCE OF BMPs SHOULD BE PROACTIVE, NOT REACTIVE. INSPECT BMPs AS SOON AS POSSIBLE (AND ALWAYS WITHIN 24 HOURS) FOLLOWING A STORM THAT CAUSES SURFACE EROSION, AND PERFORM NECESSARY MAINTENANCE.

2. FREQUENT OBSERVATIONS AND MAINTENANCE ARE NECESSARY TO MAINTAIN BMPs IN EFFECTIVE OPERATING CONDITION. INSPECTIONS AND CORRECTIVE MEASURES SHOULD BE DOCUMENTED THOROUGHLY.

3. WHERE BMPs HAVE FAILED, REPAIR OR REPLACEMENT SHOULD BE INITIATED UPON DISCOVERY OF THE FAILURE.

4. THE CWA SHALL BE REPAIRED, CLEANED, OR ENLARGED AS NECESSARY TO MAINTAIN CAPACITY FOR CONCRETE WASTE, CONCRETE MATERIALS, ACCUMULATED IN PIT, SHALL BE REMOVED ONCE THE MATERIALS HAVE REACHED A DEPTH OF 2'.

5. CONCRETE WASHOUT WATER, WASTED PIECES OF CONCRETE AND ALL OTHER DEBRIS IN THE SUBSURFACE PIT SHALL BE TRANSPORTED FROM THE JOB SITE IN A WATER–TIGHT CONTAINER AND DISPOSED OF PROPERLY.

6. THE CWA SHALL REMAIN IN PLACE UNTIL ALL CONCRETE FOR THE PROJECT IS PLACED.

7. WHEN THE CWA IS REMOVED, COVER THE DISTURBED AREA WITH TOP SOIL, SEED AND MULCH OR OTHERWISE STABILIZED IN A MANNER APPROVED BY THE LOCAL JURISDICTION.

(DETAIL ADAPTED FROM DOUGLAS COUNTY, COLORADO AND THE CITY OF PARKER, COLORADO, NOT AVAILABLE IN AUTOCAD).

NOTE: MANY JURISDICTIONS HAVE BMP DETAILS THAT VARY FROM UDFCD STANDARD DETAILS. CONSULT WITH LOCAL JURISDICTIONS AS TO WHICH DETAIL SHOULD BE USED WHEN DIFFERENCES ARE NOTED.

SILT FENCE INSTALLATION NOTES

1. SILT FENCE MUST BE PLACED AWAY FROM THE TOE OF THE SLOPE TO ALLOW FOR WATER PONDING AND SEDIMENT STORAGE. AT LEAST 10% OF A SLOPE SHOULD BE INSTALLED IN A FLAT LOCATION AT LEAST SEVERAL FEET (3–5 FT) FROM THE TOE OF THE SLOPE TO ALLOW ROOM FOR PONDING AND DEPOSITION.

2. A UNIFORM 6" X 4" ANCHOR TRENCH SHALL BE EXCAVATED USING TRENCHER OR SILT FENCE INSTALLATION DEVICE. NO HOAD GRADERS, BACKHOES, OR SIMILAR EQUIPMENT SHALL BE USED.

3. COMPACT ANCHOR TRENCH BY HAND WITH A "JUMPING JACK" OR BY WHEEL ROLLING. COMPACTION SHALL BE SUCH THAT SILT FENCE RESISTS BEING PULLED OUT OF ANCHOR TRENCH BY HAND.

4. SILT FENCE SHALL BE PULLED TIGHT AS IT IS ANCHORED TO THE STAKES. THERE SHOULD BE NO NOTICEABLE SAG BETWEEN STAKES AFTER IT HAS BEEN ANCHORED TO THE STAKES.

5. SILT FENCE FABRIC SHALL BE ANCHORED TO THE STAKES USING 1" HEAVY DUTY STAPLES OR NAILS WITH 1" HEADS. STAPLES AND NAILS SHOULD BE PLACED 3" ALONG THE FABRIC DOWN THE STAKE.

6. AT THE END OF A RUN OF SILT FENCE ALONG A CONTOUR, THE SILT FENCE SHOULD BE TURNED PERPENDICULAR TO THE CONTOUR TO CREATE A "J–HOOK." THE "J–HOOK" EXTENDING PERPENDICULAR TO THE CONTOUR SHOULD BE OF SUFFICIENT LENGTH TO KEEP RUNOFF FROM FLOWING AROUND THE END OF THE SILT FENCE (TYPICALLY 10' – 20').

7. SILT FENCE SHALL BE INSTALLED PRIOR TO ANY LAND DISTURBING ACTIVITIES.

SILT FENCE MAINTENANCE NOTES

1. INSPECT BMPs EACH WORKDAY, AND MAINTAIN THEM IN EFFECTIVE OPERATING CONDITION. MAINTENANCE OF BMPs SHOULD BE PROACTIVE, NOT REACTIVE. INSPECT BMPs AS SOON AS POSSIBLE (AND ALWAYS WITHIN 24 HOURS) FOLLOWING A STORM THAT CAUSES SURFACE EROSION, AND PERFORM NECESSARY MAINTENANCE.

2. FREQUENT OBSERVATIONS AND MAINTENANCE ARE NECESSARY TO MAINTAIN BMPs IN EFFECTIVE OPERATING CONDITION. INSPECTIONS AND CORRECTIVE MEASURES SHOULD BE DOCUMENTED THOROUGHLY.

3. WHERE BMPs HAVE FAILED, REPAIR OR REPLACEMENT SHOULD BE INITIATED UPON DISCOVERY OF THE FAILURE.

4. SEDIMENT ACCUMULATED UPSTREAM OF THE SILT FENCE SHALL BE REMOVED AS NEEDED TO MAINTAIN THE FUNCTIONALITY OF THE BMP, TYPICALLY WHEN DEPTH OF ACCUMULATED SEDIMENTS IS APPROXIMATELY 6".

5. REPAIR OR REPLACE SILT FENCE WHEN THERE ARE SIGNS OF WEAR, SUCH AS SAGGING, TEARING, OR COLLAPSE.

6. SILT FENCE IS TO REMAIN IN PLACE UNTIL THE UPSTREAM DISTURBED AREA IS STABILIZED AND APPROVED BY THE LOCAL JURISDICTION, OR IS REPLACED BY AN EQUIVALENT PERIMETER SEDIMENT CONTROL BMP.

7. WHEN SILT FENCE IS REMOVED, ALL DISTURBED AREAS SHALL BE COVERED WITH TOPSOIL, SEEDED AND MULCHED OR OTHERWISE STABILIZED AS APPROVED BY LOCAL JURISDICTION.

(DETAIL ADAPTED FROM TOWN OF PARKER, COLORADO AND CITY OF AURORA, NOT AVAILABLE IN AUTOCAD)

NOTE: MANY JURISDICTIONS HAVE BMP DETAILS THAT VARY FROM UDFCD STANDARD DETAILS. CONSULT WITH LOCAL JURISDICTIONS AS TO WHICH DETAIL SHOULD BE USED WHEN DIFFERENCES ARE NOTED.

IP–3. ROCK SOCK SUMP/AREA INLET PROTECTION

ROCK SOCK SUMP/AREA INLET PROTECTION INSTALLATION NOTES

1. SEE ROCK SOCK DESIGN DETAIL FOR INSTALLATION REQUIREMENTS.

2. STRAW BATTLES/SEDIMENT CONTROL LOGS MAY BE USED IN PLACE OF ROCK SOCKS FOR INLETS IN PERVIOUS AREAS. INSTALL PER SEDIMENT CONTROL LOG DETAIL.

IP–4. SILT FENCE FOR SUMP INLET PROTECTION

SILT FENCE INLET PROTECTION INSTALLATION NOTES

1. SEE SILT FENCE DESIGN DETAIL FOR INSTALLATION REQUIREMENTS.

2. POSTS SHALL BE PLACED AT EACH CORNER OF THE INLET AND AROUND THE EDGES AT A MAXIMUM SPACING OF 3 FEET.

3. STRAW BATTLES/SEDIMENT CONTROL LOGS MAY BE USED IN PLACE OF SILT FENCE FOR INLETS IN PERVIOUS AREAS. INSTALL PER SEDIMENT CONTROL LOG DETAIL.

GENERAL INLET PROTECTION INSTALLATION NOTES

1. SEE PLAN VIEW FOR:
   –LOCATION OF INLET PROTECTION.
   –TYPE OF INLET PROTECTION (IP.1, IP.2, IP.3, IP.4, IP.5, IP.6)

2. INLET PROTECTION SHALL BE INSTALLED PROMPTLY AFTER INLET CONSTRUCTION OR PAVING IS COMPLETE (TYPICALLY WITHIN 48 HOURS). IF A RAINFALL/RUNOFF EVENT IS FORECAST, INSTALL INLET PROTECTION PRIOR TO ONSET OF EVENT.

3. MANY JURISDICTIONS HAVE BMP DETAILS THAT VARY FROM UDFCD STANDARD DETAILS. CONSULT WITH LOCAL JURISDICTIONS AS TO WHICH DETAIL SHOULD BE USED WHEN DIFFERENCES ARE NOTED.

INLET PROTECTION MAINTENANCE NOTES

1. INSPECT BMPs EACH WORKDAY, AND MAINTAIN THEM IN EFFECTIVE OPERATING CONDITION. MAINTENANCE OF BMPs SHOULD BE PROACTIVE, NOT REACTIVE. INSPECT BMPs AS SOON AS POSSIBLE (AND ALWAYS WITHIN 24 HOURS) FOLLOWING A STORM THAT CAUSES SURFACE EROSION, AND PERFORM NECESSARY MAINTENANCE.

2. FREQUENT OBSERVATIONS AND MAINTENANCE ARE NECESSARY TO MAINTAIN BMPs IN EFFECTIVE OPERATING CONDITION. INSPECTIONS AND CORRECTIVE MEASURES SHOULD BE DOCUMENTED THOROUGHLY.

3. WHERE BMPs HAVE FAILED, REPAIR OR REPLACEMENT SHOULD BE INITIATED UPON DISCOVERY OF THE FAILURE.

4. SEDIMENT ACCUMULATED UPSTREAM OF INLET PROTECTION SHALL BE REMOVED AS NECESSARY TO MAINTAIN BMP EFFECTIVENESS, TYPICALLY WHEN STORAGE VOLUME REACHES 50% OF CAPACITY, A DEPTH OF 6" WHEN SILT FENCE IS USED, OR ¼ OF THE HEIGHT FOR STRAW BALES.

5. INLET PROTECTION IS TO REMAIN IN PLACE UNTIL THE UPSTREAM DISTURBED AREA IS PERMANENTLY STABILIZED, UNLESS THE LOCAL JURISDICTION APPROVES EARLIER REMOVAL OF INLET PROTECTION IN STREETS.

6. WHEN INLET PROTECTION AT AREA INLETS IS REMOVED, THE DISTURBED AREA SHALL BE COVERED WITH TOP SOIL, SEEDED AND MULCHED, OR OTHERWISE STABILIZED IN A MANNER APPROVED BY THE LOCAL JURISDICTION.

(DETAIL ADAPTED FROM TOWN OF PARKER, COLORADO AND CITY OF AURORA, COLORADO, NOT AVAILABLE IN AUTOCAD)

NOTE: MANY JURISDICTIONS HAVE BMP DETAILS THAT VARY FROM UDFCD STANDARD DETAILS. CONSULT WITH LOCAL JURISDICTIONS AS TO WHICH DETAIL SHOULD BE USED WHEN DIFFERENCES ARE NOTED.

NOTE: THE DETAILS INCLUDED WITH THIS FACT SHEET SHOW COMMONLY USED, CONVENTIONAL METHODS OF INLET PROTECTION IN THE DENVER METROPOLITAN AREA. THERE ARE MANY PROPRIETARY INLET PROTECTION METHODS ON THE MARKET. UDFCD NEITHER ENDORSES NOR DISCOURAGES USE OF PROPRIETARY INLET PROTECTION. HOWEVER, IN THE EVENT PROPRIETARY INLET PROTECTION IS USED, THE APPROPRIATE DETAIL FROM THE MANUFACTURER MUST BE INCLUDED IN THE SWMP AND THE BMP MUST BE INSTALLED AND MAINTAINED AS SHOWN IN THE MANUFACTURER'S DETAILS.

NOTE: SOME MUNICIPALITIES DISCOURAGE OR PROHIBIT THE USE OF STRAW BALES FOR INLET PROTECTION. CHECK WITH LOCAL JURISDICTION TO DETERMINE IF STRAW BALE INLET PROTECTION IS ACCEPTABLE.

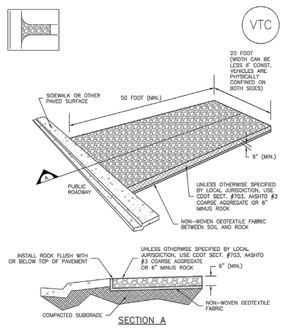

VTC–1. AGGREGATE VEHICLE TRACKING CONTROL

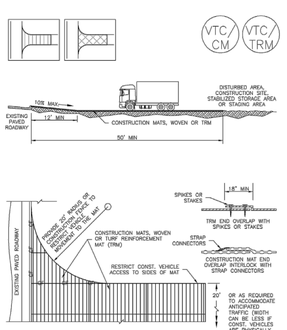

VTC–3. VEHICLE TRACKING CONTROL W/ CONSTRUCTION MAT OR TURF REINFORCEMENT MAT (TRM)

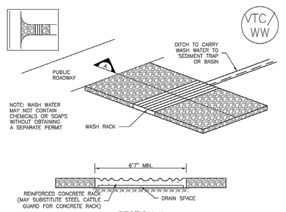

VTC–2. AGGREGATE VEHICLE TRACKING CONTROL WITH WASH RACK

STABILIZED CONSTRUCTION ENTRANCE/EXIT INSTALLATION NOTES

1. SEE PLAN VIEW FOR
   –LOCATION OF CONSTRUCTION ENTRANCE(S)/EXIT(S).
   –TYPE OF CONSTRUCTION ENTRANCE(S)/EXIT(S) (WITH/WITHOUT WHEEL WASH, CONSTRUCTION MAT OR TRM).

2. CONSTRUCTION MAT OR TRM STABILIZED CONSTRUCTION ENTRANCES ARE ONLY TO BE USED ON SHORT DURATION PROJECTS (TYPICALLY RANGING FROM A WEEK TO A MONTH) WHERE THERE WILL BE LIMITED VEHICULAR ACCESS.

3. A STABILIZED CONSTRUCTION ENTRANCE/EXIT SHALL BE LOCATED AT ALL ACCESS POINTS WHERE VEHICLES ACCESS THE CONSTRUCTION SITE FROM PAVED RIGHT–OF–WAYS.

4. STABILIZED CONSTRUCTION ENTRANCE/EXIT SHALL BE INSTALLED PRIOR TO ANY LAND DISTURBING ACTIVITIES.

5. A NON–WOVEN GEOTEXTILE FABRIC SHALL BE PLACED UNDER THE STABILIZED CONSTRUCTION ENTRANCE/EXIT PRIOR TO THE PLACEMENT OF ROCK.

6. UNLESS OTHERWISE SPECIFIED BY LOCAL JURISDICTION, ROCK SHALL CONSIST OF DOT SECT. #703, AASHTO #3 COARSE AGGREGATE OR 6" (MINUS) ROCK.

STABILIZED CONSTRUCTION ENTRANCE/EXIT MAINTENANCE NOTES

1. INSPECT BMPs EACH WORKDAY, AND MAINTAIN THEM IN EFFECTIVE OPERATING CONDITION. MAINTENANCE OF BMPs SHOULD BE PROACTIVE, NOT REACTIVE. INSPECT BMPs AS SOON AS POSSIBLE (AND ALWAYS WITHIN 24 HOURS) FOLLOWING A STORM THAT CAUSES SURFACE EROSION, AND PERFORM NECESSARY MAINTENANCE.

2. FREQUENT OBSERVATIONS AND MAINTENANCE ARE NECESSARY TO MAINTAIN BMPs IN EFFECTIVE OPERATING CONDITION. INSPECTIONS AND CORRECTIVE MEASURES SHOULD BE DOCUMENTED THOROUGHLY.

3. WHERE BMPs HAVE FAILED, REPAIR OR REPLACEMENT SHOULD BE INITIATED UPON DISCOVERY OF THE FAILURE.

4. ROCK SHALL BE REAPPLIED OR REGRADED AS NECESSARY TO THE STABILIZED ENTRANCE/EXIT TO MAINTAIN A CONSISTENT DEPTH.

5. SEDIMENT TRACKED ONTO PAVED ROADS IS TO BE REMOVED THROUGHOUT THE DAY AND AT THE END OF THE DAY BY SHOVELING OR SWEEPING. SEDIMENT MAY NOT BE WASHED DOWN STORM SEWER DRAINS.

NOTE: MANY JURISDICTIONS HAVE BMP DETAILS THAT VARY FROM UDFCD STANDARD DETAILS. CONSULT WITH LOCAL JURISDICTIONS AS TO WHICH DETAIL SHOULD BE USED WHEN DIFFERENCES ARE NOTED.

(DETAILS ADAPTED FROM CITY OF BROOMFIELD, COLORADO, NOT AVAILABLE IN AUTOCAD)

CITY ENGINEER STATEMENT

All work shall be constructed to City and County of Broomfield STANDARDS AND SPECIFICATIONS. This drawing has been reviewed and found to be in general compliance with these STANDARDS AND SPECIFICATIONS and other Broomfield requirements. **THE ENGINEERING DESIGN AND CONCEPT REMAINS THE RESPONSIBILITY OF THE PROFESSIONAL ENGINEER WHOSE STAMPAND SIGNATURE APPEAR HEREON**.

City Engineer (or Designee) Date

Date	Description	No.
08/26/25	IF CD100	2
08/12/25	IF CD90	1

Revisions

COLORADO LICENSED 51524 ROBERT ALAN PROFESSIONAL ENGINEER 08/26/25

LANGAN
Langan Engineering and Environmental Services, LLC.
300 Union Boulevard, Suite 405
Lakewood, CO 80228
T: 303.262.2000 www.langan.com

PALISADE PARK FILING NO. 1, REPLAT F LOT 1
LOCATED IN THE SOUTHWEST QUARTER OF SECTION 34, TOWNSHIP 1 NORTH, RANGE 68 WEST OF THE 6TH P.M., CITY AND COUNTY OF BROOMFIELD, STATE OF COLORADO

CITY OF BROOMFIELD
BROOMFIELD COUNTY COLORADO

Drawing Title

EROSION CONTROL DETAILS

Project No.	532039301
Date	AUGUST 2025
Drawn By	NF
Checked By	BH
Drawing No.	C7.0

© 2025 Langan

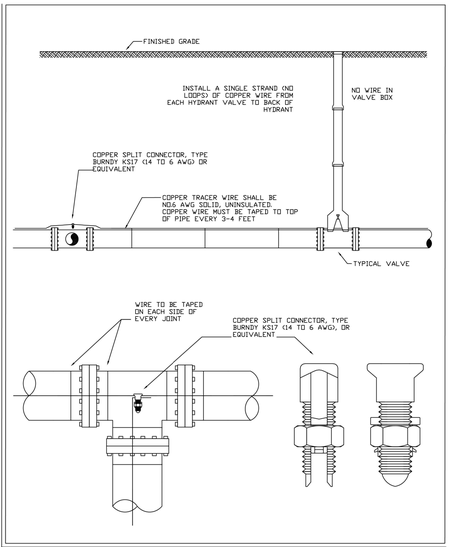

City and County of Broomfield
ENGINEERING DEPARTMENT

TITLE: TRACER WIRE
DETAIL DRAWING NUMBER:400-5
DATE: 2020

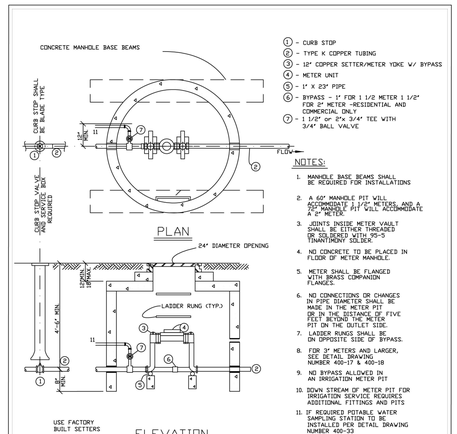

NOTES:

1. MANHOLE BASE BEAMS SHALL BE REQUIRED FOR INSTALLATIONS
2. A 60" MANHOLE PIT WILL ACCOMMODATE 1 1/2" METERS, AND A 72" MANHOLE PIT WILL ACCOMMODATE A 2" METER
3. JOINTS INSIDE METER VAULT SHALL BE EITHER THREADED OR SOLDERED WITH 95-5 TINANTIMONY SOLDER.
4. NO CONCRETE TO BE PLACED IN FLOOR OF METER MANHOLE.
5. METER SHALL BE FLANGED WITH BRASS COMPANION FLANGES.
6. NO CONNECTIONS OR CHANGES IN PIPE DIAMETER SHALL BE MADE IN THE METER PIT OR IN THE DISTANCE OF FIVE FEET BEYOND THE METER PIT ON THE OUTLET SIDE.
7. LADDER RUNGS SHALL BE ON OPPOSITE SIDE OF BYPASS.
8. FOR 3" METERS AND LARGER, SEE DETAIL DRAWING NUMBER 400-17 & 400-18
9. NO BYPASS ALLOWED IN AN IRRIGATION METER PIT
10. DOWN STREAM OF METER PIT FOR IRRIGATION SERVICE REQUIRES ADDITIONAL FITTINGS AND PITS
11. IF REQUIRED POTABLE WATER SAMPLING STATION TO BE INSTALLED PER DETAIL DRAWING NUMBER 400-33

OUTSIDE SETTING FOR 1 1/2" & 2" METER SETTERS SHALL BE VERTICAL W/ BYPASS ON THE BOTTOM FOR USE WITH RESIDENTIAL, COMMERCIAL & IRRIGATION INSTALLATIONS.

City and County of Broomfield
ENGINEERING DEPARTMENT

TITLE: METER PIT- 1½" & 2"
DETAIL DRAWING NUMBER:400-14
DATE: 2020

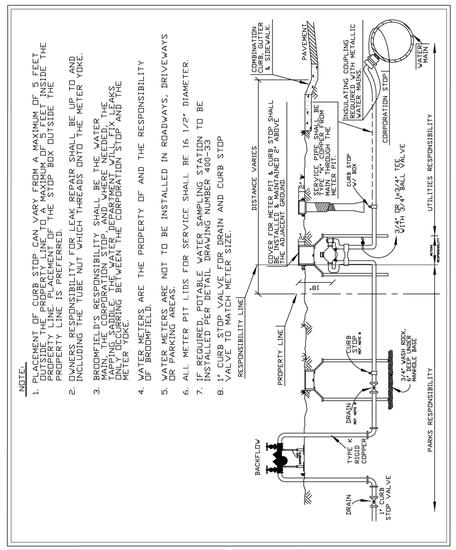

City and County of Broomfield
ENGINEERING DEPARTMENT

TITLE: IRRIGATION SERVICE LINE -METER- (3/4"&1")
DETAIL DRAWING NUMBER: 400-18
DATE: 2022

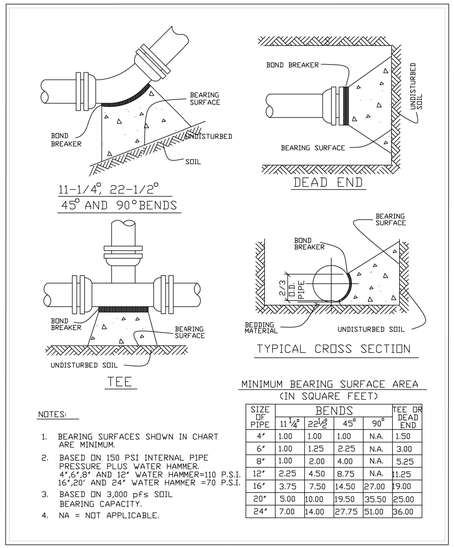

MINIMUM BEARING SURFACE AREA (IN SQUARE FEET)

SIZE OF PIPE	BENDS 11 1/4°	22 1/2°	45°	90°	TEE OR DEAD END
4"	1.00	1.00	1.00	N.A.	1.50
6"	1.00	1.25	2.25	N.A.	3.00
8"	1.00	2.00	4.00	N.A.	5.25
12"	2.25	4.50	8.75	N.A.	11.25
16"	3.75	7.50	14.50	27.00	19.00
20"	5.00	10.00	19.50	35.50	25.00
24"	7.00	14.00	27.75	51.00	36.00

NOTES:

1. BEARING SURFACES SHOWN IN CHART ARE MINIMUM.
2. BASED ON 150 PSI INTERNAL PIPE PRESSURE PLUS WATER HAMMER. 4",6",8" AND 12" WATER HAMMER=110 P.S.I. 16",20" AND 24" WATER HAMMER =70 P.S.I.
3. BASED ON 3,000 pfs SOIL BEARING CAPACITY.
4. NA = NOT APPLICABLE.

City and County of Broomfield
ENGINEERING DEPARTMENT

TITLE: THRUST BLOCKING
DETAIL DRAWING NUMBER:400-19
DATE: 2020

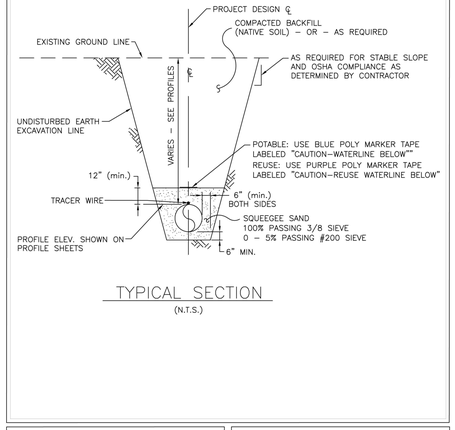

City and County of Broomfield
ENGINEERING DEPARTMENT

TITLE: WATERLINE TRENCH DETAIL
DETAIL DRAWING NUMBER:400-21
DATE: 2020

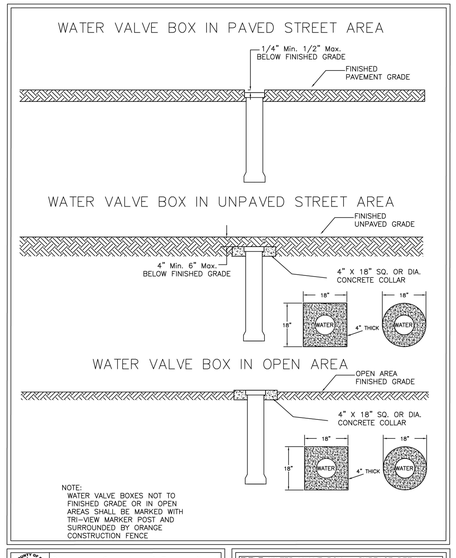

NOTE:
WATER VALVE BOXES NOT TO FINISHED GRADE OR IN OPEN AREAS SHALL BE MARKED WITH TRI-VIEW MARKER POST AND SURROUNDED BY ORANGE CONSTRUCTION FENCE

City and County of Broomfield
ENGINEERING DEPARTMENT

TITLE: WATER VALVE BOX - SURFACE DETAIL
DETAIL DRAWING NUMBER:400-25
DATE: 2020

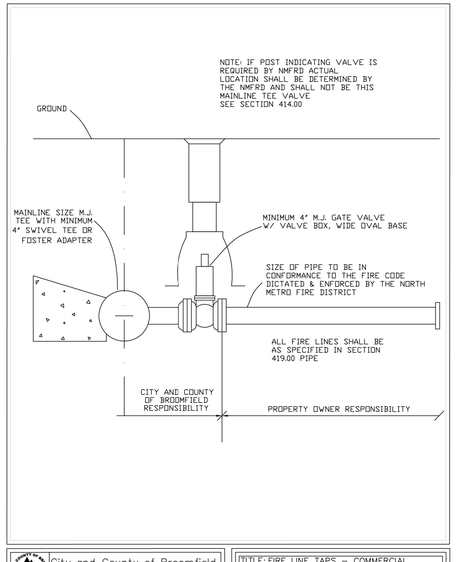

City and County of Broomfield
ENGINEERING DEPARTMENT

TITLE: FIRE LINE TAPS - COMMERCIAL
DETAIL DRAWING NUMBER:400-32
DATE: 2020

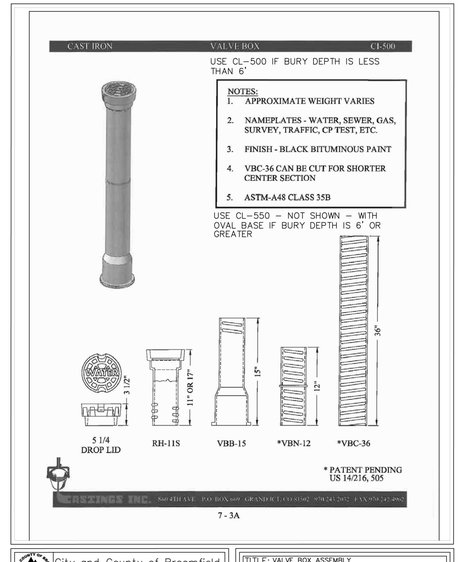

7 - 3A

City and County of Broomfield
ENGINEERING DEPARTMENT

TITLE: VALVE BOX ASSEMBLY
DETAIL DRAWING NUMBER:400-37
DATE: 2020

CITY ENGINEER STATEMENT

All work shall be constructed to City and County of Broomfield STANDARDS AND SPECIFICATIONS. This drawing has been reviewed and found to be in general compliance with these STANDARDS AND SPECIFICATIONS and other Broomfield requirements. **THE ENGINEERING DESIGN AND CONCEPT REMAINS THE RESPONSIBILITY OF THE PROFESSIONAL ENGINEER WHOSE STAMPAND SIGNATURE APPEAR HEREON**.

City Engineer (or Designee) _____ Date _____

Date	Description	No.
08/26/25	IF CD100	2
08/12/25	IF CD90	1

Revisions

COLORADO LICENSED PROFESSIONAL ENGINEER
51524
08/26/25

LANGAN
Langan Engineering and Environmental Services, LLC.
300 Union Boulevard, Suite 405
Lakewood, CO 80228
T: 303.262.2000 www.langan.com

PALISADE PARK FILING NO. 1, REPLAT F LOT 1
LOCATED IN THE SOUTHWEST QUARTER OF SECTION 34, TOWNSHIP 1 NORTH, RANGE 68 WEST OF THE 6TH P.M., CITY AND COUNTY OF BROOMFIELD, STATE OF COLORADO

CITY OF BROOMFIELD
BROOMFIELD COUNTY COLORADO

Drawing Title

WATER DETAILS

Project No.	Drawing No.
532039301	C7.1
Date: AUGUST 2025	
Drawn By: NF	
Checked By: BH	

© 2025 Langan

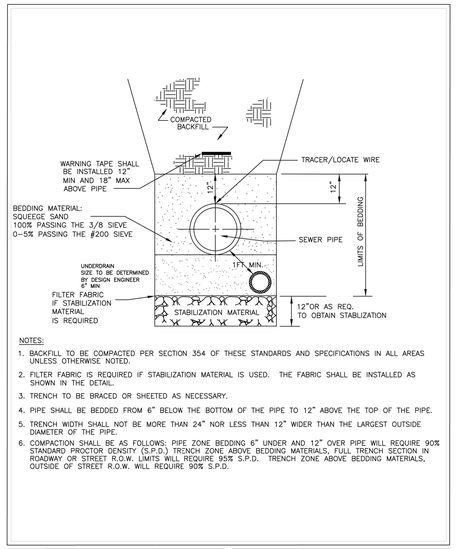

NOTES:

1. BACKFILL TO BE COMPACTED PER SECTION 354 OF THESE STANDARDS AND SPECIFICATIONS IN ALL AREAS UNLESS OTHERWISE NOTED.
2. FILTER FABRIC IS REQUIRED IF STABILIZATION MATERIAL IS USED. THE FABRIC SHALL BE INSTALLED AS SHOWN IN THE DETAIL.
3. TRENCH TO BE BRACED OR SHEETED AS NECESSARY.
4. PIPE SHALL BE BEDDED FROM 6" BELOW THE BOTTOM OF THE PIPE TO 12" ABOVE THE TOP OF THE PIPE.
5. TRENCH WIDTH SHALL NOT BE MORE THAN 24" NOR LESS THAN 12" WIDER THAN THE LARGEST OUTSIDE DIAMETER OF THE PIPE.
6. COMPACTION SHALL BE AS FOLLOWS: PIPE ZONE BEDDING 6" UNDER AND 12" OVER PIPE WILL REQUIRE 90% STANDARD PROCTOR DENSITY (S.P.D.) TRENCH ZONE ABOVE BEDDING MATERIALS, FULL TRENCH SECTION IN ROADWAY OR STREET R.O.W. LIMITS WILL REQUIRE 95% S.P.D. TRENCH ZONE ABOVE BEDDING MATERIALS, OUTSIDE OF STREET R.O.W. WILL REQUIRE 90% S.P.D.

City and County of Broomfield
ENGINEERING DEPARTMENT

TITLE: SANITARY SEWER TRENCH DETAIL
DETAIL DRAWING NUMBER:500-10
DATE: 2020

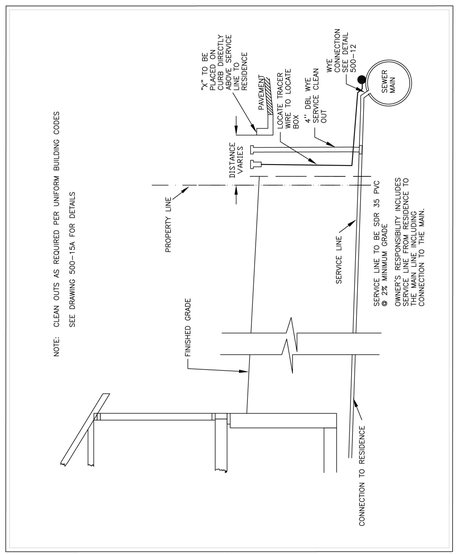

City and County of Broomfield
ENGINEERING DEPARTMENT

TITLE: SERVICE MAINTENANCE LINE
DETAIL DRAWING NUMBER: 500-15
DATE: 2020

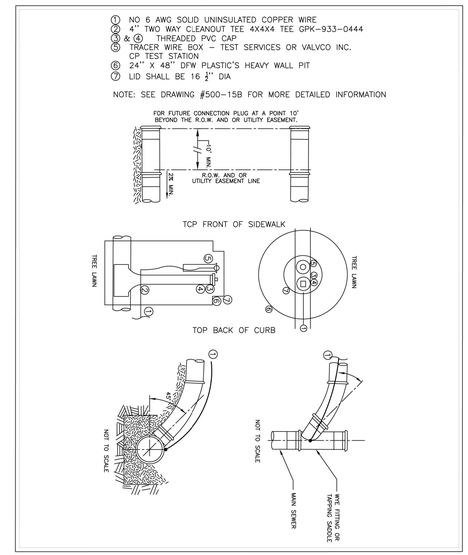

City and County of Broomfield
ENGINEERING DEPARTMENT

TITLE: SAN SEWER LOCATE WIRE DETAILS
DETAIL DRAWING NUMBER:500-15A
DATE: 2020

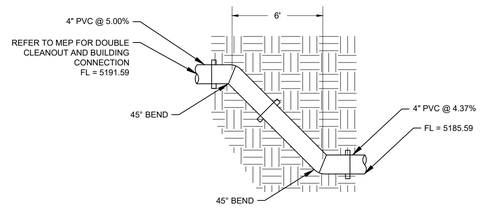

SANITARY SEWER
VERTICAL BEND
N.T.S.

CITY ENGINEER STATEMENT

All work shall be constructed to City and County of Broomfield STANDARDS AND SPECIFICATIONS. This drawing has been reviewed and found to be in general compliance with these STANDARDS AND SPECIFICATIONS and other Broomfield requirements. **THE ENGINEERING DESIGN AND CONCEPT REMAINS THE RESPONSIBILITY OF THE PROFESSIONAL ENGINEER WHOSE STAMPAND SIGNATURE APPEAR HEREON**.

City Engineer (or Designee) _____ Date _____

Date	Description	No.
08/26/25	IF CD100	2
08/12/25	IF CD90	1

Revisions

COLORADO LICENSED PROFESSIONAL ENGINEER 51524 — 08/26/25

LANGAN
Langan Engineering and Environmental Services, LLC.
300 Union Boulevard, Suite 405
Lakewood, CO 80228
T: 303.262.2000 www.langan.com

PALISADE PARK FILING NO. 1, REPLAT F LOT 1
LOCATED IN THE SOUTHWEST QUARTER OF SECTION 34, TOWNSHIP 1 NORTH, RANGE 68 WEST OF THE 6TH P.M., CITY AND COUNTY OF BROOMFIELD, STATE OF COLORADO

CITY OF BROOMFIELD
BROOMFIELD COUNTY COLORADO

Drawing Title

SANITARY SEWER DETAILS

Project No.	Drawing No.
532039301	C7.2
Date: **AUGUST 2025**	
Drawn By: **NF**	
Checked By: **BH**	

© 2025 Langan

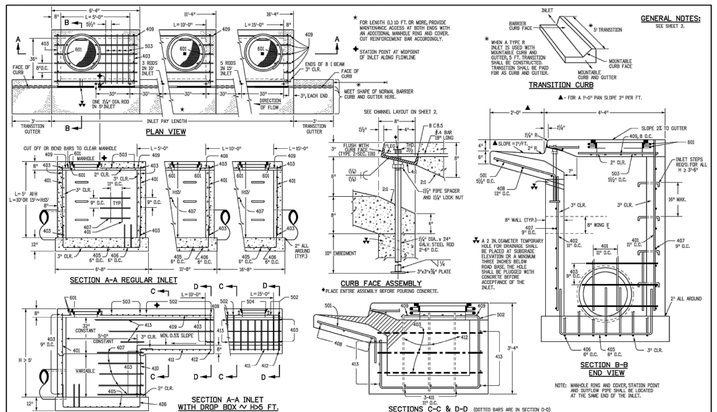

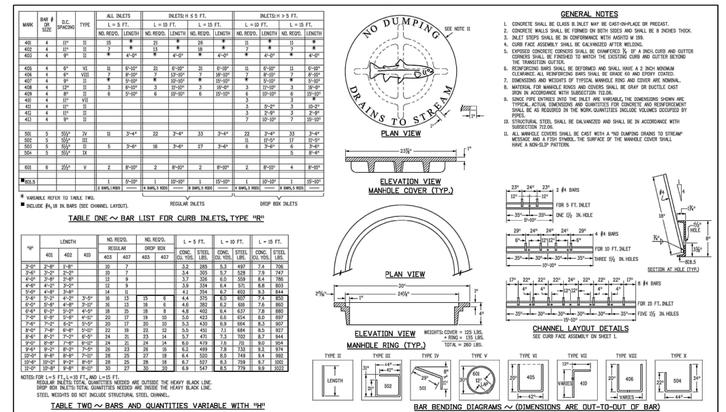

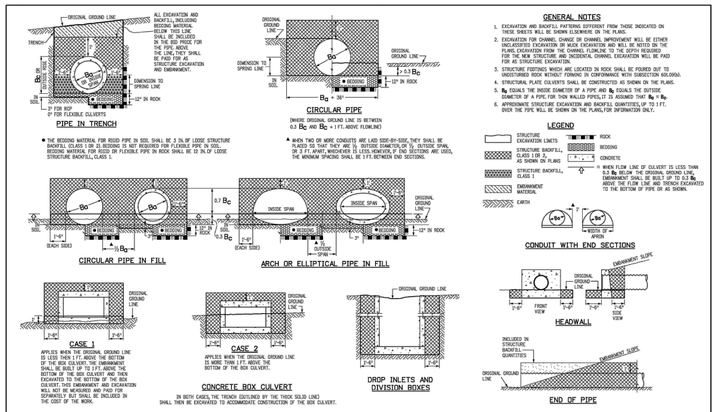

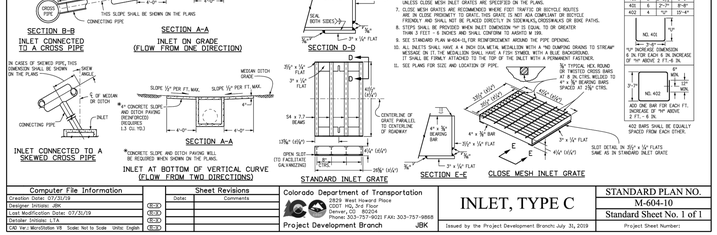

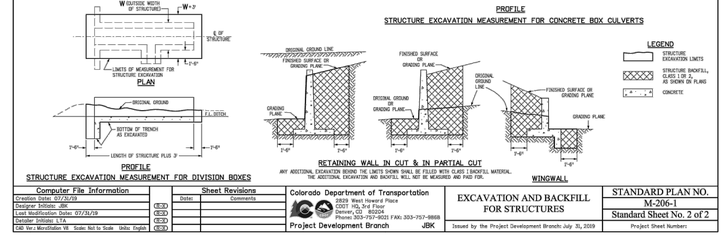

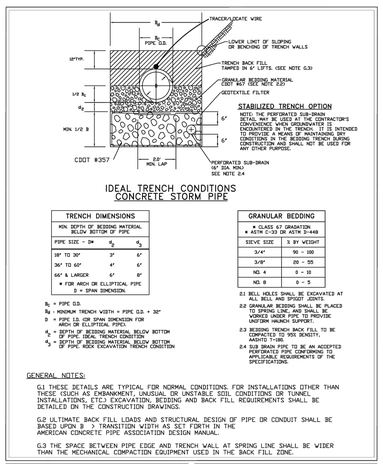

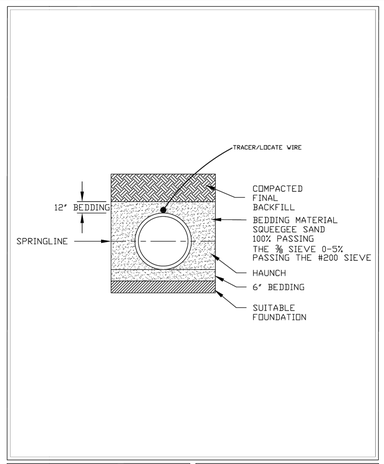

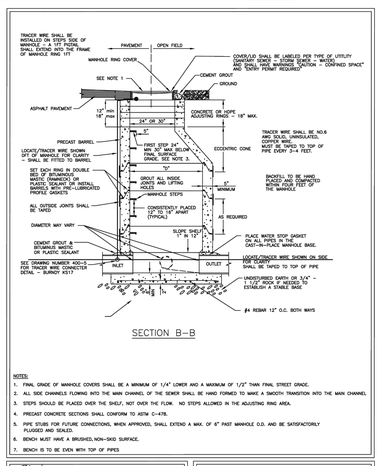

Computer File Information		Sheet Revisions		Colorado Department of Transportation	CURB INLET TYPE R	STANDARD PLAN NO.
Creation Date: 07/31/19		Date:	Comments	2829 West Howard Place		M-604-12
Designer Initials: JBK				Denver, CO 80204		Standard Sheet No. 1 of 2
Last Modification Date: 07/31/19				Phone: 303-757-9021 FAX: 303-757-9868		
Detailer Initials: LTA				Project Development Branch JBK	Issued by the Project Development Branch: July 31, 2019	Project Sheet Number:
CAD Ver.: MicroStation V8 Scale: Not to Scale Units: English						

Computer File Information		Sheet Revisions		Colorado Department of Transportation	CURB INLET TYPE R	STANDARD PLAN NO.
Creation Date: 07/31/19		Date:	Comments	2829 West Howard Place		M-604-12
Designer Initials: JBK				Denver, CO 80204		Standard Sheet No. 2 of 2
Last Modification Date: 07/31/19				Phone: 303-757-9021 FAX: 303-757-9868		
Detailer Initials: LTA				Project Development Branch JBK	Issued by the Project Development Branch: July 31, 2019	Project Sheet Number:
CAD Ver.: MicroStation V8 Scale: Not to Scale Units: English						

Computer File Information		Sheet Revisions		Colorado Department of Transportation	INLET, TYPE C	STANDARD PLAN NO.
Creation Date: 07/31/19		Date:	Comments	2829 West Howard Place		M-604-10
Designer Initials: JBK				Denver, CO 80204		Standard Sheet No. 1 of 1
Last Modification Date: 07/31/19				Phone: 303-757-9021 FAX: 303-757-9868		
Detailer Initials: LTA				Project Development Branch JBK	Issued by the Project Development Branch: July 31, 2019	Project Sheet Number:
CAD Ver.: MicroStation V8 Scale: Not to Scale Units: English						

Computer File Information		Sheet Revisions		Colorado Department of Transportation	EXCAVATION AND BACKFILL FOR STRUCTURES	STANDARD PLAN NO.
Creation Date: 07/31/19		Date:	Comments	2829 West Howard Place		M-206-11
Designer Initials: JBK				Denver, CO 80204		Standard Sheet No. 1 of 2
Last Modification Date: 07/31/19				Phone: 303-757-9021 FAX: 303-757-9868		
Detailer Initials: LTA				Project Development Branch JBK	Issued by the Project Development Branch: July 31, 2019	Project Sheet Number:
CAD Ver.: MicroStation V8 Scale: Not to Scale Units: English						

Computer File Information		Sheet Revisions		Colorado Department of Transportation	EXCAVATION AND BACKFILL FOR STRUCTURES	STANDARD PLAN NO.
Creation Date: 07/31/19		Date:	Comments	2829 West Howard Place		M-206-11
Designer Initials: JBK				Denver, CO 80204		Standard Sheet No. 2 of 2
Last Modification Date: 07/31/19				Phone: 303-757-9021 FAX: 303-757-9868		
Detailer Initials: LTA				Project Development Branch JBK	Issued by the Project Development Branch: July 31, 2019	Project Sheet Number:
CAD Ver.: MicroStation V8 Scale: Not to Scale Units: English						

City and County of Broomfield — ENGINEERING DEPARTMENT

TITLE: CONCRETE STORM PIPE TRENCH DETAIL
DETAIL DRAWING NUMBER:600-4
DATE: 2020

City and County of Broomfield — ENGINEERING DEPARTMENT

TITLE: POLYPROPYLENE STORM PIPE TRENCH DETAIL
DETAIL DRAWING NUMBER:600-4A
DATE: 2020

City and County of Broomfield — ENGINEERING DEPARTMENT

TITLE: STANDARD STM SEWER MANHOLE SECTION
DETAIL DRAWING NUMBER:600-6
DATE: 2020

Date	Description	No.
08/26/25	IF CD100	2
08/12/25	IF CD90	1

Revisions

COLORADO LICENSED — 51524 — GREGORY A. HOPPE — PROFESSIONAL ENGINEER — 08/26/25

LANGAN
Langan Engineering and Environmental Services, LLC.
300 Union Boulevard, Suite 405
Lakewood, CO 80228
T: 303.262.2000 www.langan.com

PALISADE PARK FILING NO. 1, REPLAT F LOT 1
LOCATED IN THE SOUTHWEST QUARTER OF SECTION 34, TOWNSHIP 1 NORTH, RANGE 68 WEST OF THE 6TH P.M., CITY AND COUNTY OF BROOMFIELD, STATE OF COLORADO

CITY OF BROOMFIELD
BROOMFIELD COUNTY COLORADO

Drawing Title

DRAINAGE DETAILS

CITY ENGINEER STATEMENT

All work shall be constructed to City and County of Broomfield STANDARDS AND SPECIFICATIONS. This drawing has been reviewed and found to be in general compliance with these STANDARDS AND SPECIFICATIONS and other Broomfield requirements. **THE ENGINEERING DESIGN AND CONCEPT REMAINS THE RESPONSIBILITY OF THE PROFESSIONAL ENGINEER WHOSE STAMP AND SIGNATURE APPEAR HEREON**.

City Engineer (or Designee) Date

Project No.	Drawing No.
532039301	C7.3
Date: AUGUST 2025	
Drawn By: NF	
Checked By: BH	

© 2025 Langan

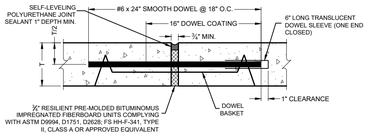

NOTES:
1. SLEEVES FOR DOWELS SHALL HAVE AN INSIDE DIAMETER OF ¼" GREATER THAN THE DIAMETER OF THE DOWELS AND SHALL BE SUBMITTED TO ENGINEER FOR APPROVAL PRIOR TO USE.
2. EXPANSION JOINTS SHALL BE CONSTRUCTED A MAXIMUM OF 500' APART ON STRAIGHT PAVING, AND WHERE INDICATED PER THE AMERICAN CONCRETE PAVEMENT ASSOCIATION'S TECHNICAL PUBLICATION ACPA ISO61.01P (LATEST VERSION)
3. DOWEL COATING SHALL BE ASPHALTIC COATING.
4. DOWELS SHALL BE SUPPORTED WITH APPROVED BASKETS AND NOT BE TIED TO OTHER REINFORCEMENT.
5. REFER TO SIDEWALK DETAILS THIS SHEET FOR EXPANSION JOINTS IN SIDEWALK AREAS.
6. ALL PAVEMENT LOCATED WITHIN THE PUBLIC R.O.W. SHALL CONFORM TO THE GOVERNING AUTHORITY'S SPECIFICATIONS, DETAILS & REQUIREMENTS FOR PUBLIC PAVEMENT.
7. FINISHED SURFACES SHALL BE INSTALLED FLUSH WITH A DIFFERENTIAL ELEVATION NOT TO EXCEED ¼".

EXPANSION JOINT (ISOLATION)

N.T.S.

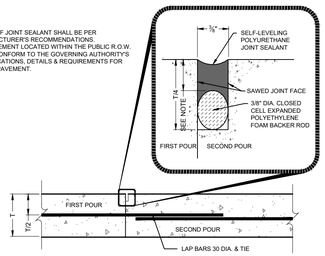

NOTES:
1. DEPTH OF JOINT SEALANT SHALL BE PER MANUFACTURER'S RECOMMENDATIONS.
2. ALL PAVEMENT LOCATED WITHIN THE PUBLIC R.O.W. SHALL CONFORM TO THE GOVERNING AUTHORITY'S SPECIFICATIONS, DETAILS & REQUIREMENTS FOR PUBLIC PAVEMENT.

CONSTRUCTION BUTT JOINT

N.T.S.

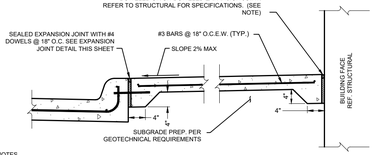

NOTES
1. ALL SIDEWALK JOINTS LOCATED WITHIN 25' OF A BUILDING FACE OR ADJACENT TO ANY STRUCTURE SHALL BE SEALED.
2. REFER TO STRUCTURAL PLANS/DETAILS FOR DOWEL/HINGE JOINT AT ALL CONNECTIONS BETWEEN FOUNDATIONS/STOOPS AND FLATWORK.
3. THE SUBGRADE PREPARATION FOR ANY FLATWORK OR SIDEWALK PAVEMENT WITHIN 25' FROM ANY BUILDING FACE OR ADJACENT TO ANY STRUCTURE SHALL AS SPECIFIED BY THE GEOTECHNICAL REPORT. IN THE EVENT THAT THE GEOTECHNICAL REPORT DOES NOT CONTAIN A RECOMMENDATION THE CONTRACTOR SHALL NOTIFY THE ENGINEER IMMEDIATELY.
4. ALL PAVEMENT LOCATED WITHIN THE PUBLIC R.O.W. SHALL CONFORM TO THE GOVERNING AUTHORITY'S SPECIFICATIONS, DETAILS & REQUIREMENTS FOR PUBLIC PAVEMENT.
5. FINISHED SURFACES SHALL BE INSTALLED FLUSH WITH A DIFFERENTIAL ELEVATION NOT TO EXCEED ¼".

SIDEWALK/CURB/BUILDING DETAIL

N.T.S.

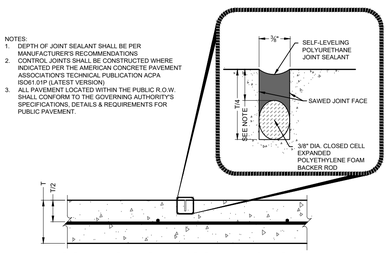

NOTES:
1. DEPTH OF JOINT SEALANT SHALL BE PER MANUFACTURER'S RECOMMENDATIONS
2. CONTROL JOINTS SHALL BE CONSTRUCTED WHERE INDICATED PER THE AMERICAN CONCRETE PAVEMENT ASSOCIATION'S TECHNICAL PUBLICATION ACPA SO061.01P (LATEST VERSION)
3. ALL PAVEMENT LOCATED WITHIN THE PUBLIC R.O.W. SHALL CONFORM TO THE GOVERNING AUTHORITY'S SPECIFICATIONS, DETAILS & REQUIREMENTS FOR PUBLIC PAVEMENT.

CONTROL JOINT (CONTRACTION)

N.T.S.

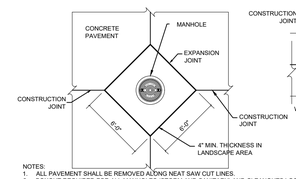

NOTES:
1. ALL PAVEMENT SHALL BE REMOVED ALONG NEAT SAW CUT LINES.
2. BOXOUT REQUIRED FOR ALL MANHOLES (STORM AND SANITARY) AND CLEANOUTS LOCATED IN PCC PAVEMENT.
3. MANHOLE BOXOUT SHALL BE EVE SQUARE AND ALIGNED WITH PAVEMENT JOINTING.
4. WATER VALVE & SANITARY CLEANOUTS SHALL BE PLACED IN BOXOUTS 2'x2' SQUARE ALIGNED WITH PAVEMENT JOINTING.
5. MANHOLES OR VALVES LOCATED IN LANDSCAPE AREAS SHALL INCLUDE 4' MIN. CONCRETE COLLAR TO THE DIMENSIONS INDICATED ABOVE AND SHALL BE INSTALLED FLUSH WITH FINISHED GRADE.
6. ALL PAVEMENT LOCATED WITHIN THE PUBLIC R.O.W. SHALL CONFORM TO THE GOVERNING AUTHORITY'S SPECIFICATIONS, DETAILS & REQUIREMENTS FOR PUBLIC PAVEMENT.



UTILITY PENETRATION/ MH/ CLEANOUT/ LIGHT POLES DETAIL

N.T.S.

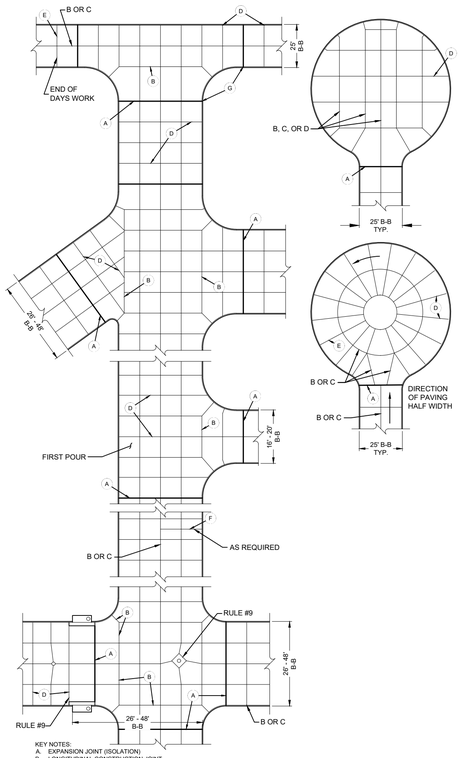

KEY NOTES:
A. EXPANSION JOINT (ISOLATION)
B. LONGITUDINAL CONSTRUCTION JOINT
C. LONGITUDINAL CONTROL JOINT (CONTRACTION)
D. TRANSVERSE CONTROL JOINT (CONTRACTION)
E. PLANNED TRANSVERSE CONSTRUCTION JOINT
F. EMERGENCY TRANSVERSE CONSTRUCTION JOINT
G. PLACE ½" EXPANSION JOINT FILLER IN TOP OF CURB ONLY AT ALL RADIUS POINTS

RULES:
1. AVOID ODD-SHAPED SLABS.
2. MAXIMUM TRANSVERSE JOINT SPACING FOR PAVEMENT SHOULD EITHER BE 24 TO 30 TIMES THE SLAB THICKNESS OR 15ft.
3. LONGITUDINAL JOINT SPACING SHOULD NOT EXCEED 12.5ft
4. KEEP SLABS AS SQUARE AS POSSIBLE. LONG NARROW SLABS TEND TO CRACK MORE THAN SQUARE ONES.
5. ALL TRANSVERSE CONTRACTION JOINTS MUST BE CONTINUOUS THROUGH THE CURB AND HAVE A DEPTH EQUAL TO ¼ THE PAVEMENT THICKNESS.
6. IN ISOLATION JOINTS, THE FILLER MUST BE FULL DEPTH AND EXTEND THROUGH THE CURB
7. IF THERE IS NO CURB, LONGITUDINAL JOINTS SHOULD BE TIED WITH DEFORMED BARS.
8. OFFSETS AT RADIUS POINTS SHOULD BE AT LEAST 1.5ft WIDE. JOINT INTERSECTION ANGLES LESS THAN 60° SHOULD BE AVOIDED.
9. MINOR ADJUSTMENTS IN JOINT LOCATION MADE BY SHIFTING OF SKEWING TO MEET INLETS AND MANHOLES WILL IMPROVE PAVEMENT PERFORMANCE.
10. WHEN THE PAVEMENT AREA HAS DRAINAGE STRUCTURES, PLACE JOINTS TO MEET THE STRUCTURES IF POSSIBLE.

TYPICAL JOINT LAYOUT

N.T.S.

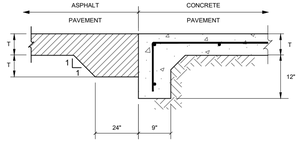

NOTES
1. PAVEMENT BARS TO BE BENT DOWN INTO HEADER.
2. HEADER AND PAVEMENT TO BE MONOLITHIC
3. REINFORCEMENT STEEL SHALL BE PER PAVEMENT SECTION SPEC.
4. ALL PAVEMENT LOCATED WITHIN THE PUBLIC R.O.W. SHALL CONFORM TO THE GOVERNING AUTHORITY'S SPECIFICATIONS, DETAILS & REQUIREMENTS FOR PUBLIC PAVEMENT.
5. FINISHED SURFACES SHALL BE INSTALLED FLUSH WITH A DIFFERENTIAL ELEVATION NOT TO EXCEED ¼".
6. SUBGRADE PREPARATION SHALL BE PER GEOTECHNICAL REPORT SPECIFICATIONS.

ASPHALT TO CONCRETE HEADER

N.T.S.

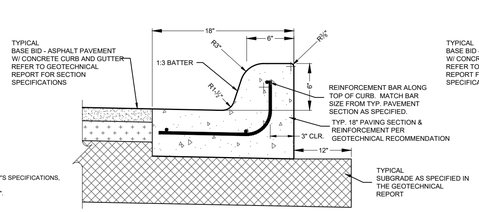

NOTE:
1. ALL CURBS ARE CONSTRUCTED OF PORTLAND CEMENT CONCRETE UNLESS OTHERWISE SHOWN.
2. GRADES SHALL BE MEASURED AT BACK OF CURB UNLESS OTHERWISE SPECIFIED.
3. ALL PAVEMENT LOCATED WITHIN THE PUBLIC R.O.W. SHALL CONFORM TO THE GOVERNING AUTHORITY'S SPECIFICATIONS, DETAILS & REQUIREMENTS FOR PUBLIC PAVEMENT.
4. CONTROL JOINTS THROUGH CURB SHALL BE SEALED IN THE PAVEMENT AND TERMINATE AT THE GUTTER.

CATCH CURB DETAIL

N.T.S.

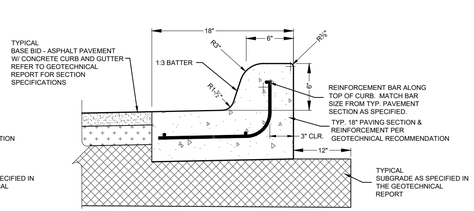

NOTE:
1. ALL CURBS ARE CONSTRUCTED OF PORTLAND CEMENT CONCRETE UNLESS OTHERWISE SHOWN.
2. GRADES SHALL BE MEASURED AT BACK OF CURB UNLESS OTHERWISE SPECIFIED.
3. ALL PAVEMENT LOCATED WITHIN THE PUBLIC R.O.W. SHALL CONFORM TO THE GOVERNING AUTHORITY'S SPECIFICATIONS, DETAILS & REQUIREMENTS FOR PUBLIC PAVEMENT.
4. CONTROL JOINTS THROUGH CURB SHALL BE SEALED IN THE PAVEMENT AND TERMINATE AT THE GUTTER.

SPILL CURB DETAIL

N.T.S.



NOTE:
IF 'X' IS LESS THAN 48" THEN THE SLOPE OF THE FLARED SIDE SHALL NOT EXCEED 1:12.

LEGEND

EJ EXPANSION JOINT
CJ CONSTRUCTION JOINT
BC BACK OF CURB
FC FACE OF CURB

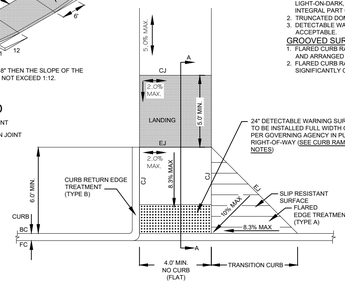

CURB RAMP NOTES

NOTES:
1. CROSS SLOPE NOT TO EXCEED 2% ON ANY PORTION OF RAMP OR TRANSITION SURFACE.
2. RAMPS SHALL BE CONSTRUCTED PER ADA & APPLICABLE STATE ACCESSIBILITY STANDARDS.
3. CURB RAMPS SHALL BE MONOLITHIC POUR & SEPARATED FROM SITE PAVING WITH A DOWELED EXPANSION JOINT.

DETECTABLE WARNING SURFACE (PUBLIC RIGHT-OF-WAY):
1. TRUNCATED DOMES SHALL CONTRAST VISUALLY WITH ADJOINING SURFACES, EITHER LIGHT-ON-DARK, OR DARK-ON-LIGHT. THE MATERIAL USED TO PROVIDE CONTRAST SHALL BE AN INTEGRAL PART OF THE WALKING SURFACE.
2. TRUNCATED DOMES TO RUN PARALLEL TO PEDESTRIAN TRAVEL.
3. DETECTABLE WARNING PAVERS, OR PLATES MEETING ADA & STATE REQUIREMENTS ARE ACCEPTABLE.

GROOVED SURFACE (RAMP FLARE):
1. FLARED CURB RAMP SURFACES SHALL BE TEXTURED WITH GROOVES 1/4" DEEP, 3/4" WIDE, 2" APART AND ARRANGED SO THAT WATER WILL NOT ACCUMULATE IN THE GROOVES.
2. FLARED CURB RAMP SURFACE SHALL HAVE A LIGHT REFLECTIVE VALUE AND TEXTURE THAT SIGNIFICANTLY CONTRASTS WITH THAT OF THE ADJOINING PEDESTRIAN ROUTE WHEN SPECIFIED.

CURB RAMP DETAIL

N.T.S. - FLARED OR RETURN CURB

SECTION A-A

SECTION A-A

SECTION B-B

LEGEND

EJ EXPANSION JOINT
CJ CONSTRUCTION JOINT
BC BACK OF CURB
FC FACE OF CURB



PARALLEL CURB RAMP DETAIL

N.T.S. -SIDEWALK PARALLEL TO CURB

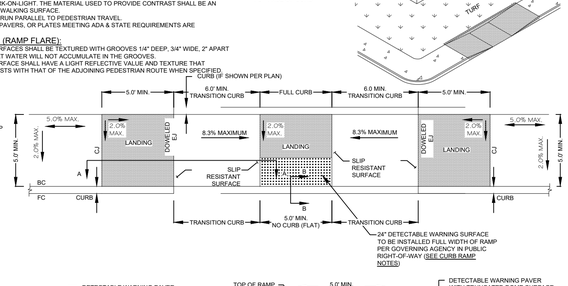

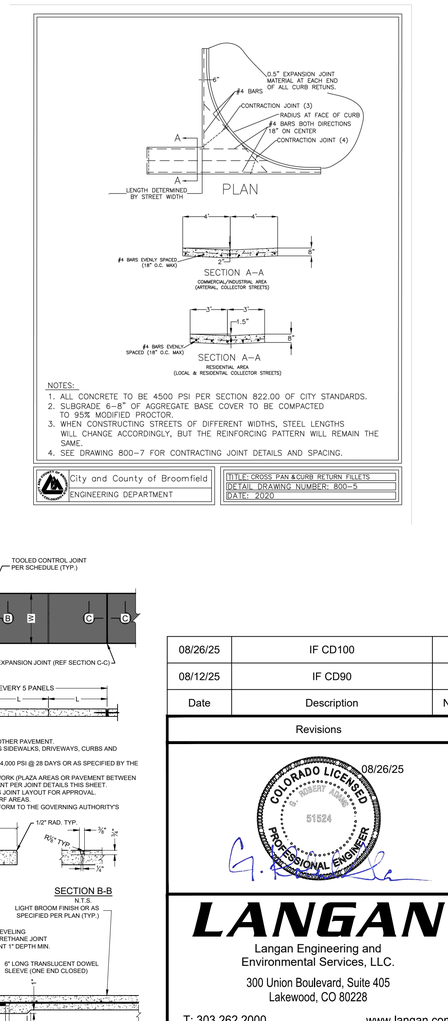

NOTES:
1. ALL CONCRETE TO BE 4500 PSI PER SECTION 822.00 OF CITY STANDARDS.
2. SUBGRADE 6-8" OF AGGREGATE BASE COVER TO BE COMPACTED TO 95% MODIFIED PROCTOR.
3. WHEN CONSTRUCTING STREETS OF DIFFERENT WIDTHS, STEEL LENGTHS WILL CHANGE ACCORDINGLY, BUT THE REINFORCING PATTERN WILL REMAIN THE SAME.
4. SEE DRAWING 800-7 FOR CONTRACTING JOINT DETAILS AND SPACING.

City and County of Broomfield
ENGINEERING DEPARTMENT

TITLE: CROSS PAN &CURB RETURN FILLETS
DETAIL DRAWING NUMBER: 800-5
DATE: 2020

(PER TEXAS ACCESSIBILITY STANDARDS)

NOTES:
-USE PREFABRICATED STENCIL SA-SO ITEM #42351 OR EQUAL

-REFERENCE TECHNICAL SPECIFICATION 32-1723 - PAVEMENT MARKINGS

ACCESSIBLE PARKING SPACE

N.T.S.

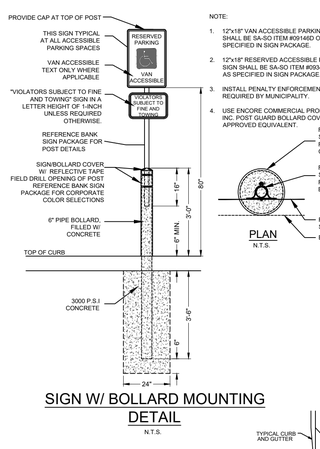

SIGN W/ BOLLARD MOUNTING DETAIL

N.T.S.

NOTE:
1. 12"x18" VAN ACCESSIBLE PARKING SIGN SHALL BE SA-SO ITEM #091460 OR AS SPECIFIED IN SIGN PACKAGE.
2. 12"x18" RESERVED ACCESSIBLE PARKING SIGN SHALL BE SA-SO ITEM #093545 NO OR AS SPECIFIED IN SIGN PACKAGE.
3. INSTALL PENALTY ENFORCEMENT SIGN AS REQUIRED BY MUNICIPALITY.
4. USE ENCORE COMMERCIAL PRODUCTS, INC. POST GUARD BOLLARD COVER OR APPROVED EQUIVALENT.

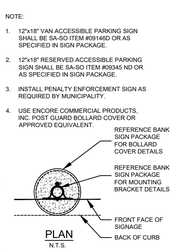

PLAN
N.T.S.



NOTES:
1. MARKINGS FOR STREET SHALL BE ACCORDING TO REQUIREMENTS AS OUTLINED IN CHAPTER 3B OF THE MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES FOR STREETS AND HIGHWAYS.

CROSSWALK/PEDESTRIAN CROSSING

N.T.S.

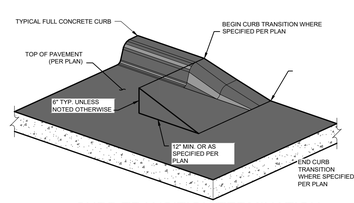

CURB TRANSITION/TERMINATION

N.T.S.



SIDEWALK NOTES
1. SAND CUSHION WILL NOT BE PERMITTED UNDER SIDEWALKS OR OTHER PAVEMENT.
2. DOWEL WITH #4 BARS AT 18" C-C WHEN CONNECTING TO EXISTING SIDEWALKS, DRIVEWAYS, CURBS AND GUTTER.
3. CONCRETE STRENGTH FOR SIDEWALKS SHALL BE A MINIMUM OF 4,000 PSI @ 28 DAYS OR AS SPECIFIED BY THE AUTHORITY HAVING JURISDICTION, WHICHEVER IS GREATER.
4. ALL JOINTS LOCATED WITHIN LARGE AREAS OF CONCRETE FLATWORK (PLAZA AREAS OR PAVEMENT BETWEEN BUILDINGS) SHALL BE SEALED WITH POLYURETHANE JOINT SEALANT PER JOINT DETAILS THIS SHEET.
5. CONTRACTOR SHALL SUBMIT FULL-SIZE SCALEABLE PLAZA AREAS JOINT LAYOUT FOR APPROVAL.
6. JOINT SEALANT IS NOT REQUIRED ON SIDEWALKS LOCATED IN TURF AREAS.
7. ALL SIDEWALKS LOCATED WITHIN THE PUBLIC R.O.W. SHALL CONFORM TO THE GOVERNING AUTHORITY'S SPECIFICATIONS, DETAILS & REQUIREMENTS FOR SIDEWALKS.

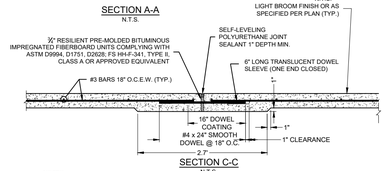

NOTES:
1. SLEEVES FOR DOWELS SHALL HAVE AN INSIDE DIAMETER OF ¼" GREATER THAN THE DIAMETER OF THE DOWELS AND SHALL BE SUBMITTED TO ENGINEER FOR APPROVAL PRIOR TO USE.
2. DOWEL COATING SHALL BE ASPHALTIC COATING.

SIDEWALK PANEL SCHEDULE

SIDEWALK WIDTH = W (FT.)	SIDEWALK THICKNESS = T (IN.)	JOINT SPACING = L (FT.)
4	4	4
5	4	5
6	4	5
7	5	7
8	5	8
9	5	9
10	5	10

TYPICAL SIDEWALK DETAIL

N.T.S.

CITY ENGINEER STATEMENT

All work shall be constructed to City and County of Broomfield STANDARDS AND SPECIFICATIONS. This drawing has been reviewed and found to be in general compliance with these STANDARDS AND SPECIFICATIONS and other Broomfield requirements. **THE ENGINEERING DESIGN AND CONCEPT REMAINS THE RESPONSIBILITY OF THE PROFESSIONAL ENGINEER WHOSE STAMPAND SIGNATURE APPEAR HEREON**.

City Engineer (or Designee) — Date

Date	Description	No.
08/26/25	IF CD100	2
08/12/25	IF CD90	1

Revisions

COLORADO LICENSED — 51524 — PROFESSIONAL ENGINEER — 08/26/25

LANGAN
Langan Engineering and Environmental Services, LLC.
300 Union Boulevard, Suite 405
Lakewood, CO 80228
T: 303.262.2000 www.langan.com

PALISADE PARK FILING NO. 1, REPLAT F LOT 1 LOCATED IN THE SOUTHWEST QUARTER OF SECTION 34, TOWNSHIP 1 NORTH, RANGE 68 WEST OF THE 6TH P.M., CITY AND COUNTY OF BROOMFIELD, STATE OF COLORADO

CITY OF BROOMFIELD
BROOMFIELD COUNTY COLORADO

Drawing Title

PAVING DETAILS

Project No. 532039301
Date AUGUST 2025
Drawn By NF
Checked By BH

Drawing No. C7.4

© 2025 Langan

CHAPTER 17-70 BROOMFIELD MUNICIPAL LANDSCAPE CODE :
https://library.municode.com/co/broomfield/codes/municipal_code?nodeId=TIT17ZO_CH17-70LACO

BROOMFIELD LANDSCAPE REFERENCE MANUAL
https://broomfield.org/DocumentCenter/View/43197/CCOB-Landscape-Reference-Manual--10162023?bidId=

LANDSCAPE AREA TABLE

	AREA in SF	%
TOTAL SITE AREA: (1.172 AC)	51,052	100
BUILDING COVERAGE	4,320	8
HARD SURFACE AREA: (parking lot, sidewalks, etc.):	19,820	39
TOTAL LANDSCAPE AREA	26,912	53
MAXIMUM 30% OF TURF GRASS ALLOWED:	8,074	
% OF TURF GRASS PROVIDED	7,740	29

WATER BUDGET CHART

HYDROZONE	AREA (SF)		WATER NEED (GAL PER SF)		ANNUAL WATER USE (GAL)
High (H)	8,102.0	x	24.9	=	201,740
Moderate (M)	3,268.0	x	11.4	=	37,255
Low (L)	7,000.0	x	3.5	=	24,500
Xeric (Z)	5,379.0	x	0	=	0
Totals	23,749.0				263,495
					11.09 Gal/SF/Season

CURBSIDE LANDSCAPE TABLE

DISTRICT PROVIDED DETACHED WALKS				TREES/SHRUBS REQUIRED / PROVIDED	
AREA	DESCRIPTION	LENGTH	WIDTH PROVIDED	TREES 1/40LF	SHRUBS 1/40SF
A	Eastern Public Sidewalk - Curbside 3' - 6' (minimum shrubs, ornamental grasses optional)	240	5	0 / 8 ex.	30 / BY DISTRICT
B	Southern Public Sidewalk - Curbside 6' - 10' (trees and shrubs required, ornamental grasses optional)	180	Variable	5 / BY DISTRICT	20 / BY DISTRICT
	Curbside over 10' (trees and xeric vegetation required, include landscape beds with shrubs and ornamental grasses)	-			

*District = Palisade Park Metropolitan District No. 2

ATTACHED WALKS					
AREA	DESCRIPTION	LENGTH	NOTES	TREES REQ. 1/20LF	TREES PROVIDED
C	Northern Attached Sidewalk	130	Street trees to be located 4'-5' from edge of sidewalk. May overlap with buffer plantings per 17-70-070 A, 3, ii (3)	7	0*

*Due to utility conflicts, the required street trees were incorporated into the landscape buffer along the northern property line.

PARKING ISLAND PLANTING TABLE

PARKING ISLANDS		TREES/SHRUBS/ORNAMENTAL GRASSES REQUIRED / PROVIDED		
Island Size	Qty.	Trees 1/9'x19' Island	Shrubs 6/9'x19' Island	Ornamental Grasses (max. 30%)
9'x19' min.	2	2 / 2	8 / 8 min.	0 / 0

PARKING LOT PERIMETER PLANTING TABLE

PARKING LOT			TREES/SHRUBS REQUIRED / PROVIDED	
AREA / DESCRIPTION	LENGTH	LANDSCAPE BUFFER WIDTH PROVIDED (min. 4' wide)	TREES 1/40LF of Perimeter	Buffer Treatment
North Perimeter	112 LF	8'	3 / 3	Double row of shrubs
East Perimeter	60 LF	8'	2 / 2	Double row of shrubs

PLANT_SCHEDULE

	KEY	QTY	BOTANICAL / COMMON NAME	SIZE	ROOT		HYDROZONE
DECIDUOUS TREES							
	CO	3	CELTIS OCCIDENTALIS / COMMON HACKBERRY	2.5" CAL.	B&B	N/A	L
	GTSH	2	GLEDITSIA TRIACANTHOS INERMIS 'SHADEMASTER' / SHADEMASTER HONEY LOCUST	2.5" CAL.	B&B	N/A	L
	QS	3	QUERCUS ROBUR 'FASTIGIATA' / SKYROCKET®ENGLISH OAK	2.5" CAL.	B&B	N/A	M
EVERGREEN TREES							
	PC2	3	PICEA PUNGENS / COLORADO SPRUCE	8'-12' HT	B&B	N/A	M
	PE	2	PINUS CEMBROIDES EDULIS / PINYON PINE	6' HT.	B&B	N/A	L/Z
ORNAMENTAL TREES							
	CV	2	CRATAEGUS VIRIDIS 'WINTER KING' / WINTER KING HAWTHORN	2" CAL.	B&B	N/A	L
	KC	3	KOELREUTERIA PANICULATA 'CORAL SUN' / CORAL SUN GOLDEN RAIN TREE	2" CAL.	B&B	N/A	L/Z
	KEY	QTY	BOTANICAL / COMMON NAME	SIZE	ROOT	SPACING	
DECIDUOUS SHRUBS							
	CC2	47	CARYOPTERIS X CLANDONENSIS / BLUEBEARD	3 GAL.	CONTAINER	48" o.c.	L/Z
	CK	52	CORNUS SERICEA 'KELSEYI' / KELSEY'S DWARF RED TWIG DOGWOOD	3 GAL.	CONTAINER	36" o.c.	M
	CL	40	CYTISUS X 'LENA' / LENA BROOM	3 GAL.	CONTAINER	48" o.c.	L
	ES	37	EUONYMUS FORTUNEI 'SUNRISE' / SUNRISE WINTERCREEPER	3 GAL.	CONTAINER	24" o.c.	L
	PF	27	POTENTILLA PARVIFOLIA 'GOLD FINGER' / GOLD FINGER CINQUEFOIL	3 GAL.	CONTAINER	48" o.c.	L/Z
	ST	56	SPIRAEA BETULIFOLIA 'TOR' / WHITE FROST™ BIRCHLEAF SPIREA	3 GAL.	CONTAINER	36" o.c.	M
EVERGREEN SHRUBS							
	JA	43	JUNIPERUS SABINA 'ARCADIA' / ARCADIA JUNIPER	5 GAL.	CONTAINER	54" o.c.	M/L
	JB	49	JUNIPERUS SQUAMATA 'BLUE STAR' / BLUE STAR JUNIPER	5 GAL.	CONTAINER	48" o.c.	M/L
	MF	15	MAHONIA FREMONTII / DESERT MAHONIA	5 GAL.	CONTAINER	96" o.c.	M
	PC4	19	PICEA GLAUCA 'CONICA' / DWARF WHITE SPRUCE	5 GAL.	CONTAINER	60" o.c.	M
	PG	18	PICEA PUNGENS 'GLOBOSA' / DWARF GLOBE BLUE SPRUCE	5 GAL.	CONTAINER	72" o.c.	M
	PA	47	PINUS MUGO 'AUREA' / GOLDEN MUGO PINE	3 GAL.	CONTAINER	48" o.c.	L/Z
	PP3	39	PINUS MUGO 'PUMILIO' / DWARF MUGO PINE	3 GAL.	CONTAINER	72" o.c.	L/Z
GRASSES							
	CA	97	CENCHRUS ALOPECUROIDES / FOUNTAIN GRASS	2 GAL.	CONTAINER	36" o.c.	L
	MSA	113	MISCANTHUS SINENSIS 'ADAGIO' / ADAGIO EULALIA GRASS	2 GAL.	CONTAINER	36" o.c.	M/L
	SL	201	SCHIZACHYRIUM SCOPARIUM / LITTLE BLUESTEM	2 GAL.	CONTAINER	18" o.c.	M/L/Z
SYMBOL	KEY	QTY	BOTANICAL / COMMON NAME	SIZE	ROOT	SPACING	
GROUND COVERS							
	CT	105	CERASTIUM TOMENTOSUM / SNOW IN SUMMER	1 GAL.	CONTAINER	24" o.c.	L
	DA	234	DELOSPERMA ASHTONII 'BLUT' / BLUT ICE PLANT	2 GAL.	CONTAINER	18" o.c.	M/L
	GB	114	GAILLARDIA ARISTATA 'BIJOU' / BIJOU BLANKET FLOWER	1 GAL.	CONTAINER	16" o.c.	M/L
	PR	154	PETROSEDUM RUPESTRE 'ANGELINA' / ANGELINA STONECROP	1 GAL.	CONTAINER	24" o.c.	L
	VB2	179	VERONICA PECTINATA 'BLUE' / BLUE WOOLLY CREEPING SPEEDWELL	1 GAL.	CONTAINER	18" o.c.	L/Z
PERENNIALS							
	HRP	77	HEMEROCALLIS X 'ROYAL PALACE PRINCE' / ROYAL PALACE PRINCE DAYLILY	2 GAL.	CONTAINER	24" o.c.	M/L
	MR	18	MAHONIA REPENS / CREEPING MAHONIA	1 GAL.	CONTAINER	36" o.c.	L
	SOD	7,740 SF	SEE SPECIFICATIONS ON SHEET 6, LANDSCAPE DETAILS.				H

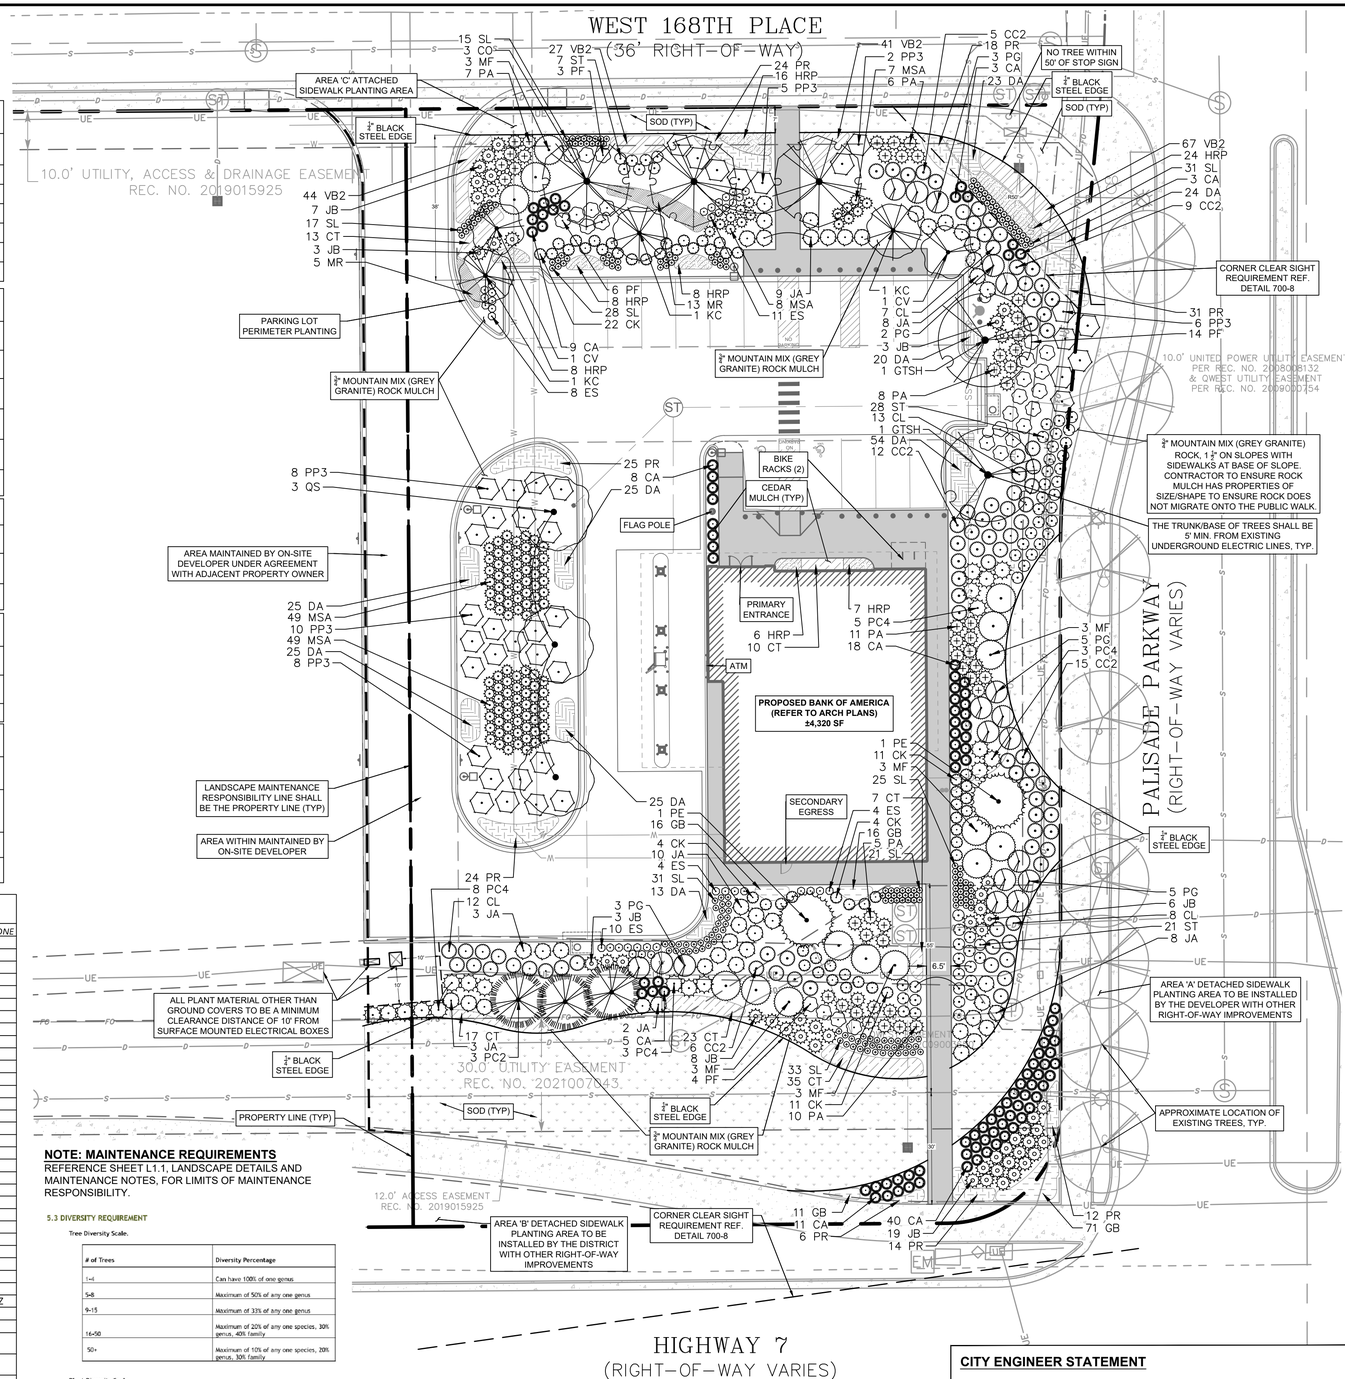

NOTE: MAINTENANCE REQUIREMENTS
REFERENCE SHEET L1.1, LANDSCAPE DETAILS AND MAINTENANCE NOTES, FOR LIMITS OF MAINTENANCE RESPONSIBILITY.

5.3 DIVERSITY REQUIREMENT

Tree Diversity Scale.

# of Trees	Diversity Percentage
1-4	Can have 100% of one genus
5-8	Maximum of 50% of any one genus
9-15	Maximum of 33% of any one genus
16-50	Maximum of 20% of any one species, 30% genus, 40% family
50+	Maximum of 10% of any one species, 20% genus, 30% family

Plant Diversity Scale.

# of Plants (shrubs, ornamental grasses, perennials)	Diversity Percentage
1-10	Can have 100% of one genus
11-25	Maximum of 50% of any one genus
26-75	Maximum of 33% of any one genus
76-100	Maximum of 20% of any one species, 30% genus, 40% family
101+	Maximum of 10% of any one species, 20% genus, 30% family

GRAPHIC SCALE
0 20 40 FEET
1" = 20'

Date	Description	No.
08/26/25	IF CD100	2
08/12/25	IF CD90	1

Revisions

ANNA L. ILAO 0001657 12/31/2026 Original Date of Licensure STATE OF COLORADO LICENSED LANDSCAPE ARCHITECT
date: 8/26/2025

LANGAN
Langan Engineering and Environmental Services, LLC.
300 Union Boulevard, Suite 405
Lakewood, CO 80228
T: 303.262.2000 www.langan.com

PALISADE PARK FILING NO. 1, REPLAT F LOT 1
LOCATED IN THE SOUTHWEST QUARTER OF SECTION 34, TOWNSHIP 1 NORTH, RANGE 68 WEST OF THE 6TH P.M., CITY AND COUNTY OF BROOMFIELD, STATE OF COLORADO

CITY OF BROOMFIELD
BROOMFIELD COUNTY COLORADO

Drawing Title

LANDSCAPE PLAN

CITY ENGINEER STATEMENT

All work shall be constructed to City and County of Broomfield STANDARDS AND SPECIFICATIONS. This drawing has been reviewed and found to be in general compliance with these STANDARDS AND SPECIFICATIONS and other Broomfield requirements. **THE ENGINEERING DESIGN AND CONCEPT REMAINS THE RESPONSIBILITY OF THE PROFESSIONAL ENGINEER WHOSE STAMPAND SIGNATURE APPEAR HEREON.**

City Engineer (or Designee) Date

Project No.	532039301
Date	AUGUST 2025
Drawn By	ACW
Checked By	BH
Drawing No.	L1.0

© 2025 Langan

CCOB STANDARD LANDSCAPE NOTES

a. Soil preparation: three (3) cubic yards of organic material per 1,000 SF of area is the minimum amount. See soil specifications.
b. HMAC to support vehicular paving with concrete curbs and walkways.
c. All utility easements shall remain unobstructed and fully accessible along their entire length for maintenance equipment entry.
d. Any landscaping within sight distance triangles at intersection of driveways shall comply with CCOB Standards and Specifications.
e. The developer, their successors, and assigns, shall be responsible for installation, maintenance and replacement of all landscaping materials shown or indicated on the approved site plan or landscape plan on file in the Planning Division. All landscaping will be installed as delineated on the plan, prior to issuance of certificates of occupancy, unless otherwise agreed upon.
f. All landscaped areas and plant material, with the exception of non-irrigated native, restorative, and dryland grass areas must be watered by an automatic underground irrigation system. Irrigation system design, installation, operation, and maintenance shall conform to requirements found in CCOB 2022 Standards and Specs, Section 161.

LANDSCAPE MAINTENANCE NOTES

17-70-140 - Maintenance of landscaping.

A. For all properties located within the City and County of Broomfield, the property owner shall keep all landscaping in a well-maintained and healthy growing condition. This applies to new development, redevelopment and existing landscape. At a minimum, the following actions are to be taken as needed:
(a) Mowing, irrigating, weeding, fertilizing, pruning, and other maintenance appropriate for the type of plant materials in the property.
(b) Removal of trash, litter, weeds.
(c) Treating plant materials that exhibit evidence of insect, pest or disease damage.
(d) Removing dead or dying plants and shrubs.
(e) Removing and replacing dead plant materials, including trees, that are required by an approved landscaping plan within one year from installation or within one month of written notice of condition, except that during adverse weather conditions, an extension to the following growing season can be granted.
(f) Replenishing natural landscape materials such as mulch, which no longer cover the area in which they were originally deposited so as to achieve full coverage to a minimum depth of three inches.
(g) Repairing, replacing or maintaining landscaping structural features, including but not limited to fountains, reflecting pools, outdoor artwork, screening walls, retaining walls, fences, benches or other street furniture elements, as necessary to maintain these items in good condition, if readily seen from an adjoining street, sidewalk or city-designated trail, park, landscape or open space area.
(h) Any other action necessary to maintain landscaping installed in accordance with an approved landscape plan.
B. Unless otherwise approved within a site development plan or other agreement with Broomfield, all property owners are responsible for the maintenance of landscaping located in the right-of-way adjacent to their property.

PLANTING SOIL SPECIFICATIONS

1. Planting soil should be friable, fertile, well drained, free of debris, toxins, trash and stones over 1" dia., it should have a high organic content suitable to sustain healthy plant growth and should look aesthetically pleasing having no noxious odors.

2. Panting Soil: Contractor shall test soils and furnish samples upon request. Packaged materials shall be unopened bags or containers, each bearing a name, guarantee, and trademark of the producer, material composition, manufacturer's certified analysis, and the weight of the materials. Soil or amendment materials shall be stored on site temporarily in stockpiles prior to placement and shall be protected from intrusion of contaminants and erosion. After mixing, soil materials shall be covered with a tarpaulin until time of actual use.

3. The following testing should be performed and results given to the landscape architect for approval before installation:
a. particle size analysis - loamy sand: 70-85% sand, 15-30% silt and clay
b. fertility analysis: ph (5.5-6.5), soluble salts (0.25-0.60 mmhos/cm), nitrate, phosphate, potassium, calcium and magnesium
c. organic matter content: 7-10%
d. toxic substance analysis
e. material drainage rate: 60% passing in 2 minutes, 40% retained

4. Organic matter as a soil amendment:
a. leaf mold with 60-90% organic content by weight.
b. shredded leaf litter, composted for a minimum of 1 yr. should be free of debris, stones over 1/2", wood chips over 1".
c. spread at a minimum rate of (3) cubic yards of organic matter per 1,000 square feet of area.

Clean soil fill in landscape areas:
Landscape fill material shall have the physical properties of a sandy loam with an organic content of less than 2% and a ph between 5 - 7.

Soil conditioning:
Contractor to provide six inches (6") minimum depth planting soil layer in lawn areas, twelve inches (12") minimum depth planting soil layer in groundcover and perennial areas, eighteen inches (18") minimum depth planting soil layer in shrub areas, and thirty-six inches (36") minimum depth planting soil layer in tree planting areas. Planting soil should be spread over a prepared surface in six inch (6") lifts until full depths are achieved as described above. Planting soil present at the site, if any, may be used to supplement total amount required. Contractor to furnish an analysis of on-site planting soil utilized in all planting areas. Adjust ph and nutrient levels as required to ensure an acceptable growing medium; lower ph using elemental sulfur only, peat moss or copper sulfate may not be used. Ground limestone as a soil amendment material will only be used pending results of soil analysis. Provide with minimum 88% calcium and magnesium carbonates and shall have total 100% passing the 10 mesh sieve, minimum 90% passing 20 mesh sieve, and minimum 60% passing 100 mesh sieve. All debris exposed from excavation and cultivation shall be disposed of at the contractor's expense.

SOD PROJECT NOTES

EROSION CONTROL:
Throughout the project and the maintenance period for turfgrass, it is the Contractor's responsibility to maintain the topsoil in place at specified grades. **Topsoil and turfgrass losses due to erosion or any disturbance from construction activity will be replaced by the Contractor until ESTABLISHMENT and ACCEPTANCE is achieved.**

SOIL PREPARATION:
All slopes and areas disturbed by construction, except those occupied by buildings, structures, or paving shall be graded smooth and four (4") inches of topsoil applied. If adequate topsoil is not available onsite, the Contractor shall provide topsoil as approved by the Owner. The area shall be dressed to typical sections and plowed to a depth of five (5") inches. Soil shall be further prepared by the removal of debris, weeds and stones larger than 3/4 inch in diameter. After tillage and cleaning, all areas to receive turf shall be leveled, fine graded, and drug with a weighted spike harrow or float drag.

GRASS SOD:
Turfgrass sod can not contain more than 20% cool season varieties in mix and should generally match that used by the surrounding development. Sod shall consist of leaf blades, and rhizomes with a healthy, virile system of dense, thickly matted roots throughout the soil of the sod for a thickness not less than three-quarters (3/4") inch. Sod shall be alive, healthy, vigorous, free of insects, disease, stones, and undesirable foreign materials and grasses. The grass shall have been mowed prior to sod cutting so that the height of grass shall not exceed two (2") inches. Sod shall have been produced on growing beds of clay-loam topsoil. Sod shall not be harvested or planted when its moisture condition is so excessively wet or dry that its survival will be affected. All sod is to be harvested, delivered, and planted within a thirty-six (36) hour period of time. Sod shall be protected from exposure to wind, sun, and freezing.

IRRIGATION:
In the absence of an irrigation system or areas beyond the coverage limits of a permanent irrigation system, Contractor shall water sod temporarily to develop adequate growth and establishment before regular maintenance begins. Turf shall be watered until firmly established.

Water shall be furnished by the Contractor with means and methods available to achieve acceptable turf. The water source shall be clean and free of industrial wastes or other substances harmful to the growth of the turf.

MAINTENANCE REQUIREMENTS:
Vegetation should be inspected regularly to ensure that plant material is established properly and remains healthy. Mowing, trimming and supervision of water applications shall be the responsibility of the Contractor until the Owner or Owner's Representative accepts and assumes regular maintenance.

ESTABLISHMENT AND ACCEPTANCE:
All disturbed areas receiving sod shall receive topsoil as specified and be adequately established with turf such that any absence of water will not kill the turf, but promote a state of turf dormancy, until the next rainfall event. Sod to be installed so that there are no gaps between slabs and laid perpendicular to all sloped areas.

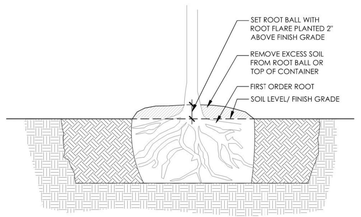

NOTES:
1. PROBE ROOTBALL TO FIND THE FIRST MAIN ORDER ROOT TO DETERMINE THE DEPTH OF THE ROOT FLARE IN THE ROOTBALL. THE ROOT FLARE MAY BE 2"-3" OR DEEPER IN THE ROOTBALL. REMOVE EXCESS SOIL DOWN TO THE TOP OF THE ROOT FLARE ONCE THE TREE IS IN THE PLANTING PIT.
2. VERIFY PLANTING HEIGHT WITH PROJECT MANAGER BEFORE PLANTING THE TREE.

1 ROOT FLARE SECTION - CITY PROVIDED
N.T.S.

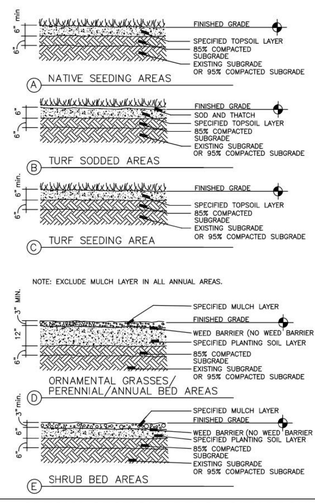

2 SPECIAL SECTION AREAS - CITY PROVIDED
N.T.S.



NOTE: ALL PLANTS SHALL BE PLANTED AT EQUAL TRIANGULAR SPACING (EXCEPT AS SHOWN ON PLAN AS INFORMAL GROUPINGS). REFER TO PLANT LEGEND FOR SPACING DISTANCE BETWEEN PLANTS.

PLANT SPACING	AREA DIVIDER TO DETERMINE NO. OF PLANTS
6"	0.25
8"	0.45
10"	0.69
12"	1
15"	1.56
18"	2.25
24"	4
30"	6.25
36"	9

EXAMPLE: PLANTS AT 18' OC IN 1005F OF PLANTING AREA - 100/2.25 = 44 PLANTS

3 PLANT SPACING - CITY PROVIDED
N.T.S.

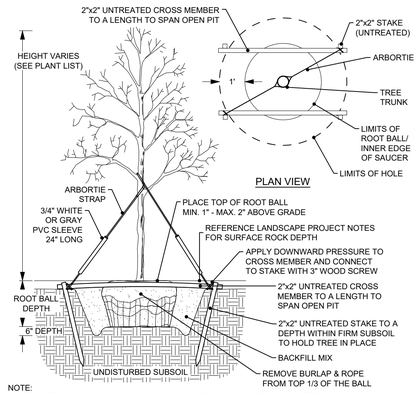

NOTE:
1. ARBORTIE SHOULD ONLY BE USED AS A REMEDIAL MEANS TO PLUMB A TREE WHEN THE PRIMARY BELOW GRADE STAKING CAN NO LONGER BE ADJUSTED EFFECTIVELY AND CONDITIONS ARE WARRANTED BY THE LANDSCAPE ARCHITECT.
2. SEE LANDSCAPE NOTES FOR THE TYPE OF WEED BLOCK AND MULCH MATERIAL TO USE.

6 TREE PLANTING IN SURFACE ROCK
N.T.S.

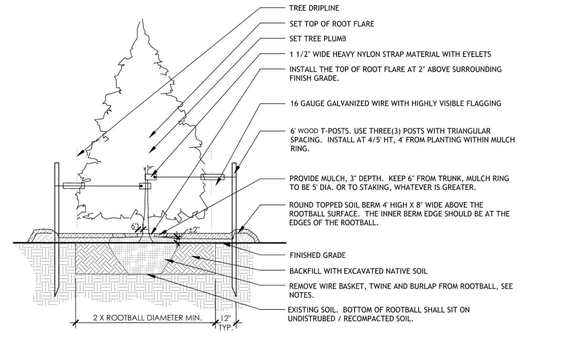

NOTES:
1. DO NOT CUT OR DAMAGE LEADER. PRUNE ALL BROKE, DISEASED OR DEAD WOOD IMMEDIATLY PRIOR TO PLANTING.
2. CLEANLY PRUNE ALL DAMAGED ROOT ENDS. WITH CONTAINER GROWN TREES: CUT ALL CIRCLING ROOTS ON PERIMETER OF ROOTBALL.
3. DO NOT ALLOW ROOTS TO DRY OUT DURING INSTALLTION PROCESS. ANY BROKEN OR CRUMBLING ROOTBALLS WILL BE REJECTED. REMOVING THE WIRE WILL NOT BE AN EXCUSE FOR DAMAGED ROOTBALLS.
4. DEEP WATER AFTER PLANTING. DO NOT ALLOW AIR POCKETS TO FORM WHEN BACKFILLING.
5. APPLY SPECIFIED MULCH 3" ABOVE SOD GRADE.
6. FOR B&B TREES: THE WIRE BASKET, ALL TWINE AND BURLAP ARE TO BE COMPLETELY REMOVED FROM THE TREE'S ROOTBALL AT PLANTING. ALL TWINE, PROTECTIVE SLEEVES, HORTICULTURAL TAPE, FLAGGING AND/OR OTHER MATERIAL USED DURING TRANSPORT OR AT THE NURSERY SHALL BE REMOVED AT PLANTING.
7. THE TREE IDENTIFICATION TAG WITH TREE SPECIES INFORMATION SHALL BE LEFT ON THE TREE FOR FORESTRY OR HORTICULTURE STAFF TO REMOVE.
8. WOOD T-POSTS TO BE REMOVED AT END OF WARRANTY PERIOD.

5 EVERGREEN TREE PLANTING - CITY PROVIDED
N.T.S.

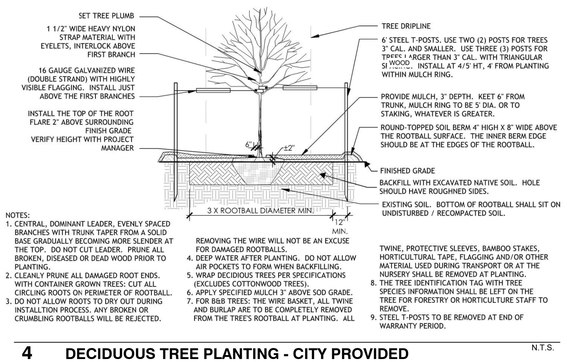

NOTES:
1. CENTRAL, DOMINANT LEADER, EVENLY SPACED BRANCHES WITH TRUNK TAPER FROM A SOLID BASE GRADUALLY BECOMING MORE SLENDER AT THE TOP. DO NOT CUT LEADER. PRUNE ALL BROKEN, DISEASED OR DEAD WOOD PRIOR TO PLANTING.
2. CLEANLY PRUNE ALL DAMAGED ROOT ENDS. WITH CONTAINER GROWN TREES: CUT ALL CIRCLING ROOTS ON PERIMETER OF ROOTBALL.
3. DO NOT ALLOW ROOTS TO DRY OUT DURING INSTALLTION PROCESS. ANY BROKEN OR CRUMBLING ROOTBALLS WILL BE REJECTED. REMOVING THE WIRE WILL NOT BE AN EXCUSE FOR DAMAGED ROOTBALLS.
4. DEEP WATER AFTER PLANTING. DO NOT ALLOW AIR POCKETS TO FORM WHEN BACKFILLING.
5. WRAP DECIDIOUS TREES PER SPECIFICATIONS (EXCLUDES COTTONWOOD TREES).
6. APPLY SPECIFIED MULCH 3" ABOVE SOD GRADE.
7. FOR B&B TREES: THE WIRE BASKET, ALL TWINE AND BURLAP ARE TO BE COMPLETELY REMOVED FROM THE TREE'S ROOTBALL AT PLANTING. ALL TWINE, PROTECTIVE SLEEVES, BAMBOO STAKES, HORTICULTURAL TAPE, FLAGGING AND/OR OTHER MATERIAL USED DURING TRANSPORT OR AT THE NURSERY SHALL BE REMOVED AT PLANTING.
8. THE TREE IDENTIFICATION TAG WITH TREE SPECIES INFORMATION SHALL BE LEFT ON THE TREE FOR FORESTRY OR HORTICULTURE STAFF TO REMOVE.
9. STEEL T-POSTS TO BE REMOVED AT END OF WARRANTY PERIOD.

4 DECIDUOUS TREE PLANTING - CITY PROVIDED
N.T.S.

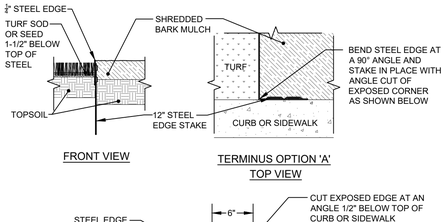

NOTES:
1. INSTALL STEEL EDGING TO UTILIZE FULL SECTIONS UNLESS CONTROLLED OTHERWISE WITH PLAN SHEET DIMENSIONS.
2. CUT STEEL EDGING AT AN ANGLE TO ACHIEVE A FINISHED STEEL EDGE HEIGHT OF 1/2" BELOW THE TOP OF ADJACENT HARDSCAPE.
3. IF STAKING IS NOT AVAILABLE WITHIN 12" OF THE EDGING TERMINATION, INSTALL A SPLICING EDGING STAKE WITHIN 6" OF THE TERMINATING EDGE AS SHOWN WITH OPTION 'B'
4. WHERE POSSIBLE, EDGE TERMINATION SHALL BE INSTALLED AS SHOWN IN TERMINUS OPTION 'A'.

7 STEEL EDGE TERMINATION
N.T.S.

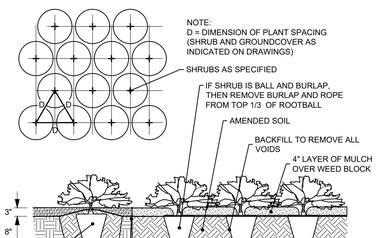

NOTE:
1. SEE LANDSCAPE NOTES FOR THE TYPE OF WEED BLOCK AND MULCH MATERIAL TO USE.
2. OMIT WEED BLOCK WHEN PLANT SPACING IS 18" O.C. OR LESS

8 SHRUB PLANTING AND SPACING
N.T.S.

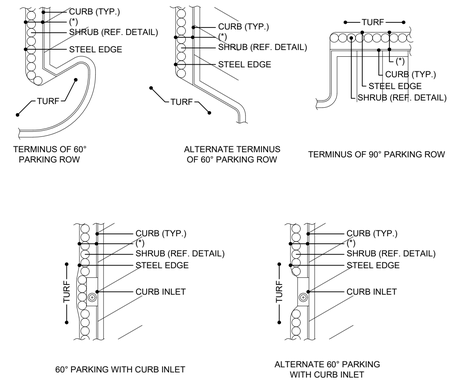

(*) SEE SHRUB PLANTING DETAIL FOR DIMENSIONS.
REFERENCE PLANT MATERIAL LIST FOR PLANT TYPES AND LOCATIONS.

9 GENERAL STEEL EDGE ALIGNMENT EXAMPLES
N.T.S.

Date	Description	No.
08/26/25	IF CD100	2
08/12/25	IF CD90	1

Revisions

ANNA L. ILAO 0001657 12/31/2026 Original Date of Licensure STATE OF COLORADO LICENSED LANDSCAPE ARCHITECT
date: 8/26/2025

LANGAN
Langan Engineering and Environmental Services, LLC.
300 Union Boulevard, Suite 405
Lakewood, CO 80228
T: 303.262.2000 www.langan.com

PALISADE PARK FILING NO. 1, REPLAT F LOT 1
LOCATED IN THE SOUTHWEST QUARTER OF SECTION 34, TOWNSHIP 1 NORTH, RANGE 68 WEST OF THE 6TH P.M., CITY AND COUNTY OF BROOMFIELD, STATE OF COLORADO

CITY OF BROOMFIELD
BROOMFIELD COUNTY COLORADO

Drawing Title

LANDSCAPE DETAILS

THESE PLANS ARE SUBJECT TO REVIEW & APPROVAL BY JURISDICTIONAL ENTITIES.

CITY ENGINEER STATEMENT

All work shall be constructed to City and County of Broomfield STANDARDS AND SPECIFICATIONS. This drawing has been reviewed and found to be in general compliance with these STANDARDS AND SPECIFICATIONS and other Broomfield requirements. **THE ENGINEERING DESIGN AND CONCEPT REMAINS THE RESPONSIBILITY OF THE PROFESSIONAL ENGINEER WHOSE STAMPAND SIGNATURE APPEAR HEREON**.

City Engineer (or Designee) Date

Project No.	Drawing No.
532039301	L1.1
Date: AUGUST 2025	
Drawn By: ACW	
Checked By: BH	

© 2025 Langan

DOOR, FRAME AND HARDWARE SCHEDULE

NUMBER	LOCATION	TYPE	WIDTH	DOOR DIMENSIONS HEIGHT	DOOR DIMENSIONS THICKNESS	DOOR MATERIAL	DOOR FINISH	FRAME MATERIAL	FRAME FINISH	DETAILS HEAD	DETAILS JAMB	DETAILS SILL	HARDWARE GROUP	REMARKS
100		D	(PR) 3' - 0"	8' - 4"	2"	ALUMINUM / GLASS	SEE SHEET NOTE "B"	ALUMINUM	SEE SHEET NOTE "B"	06/A12.02	03/A12.02	06/A12.02	AL-2C	REFER TO SHEET A12.11 FOR MORE INFORMATION
100A	CENTRAL ZONE	D1	3' - 0"	8' - 4"	2"	ALUMINUM / GLASS	SEE SHEET NOTE "E"	ALUMINUM	SEE SHEET NOTE "E"					EMPLOYEE ENTRANCE
101	VESTIBULE	E	(PR) 3' - 0"	8' - 4"	1/2"	ALUMINUM / GLASS	SEE SHEET NOTE "E"	ALUMINUM	SEE SHEET NOTE "E"	04/A12.10	-	04/A12.10	AL-3C	-
102	CENTRAL ZONE	A	3' - 6"	8' - 0"	1 3/4"	WOOD	SEE SHEET NOTE "C"	HOLLOW METAL	SEE SHEET NOTE "C"	10/A12.02	11/A12.02	-	11C	PROVIDE DOOR SCOPE TO BE VIEWED FROM ATM ROOM SIDE
103	24 HR VESTIBULE	H	SEE PLAN	13' - 6 1/2"	2"	ALUMINUM	CLEAR ANODIZED	ALUMINUM	CLEAR ANODIZED	A08.21	A08.21	-	-	PROVIDE KEY SWITCH, EMERGENCY PUSH EXIT AT CENTRAL LOBBY SIDE
105	CENTRAL ZONE	DFC-1A	3' - 0"	7' - 10"	1 3/4"	ALUMINUM / GLASS	-	ALUMINUM	-	-	-	-	-	SEE SHEET NOTE 'N'
106	CENTRAL ZONE	DFC-1A	3' - 0"	7' - 10"	1 3/4"	ALUMINUM / GLASS	-	ALUMINUM	-	-	-	-	-	SEE SHEET NOTE 'N'
107	CENTRAL ZONE	DFC-1A	3' - 0"	7' - 10"	1 3/4"	ALUMINUM / GLASS	-	ALUMINUM	-	-	-	-	-	SEE SHEET NOTE 'N'
108	CENTRAL ZONE	DFC-1A	3' - 0"	7' - 10"	1 3/4"	ALUMINUM / GLASS	-	ALUMINUM	-	-	-	-	-	SEE SHEET NOTE 'N'
109	CENTRAL ZONE	DFC-1A	3' - 0"	7' - 10"	1 3/4"	ALUMINUM / GLASS	-	ALUMINUM	-	-	-	-	-	SEE SHEET NOTE 'N'
110	CENTRAL ZONE	DFC-1A	3' - 0"	7' - 10"	1 3/4"	ALUMINUM / GLASS	-	ALUMINUM	-	-	-	-	-	SEE SHEET NOTE 'N'
111	CENTRAL ZONE	A	3' - 0"	8' - 0"	1 3/4"	WOOD	SEE SHEET NOTE "C"	HOLLOW METAL	SEE SHEET NOTE "C"	10/A12.02	11/A12.02	-	4A	PROVIDE DOOR SCOPE TO BE VIEWED FROM CORRIDOR SIDE
112	MEN'S RESTROOM	A	3' - 0"	7' - 0"	1 3/4"	WOOD	SEE SHEET NOTE "C"	HOLLOW METAL	SEE SHEET NOTE "C"	10/A12.02	11/A12.02	-	9	PROVIDE STOREROOM TYPE LOCK. PROVIDE 3/4" UNDERCUT AT DOOR LEAF. REFER TO MECHANICAL
113	CORRIDOR	A	3' - 0"	7' - 0"	1 3/4"	WOOD	SEE SHEET NOTE "C"	HOLLOW METAL	SEE SHEET NOTE "C"	10/A12.02	11/A12.02	-	8	PROVIDE PRIVACY TYPE LOCK. PROVIDE 3/4" UNDERCUT AT DOOR LEAF. REFER TO MECHANICAL
114	CORRIDOR	A	3' - 0"	7' - 0"	1 3/4"	WOOD	SEE SHEET NOTE "C"	HOLLOW METAL	SEE SHEET NOTE "C"	10/A12.02	11/A12.02	-	8	PROVIDE PRIVACY TYPE LOCK. PROVIDE 3/4" UNDERCUT AT DOOR LEAF. REFER TO MECHANICAL
115	CORRIDOR	A	3' - 0"	7' - 0"	1 3/4"	WOOD	SEE SHEET NOTE "C"	HOLLOW METAL	SEE SHEET NOTE "C"	10/A12.02	11/A12.02	-	16	PROVIDE PRIVACY TYPE LOCK. PROVIDE 3/4" UNDERCUT AT DOOR LEAF
116	BREAK ROOM	A	3' - 0"	7' - 0"	1 3/4"	WOOD	SEE SHEET NOTE "C"	HOLLOW METAL	SEE SHEET NOTE "C"	10/A12.02	11/A12.02	-	11	-
117	CORRIDOR	A	3' - 0"	7' - 0"	1 3/4"	WOOD	SEE SHEET NOTE "C"	HOLLOW METAL	SEE SHEET NOTE "C"	10/A12.02	11/A12.02	-	10	PROVIDE DOOR SCOPE TO BE VIEWED FROM STORAGE SIDE
118A	CENTRAL ZONE	A	3' - 0"	8' - 0"	1 3/4"	WOOD	SEE SHEET NOTE "C"	HOLLOW METAL	SEE SHEET NOTE "C"	10/A12.02	11/A12.02	-	11B	PROVIDE DOOR SCOPE TO BE VIEWED FROM BREAK ROOM SIDE
118B	CORRIDOR	A	3' - 0"	7' - 0"	1 3/4"	WOOD	SEE SHEET NOTE "C"	HOLLOW METAL	SEE SHEET NOTE "C"	10/A12.02	11/A12.02	-	11	PROVIDE DOOR SCOPE TO BE VIEWED FROM BREAK ROOM SIDE
119	CASH WINDOW	A	3' - 0"	7' - 0"	1 3/4"	WOOD	SEE SHEET NOTE "C"	HOLLOW METAL	SEE SHEET NOTE "C"	10/A12.02	11/A12.02	-	12	PROVIDE DOOR SCOPE TO BE VIEWED FROM WORK ROOM SIDE
120	BREAK ROOM	A	3' - 0"	7' - 0"	1 3/4"	WOOD	SEE SHEET NOTE "C"	HOLLOW METAL	SEE SHEET NOTE "C"	10/A12.02	11/A12.02	-	10A	-
121	BREAK ROOM	A	3' - 0"	7' - 0"	1 3/4"	WOOD	SEE SHEET NOTE "C"	HOLLOW METAL	SEE SHEET NOTE "C"	10/A12.02	11/A12.02	-	10B	-
122	CORRIDOR	A	3' - 0"	7' - 0"	1 3/4"	WOOD	SEE SHEET NOTE "C"	HOLLOW METAL	SEE SHEET NOTE "C"	10/A12.02	11/A12.02	-	11D	PROVIDE DOOR SCOPE TO BE VIEWED FROM CALLING CUBES SIDE
123		C	3' - 0"	8' - 0"	1 3/4"	HOLLOW METAL	SEE SHEET NOTE "K"	HOLLOW METAL	SEE SHEET NOTE "K"	14/A09.27	SIM 14/A09.27	13/A09.27	13	-

DOOR TYPES



TYPE A

SINGLE PAINT GRADE SOLID CORE WOOD DOOR 2" HOLLOW METAL FRAME



TYPE C

HOLLOW METAL DOOR 2" HOLLOW METAL FRAME



TYPE D

STOREFRONT DOORS WIDE STILES AND RAILS 1" TEMPERED INSULATED GLASS UNIT AND ALUMINUM FRAME



TYPE D1

STOREFRONT DOORS WIDE STILES AND RAILS 1/2" TEMPERED INSULATED GLASS UNIT AND ALUMINUM FRAME



TYPE E

1/2" TEMPERED MONOLITHIC GLASS DOORS W/ BOTTOM & TOP RAIL

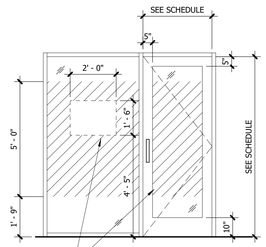

DFC-1A

INTERIOR DOOR AND SIDELITE SYSTEM (BY ALLSTEEL. SEE NOTE N.)

HARDWARE GROUPS:

Hardware Group No. 04A Provide each SGL door(s) with the following:

Quantity	Description	Model Number	Finish	Mfr
3	EA HINGE	5BB1 4.5 x 4.5	652	IVE
1	EA ELECTRIFIED HINGE	5BB1 HW TW4 CON 4-1/2" X...	652	IVE
1	EA ALARMED PANIC DEVICE	RX-98-L-BE-07-ALK	626	VON
1	EA MORTISE CYLINDER	80-132 X CAM AS REQUIRED	626	SCH
1	EA PERMANENT CORE	80-037	626	SCH
1	EA SURFACE CLOSER	4100	689	LCN
1	EA KICK PLATE	8400 10" X 2" LDW B-CS	630	IVE
1	EA WALL STOP	WS406/407CCV	630	IVE
3	EA SILENCER	SR64	GRY	IVE
1	EA POWER SUPPLY	PS902	-	VON
1	EA POWER SUPPLY EXTENSION	CON-6W	-	SCH
1	EA DIGITAL KEYPAD SYSTEM	SK-12	US32D	SN

*CONNECT ELECTRIC STRIKE TO RELAY OUTPUT OUT OF FIRE ALARM SYSTEM

Hardware Group No. 08 Provide each SGL door(s) with the following:

Quantity	Description	Model Number	Finish	Mfr
3	EA HINGE	BB1279 4.5 X 4.5	26D	HAG
1	EA PRIVACY SET	ND40S SPA	626	SCH
1	EA SURFACE CLOSER	4011	689	LCN
1	EA KICK PLATE	8400 10" X 34" LDW	630	IVE
1	EA WALL STOP	WS407CCV	630	IVE
1	SET SEALS	188S	CL	ZER

Hardware Group No. 09 Provide each SGL door with the following:

Quantity	Description	Model Number	Finish	Mfr
3	EA HINGE	BB1279 4.5 X 4.5 NRP	26D	HAG
1	EA STOREROOM LOCK	ND80HD SPA	626	SCH
1	EA SFIC EV B CORE ONLY	80-037	626	SCH
1	EA SURFACE CLOSER	4111 HCUSH	689	LCN
3	EA SILENCER	SR64	GRY	IVE

Hardware Group No. 10 Provide each SGL door(s) with the following:

Quantity	Description	Model Number	Finish	Mfr
3	EA HINGE	BB1168 5 X 4.5	26D	HAG
1	EA STOREROOM LOCK	ND80HD SPA	626	SCH
1	EA SFIC EV B CORE ONLY	80-037	626	SCH
1	EA ELECTRIC STRIKE	1500C (BY SECURITY VENDOR)	630	HES
1	EA STRIKE GUARD	152 (BY SECURITY VENDOR)	630	HES
1	EA SURFACE CLOSER	4011	689	LCN
1	EA WALL STOP	WS407CCV	630	IVE
2	EA DOOR SCOPE	DS/2000-ALS	AL	MIS
3	EA SILENCER	SR64	GRY	IVE
1	EA CARD READER	(BY SECURITY VENDOR)	-	-
1	EA CUSTOM	WIRING DIAGRAM (BY SECURITY VENDOR)	-	-

Hardware Group No. 10A Provide each SGL door(s) with the following:

Quantity	Description	Model Number	Finish	Mfr
3	EA HINGE	BB1279 4.5 X 4.5 NRP	26D	HAG
1	EA PUSH BUTTON LOCK	5031B WL	626	SIM
1	EA SFIC EV B CORE ONLY	80-037	626	SCH
1	EA SURFACE CLOSER	4111 HCUSH	689	LCN
1	EA LOCKSET	L9080 17A XL11-422	626	SCH
1	EA MORTISE CYLINDER	80-101	626	SCH
1	EA CONSTRUCTION CORE	80-037	626	SCH
1	EA SURFACE CLOSER	4111 HCUSH	689	LCN
3	EA SILENCER	SR64	GRY	IVE
1	EA STRIKE GUARD	152 (BY SECURITY VENDOR)	630	HES
1	EA CARD READER	BY SECURITY VENDOR	-	-
1	EA WIRING DIAGRAM	BY SECURITY VENDOR	-	-

Hardware Group No. 10B Provide each SGL door(s) with the following:

Quantity	Description	Model Number	Finish	Mfr
3	EA HINGE	BB1168 5 X 4.5 NRP	26D	HAG
1	EA ELECTRIC STRIKE	1500C (BY SECURITY VENDOR)	630	HES
1	EA MORTISE CYLINDER	80-101	626	SCH
1	EA CONSTRUCTION CORE	80-037	626	SCH
1	EA SURFACE CLOSER	4111 HCUSH	689	LCN
3	EA SILENCER	SR64	GRY	IVE
1	EA STRIKE GUARD	152 (BY SECURITY VENDOR)	630	HES
1	EA CARD READER	BY SECURITY VENDOR	-	-
1	EA WIRING DIAGRAM	BY SECURITY VENDOR	-	-

Hardware Group No. 11 Provide each SGL door(s) with the following:

Quantity	Description	Model Number	Finish	Mfr
3	EA HINGE	BB1279 4.5 X 4.5 NRP	26D	HAG
1	EA PUSH BUTTON LOCK	5031B WL	626	SIM
1	EA SFIC EV B CORE ONLY	80-037	626	SCH
1	EA SURFACE CLOSER	4011	689	LCN
1	EA WALL STOP	WS407CCV	630	IVE
1	EA DOOR SCOPE	DS/2000-ALS	AL	MIS
3	EA SILENCER	SR64	GRY	IVE

Hardware Group No. 11B Provide each SGL door(s) with the following:

Quantity	Description	Model Number	Finish	Mfr
4	EA HINGE	BB1279 4.5 X 4.5 NRP	26D	HAG
1	EA PUSH BUTTON LOCK	5031B WL	626	SIM
1	EA SFIC EV B CORE ONLY	80-037	626	SCH
1	EA SURFACE CLOSER	4011	689	LCN
1	EA KICK PLATE	8400 10" X 34" LDW	630	IVE
1	EA WALL STOP	WS407CCV	630	IVE
3	EA DOOR SCOPE	DS/2000-ALS	AL	MIS
3	EA SILENCER	SR64	GRY	IVE

Hardware Group No. 11C Provide each SGL door(s) with the following:

Quantity	Description	Model Number	Finish	Mfr
4	EA HINGE	BB1168 5 X 4.5	26D	HAG
1	EA STOREROOM LOCK	ND80HD SPA	626	SCH
1	EA SFIC EV B CORE ONLY	80-037	626	SCH
1	EA ELECTRIC STRIKE	1500C (BY SECURITY VENDOR)	630	HES
1	EA STRIKE GUARD	152 (BY SECURITY VENDOR)	630	HES
1	EA SURFACE CLOSER	4111 HCUSH	689	LCN
1	EA DOOR SCOPE	DS/2000-ALS	AL	MIS
3	EA SILENCER	SR64	GRY	IVE
1	EA CARD READER	(BY SECURITY VENDOR)	-	-
1	EA CUSTOM	WIRING DIAGRAM (BY SECURITY VENDOR)	-	-

Hardware Group No. 11D Provide each SGL door(s) with the following:

Quantity	Description	Model Number	Finish	Mfr
3	EA HINGE	BB1279 4.5 X 4.5 NRP	26D	HAG
1	EA PUSH BUTTON LOCK	5031B WL	626	SIM
1	EA SFIC EV B CORE ONLY	80-037	626	SCH
1	EA SURFACE CLOSER	4011	689	LCN
1	EA FLOOR STOP	FS436	626	IVE
1	EA DOOR SCOPE	DS/2000-ALS	AL	MIS
3	EA SILENCER	SR64	GRY	IVE

Hardware Group No. 12 Provide each SGL door(s) with the following:

Quantity	Description	Model Number	Finish	Mfr
3	EA HINGE	BB1279 4.5 X 4.5	26D	HAG
1	EA PUSH BUTTON LOCK	5031B WL	626	SIM
1	EA SFIC EV B CORE ONLY	80-037	626	SCH
1	EA SURFACE CLOSER	4111 EDA	689	LCN
1	EA WALL STOP	WS407CCV	630	IVE
1	EA DOOR SCOPE	DS/2000-ALS	AL	MIS
3	EA SILENCER	SR64	GRY	IVE

Hardware Group No. 13 Provide each SGL door(s) with the following:

Quantity	Description	Model Number	Finish	Mfr
4	EA HINGE	BB1191 4.5 X 4.5 NRP	32D	HAG
1	EA PANIC HARDWARE	98EO X ALK-RSS	626	VON
1	EA MORTISE CYLINDER	80-132	626	SCH
1	EA SURFACE CLOSER	4111 SCUSH	689	LCN
1	SET SEALS	316AS	AL	PEM
1	EA RAIN DRIP	346C	AL	PEM
1	EA DOOR SWEEP	216AV	AL	PEM
1	EA THRESHOLD	325	AL	NGP

Hardware Group No. 14 Provide Roof Hatch with the following:

Quantity	Description	Model Number	Finish	Mfr
1	EA SFIC EV B CORE ONLY	80-037	626	SCH
1	EA PADLOCK	KS21F1200	625	SCH

Hardware Group No. 16 Provide each SGL door(s) with the following:

Quantity	Description	Model Number	Finish	Mfr
3	EA HINGE	BB1279 4.5 X 4.5	26D	HAG
1	PRIVACY SET	L9456HD 17A LS83-363 L283-722 (INCLUDE EMERG. KEYS AND OCCUPY INDICATOR)	626	SCH
1	EA WALL STOP	WS407CCV	630	IVE
3	EA SILENCER	SR64	GRY	IVE

Hardware Group No. AL-1C Provide each door with the following. Substitutions are not permitted:

Quantity	Description	Model Number	Finish	Mfr
4	EA HINGE	BY DOOR MANUFACTURER (BALL BEARING HINGES W/ NON-REMOVABLE PINS)	32D	
1	EA POWER TRANSFER	EPT-2 (BY SECURITY VENDOR)	689	VON
1	EA PANIC HARDWARE	EL98NL-OP (BY SECURITY VENDOR)	626	VON
1	EA RIM CYL W/CONST CORE	80-159	626	SCH
1	EA SFIC EV B CORE ONLY	80-037	626	SCH
1	EA PULL BAR	RM2110-10 1-1/4 inch (2 STANDOFFS PER PULL)	630	ROC
1	EA SURFACE CLOSER	4111 SCUSH	689	LCN
1	EA MOUNTING PLATE	4110-18	689	LCN
1	EA CUSH SHOE SUPPORT	4110-30	689	LCN
1	EA BLADE STOP SPACER	4110-61	689	LCN
1	EA POWER SUPPLY	PS914-2RS (BY DOOR MANUFACTURER)	GRY	VON
1	EA CARD READER	BY SECURITY VENDOR	-	-
1	EA CUSTOM	WIRING DIAGRAM BY HARDWARE SUPPLIER	-	-

Hardware Group No. AL-2C Provide each PR door(s) with the following. Substitutions are not permitted:

Quantity	Description	Model Number	Finish	Mfr
8	EA HINGE	BY DOOR MANUFACTURER (BALL BEARING HINGES W/ NON-REMOVABLE PINS)	32D	
2	EA POWER TRANSFER	EPT-2 (BY SECURITY VENDOR)	689	VON
1	EA PANIC HARDWARE	QEL9847NL-OP (BY SECURITY VENDOR)	626	VON
1	EA PANIC HARDWARE	QEL9847 (BY SECURITY VENDOR)	626	VON
1	EA RIM CYL W/CONST CORE	80-159	626	SCH
1	EA SFIC EV B CORE ONLY	80-037	626	SCH
2	SET PULL BAR	RM2110-78" 1-1/4 inch (2 STANDOFFS PER PULL)	630	ROC
1	EA POWER OPERATOR	ED900-CMP-J8 (BY SECURITY VENDOR)	689	DRM
2	EA PUSH PLATES	10PBJM1 10BOXJAMBFM (BY SECURITY VENDOR)	-	BEA
2	EA AUTOMATIC CAUTION DOOR SIGN*	BY BANK SIGNAGE VENDOR	-	-
1	EA THRESHOLD	325	AL	NGP
1	EA KEYSWITCH	653-14-NS-L2 (BY SECURITY VENDOR)	630	SCE
1	EA SFIC CYLINDER/MORTISE HOUSING LOCK CYLINDER	317-600 (BY SECURITY VENDOR)	26D	KSP
1	EA POWER SUPPLY	PS914-2RS	GRY	VON
1	SET WEATHERSTRIPPING	BY DOOR MANUFACTURER	-	-
1	EA CARD READER	BY SECURITY VENDOR	-	-
1	EA CUSTOM	WIRING DIAGRAM BY HARDWARE SUPPLIER	-	-

*THE SIGN SHALL BE MIN. 6" DIA WITH BLACK LETTERING ON A YELLOW BACKGROUND. THE SIGN SHALL BE PROVIDED ON EACH SIDE OF THE DOOR WHERE THE PUSH BUTTON (SWITCH) IS LOCATED WITH MESSAGE "ACTIVATE SWITCH TO OPERATE". THE LETTERING SHALL BE WHITE AND BACKGROUND SHALL BE BLUE

Hardware Group No. AL-3C Provide each PR door(s) with the following. Substitutions are not permitted:

Quantity	Description	Model Number	Finish	Mfr
2	EA CENTER HUNG TOP PIVOT W/ COVER	CRL860BS	630	CRL
2	EA CENTER HUNG END LOADED MOUNT PIVOT FOR BOTTOM DOOR RAIL	CRL8010DP	-	CRL
2	EA DOOR PULL/DOOR PUSH	RM2110-78" 1-1/4" (2 STANDOFFS PER PULL)	630	ROC
1	EA POWER OPERATOR	ED900-CMP-J8 (BY SECURITY VENDOR)	689	DRM
1	EA PUSH PLATES	10PBJM1 10BOXJAMBFM (BY SECURITY VENDOR)	-	BEA
1	EA AUTOMATIC CAUTION DOOR SIGN*	BY BANK SIGNAGE VENDOR	-	-
1	EA CUSTOM	WIRING DIAGRAM BY SECURITY VENDOR	-	-

*THE SIGN SHALL BE MIN. 6" DIA WITH BLACK LETTERING ON A YELLOW BACKGROUND. THE SIGN SHALL BE PROVIDED ON EACH SIDE OF THE DOOR WHERE THE PUSH BUTTON (SWITCH) IS LOCATED WITH MESSAGE "ACTIVATE SWITCH TO OPERATE". THE LETTERING SHALL BE WHITE AND BACKGROUND SHALL BE BLUE

MILLWORK:

TAG NUMBER	NAME	DESCRIPTION	HEIGHT AND DEPTH	PLAN, ELEVATION & DETAIL LOCATION	REMARKS
MW01	PRINTER	CABINET	HEIGHT: REFER TO DETAIL DEPTH: REFER TO DETAILS	A12.03	COORDINATE U.C. LIGHT LENGTHS WITH MILLWORK CONSTRUCTION
MW05	STORAGE	ADJUSTABLE SHELVES ON STANDARDS	HEIGHT: REFER TO ELEVATION DEPTH: 1'-0"	A12.04	---
MW06A	JANITOR	ADJUSTABLE SHELVES ON STANDARDS	HEIGHT: REFER TO ELEVATION DEPTH: 1'-0"	A12.04	-
MW07	UNIVERSAL CALLING CUBE	BASE CABINET, 1-3" DEEP UPPER CABINET (PROVIDE BACKSPLASH & SIDESPLASH)	HEIGHT: REFER TO ELEVATION DEPTH: 2'-0"	A12.05	COORDINATE U.C. LIGHT LENGTHS WITH O.H. CABINET CONSTRUCTION
MW08	BREAKROOM	BASE CABINET WITH SINK	HEIGHT: REFER TO ELEVATION DEPTH: 2'-0"		-
MW11	TELLER WORK COUNTER	BASE CABINETS W/ TOP COUNTER (PROVIDE BACKSPLASH & SIDESPLASH)	HEIGHT: REFER TO ELEVATION DEPTH: 2'-0"	A12.05	GROMMET COLOR: WHITE
MW12	TELLER WORKROOM	COUNTER OPEN BELOW AND 1'-3" DEEP OPEN UPPER CABINET (PROVIDE BACKSPLASH & SIDE SPLASH)	HEIGHT: REFER TO ELEVATION DEPTH: 2'-0"	A12.05	GROMMET COLOR: WHITE. COORDINATE U.C. LIGHT LENGTHS WITH O.H. CABINET CONSTRUCTION
MW13	WORK ROOM CASH VAULTS	SHELVING/LOCKING CABINET DOORS	HEIGHT: REFER TO ELEVATION DEPTH: 2'-7"	A12.06	SHELVING AND SURROUND, (PL-7)
MW18	ATM ROOM	CABINET AND ADJUSTABLE SHELVES ON STANDARDS	HEIGHT: REFER TO ELEVATION DEPTH: 2'-0"	A12.06	GROMMET COLOR: WHITE
MW21	BREAKROOM COUNTER	OPEN COUNTER W/ SUPPORTS	HEIGHT: REFER TO ELEVATION DEPTH: 2'-0"	A12.06	-

DOOR SHEET NOTES

A. REFER TO SPECIFICATIONS FOR DOOR HARDWARE GROUPS.
B. CURTAINWALL, STOREFRONT, DOORS & FRAMES TO HAVE CLEAR ANODIZED FINISH.
C. PAINT DOORS AND DOOR FRAMES COLOR TO MATCH ADJACENT PARTITION IN SEMI GLOSS ENAMEL FINISH UNLESS NOTED OTHERWISE.
D. PROVIDE BLOCKING AT EACH WALL STOP.
E. DOOR RAILS/FRAME TO BE CLEAR ANODIZED FINISH.
F. ALL DOOR HARDWARE SHALL BE LEVER TYPE MEETING ACCESSIBILITY DESIGN REQUIREMENTS.
G. ALL DOOR HARDWARE SHALL BE SATIN CHROME FINISH (US26D, UNLESS OTHERWISE INDICATED).
H. COORDINATE ALL HARDWARE KEYING WITH THE OWNER AND OBTAIN OWNER'S APPROVAL PRIOR TO PLACING HARDWARE ORDER.
I. VERIFY IN FIELD ALL DIMENSIONS FOR MILLWORK.
J. REFER TO FINISH SCHEDULE FOR WOOD DOOR FINISHES.
K. PAINT FRAME AND DOOR ON INTERIOR SIDE TO MATCH ADJACENT PARTITION COLOR. PAINT FRAME AND DOOR ON EXTERIOR SIDE TO MATCH ADJACENT FINISH.
L. ALL DOORS WITH SECURITY DOOR HARDWARE ARE ALWAYS FREE TO EGRESS FROM WITHIN THE SPACE TO THE EXTERIOR OF THE BUILDING
M. COORDINATE THE INTERFACE OF THE DOOR SECURITY ACCESS SYSTEM DEVICES WITH THE FIRE ALARM SYSTEM DOCUMENTS.
N. GC SHALL PROVIDE ALL COSTS TO FURNISH AND INSTALL THE ALLSTEEL OFFICEFRONT SYSTEM THROUGH BANK VENDOR - HNI GLOBAL (bankofamericasupport@hni.global). DOOR HARDWARE IS INCLUDED UNDER BANK VENDOR SCOPE.
O. ALL DOOR AND SIDELIGHT GLAZING SHALL BE SAFETY GLAZING.

NELSON
Nelco Architecture, Inc.

12400 Coit Road, Suite 510
Dallas, TX. 75251
Phone: (972) 644-8830
Fax: (972) 644-8496

Client Representative:
CUSHMAN & WAKEFIELD
Attn: Paul Hurchanik
Tel: 720.582.6073
Email: paul.hurchanik@cushwake.com

Architect:
Nelco Architecture, Inc.
Attn: Harry Koutsis
Tel: 310.693.5271
Email: hkoutsis@nelsonww.com

AOR Contact
Robert J. Sullivan Jr.
Tel: 216.830.1561
Email:rsullivan@nelsonww.com
License No. ARC.00405343

Civil:
LANGAN
Attn: Ben Henry
Tel: (817) 328-3217
Email: bhenry@langan.com

Structural:
Salas O'Brien
Attn: Julie Bolding
Tel: 469-782-9753
Email: julie.bolding@salasobrien.com

MEP:
Salas O'Brien
Attn: Carly Wood
Tel: 727-804-7626
Email: carly.wood@salasobrien.com

Description:	No:	Date:
IF COE Package		11/09/2023
IF Design Development 90%		07/19/2024
IF Design Development Final		08/19/2024
IF Construction Document Review		09/20/2024
IF Construction Document Final		12/05/2024
IF CD 90		08/15/2025
IF Permit		08/26/2025

BANK OF AMERICA
Broomfield

CO1-111
NWC Hwy 7 and Palisade Pkwy
Broomfield CO, 80023

PROPERTY ID: CO1-111
NSRP VERSION: 2.0
BULLETIN: 2-2025

DOOR, HARDWARE & MILLWORK SCHEDULES

COLORADO LICENSED ROBERT JOHN SULLIVAN JR. 00405343 ARCHITECT
09/04/2025

Project No: 23.0002261.000 Reviewed By: MB

A00.30

C:\Users\rposter\Revit_Locals\2023\CO1-111 Broomfield_for SDP_cgonlin53725.rvt
9/3/2025 4:19:51 PM

EQUIPMENT SCHEDULE

- EQUIPMENT WITHOUT POWER SUPPLY
- EQUIPMENT WITH POWER SUPPLY

NUMBER	DESCRIPTION	MANUFACTURER	MODEL #	DIMENSION	NOTES	ORDERED BY	INSTALLED BY
1. EQUIPMENT BY BANK SECURITY VENDOR: HAMILTON, DIEBOLD, & NCR							
39	ADA SIT DOWN PEDESTAL	DIEBOLD	#19-086720-000A	18.85" W X 20" D X 28.58" H	SD-3-LL (LEFT)/ SD-3-RL (RIGHT)	PJM	BANK VENDOR
41a	FLEX CASH STORAGE SAFE	HAMILTON	15-071	72"H x 40"W x 26"D	COLOR: CHARCOAL GRAY	PJM	BANK VENDOR
43	STAND UP PEDESTAL	DIEBOLD	19-086723-111A	18.85" W X 18.8"D X 38.33" H	SU-4-L2L (LEFT) OR SU-4-R2L (RIGHT)	PJM	BANK VENDOR
56	ATM-WALK UP	SEE SHEET A08.11	SEE SHEET A08.11	-	-	PJM	BANK VENDOR
57	ATM-DRIVE UP	SEE SHEET A08.11	SEE SHEET A08.11	-	-	PJM	BANK VENDOR
2. EQUIPMENT BY SECURITY VENDOR							
58	SECURITY MONITOR	CLINTON	ELECTRONIC LCD MONITOR	15", 17", 19" SCREEN	15" AT CALLING CUBES, 17/19" AT WORK ROOM	PJM	SECURITAS
59	SECURITY CAMERA (INTERIOR DOME)	HANWHA WISENET X	XND-6080RV	6.3" DIA. x 4.67"H	-	PJM	SECURITAS
61	HOLD UP BUTTON	DMP	DMP: 1142-B	3.3"L X 1.6"W X 1.2"H	WIRELESS 2 BUTTON TRANSMITTER; COLOR: WHITE	PJM	SECURITAS
62	ROBBERY LIGHT	DMP	572	2.75"W X 4.5"H	POLYCARBONATE INDICATOR LED WITH STAINLESS STEEL MOUNTING PLATE	PJM	SECURITAS
63	SECURITY CAMERA (INTERIOR BOX)	HANWHA WISENET	XNB-6000	2.88"W x 2.62"H x 5.82"D	COLOR: WHITE	PJM	SECURITAS
82	ATM POINT OF CONNECTION	-	-	-	-	PJM	SECURITAS
86	DOOR CONTACT WIRELESS	DMP	1101-W	4.65"L X 3.1"W X 1.4"H	COLOR: WHITE	PJM	SECURITAS
94	SECURITY PANEL (KEYPAD)	DMP	7872-WBOA	5.8"W x 4.13"H x 0.6"D	COLOR: WHITE	PJM	SECURITAS
99	MOTION DETECTOR	DMP	1127W-W	2.7"W x 1.77"D" x 4.33H	COLOR: WHITE	PJM	SECURITAS
100	CARD READER	PARABIT	200-10095-BT-2X	-	-	PJM	SECURITAS
101	CARD READER	DMP	HID MP-5365 OR TL-5395	-	-	PJM	SECURITAS
102	MOTION DETECTOR 360	DMP	1126R-W	4"DIA X 2"H	COLOR: WHITE	PJM	SECURITAS
103	KEY FOB TRANSMITTER	DMP	1144-2	1.98"W X 0.6"D X 1.98"H	COLOR: BLACK	PJM	SECURITAS
105	BANDIT BARRIER TRANSACTION CAMERA	WISENET	SLA-T2815B	-	SURFACE: 400-10056, EDGE 400-10055	SECURITY	SECURITAS
106	SECURITY MONITOR @ TELLER STATION	ORION	10REDPW	10.6" W x 2.8" D x 9" H	-	SECURITY	SECURITAS
3. EQUIPMENT BY OWNER (REFER TO NOTES FOR INSTALLATION BY CONTRACTOR)							
7	COMBO BOARD (CORK/WHITE)	STAPLES	#518886 W/ QUARTET ACCESSORIES	48" W x 36" H	COLOR: CORK/WHITE, NATURAL FINISH. CONTRACTOR TO INSTALL, ONLY	PJM	GC/PJM
9	WALL CLOCK - 10 IN. BLAC QUARTZ	STAPLES	#32436	10" DIAMETER	BLACK BEZEL AND WHITE FACE. REQUIRES AA BATTERY. CONTRACTOR TO INSTALL, ONLY	PJM	GC/PJM
10	LAPTOP, LAPTOP STAND, KEYBOARD, MOUSE	-	-	-	-	TECHNOLOGY	HP/TPM
10A	MONITOR	DELL	P2419H	BELL P2410H	-	TECHNOLOGY	HP/TPM
11	MONITOR	-	-	15" SCREEN	ENERGY STAR GOLD	TECHNOLOGY	HP/TPM
12	PRINTER	HP	LJ E50145	-	-	TECHNOLOGY	HP/TPM
14	COUNTER COPIER/FAX	HP	M528 MULTI PRINTER	20.3"W X 21.6"D X 28.2"H	INCLUDES CE530A 500 SHEET ACCESSORY	TECHNOLOGY	HP/TPM
22	PRINTER	BROTHER	MFC-J5855	-	-	TECHNOLOGY	HP/TPM
23	CORDLESS PHONE	CISCO	CP-7920	2.1"W X 1"D X 5"H	BACK TELLER LINE.	TECHNOLOGY	BLACKBOX
24	PHONE	CISCO	8862 - WALL MOUNT	10.5"W X 6.0"D X 8.2"H	COLOR: BLACK	TECHNOLOGY	BLACKBOX
25	QUICK SERVICE TERMINAL	VERIFONE	MX 925	8.6"W X 2.2"D X 9.1"H	-	TECHNOLOGY	BLACKBOX
26	CURRENCY COUNTER	PRO NOTE	1.5 (G&D)	335 X 280 X 270MM	STANDARD FOR NEW FC IS 1 POCKET	TECHNOLOGY	HP/TPM
26A	CURRENCY COUNTER	BPS	C2-2 (G&D)	510 X 330 X 390MM	-	TECHNOLOGY	HP/TPM
29	CART	STAPLES	810832	37.75"W x 40.25"D x 20"D	COLOR: GRAY	-	-
30	COUNTER CHECK SEPARATOR	MMF	266066404	16.25"W X 8"D X 4"H	COLOR: BLACK	-	-
32	SIX POCKET FORM HOLDER	MMF	267460604	8"W X 3 5/8"D X 6"H	COLOR: SMOKE	-	-
51	DOUBLE TRASH & RECYCLING CONTAINERS	RECYCLE AWAY	SIMPLE SORT DOUBLE RECYCLING STATION	22" L X 20" W X 30" H	RECYCLABLES: BLUE, WASTE: BLACK	PJM	GC/PJM
55	ROLLING RECYCLE BIN	SHRED IT	-	42"H x 24"W x 30"D	COLOR: GRAY	PJM	GC/PJM
64	HAND SANITIZER	GOJO PURELL	FMX-12 DISPENSER	6.125" W x 5.125" D x 10.625" H	COLOR: WHITE	PJM	GC/PJM
66	DESK SIDE RECYCLE CONTAINER	RUBBERMAID	2955-73	8.25"W x 11.38" L x 12.13" H	-	PJM	GC/PJM
69	CORK BOARD	STAPLES	#ST52462-CC; QUARTET	36"W x 48"H	-	PJM	GC/PJM
71	CREDIT CARD TERMINAL	FIRST DATA	FD50TI	3.7"W x 7.8"D x 3.5"H	-	-	-
88	US FLAG & FLAG POLE	EXTERNAL HALYARD FLAG POLE WITH US FLAG	-	-	ORDER WITH TOP BEACON LIGHT	PJM	GC/PJM
93	85" MEDIA MONITOR MOUNT	LEGRAND	LSTU LARGE THINSTALL FIXED WALL DISPLAY MOUNT	-	-	PJM	GC/PJM
96	TABLET STORAGE	MIDDLE ATLANTIC PRODUCTS	PTRK-2126	26.93"W x 26.93"D x 45.91H"	-	-	-
111	WALL MOUNT MONITOR ARM	HUMANSCALE	M21HMSETB (SILVER W/ GREY TRIM) WALL MOUNT	-	COLOR: SILVER W/ GREY TRIM	B&N	GC
112	FLIP SWITCH	STARTECH	SV231DPUA	-	-	TECHNOLOGY	HP/TPM
113	SECURITY MONITOR MOUNTING ARM	ERGOTRON	45-232-200 SINGLE MONITOR ARM	-	-	B&N	GC
115	QST MOUNT	LOW CONTOUR STAND	367-2481	-	-	TECHNOLOGY	BLACKBOX
117	CHECK SCANNER	PANINI EVERNEXT SCANNER	-	6.1" W X 8.9" L X8.4" H	-	TECHNOLOGY	BLACKBOX
118	PROOF WORK TRAY	BANK STANDARD	-	-	-	BOFA	BOFA
119	BANK DESPOSIT SLIP TRAY	BANK STANDARD	-	-	-	BOFA	BOFA
141	HP THUNDERBOLT DOCK	HP	-	-	-	TECHNOLOGY	BANK VENDOR
142	CONTACTLESS CARD READER	MAGTEK	-	-	-	TECHNOLOGY	BANK VENDOR
WHS-FC	WELLNESS HAND SANITIZER	FINANCIAL CENTERS	-	14.81"W x 13"D x 48.75"H	-	PJM	GC/PJM
4. EQUIPMENT BY CONTRACTOR							
1	FIREMAN'S LOCKBOX	KNOXBOX	3200 - BLACK POWDER COAT	7" H x 7" W x 3" D (RECESSED MOUNT)	COORDINATE WITH AHJ/FIRE MARSHALL FOR MOUNTING LOCATION	GC	GC
3	COAT HOOKS	REFER TO SPECIFICATIONS SECTION 12 90 00	CHROME HOOKS, DOUBLE PRONG UNIT	-	COAT RACK WITH 3 HOOKS ON BAR. 2 BARS AND 6 HOOKS IN TOTAL	GC	GC
15	MICROWAVE	GE	#JES2051SNSS	24.125" W x 13.625" H x 19.25" D	COLOR: STAINLESS STEEL	GC	GC
16	REFRIGERATOR (FULL SIZE)	GE	GIE18GSNRSS	28" W x 67.375" H x 32.875" D	COLOR: STAINLESS STEEL	GC	GC
65	FILTERED WATER DISPENSER	ION	TS400	16.2"W x 13.6"D x 20.6"H	COLOR: TITANIUM WITH CHARCOAL TRIM	GC	GC
107	TRASH CAN - WELLNESS ROOM	HONEY CAN DO 3.2 GAL S.S. OVAL STEP TRASH CAN	SILVER, ITEM #985602, MODEL #TRS-01447	15.37"H X 11.75"W X 10.12"D	COLOR: SILVER, STAINLESS STEEL. SUPPLIED BY RDX	GC	GC
108	SOUND MACHINE	PURE ENRICHMENT	PESLEEP W/853975005477	8.2" X 10.5" X 6.0"	PLACE UNIT ON TABLE	GC	GC
FEC-1	FIRE EXTINGUISHER CABINET - FRONT OF HOUSE	REFER TO SPECIFICATIONS SECTION 10 44 00	-	-	COLOR: WHITE; RECESSED	GC	GC
FEC-2	EXTINGUISHER BRACKET	REFER TO SPECIFICATIONS SECTION 10 44 00	-	-	COLOR: BLACK	GC	GC

FINISH LEGENDS

TAG	DESCRIPTION	MANUFACTURER	MODEL NO.	STYLE/COLOR	CONTACT	Notes	Ordered By	Installed By
CARPET								
CPT-10	Carpet	Tarkett	Scape One w/ Powerbond Ethos Cushion	113963843-80A	BOACONTRACT@TARKETT.COM	Synthetic Non-Woven Dynex	PJM	TARKETT
CEILING TILE								
ACT-4	CALLA - 24" x 24" x 1"	ARMSTRONG	2824	WHITE SQUARE TEGULAR 9/16"	-	UCR, CENTRAL ZONE. CEILING GRID SUPRAFINE ML 9/16" EXPOSED TEE	GC	GC
ACT-5	ULTIMA - 24" x 48" x 3/4"	ARMSTRONG	1914	WHITE	-	BACK OF HOUSE	GC	GC
CERAMIC TILE								
CT-12	CERAMIC TILE	DALTILE	COLOR WHEEL COLLECTION	Desert Gray X714 MATTE	BOACONTRACT@TARKETT.COM	3"H x 6"W Stacked pattern	PJM	TARKETT
CT-12C	CERAMIC TILE	DALTILE	COLOR WHEEL COLLECTION A3361	Desert Gray X714 MATTE	BOACONTRACT@TARKETT.COM	Flat top cove base	PJM	TARKETT
CT-14	PORCELAIN TILE 12" x 24" x 3/8"	KAREN PEARSE GLOBAL DIRECT	BADAC	EVEREST DARK	BOACONTRACT@TARKETT.COM	SIZE: 12"x24"x3/8" THICK. GROUT: G-10 1/8" THICK.COLOR: STERLING SILVER 78	PJM	TARKETT
CT-16	GLAZED PORCELAIN	DALTILE	VOLUME 1.0	STEREO GREY	BOACONTRACT@TARKETT.COM	12" x 12" x 5/16"; GROUT - G-11 MAPEI SILVER	PJM	TARKETT
G-9	RESTROOM WALL TILE GROUT	MAPEI	-	#02 PEWTER	BOACONTRACT@TARKETT.COM	MUST BE USED WITH CT-12	PJM	TARKETT
G-10	TILE GROUT	LATICRETE	-	#78 STERLING SILVER	BOACONTRACT@TARKETT.COM	MUST BE USED WITH CT-14	PJM	TARKETT
G-11	TILE GROUT	MAPEI	-	#27 SILVER	BOACONTRACT@TARKETT.COM	MUST BE USED WITH CT-16	PJM	TARKETT
GLAZING FILM (BAC PROPIETARY)								
FLM-25	DISTRACTION GRAPHIC FILM	GPI	BUMPER STRIPE	FROSTED DISTRACTION BAND	DARYL SLADEK, 815.726.3288, DARYL@GPI920.COM.	-	PJM	GPI
FLM-28	OFFICE FADE FILM 5' HIGH	GPI	MICRODOT	BRONZE	DARYL SLADEK, 815.726.3288, DARYL@GPI920.COM.	-	PJM	GPI
SS-M-G	SPECIALIST OFFICE REMOVABLE SIGNAGE	GPI	-	-	DARYL SLADEK, 815.726.3288, DARYL@GPI920.COM.	-	PJM	GPI
LAMINATES (BAC PROPRIETARY)								
CL-1	CABINET LINER TYPE 101	WILSONART	-	WHITE (#1570-60)	RICHELLE SIGAFOOS, 215.219.1133, SIGAFOR@WILSONART.COM	-	GC	GC
PL-7	LAMINATE	WILSONART	-	DESIGNER WHITE MATTE (#D354-60)	RICHELLE SIGAFOOS, 215.219.1133, SIGAFOR@WILSONART.COM	-	GC	GC
PAINT (BAC PRESCRIPTIVE/BASIS OF DESIGN)								
P-14	INTERIOR PAINT FOR METAL LADDER	BENJAMIN MOORE	2118-10	UNIVERSAL BLACK	DIANA RATTAZZI - diana.rattazzi@benjaminmoore.com	FINISH: LATEX FLOOR & PATIO (N122) OVER COROTECH ACRYLIC METAL PRIMER (V110)	GC	GC
P-15	PRIMARY WALLS/CEILINGS	BENJAMIN MOORE	OC-152	SUPER WHITE	DIANA RATTAZZI - diana.rattazzi@benjaminmoore.com	EGGSHELL FINISH FOR WALLS, FLAT FINISH FOR CEILINGS, SEMI-GLOSS FINISH FOR DOORS & FRAMES	GC	GC
P-16	FEATURE/ACCENT WALL PAINT	BENJAMIN MOORE	Color Number 1472	Silver Chain	DIANA RATTAZZI - diana.rattazzi@benjaminmoore.com	EGGSHELL FINISH FOR WALLS, SEMI-GLOSS FINISH FOR DOORS & FRAMES	GC	GC
P-17	FEATURE/ACCENT WALL PAINT	BENJAMIN MOORE	HC-178	CHARCOAL SLATE	DIANA RATTAZZI - diana.rattazzi@benjaminmoore.com	EGGSHELL FINISH FOR WALLS, SEMI-GLOSS FINISH FOR DOORS & FRAMES	GC	GC
P-18	FEATURE/ACCENT WALL PAINT	BENJAMIN MOORE	2132-30	BLACK HORIZON	DIANA RATTAZZI - diana.rattazzi@benjaminmoore.com	EGGSHELL FINISH FOR WALLS, SEMI-GLOSS FINISH FOR DOORS & FRAMES	GC	GC
P-19	FEATURE/ACCENT WALL PAINT	BENJAMIN MOORE	AF-565	MYSTERIOUS	DIANA RATTAZZI - diana.rattazzi@benjaminmoore.com	EGGSHELL FINISH FOR WALLS, SEMI-GLOSS FINISH FOR DOORS & FRAMES	GC	GC
P-20	FEATURE/ACCENT WALL PAINT - ALONG WC-22	BENJAMIN MOORE	HC-154	HALE NAVY	DIANA RATTAZZI - diana.rattazzi@benjaminmoore.com	EGGSHELL FINISH FOR WALLS, SEMI-GLOSS FINISH FOR DOORS & FRAMES	GC	GC
P-24	FEATURE/ACCENT WALL PAINT - ALONG WC-22	SCUFFMASTER	SCRUBTOUGH ST9824	THIS PAINT IS A MATCH FOR PT-15	-	-	GC	GC
P-26	FEATURE/ACCENT WALL PAINT - ALONG WC-22	SCUFFMASTER	SCRUBTOUGH ST11276	THIS PAINT IS A MATCH FOR PT-18 AND P-20	-	-	GC	GC
VINYL COMPOSITION TILE								
VCT-2	VINYL COMPOSITION TILE	TARKETT	TARKETT VCT II	STONE GREY QUARTZ 602	BOACONTRACT@TARKETT.COM	-	PJM	TARKETT
WALK-OFF MAT								
WM-1	RECESSED ROLL-UP RAIL MAT	REESE ENTERPRISES, INC	PERFEC MAT	POLYPROPYLENE BRUSH: GRAY	BARTLEY SALES COMPANY 952.929.001	TREAD RAILS - ANODIZED ALUMINUM - CLEAR / 2" SQUARE VINYL EDGE - BLACK / RUBBER HINGE	PJM	TARKETT
WALL BASE "BASIS OF DESIGN"								
B-11	4.5" H x 3/8" Thick	Tarkett/ Johnsonite	Baseworks Thermoset Rubber (Type TS)	Black Pearl 82	BOACONTRACT@TARKETT.COM	-	PJM	TARKETT
B-12	4"x1/8" RUBBER WALL BASE	Tarkett/ Johnsonite	Baseworks Thermoset Rubber (Type TS)	IRON MOUNTAIN TG3	BOACONTRACT@TARKETT.COM	-	PJM	TARKETT
WALLCOVERING (BAC PERFORMANCE)								
WC-2	GLASS FIBER REINFORCED PLASTIC PANEL	-	-	WHITE	-	FINISH: GELCOATED, MOLDED PEBBLE TEXTURE	GC	GC
WC-3	FIBER REINFORCED PLASTIC PANEL	MARLITE	SYMMETRIX SMARTSEAML	GRIZEL	-	GROUT TO MATCH TILE COLOR; PANEL SIZE 48" X 96"; TILE CONFIGURATION 6" X 3" RUNNING BOND; SCORING WIDTH 1/8"; EDGE PROFILE HALF GROOVES ON 4 SIDES	GC	GC
WC-18	WALL COVERING - FULL FELT PANELS	TURF	-	COLOR: CHARCOAL #6; 9MM THICK FELT	MARY KELLER COSTA - HBF (704)280-6299 MKCOSTA@CMGREPS.COM	FURNISHED AND INSTALLED BY GC; WALL SURFACE TO BE LEVEL 5	GC	GC
WC-22	WALL COVERING	GPI	DIMESIONAL EFFECT WITH SPOT GLOSS PATTERN	HALE NAVY - SATIN	DARYL SLADECK 815.726.3288 DARYL@GPI920.COM	FURNISHED AND INSTALLED BY GPI; WALL SURFACE TO BE LEVEL 5; PREP WALL WITH BM FRESH START HIGH HIDING ALL PURPOSE INTERIOR/EXTERIOR PRIMER TINTED WITH PRIMER DEEP BASE (046 04); ALLOW TO DRY 10 DAYS MIN. BEFORE WALL COVERING APPLICATION	PJM	GPI

NELSON
Nelco Architecture, Inc.

12400 Coit Road, Suite 510
Dallas, TX. 75251
Phone: (972) 644-8830
Fax: (972) 644-8496

Client Representative:
CUSHMAN & WAKEFIELD
Attn: Paul Hurchanik
Tel: 720.582.6073
Email: paul.hurchanik@cushwake.com

Architect:
Nelco Architecture, Inc.
Attn: Harry Koutsis
Tel: 310.693.5271
Email: hkoutsis@nelsonww.com

AOR Contact
Robert J. Sullivan Jr.
Tel: 216.830.1561
Email:rsullivan@nelsonww.com
License No. ARC.00405343

Civil:
LANGAN
Attn: Ben Henry
Tel: (817) 328-3217
Email: bhenry@langan.com

Structural:
Salas O'Brien
Attn: Julie Bolding
Tel: 469-782-9753
Email: julie.bolding@salasobrien.com

MEP:
Salas O'Brien
Attn: Carly Wood
Tel: 727-804-7626
Email: carly.wood@salasobrien.com

Description:	No:	Date:
IF COE Package		11/09/2023
IF Design Development 90%		07/19/2024
IF Design Development Final		08/19/2024
IF Construction Document Review		09/20/2024
IF Construction Document Final		12/05/2024
IF CD 90		08/15/2025
IF Permit		08/26/2025

BANK OF AMERICA
Broomfield

CO1-111
NWC Hwy 7 and Palisade Pkwy
Broomfield CO, 80023

PROPERTY ID:	CO1-111
NSRP VERSION:	2.0
BULLETIN:	2-2025

EQUIPMENT & FINISH LEGENDS

COLORADO LICENSED
ROBERT JOHN SULLIVAN JR.
00405343
REGISTERED ARCHITECT
09/04/2025

Project No: 23.0002261.000 Reviewed By: MB

A00.40

C:\Users\cpoaler\Revit_Locals\2023\CO1-111 Broomfield_for SDP_cpoaler53725.rvt
9/3/2025 4:19:55 PM

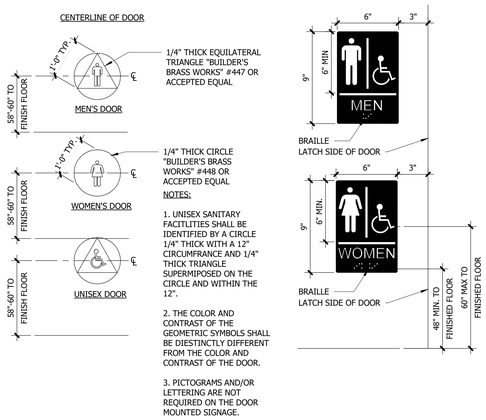

13 RESTROOM DOOR SIGNAGE
N.T.S.

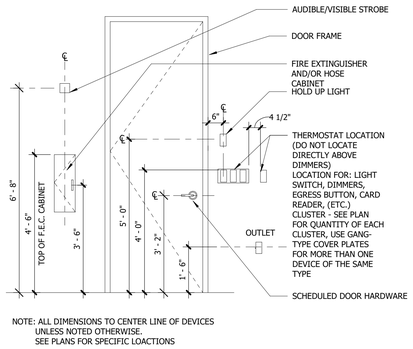

NOTE: ALL DIMENSIONS TO CENTER LINE OF DEVICES UNLESS NOTED OTHERWISE. SEE PLANS FOR SPECIFIC LOACTIONS

10 MOUNTING HEIGHTS
N.T.S.

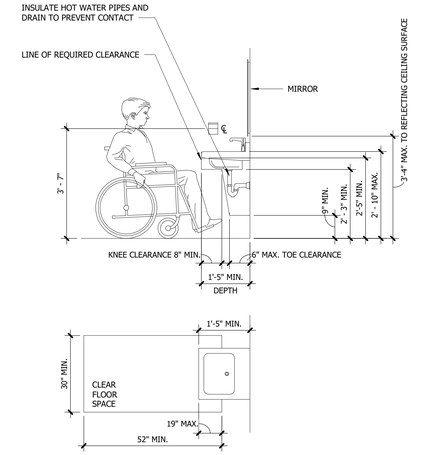

7 SINK OR VANITY
N.T.S.

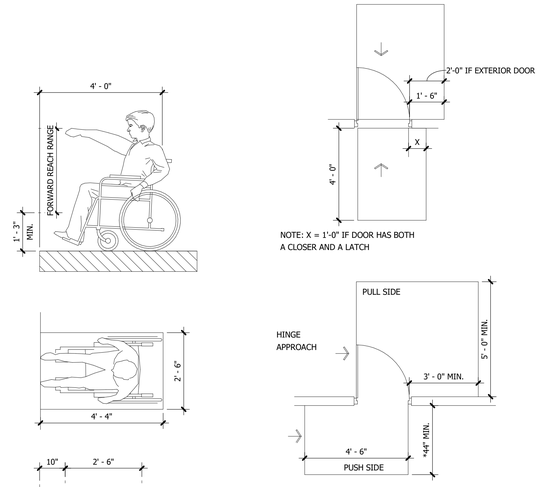

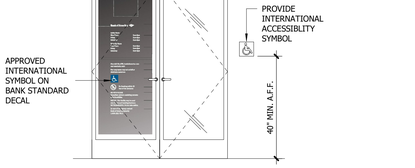

12 RESTROOM SIGNAGE
N.T.S.

SIGNAGE TO COMPLY WITH THE FOLLOWING:

1. TACTILE SIGN - MNFR: "COMPLIANT SIGNS" - MODEL:RRE-6SS_WHITE_ON_CHARCOAL GRAY - WHITE TEXT ON CHARCOAL GRAY BACKGROUND
2. RAISED LETTERS TO BE SANSERIF, UPPER CASE FONT, 5/8" MIN., 2" MAX. HEIGHT, RAISED 1/32" MIN. ABOVE BACKGROUND.
3. GRADE 2 BRAILLE DOTS SPACED 1/10" ON CENTER IN EACH CELL WITH 3/10" SPACE BETWEEN CELLS, RAISED 1/31" MINIMUM ABOVE THE BACKGROUND.
4. INSTALL TACTILE SIGN ON STRIKE SIDE OF DOOR.

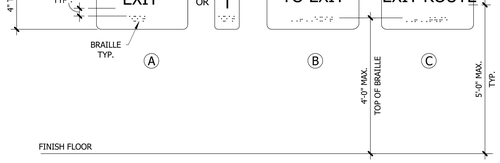

9 TACTILE SIGNAGE
N.T.S.

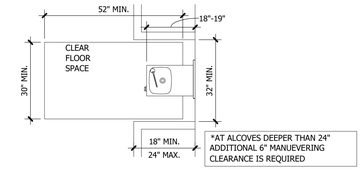

6 DRINKING FOUNTAIN - SINGLE
N.T.S.

COLOR:	CONTRASTING BACKGROUND AND COPY
COPY TYPE:	3/4" LETTER HEIGHT, UPPER CASE, SANS-SERIF, 1/32" RAISED LETTERS (UNO)
BRAILLE:	GRADE 2 BRAILLE POSITIONED DIRECTLY BELOW TEXT
MOUNTING HEIGHT:	5'-0" A.F.F TO CENTER LINE OF SIGN

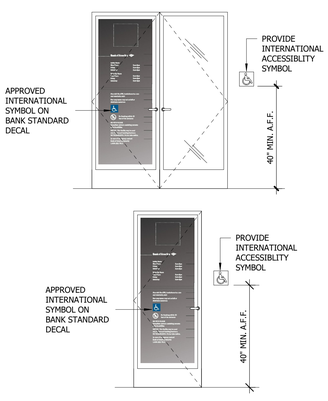

11 ACCESSIBLE ENTRANCE SIGNAGE
N.T.S.

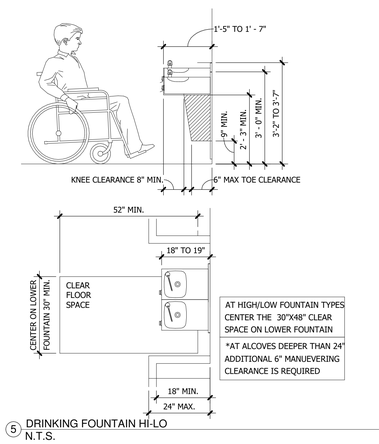

5 DRINKING FOUNTAIN HI-LO
N.T.S.

4 REACH RANGES
N.T.S.

2 CLEARANCES
N.T.S.

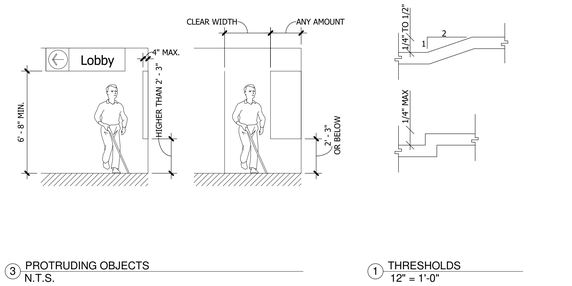

3 PROTRUDING OBJECTS
N.T.S.

1 THRESHOLDS
12" = 1'-0"

NELSON
Nelco Architecture, Inc.

12400 Coit Road, Suite 510
Dallas, TX. 75251
Phone: (972) 644-8830
Fax: (972) 644-8496

Client Representative:
CUSHMAN & WAKEFIELD
Attn: Paul Hurchanik
Tel: 720.582.6073
Email: paul.hurchanik@cushwake.com

Architect:
Nelco Architecture, Inc.
Attn: Harry Koutsis
Tel: 310.693.5271
Email: hkoutsis@nelsonww.com

AOR Contact
Robert J. Sullivan Jr.
Tel: 216.830.1561
Email:rsullivan@nelsonww.com
License No. ARC.00405343

Civil:
LANGAN
Attn: Ben Henry
Tel: (817) 328-3217
Email: bhenry@langan.com

Structural:
Salas O'Brien
Attn: Julie Bolding
Tel: 469-782-9753
Email: julie.bolding@salasobrien.com

MEP:
Salas O'Brien
Attn: Carly Wood
Tel: 727-804-7626
Email: carly.wood@salasobrien.com

Description:	No:	Date:
IF Design Development Final		08/19/2024
IF Construction Document Review		09/20/2024
IF Construction Document Final		12/05/2024
IF CD 90		08/15/2025
IF Permit		08/26/2025

BANK OF AMERICA
Broomfield

CO1-111
NWC Hwy 7 and Palisade Pkwy
Broomfield CO, 80023

PROPERTY ID:	CO1-111
NSRP VERSION:	2.0
BULLETIN:	2-2025

ACCESSIBILITY DETAILS

COLORADO LICENSED
ROBERT JOHN SULLIVAN JR.
00405343
ARCHITECT
09/04/2025

Project No: 23.0002261.000 Reviewed By: MB

A00.41

9/3/2025 4:19:58 PM C:\Users\cgosier\Revit_Locals\2023\CO1-111 Broomfield_for SDP_cgosier53725.rvt

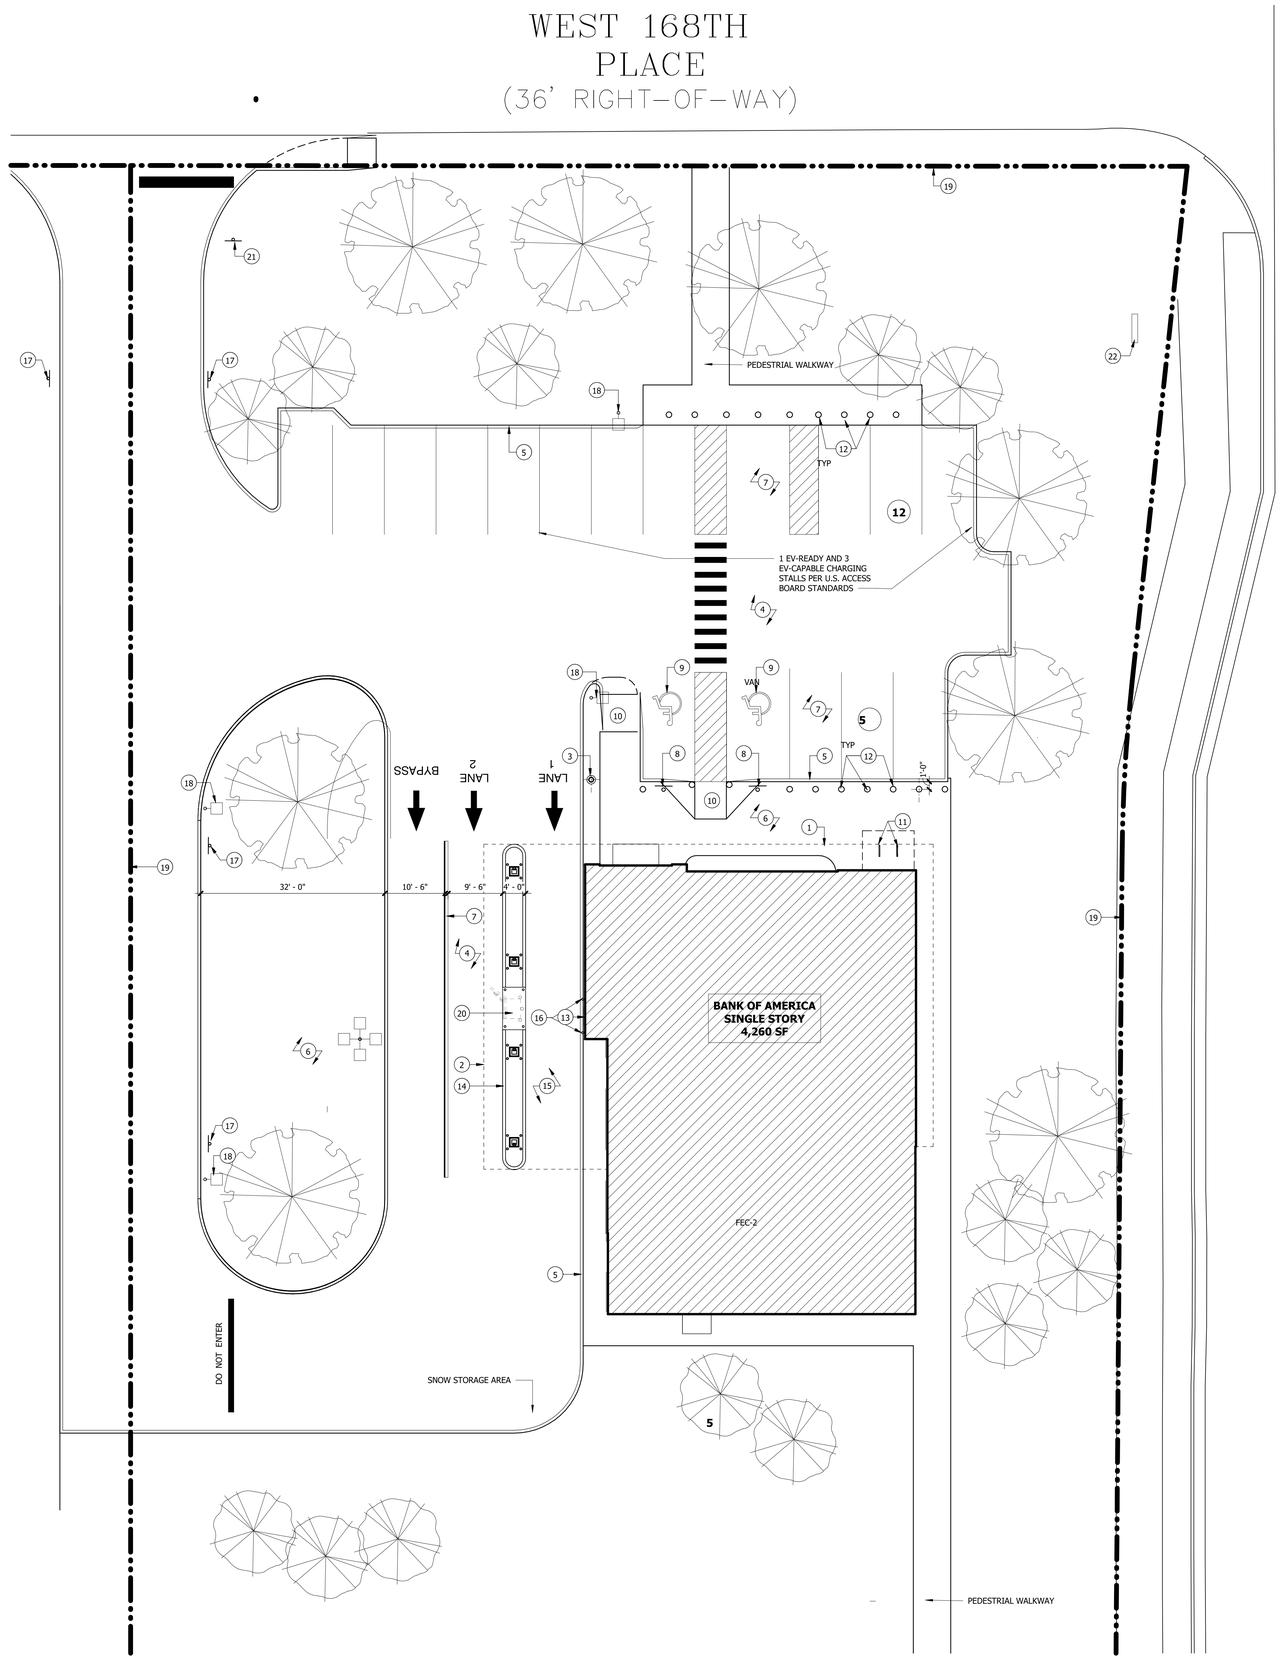

1 A00.60 SITE PLAN
3/32" = 1'-0"

SITE GENERAL NOTES:

A. ALL SIDEWALK AND EGRESS ROUTE SLOPE TO BE 2% MAX (1.5% RECOMMENDED).
B. ALL WALKWAY CAULKING TO BE GRAY.
C. 2% MAX SLOPE (CROSS & PATH ACROSS DRIVE IS 4.56%) AT DOOR MANEUVERING CLEARANCE 1.5%.
D. SEE CIVIL DRAWINGS FOR MORE INFORMATION.
E. SITE SIGNAGE BY BANK VENDOR. SEE SIGNAGE PACKAGE FOR SITE DIRECTIONAL AND/OR MONUMENT/PYLON SIGN.
F. COORDINATE SITE LIGHTING WITH CIVIL & ELECTRICAL DRAWINGS.
G. COORDINATE WITH LANDSCAPE DRAWINGS FOR LAYOUT.
H. ALL HARDSCAPE DIMENSIONS ARE TO BACK OF CURB U.N.O.

SITE KEYNOTES:

1. ACM CANOPY ABOVE.
2. DRIVE-THRU CANOPY ABOVE.
3. FLAGPOLE, SEE SHEET A09.30 FOR DETAILS. PROVIDE POWER AS REQUIRED FOR LIGHT.
4. ASPHALT PAVING PER DOT SPEC. SEE CIVIL DRAWINGS FOR MORE INFORMATION.
5. CURB, TYP. SEE CIVIL DRAWINGS FOR MORE INFORMATION.
6. CONCRETE SIDEWALK. SEE CIVIL DRAWINGS FOR MORE INFORMATION.
7. STRIPING. SEE CIVIL DRAWINGS FOR MORE INFORMATION.
8. PARKING SIGN: PER BANK OF AMERICA SIGNAGE AND ADA GUIDELINES. SEE A09.30 AND CIVIL DRAWINGS FOR MORE INFORMATION. 36"H x 6" DIA. SCHEDULE 80 PIPE BOLLARD PROVIDED BY GC - COORDINATE WITH SIGN VENDOR FOR INSTALLATION OF POST AND BOLLARD COVER.
9. INTERNATIONAL SYMBOL OF ACCESSIBILITY. SEE CIVIL DRAWINGS.
10. ADA RAMP PER IBC AND ANSI. MAINTAIN CLEARANCE AT ENTRY DOOR AS REQUIRED PER CODE AND AS SHOWN. SEE CIVIL DRAWINGS FOR MORE INFORMATION.
11. ELECTRIC CHARGABLE BIKE RACK. COORDINATE WITH ELECTRICAL POWER REQUIREMENTS.
12. 36"H x 6" DIA. SCHEDULE 80 BOLLARD WITH GRAY AND RED STRIPED PVC BOLLARD COVER. GC IS TO PROVIDE AND INSTALL BOLLARD AND BOLLARD COVER AS SHOWN IN DETAIL 2/A00.60.
13. DRIVE UP ATM. SEE **A03.01** & **A08.12** FOR MORE INFORMATION.
14. CONCRETE DIVIDER ISLAND.
15. PROVIDE CONCRETE DRIVE LANE UNDER CANOPY AT DRIVE-THRU. SEE CIVIL DRAWINGS.
16. PROVIDE BOLLARDS AS INDICATED, SEE **2/A08.11** FOR DETAIL.
17. NO PARKING SIGNS. SEE CIVIL DRAWINGS FOR MORE INFORMATION.
18. NEW SITE LIGHT POLE. SEE CIVIL & ELECTRICAL DRAWINGS FOR MORE INFORMATION.
19. PROPERTY LINE. SEE CIVIL DRAWINGS FOR METES AND BOUNDS.
20. FUTURE ATM PAD & BOLLARDS, SEE **A03.01** FOR MORE INFORMATION
21. STOP SIGN. SEE CIVIL DRAWINGS FOR MORE INFORMATION.
22. MONUMENTAL SIGNAGE PER BANK SIGNAGE VENDOR

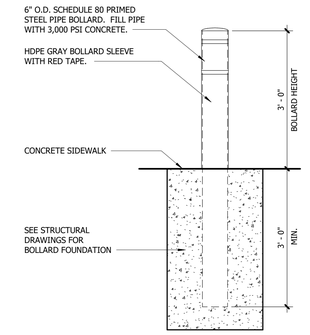

2 A00.60 DETAIL - BOLLARD
3/4" = 1'-0"

NELSON
Nelco Architecture, Inc.

12400 Coit Road, Suite 510
Dallas, TX. 75251
Phone: (972) 644-8830
Fax: (972) 644-8496

Client Representative:
CUSHMAN & WAKEFIELD
Attn: Paul Hurchanik
Tel: 720.582.6073
Email:
paul.hurchanik@cushwake.com

Architect:
Nelco Architecture, Inc.
Attn: Harry Koutsis
Tel: 310.693.5271
Email: hkoutsis@nelsonww.com

AOR Contact
Robert J. Sullivan Jr.
Tel: 216.830.1561
Email:rsullivan@nelsonww.com
License No. ARC.00405343

Civil:
LANGAN
Attn: Ben Henry
Tel: (817) 328-3217
Email: bhenry@langan.com

Structural:
Salas O'Brien
Attn: Julie Bolding
Tel: 469-782-9753
Email: julie.bolding@salasobrien.com

MEP:
Salas O'Brien
Attn: Carly Wood
Tel: 727-804-7626
Email: carly.wood@salasobrien.com

Description:	No:	Date:
IF COE Package		11/09/2023
IF Design Development 90%		07/19/2024
IF Design Development Final		08/19/2024
IF Construction Document Review		09/20/2024
IF Construction Document Final		12/05/2024
IF CD 90		08/15/2025
IF Permit		08/26/2025

BANK OF AMERICA
Broomfield

CO1-111
NWC Hwy 7 and Palisade Pkwy
Broomfield CO, 80023

PROPERTY ID:	CO1-111
NSRP VERSION:	2.0
BULLETIN:	2-2025

ARCHITECTURAL SITE PLAN

COLORADO LICENSED
ROBERT JOHN SULLIVAN JR.
00405343
ARCHITECT
09/04/2025

NORTH

Project No: 23.0002261.000 Reviewed By: MB

A00.60

9/3/2025 4:20:01 PM C:\Users\cgosier\Revit_Locals\2023\CO1-111 Broomfield_for SDP_cgosier53725.rvt

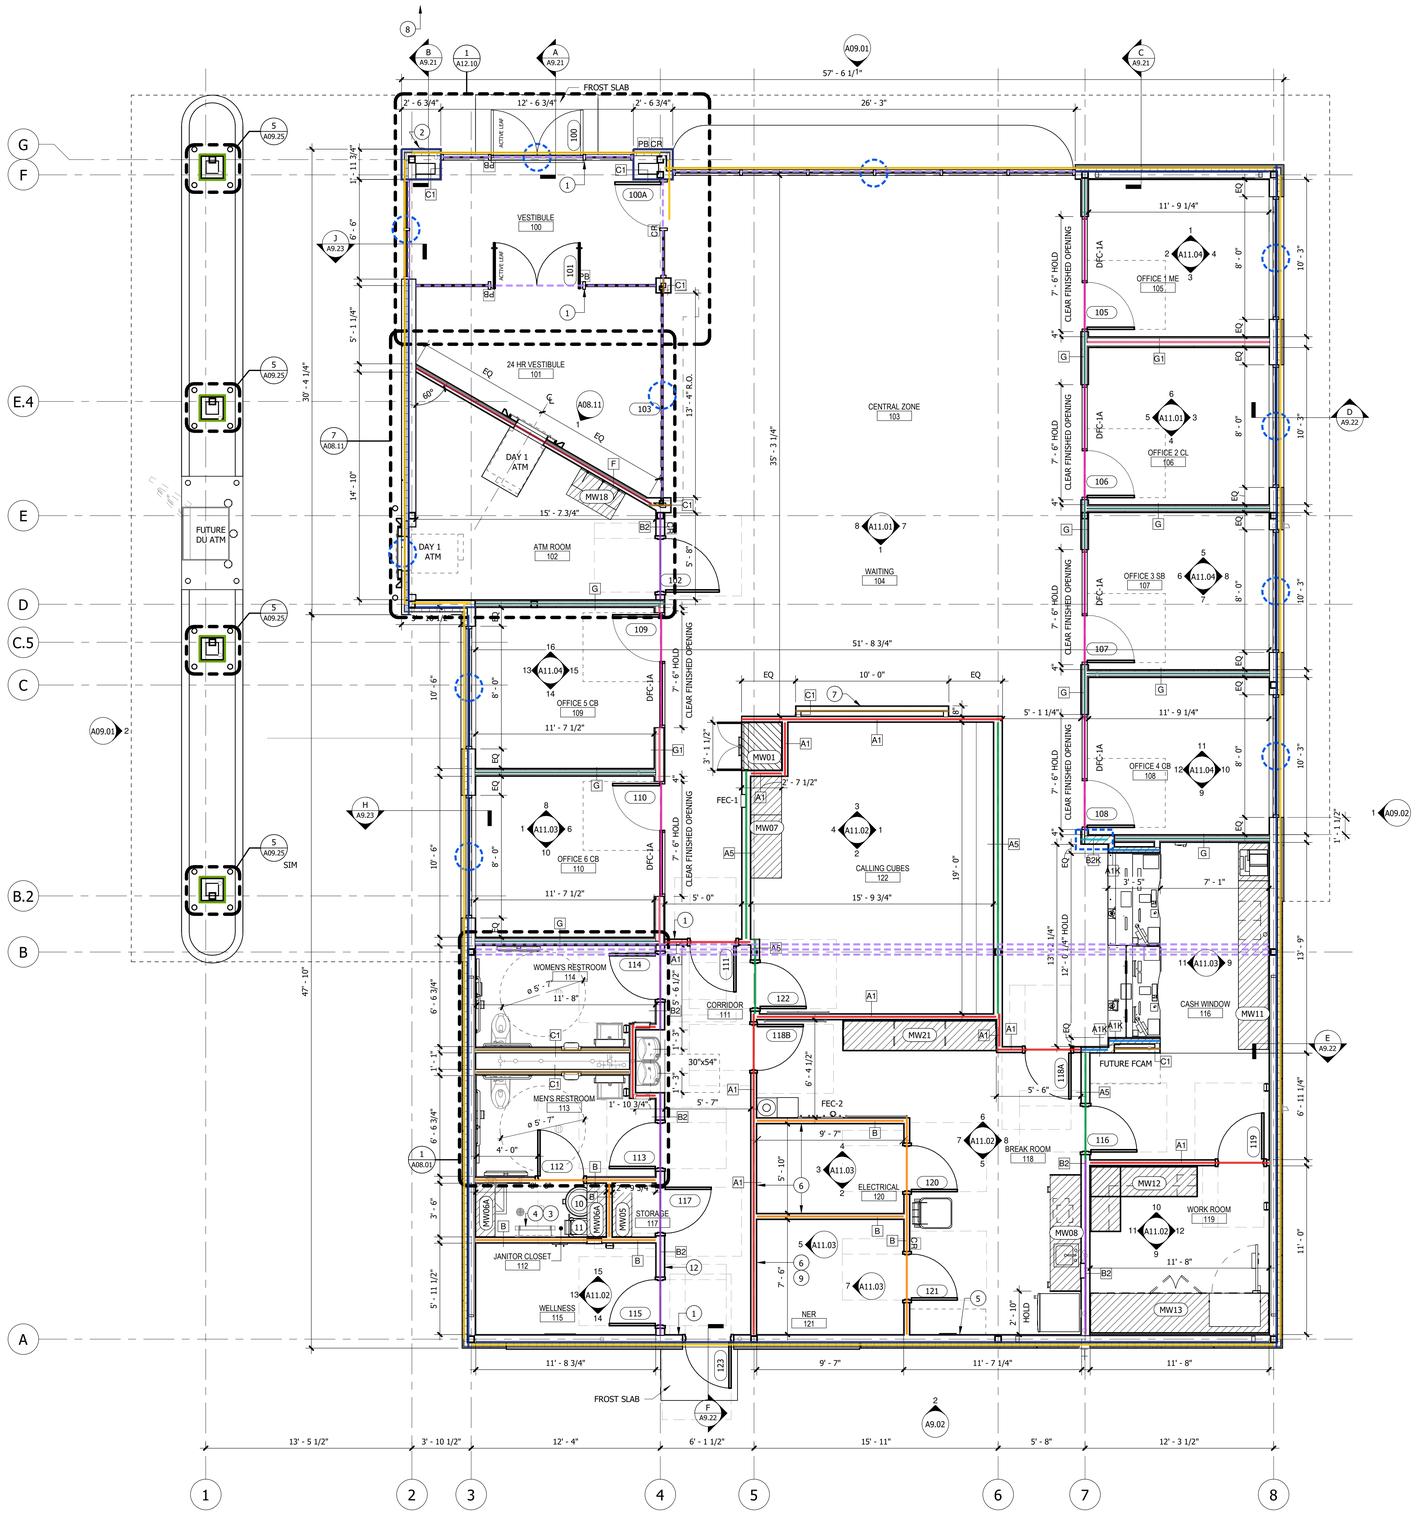

F A02.01 CONSTRUCTION PLAN
1/4" = 1'-0"

CONSTRUCTION PLAN NOTES:

A. ALL PARTITIONS TO BE TYPE "A1", UNLESS OTHERWISE NOTED. REFER TO SHEET A12.01 FOR PARTITION TYPES.

B. UNLESS OTHERWISE NOTED, LOCATE HINGE SIDE OF ALL DOORS 6" FROM ADJACENT PERPENDICULAR PARTITION.

C. CONTRACTOR SHALL PROVIDE BLOCKING FOR ALL EQUIPMENT AND ACCESSORIES MOUNTED ON WALLS.

D. DIMENSIONS PROVIDED ARE SHOWN FROM FACE OF FINISH TO FACE OF FINISH UNLESS OTHERWISE NOTED.

E. ALLSTEEL OFFICE FRONT SYSTEM: DFC-1A ASPECT. ORDERED BY GC. FURNISHED AND INSTALLED BY BANK VENDOR

CONSTRUCTION KEY NOTES:

1. TACTILE EXIT SIGNAGE. SEE **9/A00.41**
2. APPROXIMATE LOCATION OF KNOX BOX. COORDINATE WITH LOCAL FIRE AUTHORITY FOR FINAL LOCATION.
3. LADDER TO ROOF HATCH - SEE DETAIL ON SHEET **A09.30**.
4. ROOF HATCH ABOVE - SEE DETAIL ON SHEET **A09.30**.
5. PROVIDE BLOCKING IN WALL AS REQUIRED FOR LOCKERS. COORDINATE WITH VENDOR.
6. PROVIDE FIRE RATED 3/4" PLYWOOD BACKBOARD PAINTED WHITE, INSTALL 6" AFF. ALL WALL POWER/DATA OUTLETS SHALL BE RECESSED AND FLUSH WITH THE PLYWOOD PANELS. SEE INTERIOR ELEVATIONS SHEET **A11.03**
7. 85" DISPLAY MEDIA MONITOR . SEE ELECTRICAL FOR MORE INFORMATION. COORDINATE WITH ELECTRICAL DRAWINGS AND TECHNOLOGY VENDOR. REFER TO INSTALLATION INSTRUCTIONS AND PROVIDE BLOCKING IN WALL AS REQUIRED.
8. FLAGPOLE, SEE SITE PLAN **A00.60**
9. NO WATER PIPING SHALL BE ROUTED THROUGH OR OVERHEAD THIS ROOM.
10. LOCATION OF ROLLING TRASH CONTAINER.
11. LOCATION OF MOP BUCKET.
12. WELLNESS ROOM SIGNAGE BY SIGNAGE VENDOR.

CONSTRUCTION PLAN LEGEND:

- A1 — NEW PARTITION (SEE SCHEDULE)
- NEW PARTITION WITH KEVLAR REINFORCMENT
- OFFICE — ROOM NAME
- 04F06 — ROOM NUMBER
- XXXX — DOOR NUMBER (SEE SCHEDULE)
- ELEVATION DATUM POINT
- ALIGN — ALIGN SURFACES
- XXX — MILLWORK / MILLWORK SCHEDULE TAG
- FIRE EXTINGUISHER CABINET
- NEW SWING DOOR WITH DOOR TYPE. (SEE DOOR SCHEDULE)

EXTERIOR ELEVATION INDICATOR

- ROW ON ELEVATION SHEET WHERE SHOWN
- DIRECTION OF ELEVATION VIEW
- SHEET WHERE SHOWN
- DESCRIPTION OF SIMILAR OR OPPOSITE
- DETAIL NUMBER
- AREA TO BE DETAILED

INTERIOR ELEVATION INDICATION

- LOCATION ON ROW WHERE SHOWN
- ROW ON ELEVATION SHEET WHERE SHOWN
- DIRECTION OF ELEVATION
- SHEET WHERE SHOWN
- DIRECTION OF SECTION/ELEVATION
- SHEET WHERE SHOWN

NELSON
Nelco Architecture, Inc.

12400 Coit Road, Suite 510
Dallas, TX. 75251
Phone: (972) 644-8830
Fax: (972) 644-8496

Client Representative:
CUSHMAN & WAKEFIELD
Attn: Paul Hurchanik
Tel: 720.582.6073
Email: paul.hurchanik@cushwake.com

Architect:
Nelco Architecture, Inc.
Attn: Harry Koutsis
Tel: 310.693.5271
Email: hkoutsis@nelsonww.com

AOR Contact
Robert J. Sullivan Jr.
Tel: 216.830.1561
Email:rsullivan@nelsonww.com
License No. ARC.00405343

Civil:
LANGAN
Attn: Ben Henry
Tel: (817) 328-3217
Email: bhenry@langan.com

Structural:
Salas O'Brien
Attn: Julie Bolding
Tel: 469-782-9753
Email: julie.bolding@salasobrien.com

MEP:
Salas O'Brien
Attn: Carly Wood
Tel: 727-804-7626
Email: carly.wood@salasobrien.com

Description:	No:	Date:
IF Schematic Design Final		09/29/2023
IF COE Package		11/09/2023
IF Design Development 90%		07/19/2024
IF Design Development Final		08/19/2024
IF Construction Document Review		09/20/2024
IF Construction Document Final		12/05/2024
IF CD 90		08/15/2025
IF Permit		08/26/2025

BANK OF AMERICA
Broomfield

CO1-111
NWC Hwy 7 and Palisade Pkwy
Broomfield CO, 80023

PROPERTY ID: CO1-111
NSRP VERSION: 2.0
BULLETIN: 2-2025

CONSTRUCTION PLAN

COLORADO LICENSED
ROBERT JOHN SULLIVAN JR.
#00405343
ARCHITECT
09/04/2025

NORTH

Project No: 23.0002261.000 Reviewed By: MB

A02.01

9/3/2025 4:20:08 PM C:\Users\cgosier\Revit_Locals\2023\CO1-111 Broomfield_for SDP_cgosier537ZS.rvt

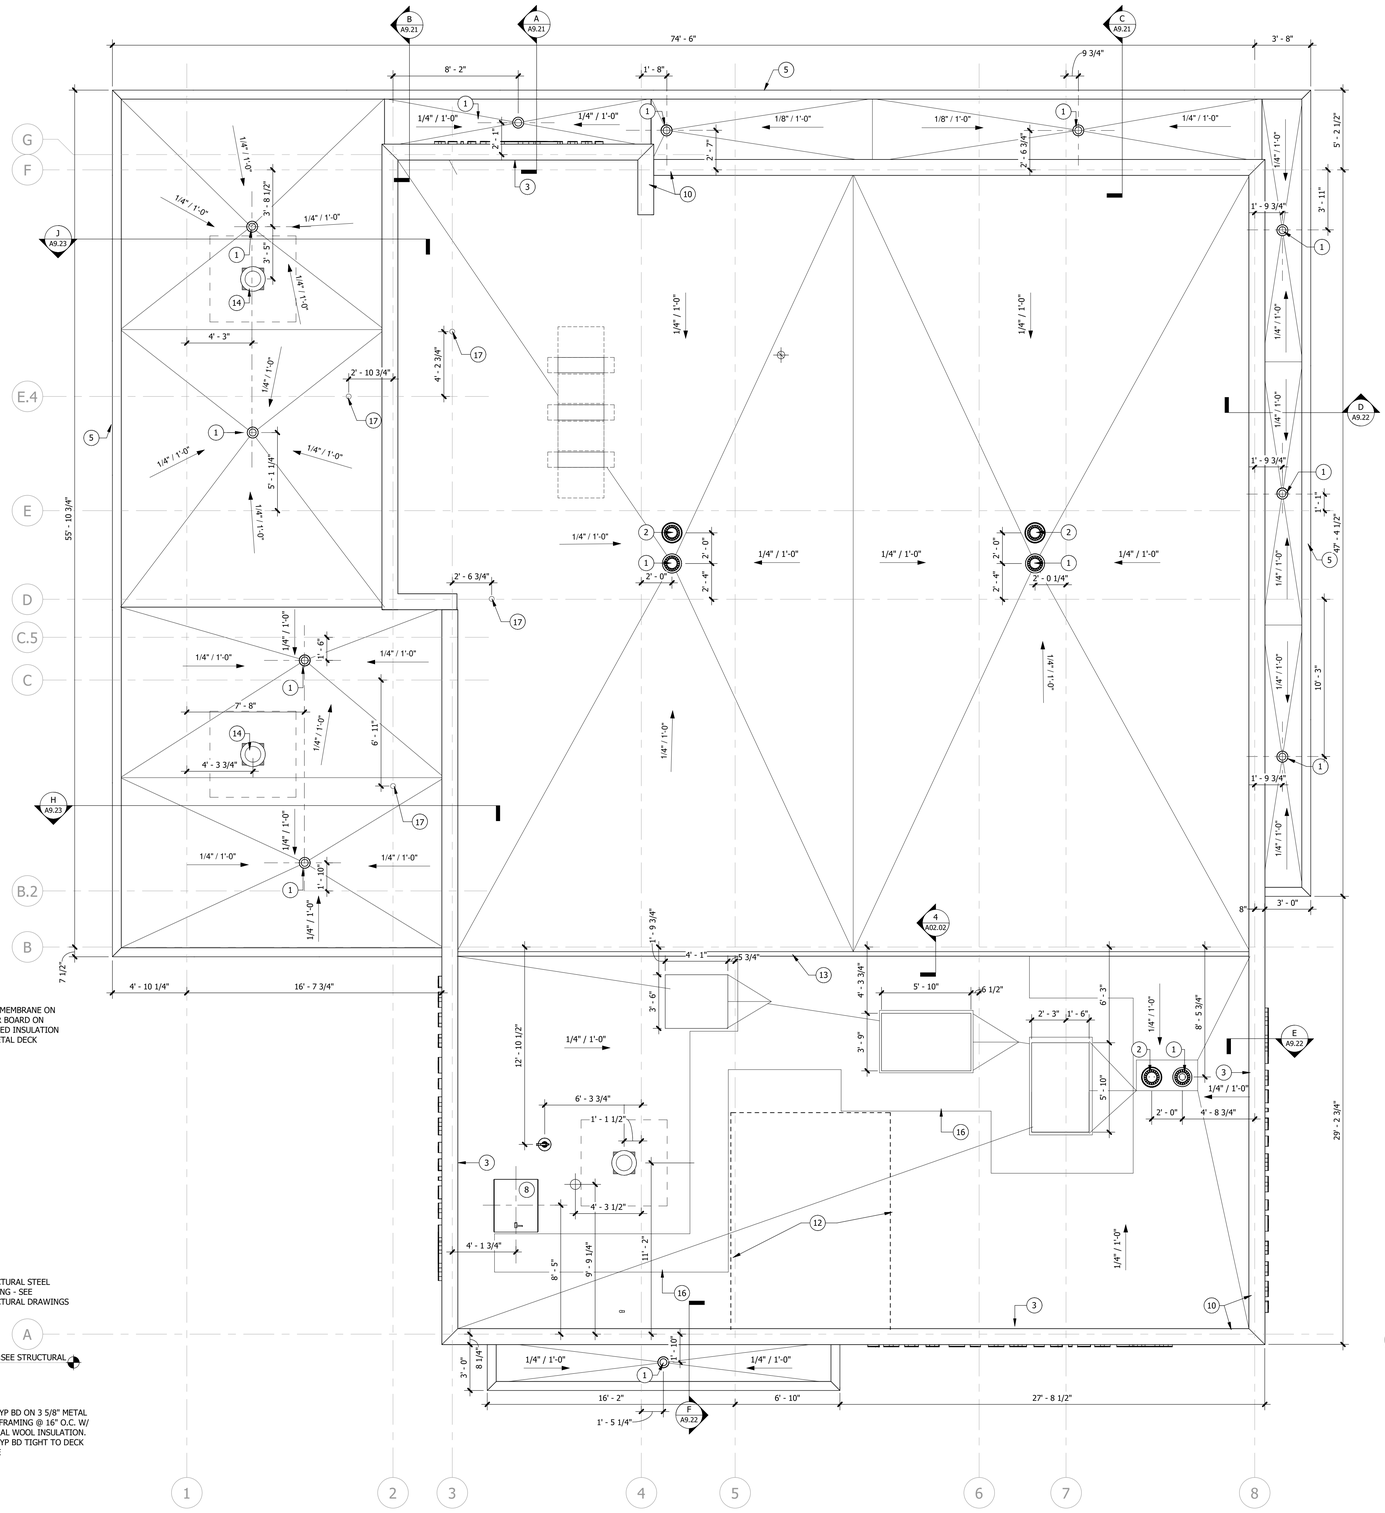

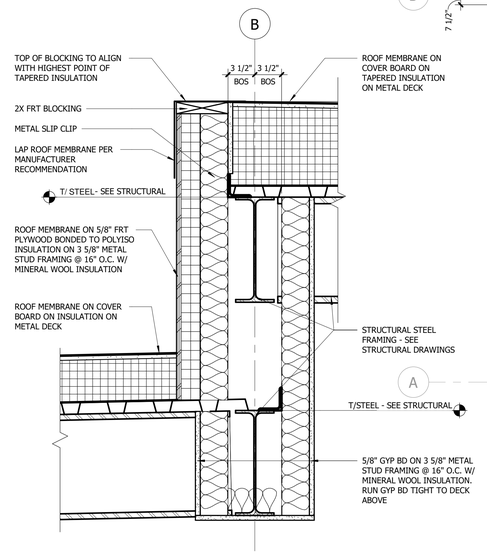

4 A02.02 SECTION DETAIL @ ROOF STEP
1 1/2" = 1'-0"

1 A02.02 ROOF PLAN
1/4" = 1'-0"

ROOF PLAN SHEET NOTES:

A. REFERENCE MECHANICAL AND PLUMBING DRAWINGS FOR ROOF TOP EQUIPMENT, COORDINATE CURB AND ROOFING.

B. ALL ROOF SLOPES SHALL BE 1/4" PER 12"

C. ALL ROOF SLOPES AS SHOWN ARE TO BE REVIEWED AND APPROVED BY THE ROOFING SUPPLIER.

D. ALL EQUIPMENT ON ROOF TO BE MOUNTED ON CURBS AND PROPERLY FLASHED PER EQUIPMENT MANUFACTURERS AND ROOF MANUFACTURERS RECOMMENDATIONS.

E. CRICKETS ARE TO BE PROVIDED WITH SUFFICIENT DEPTH AND SLOPE TO ACCOMMODATE PROPER DRAINAGE ON ROOF AT ALL EQUIPMENT OR PENETRATIONS.

F. COORDINATE ALL ROOF PENETRATIONS WITH STRUCTURAL AND MECHANICAL DRAWINGS.

G. REFERENCE SHEET A09.30 FOR TYPICAL ROOFING DETAILS.

H. TYPICAL ROOF ASSEMBLY:
   a. MEMBRANE ROOF ON COVER BOARD ON R-30 MIN. TAPERED OR SLOPING INSULATION ON METAL DECK.

   CANOPY ROOF ASSEMBLY:
   a. MEMBRANE ROOF ON COVER BOARD ON 1/2" MIN. TAPERED INSULATION ON METAL DECK.

I. ALL STORM DRAINS, INCLUDING CLEAN-OUTS AND EXTERIOR SPOUTS TO BE LOCATED AWAY FROM SIDEWALK/WALKWAYS AND FRONT ENTRY ELEVATION.

ROOF PLAN KEY NOTES:

1. ROOF DRAIN - SEE PLUMBING DRAWINGS.
2. OVERFLOW DRAIN - SEE PLUMBING DRAWINGS.
3. GC TO COORDINATE SIGNAGE WIRING THROUGH BACK SIDE OF PARAPET WITH VENDOR.
4. ROOF TOP UNIT. PROVIDE CRICKET ON HIGH SIDE OF UNIT. SEE MECHANICAL DRAWINGS FOR MORE INFORMATION. PROVIDE CURB PER DETAIL ON SHEET A09.30
5. ACM CLAD CANOPY BELOW.
6. NON-FREEZE ROOF HYDRANT. SEE PLUMBING DRAWINGS FOR ADDITIONAL INFORMATION.
7. CRICKETS OF TAPERED INSULATION, TYP.
8. ROOF HATCH WITH SAFETY RAIL. SEE DETAIL ON SHEET A09.30
9. PROVIDE CONTINUOUS WALKPAD OVER ROOF MEMBRANE FROM ROOF HATCH TO AND AROUND EACH RTU. WALKPAD TO BE COMPATIBLE WITH MEMBRANE, COORDINATE WITH ROOF MANUFACTURER.
10. ACM COPING. SEE DETAIL SHEETS.
11. RESTROOM AND JANITOR CLOSET EXHAUST FAN. SEE MECHANICAL DRAWINGS FOR ADDITIONAL INFORMAITON.
12. DASHED LINE INDICATES NER AND ELECTRICAL ROOM BELOW. NO RTU EQUIPMENT, PIPING OR PENETRATIONS SHALL BE OVERHEAD OR THROUGH THIS SPACE.
13. ROOF STEP.
14. LOW PROFILE STATIC ROOF VENT. PROVIDE 1 SQ. FT. OF NET AREA MIN. PER VENT.
15. ROOF TOP CONDENSING UNIT. SEE MECHANICAL DRAWINGS FOR MORE INFORMATION.
16. PROVIDE CONTINUOUS WALKPAD OVER ROOF MEMBRAME FROM ROOF HATCH TO EACH RTU. WALKPAD TO BE COMPATIBLE WITH MEMBRAME, COORDINATE WITH ROOF MANUFACTURER.
17. ROOF TIE-OFF. SEE STRUCTURAL DRAWINGS FOR DETAIL.

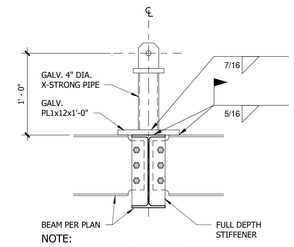

NOTE:
DESIGN BASED ON 5,000LBS
ULTIMATE LOAD IN ANY DIRECTION

2 A02.02 ROOF TIE OFF POST DETAIL
1" = 1'-0"

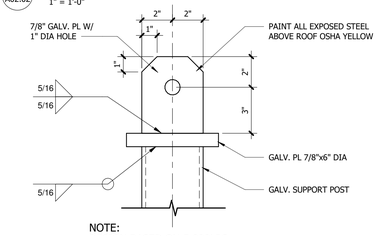

NOTE:
DESIGN BASED ON 5,000LBS
ULTIMATE LOAD IN ANY DIRECTION

3 A02.02 ROOF TIE OFF ANCHOR POINT DETAIL
3" = 1'-0"

NORTH

NELSON
Nelco Architecture, Inc.

12400 Coit Road, Suite 510
Dallas, TX. 75251
Phone: (972) 644-8830
Fax: (972) 644-8496

Client Representative:
CUSHMAN & WAKEFIELD
Attn: Paul Hurchanik
Tel: 720.582.6073
Email: paul.hurchanik@cushwake.com

Architect:
Nelco Architecture, Inc.
Attn: Harry Koutsis
Tel: 310.693.5271
Email: hkoutsis@nelsonww.com

AOR Contact
Robert J. Sullivan Jr.
Tel: 216.830.1561
Email:rsullivan@nelsonww.com
License No. ARC.00405343

Civil:
LANGAN
Attn: Ben Henry
Tel: (817) 328-3217
Email: bhenry@langan.com

Structural:
Salas O'Brien
Attn: Julie Bolding
Tel: 469-782-9753
Email: julie.bolding@salasobrien.com

MEP:
Salas O'Brien
Attn: Carly Wood
Tel: 727-804-7626
Email: carly.wood@salasobrien.com

Description:	No:	Date:
IF Design Development Final		08/19/2024
IF Construction Document Review		09/20/2024
IF Construction Document Final		12/05/2024
IF CD 90		08/15/2025
IF Permit		08/26/2025

BANK OF AMERICA
Broomfield

CO1-111
NWC Hwy 7 and Palisade Pkwy
Broomfield CO, 80023

PROPERTY ID:	CO1-111
NSRP VERSION:	2.0
BULLETIN:	2-2025

ROOF PLAN

COLORADO LICENSED
JOHN SULLIVAN
ARCHITECT
00405343
09/04/2025

Project No: 23.0002261.000 Reviewed By: MB

A02.02

C:\Users\MOlvera\Revit_Locals\2023\CO1-111 Broomfield_for SSP_molvera@CWAB.rvt
9/4/2025 9:36:58 AM

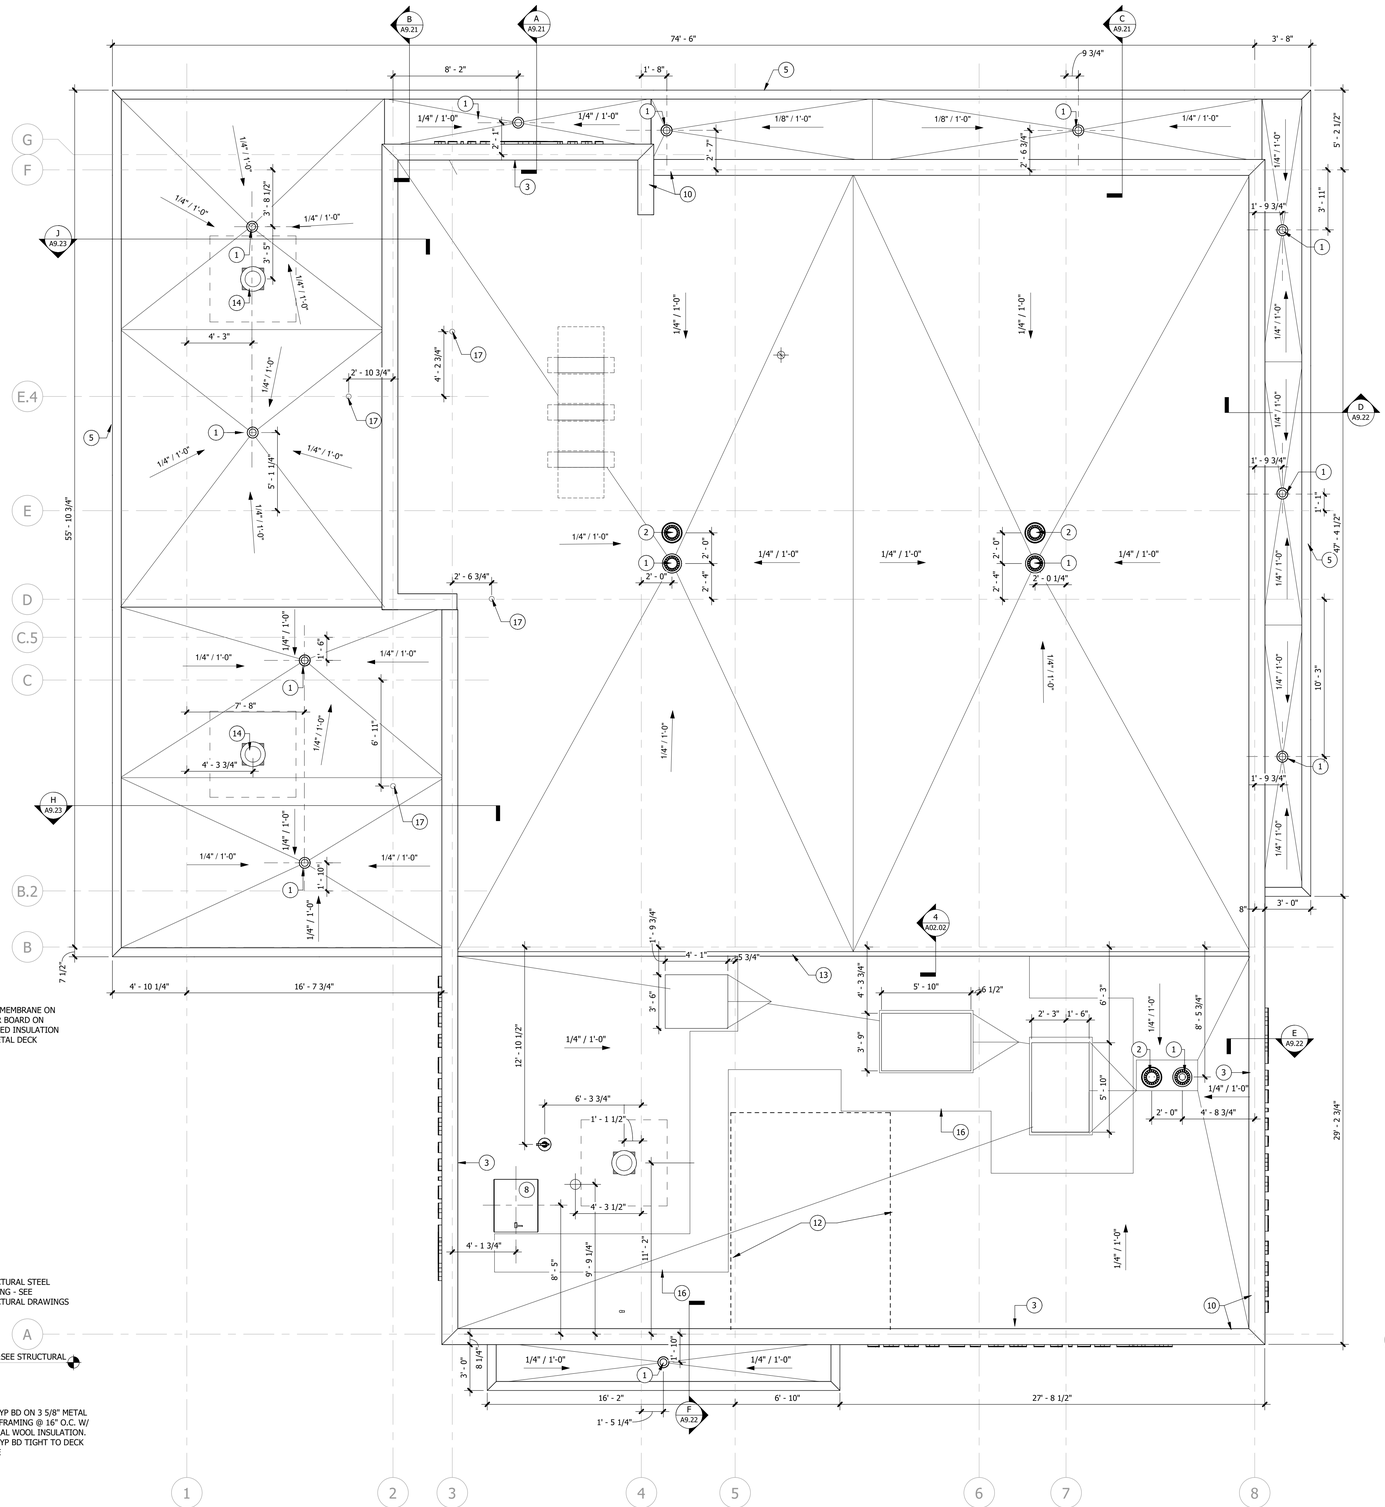

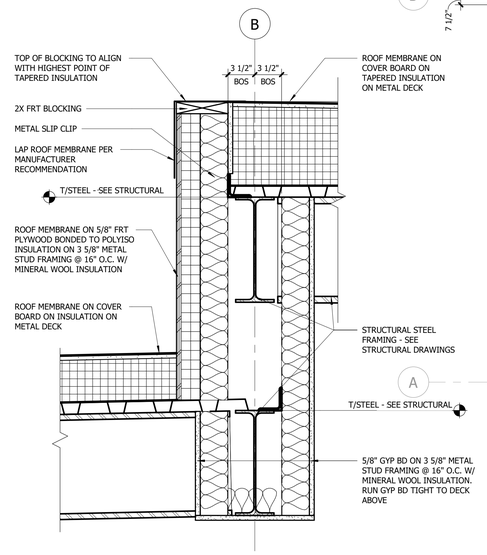

4 A02.02 SECTION DETAIL @ ROOF STEP
1 1/2" = 1'-0"

1 A02.02 ROOF PLAN
1/4" = 1'-0"

ROOF PLAN SHEET NOTES:

A. REFERENCE MECHANICAL AND PLUMBING DRAWINGS FOR ROOF TOP EQUIPMENT, COORDINATE CURB AND ROOFING.

B. ALL ROOF SLOPES SHALL BE 1/4" PER 12"

C. ALL ROOF SLOPES AS SHOWN ARE TO BE REVIEWED AND APPROVED BY THE ROOFING SUPPLIER.

D. ALL EQUIPMENT ON ROOF TO BE MOUNTED ON CURBS AND PROPERLY FLASHED PER EQUIPMENT MANUFACTURERS AND ROOF MANUFACTURERS RECOMMENDATIONS.

E. CRICKETS ARE TO BE PROVIDED WITH SUFFICIENT DEPTH AND SLOPE TO ACCOMMODATE PROPER DRAINAGE ON ROOF AT ALL EQUIPMENT OR PENETRATIONS.

F. COORDINATE ALL ROOF PENETRATIONS WITH STRUCTURAL AND MECHANICAL DRAWINGS.

G. REFERENCE SHEET A09.30 FOR TYPICAL ROOFING DETAILS.

H. TYPICAL ROOF ASSEMBLY:
   a. MEMBRANE ROOF ON COVER BOARD ON R-30 MIN. TAPERED OR SLOPING INSULATION ON METAL DECK.

   CANOPY ROOF ASSEMBLY:
   a. MEMBRANE ROOF ON COVER BOARD ON 1/2" MIN. TAPERED INSULATION ON METAL DECK.

I. ALL STORM DRAINS, INCLUDING CLEAN-OUTS AND EXTERIOR SPOUTS TO BE LOCATED AWAY FROM SIDEWALK/WALKWAYS AND FRONT ENTRY ELEVATION.

ROOF PLAN KEY NOTES:

1. ROOF DRAIN - SEE PLUMBING DRAWINGS.
2. OVERFLOW DRAIN - SEE PLUMBING DRAWINGS.
3. GC TO COORDINATE SIGNAGE WIRING THROUGH BACK SIDE OF PARAPET WITH VENDOR.
4. ROOF TOP UNIT. PROVIDE CRICKET ON HIGH SIDE OF UNIT. SEE MECHANICAL DRAWINGS FOR MORE INFORMATION. PROVIDE CURB PER DETAIL ON SHEET A09.30
5. ACM CLAD CANOPY BELOW.
6. NON-FREEZE ROOF HYDRANT. SEE PLUMBING DRAWINGS FOR ADDITIONAL INFORMATION.
7. CRICKETS OF TAPERED INSULATION, TYP.
8. ROOF HATCH WITH SAFETY RAIL. SEE DETAIL ON SHEET A09.30
9. PROVIDE CONTINUOUS WALKPAD OVER ROOF MEMBRANE FROM ROOF HATCH TO AND AROUND EACH RTU. WALKPAD TO BE COMPATIBLE WITH MEMBRANE, COORDINATE WITH ROOF MANUFACTURER.
10. ACM COPING. SEE DETAIL SHEETS.
11. RESTROOM AND JANITOR CLOSET EXHAUST FAN. SEE MECHANICAL DRAWINGS FOR ADDITIONAL INFORMAITON.
12. DASHED LINE INDICATES NER AND ELECTRICAL ROOM BELOW. NO RTU EQUIPMENT, PIPING OR PENETRATIONS SHALL BE OVERHEAD OR THROUGH THIS SPACE.
13. ROOF STEP.
14. LOW PROFILE STATIC ROOF VENT. PROVIDE 1 SQ. FT. OF NET AREA MIN. PER VENT.
15. ROOF TOP CONDENSING UNIT. SEE MECHANICAL DRAWINGS FOR MORE INFORMATION.
16. PROVIDE CONTINUOUS WALKPAD OVER ROOF MEMBRAME FROM ROOF HATCH TO EACH RTU. WALKPAD TO BE COMPATIBLE WITH MEMBRAME, COORDINATE WITH ROOF MANUFACTURER.
17. ROOF TIE-OFF. SEE STRUCTURAL DRAWINGS FOR DETAIL.

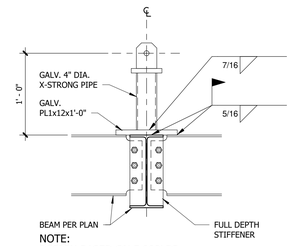

NOTE:
DESIGN BASED ON 5,000LBS
ULTIMATE LOAD IN ANY DIRECTION

2 A02.02 ROOF TIE OFF POST DETAIL
1" = 1'-0"

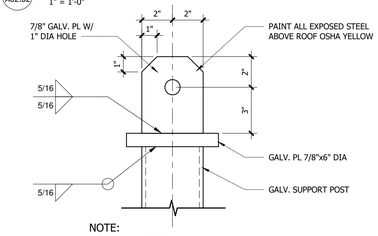

NOTE:
DESIGN BASED ON 5,000LBS
ULTIMATE LOAD IN ANY DIRECTION

3 A02.02 ROOF TIE OFF ANCHOR POINT DETAIL
3" = 1'-0"

NORTH

NELSON
Nelco Architecture, Inc.

12400 Coit Road, Suite 510
Dallas, TX. 75251
Phone: (972) 644-8830
Fax: (972) 644-8496

Client Representative:
CUSHMAN & WAKEFIELD
Attn: Paul Hurchanik
Tel: 720.582.6073
Email: paul.hurchanik@cushwake.com

Architect:
Nelco Architecture, Inc.
Attn: Harry Koutsis
Tel: 310.693.5271
Email: hkoutsis@nelsonww.com

AOR Contact
Robert J. Sullivan Jr.
Tel: 216.830.1561
Email:rsullivan@nelsonww.com
License No. ARC.00405343

Civil:
LANGAN
Attn: Ben Henry
Tel: (817) 328-3217
Email: bhenry@langan.com

Structural:
Salas O'Brien
Attn: Julie Bolding
Tel: 469-782-9753
Email: julie.bolding@salasobrien.com

MEP:
Salas O'Brien
Attn: Carly Wood
Tel: 727-804-7626
Email: carly.wood@salasobrien.com

Description:	No:	Date:
IF Design Development Final		08/19/2024
IF Construction Document Review		09/20/2024
IF Construction Document Final		12/05/2024
IF CD 90		08/15/2025
IF Permit		08/26/2025

BANK OF AMERICA
Broomfield

CO1-111
NWC Hwy 7 and Palisade Pkwy
Broomfield CO, 80023

PROPERTY ID:	CO1-111
NSRP VERSION:	2.0
BULLETIN:	2-2025

ROOF PLAN

COLORADO LICENSED
JOHN SULLIVAN
00405343
ARCHITECT
09/04/2025

Project No: 23.0002261.000 Reviewed By: MB

A02.02

C:\Users\MOlvera\Revit_Locals\2023\CO1-111 Broomfield_for SSP_molvera@CWAB.rvt
9/4/2025 9:45:42 AM

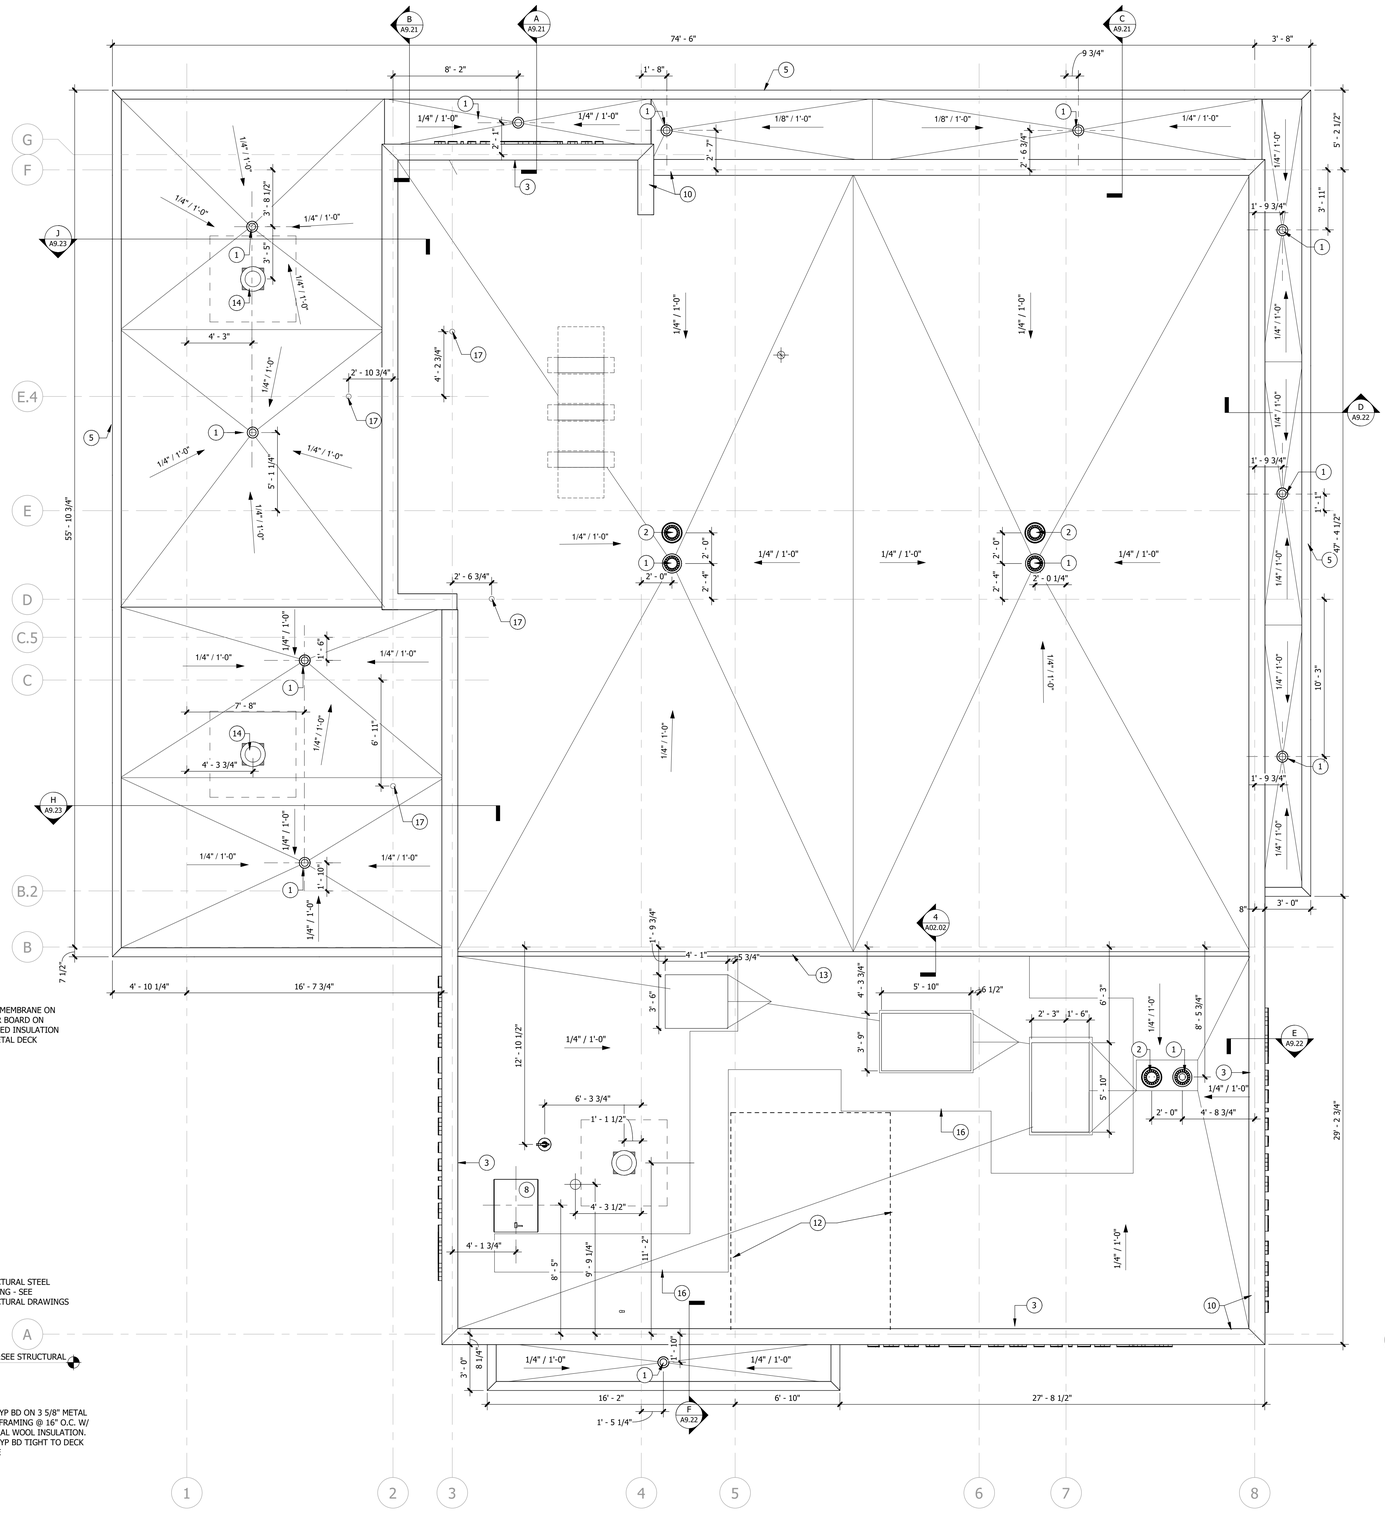

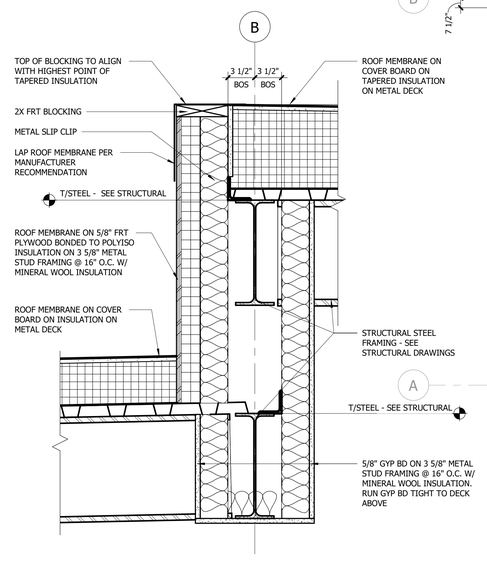

4 A02.02 SECTION DETAIL @ ROOF STEP
1 1/2" = 1'-0"

1 A02.02 ROOF PLAN
1/4" = 1'-0"

ROOF PLAN SHEET NOTES:

A. REFERENCE MECHANICAL AND PLUMBING DRAWINGS FOR ROOF TOP EQUIPMENT, COORDINATE CURB AND ROOFING.

B. ALL ROOF SLOPES SHALL BE 1/4" PER 12"

C. ALL ROOF SLOPES AS SHOWN ARE TO BE REVIEWED AND APPROVED BY THE ROOFING SUPPLIER.

D. ALL EQUIPMENT ON ROOF TO BE MOUNTED ON CURBS AND PROPERLY FLASHED PER EQUIPMENT MANUFACTURERS AND ROOF MANUFACTURERS RECOMMENDATIONS.

E. CRICKETS ARE TO BE PROVIDED WITH SUFFICIENT DEPTH AND SLOPE TO ACCOMMODATE PROPER DRAINAGE ON ROOF AT ALL EQUIPMENT OR PENETRATIONS.

F. COORDINATE ALL ROOF PENETRATIONS WITH STRUCTURAL AND MECHANICAL DRAWINGS.

G. REFERENCE SHEET A09.30 FOR TYPICAL ROOFING DETAILS.

H. TYPICAL ROOF ASSEMBLY:
   a. MEMBRANE ROOF ON COVER BOARD ON R-30 MIN. TAPERED OR SLOPING INSULATION ON METAL DECK.

   CANOPY ROOF ASSEMBLY:
   a. MEMBRANE ROOF ON COVER BOARD ON 1/2" MIN. TAPERED INSULATION ON METAL DECK.

I. ALL STORM DRAINS, INCLUDING CLEAN-OUTS AND EXTERIOR SPOUTS TO BE LOCATED AWAY FROM SIDEWALK/WALKWAYS AND FRONT ENTRY ELEVATION.

ROOF PLAN KEY NOTES:

1. ROOF DRAIN - SEE PLUMBING DRAWINGS.
2. OVERFLOW DRAIN - SEE PLUMBING DRAWINGS.
3. GC TO COORDINATE SIGNAGE WIRING THROUGH BACK SIDE OF PARAPET WITH VENDOR.
4. ROOF TOP UNIT. PROVIDE CRICKET ON HIGH SIDE OF UNIT. SEE MECHANICAL DRAWINGS FOR MORE INFORMATION. PROVIDE CURB PER DETAIL ON SHEET A09.30
5. ACM CLAD CANOPY BELOW.
6. NON-FREEZE ROOF HYDRANT. SEE PLUMBING DRAWINGS FOR ADDITIONAL INFORMATION.
7. CRICKETS OF TAPERED INSULATION, TYP.
8. ROOF HATCH WITH SAFETY RAIL. SEE DETAIL ON SHEET A09.30
9. PROVIDE CONTINUOUS WALKPAD OVER ROOF MEMBRANE FROM ROOF HATCH TO AND AROUND EACH RTU. WALKPAD TO BE COMPATIBLE WITH MEMBRANE, COORDINATE WITH ROOF MANUFACTURER.
10. ACM COPING. SEE DETAIL SHEETS.
11. RESTROOM AND JANITOR CLOSET EXHAUST FAN. SEE MECHANICAL DRAWINGS FOR ADDITIONAL INFORMAITON.
12. DASHED LINE INDICATES NER AND ELECTRICAL ROOM BELOW. NO RTU EQUIPMENT, PIPING OR PENETRATIONS SHALL BE OVERHEAD OR THROUGH THIS SPACE.
13. ROOF STEP.
14. LOW PROFILE STATIC ROOF VENT. PROVIDE 1 SQ. FT. OF NET AREA MIN. PER VENT.
15. ROOF TOP CONDENSING UNIT. SEE MECHANICAL DRAWINGS FOR MORE INFORMATION.
16. PROVIDE CONTINUOUS WALKPAD OVER ROOF MEMBRAME FROM ROOF HATCH TO EACH RTU. WALKPAD TO BE COMPATIBLE WITH MEMBRAME, COORDINATE WITH ROOF MANUFACTURER.
17. ROOF TIE-OFF. SEE STRUCTURAL DRAWINGS FOR DETAIL.

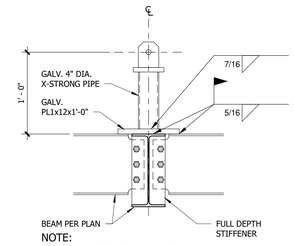

NOTE:
DESIGN BASED ON 5,000LBS
ULTIMATE LOAD IN ANY DIRECTION

2 A02.02 ROOF TIE OFF POST DETAIL
1" = 1'-0"

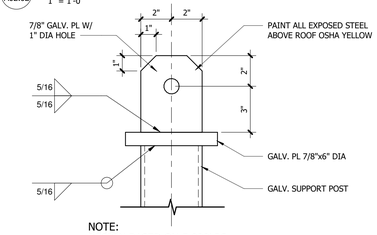

NOTE:
DESIGN BASED ON 5,000LBS
ULTIMATE LOAD IN ANY DIRECTION

3 A02.02 ROOF TIE OFF ANCHOR POINT DETAIL
3" = 1'-0"

NORTH

NELSON
Nelco Architecture, Inc.

12400 Coit Road, Suite 510
Dallas, TX. 75251
Phone: (972) 644-8830
Fax: (972) 644-8496

Client Representative:
CUSHMAN & WAKEFIELD
Attn: Paul Hurchanik
Tel: 720.582.6073
Email: paul.hurchanik@cushwake.com

Architect:
Nelco Architecture, Inc.
Attn: Harry Koutsis
Tel: 310.693.5271
Email: hkoutsis@nelsonww.com

AOR Contact
Robert J. Sullivan Jr.
Tel: 216.830.1561
Email:rsullivan@nelsonww.com
License No. ARC.00405343

Civil:
LANGAN
Attn: Ben Henry
Tel: (817) 328-3217
Email: bhenry@langan.com

Structural:
Salas O'Brien
Attn: Julie Bolding
Tel: 469-782-9753
Email: julie.bolding@salasobrien.com

MEP:
Salas O'Brien
Attn: Carly Wood
Tel: 727-804-7626
Email: carly.wood@salasobrien.com

Description:	No:	Date:
IF Design Development Final		08/19/2024
IF Construction Document Review		09/20/2024
IF Construction Document Final		12/05/2024
IF CD 90		08/15/2025
IF Permit		08/26/2025

BANK OF AMERICA
Broomfield

CO1-111
NWC Hwy 7 and Palisade Pkwy
Broomfield CO, 80023

PROPERTY ID:	CO1-111
NSRP VERSION:	2.0
BULLETIN:	2-2025

ROOF PLAN

COLORADO LICENSED
JOHN SULLIVAN
00405343
ARCHITECT
09/04/2025

Project No: 23.0002261.000 Reviewed By: MB

A02.02

C:\Users\MOlvera\Revit_Locals\2023\CO1-111 Broomfield_for SSP_molvera@QCWAB.rvt
9/4/2025 9:48:07 AM

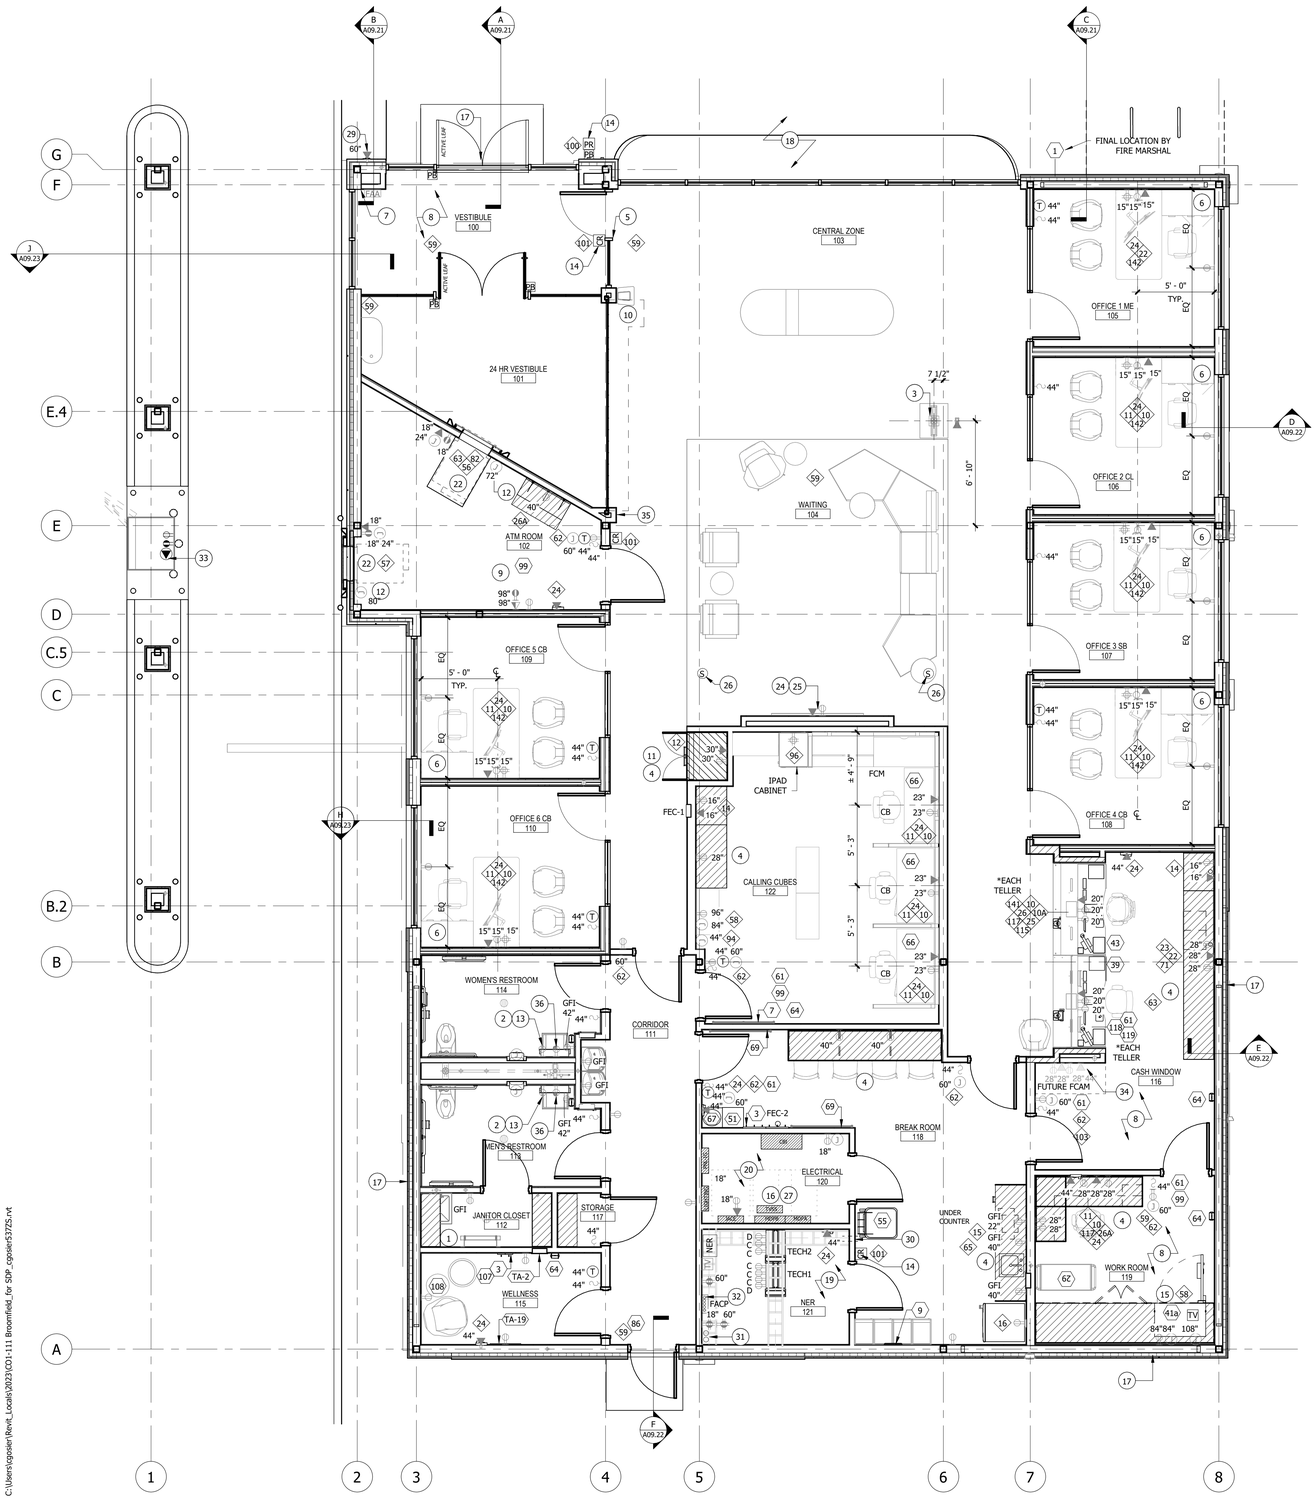

1 POWER AND COMMUNICATIONS PLAN
A03.01 1/4" = 1'-0"

POWER AND COMM. GENERAL NOTES:

A. REFER TO INTERIOR ELEVATION FOR ALL OUTLETS MOUNTED ORIENTATION. OTHERWISE MOUNT VERTICALLY. OUTLETS SHOWN WITH A "+" SIGN ONLY SHALL BE LOCATED 1" CLEAR ABOVE THE SCHEDULED MILLWORK COUNTER. TO BE COORDINATED WITH COUNTER HEIGHTS.
B. REFER TO ELECTRICAL DRAWINGS FOR ADDITIONAL INFORMATION.
C. FURNITURE SHOWN FOR REFERENCE ONLY.
D. FOR ADDITIONAL SCHEDULES AND REFERENCE DRAWINGS REFER TO A00.00 AND A00.31.
E. LOCATION OF CORES/FLOOR BOXES TO BE CONFIRMED WITH ARCHITECT.
F. CONFIRM ALL LOCATION OF ELECTRICAL AND DATA COVER PLATES WITH ARCHITECT.
G. WIRELESS HOLDUP, DOUBLE BUTTON WILL BE INSTALLED AT TELLER POSITIONS, PLATFORM DESKS, FOR PERSONNEL ENTRY AND EXIT, AND ANY WHERE A HOLDUP IS CONSIDERED NECESSARY IN A BANKING CENTER. THE NEW WIRELESS INTERFACE MODULE WILL BE LOCATED IN THE NER ROOM BY THE ALARM PANEL.
H. WALL MOUNTED OUTLETS / J-BOXES TO BE AT 18" A.F.F. TO CENTER OF BOX.
I. U.O.N., PROVIDE JUNCTION BOXES FOR ALL WALL MOUNTED FIRE PROTECTION EQUIPMENTS SUCH AS FIRE STROBES AND FIRE PULL AND FOR ALL SECURITY EQUIPMENT SUCH AS HOLD UP LIGHTS.
J. FIRE DEVICE COVERS SHALL MATCH WHITE UNLESS DICTATED OTHERWISE BY LOCAL JURISDICTION.
K. COORDINATE INSTALLATION OF TELECOMMUNICATIONS, DATA AND SECURITY SYSTEMS WITH VENDOR DRAWINGS.
L. VERIFY EQUIPMENT SPECIFICATIONS, POWER AND INSTALLATION REQUIREMENTS WITH MANUFACTURER TO ENSURE PROPER FIT AND FUNCTION.
M. VERIFY MOUNTING REQUIREMENTS OF ELECTRICAL, TELEPHONE AND OTHER EQUIPMENT.
N. GANG ADJACENT LIGHT SWITCHES AND COVER WITH A SINGLE PLATE.
O. INDICATED DIMENSIONS ARE TO THE CENTERLINE OF OUTLET OR SWITCH, OR CLUSTER OF OUTLETS OR SWITCHES, UNLESS OTHERWISE NOTED.
P. INSTALL OUTLETS ON OPPOSITE SIDES OF PARTITIONS IN SEPARATE STUD CAVITIES. DO NOT INSTALL BACK-TO-BACK.
Q. PROVIDE MATCHING COVER PLATES, RECEPTACLES AND RELATED ITEMS. PROVIDE ONE-PIECE TYPE GANG COVER PLATES, UNLESS OTHERWISE NOTED.
R. IDENTIFY DEDICATED OR ISOLATED GROUND ELECTRICAL OUTLETS WITH A RED DOT.
S. DOOR BELL PUSH BUTTON COVER PLATE: PLATE TO BE INSTALLED WHEN PUSH BUTTON IS LOCATED ON PARTITION WALL.
T. ALL DOOR CHIMES TO BE SET AT TWO TONES U.O.N.
U. CORPORATE WORKPLACE PROJECT MANAGER IS RESPONSIBLE FOR DOWNLOADING A COPY OF THE VENDOR SPECIFIC ATA/ATM INSTALLATION CUT SHEETS AND PROVIDING COPIES OF THESE CUT SHEETS TO THE GC. GENERAL CONTRACTOR IS RESPONSIBLE FOR ENSURING THAT THEIR ELECTRICAL SUBCONTRACTOR IS PROVIDED A COPY OF THESE SAME INSTALLATION CUT SHEETS.
V. PROVIDE MANUFACTURER'S ELECTRICAL DEVICE COVER PLATES PER MANUFACTURER'S STANDARD AS FOLLOWS.
USE WHITE DEVICES AND COVER PLATES FOR WALLS WITH P-15 & P-16 FINISHES
USE BLACK DEVICES AND COVER PLATES FOR WALLS WITH P-17, P-18, P-20, WC-16, WC-17 & WC-18 FINISHES.

POWER AND COMM. PLAN LEGEND:

- WALL MOUNTED DUPLEX
- WALL MOUNTED FOURPLEX
- QUADRAPLEX ISOLATED
- WALL MOUNTED DEDICATED DUPLEX
- WALL MOUNTED SEPARATE DUPLEX
- WALL MOUNTED DEDICATED FLOURPLEX
- WALL MOUNTED HALF DEDICATED FOURPLEX
- WALL MOUNTED SPECIAL OUTLET
- GFI GROUND FAULT INTERRUPTER ELECTRICAL RECEPTACLE
- C DEDICATED 120V L5-20R OUTLET ABOVE RACKS ON UNISTRUT
- D DEDICATED 120V NEMA-20R OUTLET ABOVE RACKS ON UNISTRUT
- WALL MOUNTED TELE/DATA RECEPTICAL - SINGLE DROP
- WALL MOUNTED 1 TELE/2 DATA RECEPTICAL - DUAL DROP
- WALL MOUNTED PHONE RECEPTACLE
- FLUSH FLOOR MOUNTED TELE/DATA RECEPTACLE
- FLUSH FLOOR MOUNTED 1 TELE/2 DATA RECEPTACLE
- F FIRE ALARM PULL BOX
- FIRE ALARM HORN STROBE
- EQUIPMENT ITEM - SEE SCHEDULE
- FLUSH FLOOR MOUNTED DUPLEX
- DR DOOR RELEASE BUTTON
- AV WALL MOUNTED A/V RECEPTACLE
- TV WALL MOUNTED RECEPTACLE FOR TV, CAMERA OR MONITOR; 3" SQUARE
- POWER POLE
- J FLUSH WALL MOUNTED POWER JUNCTION BOX WITH HARDWIRE CONNECTION
- T THERMOSTAT
- CO2 CO2 SENSOR
- EQUIPMENT WITHOUT POWER SUPPLY
- EQUIPMENT WITH POWER SUPPLY
- LIGHT SWITCH

POWER AND COMM. PLAN KEY NOTES:

1 PROVIDE POWER FOR WATER HEATER. REFER TO PLUMBING DRAWINGS FOR LOCATION & ELECTRICAL DRAWINGS FOR REQUIREMENTS
2 REFER TO DRAWING A08.01 FOR OUTLET LOCATIONS
3 FLUSH MOUNTED FLOOR P/C BOX. COORDINATE ALL ELECTRICAL DRAWINGS
4 REFER TO MILLWORK DRAWINGS FOR OUTLET LOCATION
5 GC TO PROVIDE AND INSTALL KEY SWITCH FOR PARABIT CARD READER AS SHOWN ON A12.11
6 REFER TO UCR ELEVATIONS FOR OUTLET LOCATION.
7 FIRE ALARM REMOTE ANNUNCIATOR LOCATION
8 PROVIDE JUNCTION BOX FOR ALL CEILING MOUNTED SECURITY CAMERAS. COORDINATE WITH SECURITY VENDOR
9 PROVIDE DEDICATED DUPLEX OUTLET AND DUAL DATA DROP 4" BELOW CEILING FOR "NEVER DOWN WIFI" EQUIPMENT
10 POWER ABOVE CEILING FOR COILING GRILLE MOTOR. COORDINATE WITH COILING GRILLE VENDOR FOR POWER REQUIREMENTS
11 REFER TO DRAWING A12.03 FOR OUTLET LOCATION. LIGHT FIXTURE TO ACTIVATE UPON DOOR OPENING
12 PROVIDE POWER FOR ATM SURROUND
13 PROVIDE J-BOX BELOW THE LAVATORY FOR VOLTAGE ADAPTOR CONNECTION. COORDINATE WITH PRODUCT DATA CUT SHEETS FOR FAUCET POWER REQUIREMENTS
14 PROVIDE POWER TO CONVERTER FOR SECURITY VENDORS WIRING TO DOOR LOCK DEVICE AS REQUIRED
15 PROVIDE GANG JUNCTION BOX FOR CASH SAFE POWER. COORDINATE WITH VENDOR FOR POWER/DATA NEEDED FOR SECURITY. CONDUIT FOR POWER AND DATA TO BE CONCEALED BEHIND MILLWORK
16 PROVIDE POWER ON SEPARATE CIRCUIT FOR FLAG POLE LIGHT
17 PROVIDE AND INSTALL POWER AS REQUIRED FOR EXTERIOR SIGNAGE. COORDINATE WITH SIGN VENDOR FOR POWER REQUIREMENTS/LOCATION
18 PROVIDE JUNCTION BOX FOR EXTERIOR MOUNTED SECURITY CAMERAS. COORDINATE FINAL & ALL LOCATIONS WITH SECURITY VENDOR
19 REFER TO ELECTRICAL/FIRE PROTECTION DRAWINGS FOR NER LAYOUT
20 ELECTRICAL PANELS. REFER TO ELECTRICAL DRAWINGS
22 REFER TO ATM VENDOR CUTSHEETS, PROVIDED BY PJM, FOR ADDITIONAL SPECIFIC ATM DEVICE DETAILS AND ELECTRICAL REQUIREMENTS, CONSTRUCTION ROUGH OPENING DIMENSIONS AND ELECTRICAL CIRCUIT DESIGN ON THESE DRAWINGS SUPERCEDE MANUFACTURER'S NOTES. BRING ANY OTHER DISCREPANCIES TO ARCHITECT'S ATTENTION PRIOR TO PROCEEEDING WITH WORK.
24 COORDINATE TV P/C WITH ELEVATION AND VENDOR CUTSHEET. PROVIDE CHIEFN LSTU "FIXED THINSTALL UNIVERSAL" TV MOUNT OVER 18" HIGH 3/4" FIRE TREATED PLYWOOD BLOCKING FASTENED TO MINIMUM OF (2) METAL STUDS.
25 PROVIDE POWER AND DATA TO J-BOXES ON TOP OF CHIEF PAC527L IN-WALL BOX RECESSED BEHIND MONITOR WALL TO HOUSE VENDOR PROVIDED ONECONNECT BOX. SEE DETAILS ON A12.02 FOR ADDITIONAL INFORMATION.
26 J-BOX ABOVE CEILING FOR SPEAKERS. REFER TO MEDIA DRAWINGS FOR MORE INFORMATION.
27 INSTALL INVERTER ON 4" HOUSEKEEPING PAD EXTENDING 2" BEYOND EQUIPMENT ON ALL SIDES
29 PROVIDE POWER/DATA FOR KNOX BOX AS REQUIRED. COORDINATE WITH LOCAL FIRE AUTHORITY FOR KNOX BOX TYPE AND MANUFACTURER
30 (X2) 4" DIA SLEEVES OVERHEAD FOR DATA CABLING ACCESS.
31 (X2) 4" DIA CONDUIT STUBS FOR TELE/DATA SERVICE
32 (X5) 1/2" DIA CONDUIT STUBS
33 PROVIDE CONDUIT AND PULL STRING FOR FUTURE ATM POWER AND DATA
34 PROVIDE CONDUIT AND PULL STRING FOR FUTURE CABLING
35 PUSH TO EXIT & KEY SWITCH/EMERGENCY BUTTON
36 J-BOX FOR LED MIRROR

NORTH

NELSON
Nelco Architecture, Inc.

12400 Coit Road, Suite 510
Dallas, TX. 75251
Phone: (972) 644-8830
Fax: (972) 644-8496

Client Representative:
CUSHMAN & WAKEFIELD
Attn: Paul Hurchanik
Tel: 720.582.6073
Email: paul.hurchanik@cushwake.com

Architect:
Nelco Architecture, Inc.
Attn: Harry Koutsis
Tel: 310.693.5271
Email: hkoutsis@nelsonww.com

AOR Contact
Robert J. Sullivan Jr.
Tel: 216.830.1561
Email:rsullivan@nelsonww.com
License No. ARC.00405343

Civil:
LANGAN
Attn: Ben Henry
Tel: (817) 328-3217
Email: bhenry@langan.com

Structural:
Salas O'Brien
Attn: Julie Bolding
Tel: 469-782-9753
Email: julie.bolding@salasobrien.com

MEP:
Salas O'Brien
Attn: Carly Wood
Tel: 727-804-7626
Email: carly.wood@salasobrien.com

Description:	No:	Date:
IF COE Package		11/09/2023
IF Design Development 90%		07/19/2024
IF Design Development Final		08/19/2024
IF Construction Document Review		09/20/2024
IF Construction Document Final		12/05/2024
IF CD 90		08/15/2025
IF Permit		08/26/2025

BANK OF AMERICA
Broomfield

CO1-111
NWC Hwy 7 and Palisade Pkwy
Broomfield CO, 80023

PROPERTY ID: CO1-111
NSRP VERSION: 2.0
BULLETIN: 2-2025

POWER & COMMUNICATION PLAN

COLORADO LICENSED
ROBERT JOHN SULLIVAN JR.
00405343
ARCHITECT
09/04/2025

Project No: 23.0002261.000 Reviewed By: MB

A03.01

C:\Users\kgosier\Revit_Locals\2023\CO1-111 Broomfield_for SDP_cgosier53725.rvt
9/3/2025 4:20:29 PM

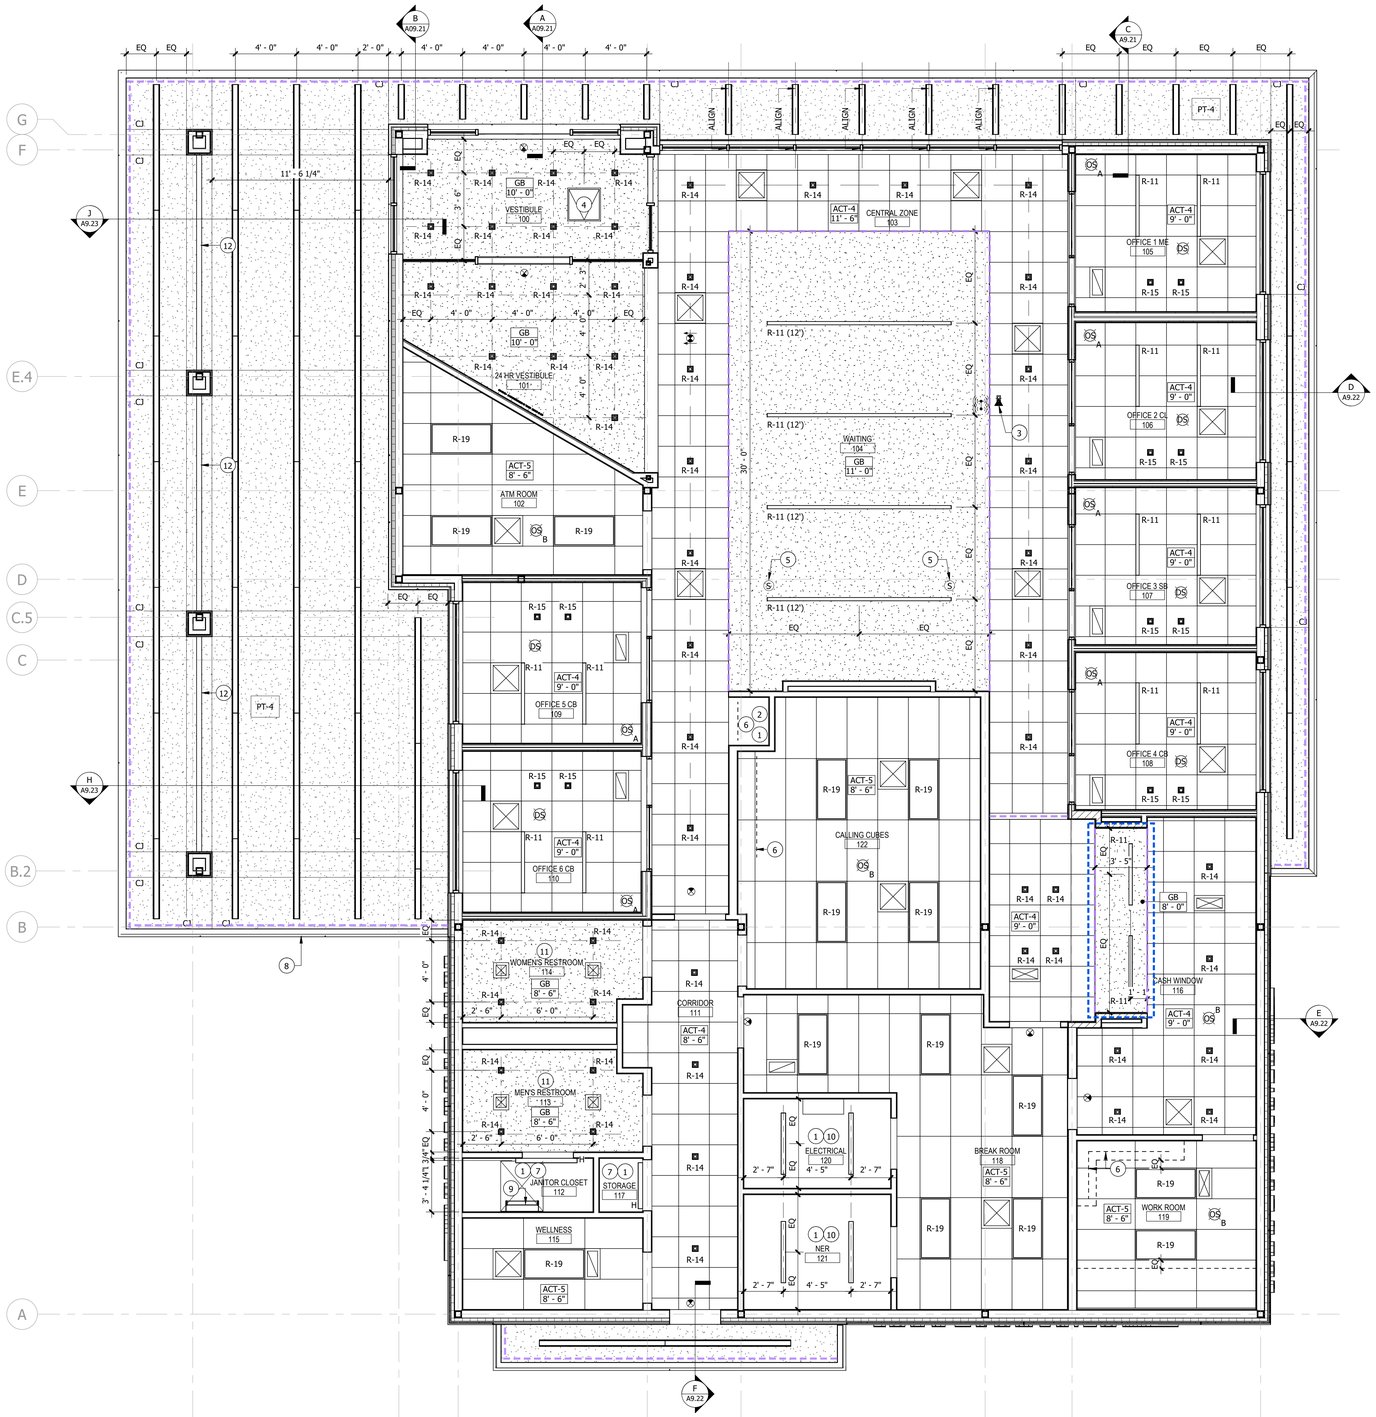

1 REFLECTED CEILING PLAN
A04.01 1/4" = 1'-0"

REFLECTED CEILING PLAN NOTES:

A. ALL CEILING HEIGHTS SHALL BE 8'-6", UNLESS NOTED OTHERWISE. CEILING HEIGHTS SHOWN ARE NOMINAL.
B. ALL CEILING GRID AND CEILING TILES SHALL BE ACT-4, UNLESS NOTED OTHERWISE.
C. COORDINATE LENGTHS OF UNDER CABINET FIXTURES WITH SCHEDULED MILLWORK CABINETS.
D. REFER TO A00.40 FOR FINISH SCHEDULE.
E. GYP. BOARD CEILING PAINTED P-15 UNLESS NOTED OTHERWISE
F. REFER TO SHEET A09.33 FOR WIRELESS APPLICATION PROTOCOL MOUNTING DETAIL.

REFLECTED CEILING PLAN KEY NOTES:

1. OPEN TO STRUCTURE ABOVE.
2. REFER TO PRINTER CABINET DETAIL A12.03 FOR LOCATION OF OC SENSOR.
3. LOCATION FOR WIRELESS ACCESS PROTOCOL DEVICE FOR DIGITAL POSTER. COORDINATE LOCATION WITH TECHNOLOGY VENDOR.
4. 2' X 2' LOCKING ACCESS PANEL. KEYED TO MATCH MAIN ENTRY.
5. SPEAKERS BY OWNERS VENDOR
6. UNDER CABINET LIGHTS. REFER TO ELECTRICAL DRAWINGS. COORDINATE LIGHT LENGTH WITH MILLWORK.
7. LIGHT FIXTURE MOUNTED ON WALL OVER DOOR FRAME. LIGHT FIXTURE MOUNTED ON WALL OVER DOOR FRAME.
8. LANE SIGNAGE. REFER TO EXTERIOR ELEVATIONS FOR MORE INFORMATION.
9. ROOF HATCH AND LADDER. PROVIDE BLOCKING AS REQUIRED.
10. CHAIN HUNG LIGHT FIXTURES.
11. INSTALL SOUND BATT INSULATION ABOVE CEILING.
12. SA-4 SCREEN VENT AS SPECIFIED.

REFLECTED CEILING PLAN LEGEND:

- ACT 1 / 8' - 0" — CEILING HEIGHT AND FINISH
- NEW ACOUSTICAL SUSPENDED CEILING TILE AND GRID SYSTEM (ACT-4 U.N.O.)
- NEW SUSPENDED GYPSUM WALL BOARD CEILING/SOFFIT
- 2'x4' LIGHT FIXTURE
- 1'x4' LIGHT FIXTURE
- UNDER CABINET FIXTURE
- ACCESS DOOR
- NEW 2'x2' HVAC DIFFUSER/GRILLE
- NEW 2'x2' HVAC DIFFUSER/GRILLE
- OS A — PASSIVE INFARED OCCUPANCY SENSOR
- OS B — 360 DEGREE - TWO SIDED OCCUPANCY SENSOR
- OS D — PASSIVE INFARED WALL SWITCH OCCUPANCY SENSOR
- DS A — DAYLIGHT SENSOR
- S — CEILING MOUNTED SPEAKERS
- CEILING MOUNTED EXIT SIGN
- M — MOTION DETECTOR
- SD — SMOKE DETECTOR
- F — FIRE ALARM PULL STATION
- F — FIRE ALARM HORN/STROBE
- F — FIRE ALARM STROBE
- SECURITY CAMERA
- D — DOME CAMERA

NELSON
Nelco Architecture, Inc.

12400 Coit Road, Suite 510
Dallas, TX. 75251
Phone: (972) 644-8830
Fax: (972) 644-8496

Client Representative:
CUSHMAN & WAKEFIELD
Attn: Paul Hurchanik
Tel: 720.582.6073
Email: paul.hurchanik@cushwake.com

Architect:
Nelco Architecture, Inc.
Attn: Harry Koutsis
Tel: 310.693.5271
Email: hkoutsis@nelsonww.com

AOR Contact
Robert J. Sullivan Jr.
Tel: 216.830.1561
Email:rsullivan@nelsonww.com
License No. ARC.00405343

Civil:
LANGAN
Attn: Ben Henry
Tel: (817) 328-3217
Email: bhenry@langan.com

Structural:
Salas O'Brien
Attn: Julie Bolding
Tel: 469-782-9753
Email: julie.bolding@salasobrien.com

MEP:
Salas O'Brien
Attn: Carly Wood
Tel: 727-804-7626
Email: carly.wood@salasobrien.com

Description:	No: Date:
IF Schematic Design Final	09/29/2023
IF COE Package	11/09/2023
IF Design Development 90%	07/19/2024
IF Design Development Final	08/19/2024
IF Construction Document Review	09/20/2024
IF Construction Document Final	12/05/2024
IF CD 90	08/15/2025
IF Permit	08/26/2025

BANK OF AMERICA
Broomfield

CO1-111
NWC Hwy 7 and Palisade Pkwy
Broomfield CO, 80023

PROPERTY ID:	CO1-111
NSRP VERSION:	2.0
BULLETIN:	2-2025

REFLECTED CEILING PLAN

COLORADO LICENSED
ROBERT JOHN SULLIVAN JR.
00405343
ARCHITECT
09/04/2025

NORTH

Project No: 23.0002261.000 Reviewed By: MB

A04.01

9/3/2025 4:20:33 PM C:\Users\cpoisler\Revit_Locals\2023\CO1-111 Broomfield_for SSP_cpoisler53725.rvt

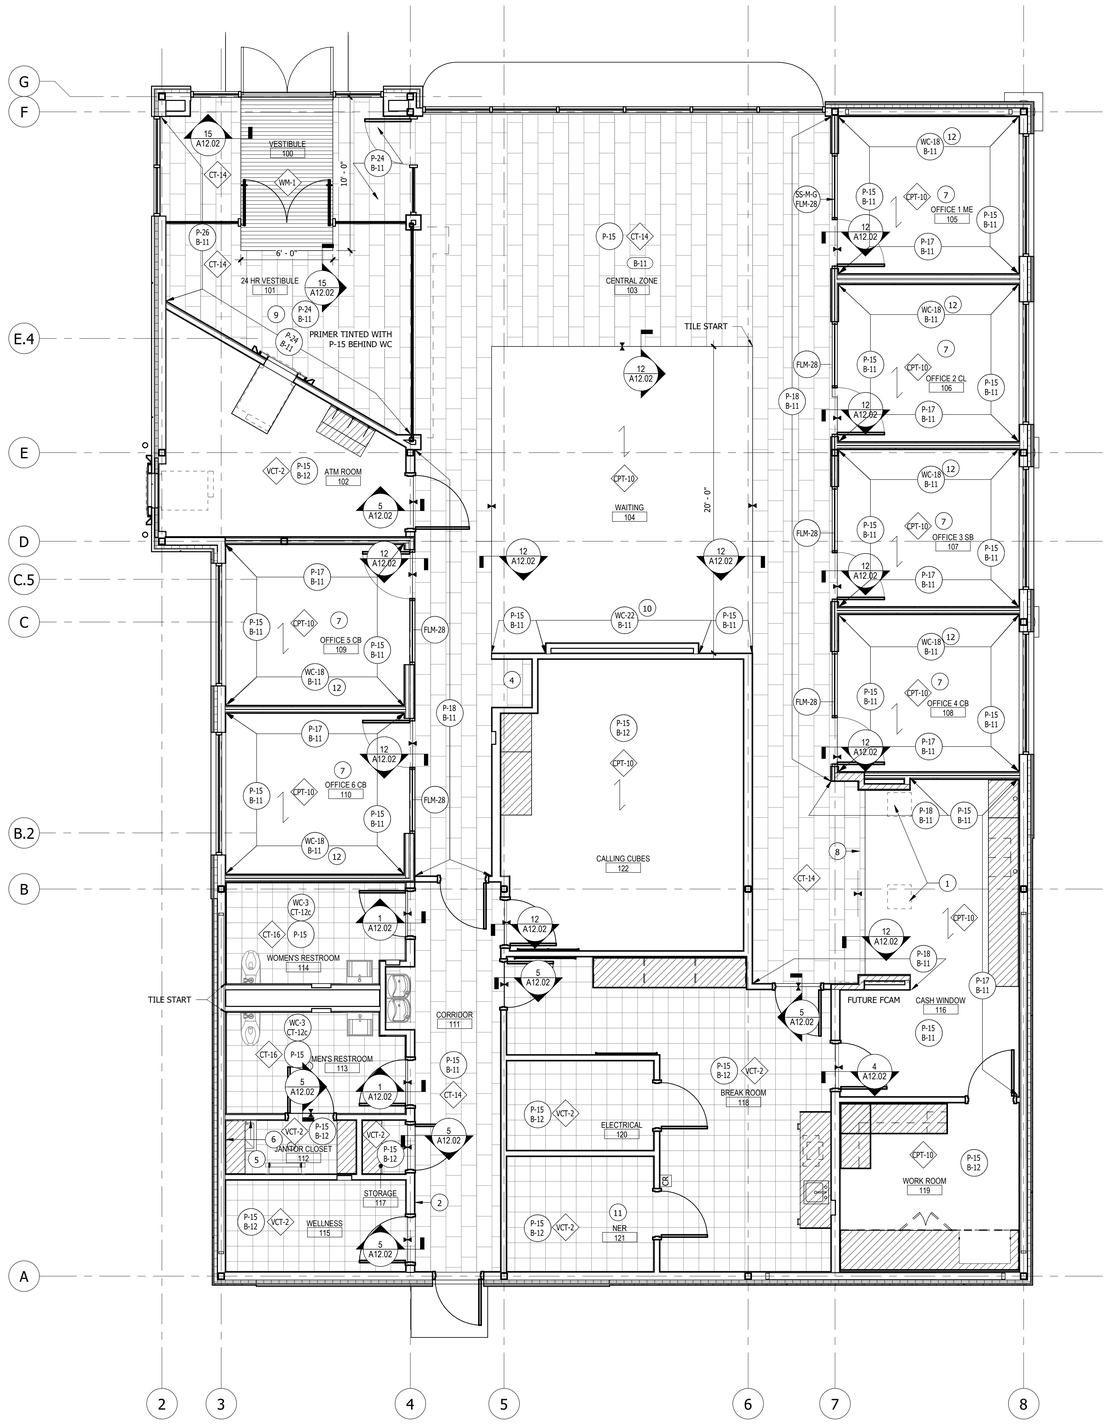

1 A05.01 FINISH PLAN
1/4" = 1'-0"

FINISH PLAN NOTES:

A. REFER TO FINISH SCHEDULE A00.31
B. REFER TO SHEET A00.00 and A00.31 FOR EXTENT OF FINISHES AND FOR ADDITIONAL NOTES.
C. ALL PARTITIONS SHALL BE PAINTED, P-15 UNO.
D. ALL PARTITIONS TO RECEIVE WALL BASE B-11 UNO.
E. ALL FLOORS SHALL BE CARPET CPT-10 UNO.
F. ALL EXPOSED SURFACES OF SOFFIT AND BULKHEADS SHALL BE PAINTED P-15 UNO.
G. REFER TO DETAIL 4/A12.02 FOR CARPET TO VCT TRANSITION.
H. REFER TO DETAIL 8/A12.02 FOR CERAMIC TILE TO VCT TRANSITION.
I. REFER TO DETAIL 12/A12.02 FOR CERAMIC TILE TO CARPET TRANSITION.
J. PROVIDE STRAIGHT, FLUSH RESILIENT BASE AT CARPETED AREAS, ADD COVED, TOP SET RESILIENT BASE AT RESILIENT FLOORING, UNLESS OTHERWISE NOTE.
K. REFER TO FINISH NOTES ON SHEET A08.01 FOR FINISHES IN RESTROOMS.
L. ALL SOLID WOOD DOORS AND HOLLOW METAL FRAMES TO BE PAINTED TO MATCH ADJACENT COLOR IN SEMI GLOSS FINISH.
M. ENSURE SURFACES TO RECEIVE FINISHES ARE CLEAN, TRUE AND FREE OF IRREGULARITIES. DO NOT PROCEED WITH WORK UNTIL UNSATISFACTORY CONDITIONS HAVE BEEN CORRECTED.
N. ALL INTERIOR WALL AND CEILING FINISHES AND TRIM WITHIN PUBLIC AREAS SHALL COMPLY WITH CLASS A MATERIAL CLASSICATION; FLAME SPREAD RATING 0 TO 25, SMOKED DEVELOPED 200.
O. ALL INTERIOR WALL AND CEILING FINISHES AND TRIM WITHIN NON-PUBLIC AREAS SHALL COMPLY WITH CLASS B MATERIAL CLASSIFICATION; FLAME SPREAD RATING 26 TO 75, SMOKE DEVELOPED 450.

FINISH PLAN KEY NOTES:

1. TELLER LINE MILLWORK AND UNDER COUNTER STEEL TO BE INSTALLED DIRECTLY ON TOP OF CONCRETE FLOOR SLAB.
2. WELLNESS ROOM SIGNAGE BY SIGNAGE VENDOR.
3. NOT USED
4. TILE TO BE PROVIDED INTO NICHE UNDER PRINTER CABINET MILLWORK.
5. LADDER TO BE FINISHED PER SPEC.
6. FRP FROM FLOOR TO 4'-0" AFF, WIDTH TO MATCH WIDTH OF MOP SINK AT BOTH SIDES.
7. INSTALL WALL BASE AFTER FURNITURE HAS BEEN INSTALLED
8. COORDINATE FLOORING TERMINATION WITH IDX TELLER MILLWORK.
9. TO PREP FOR WALLCOVERING WC-20 PROVIDE LEVEL 5 FINISH AND COAT WALL USING BM FRESH START HIGH HIDING ALL PURPOSE PRIMER TINTED P-15. PRIMER TO DRY A MINIMUM OF 10 DAYS BEFORE INSTALLATION OF WALLCOVERING.
10. TO PREP FOR WALLCOVERING WC-22 PROVIDE LEVEL 5 FINISH AND COAT WALL USING BM FRESH START HIGH HIDING ALL PURPOSE PRIMER TINTED P-20. PRIMER TO DRY A MINIMUM OF 10 DAYS BEFORE INSTALLATION OF WALLCOVERING.
11. PAINT ALL WALLS IN NER - DO NOT PAINT OVER FIRE RATED STAMP
12. INSTALL BOTTOM OF WC-18 ABOVE WALL BASE

FINISH PLAN LEGEND:

- WALL FINISH / WALL BASE / EXTENT OF FINISH
- WALL FINISH / EXTENT OF FINISH
- WALL BASE FINISH
- FLOOR FINISH
- CHANGE IN FLOOR FINISH

NELSON
Nelco Architecture, Inc.

12400 Coit Road, Suite 510
Dallas, TX. 75251
Phone: (972) 644-8830
Fax: (972) 644-8496

Client Representative:
CUSHMAN & WAKEFIELD
Attn: Paul Hurchanik
Tel: 720.582.6073
Email: paul.hurchanik@cushwake.com

Architect:
Nelco Architecture, Inc.
Attn: Harry Koutsis
Tel: 310.693.5271
Email: hkoutsis@nelsonww.com

AOR Contact
Robert J. Sullivan Jr.
Tel: 216.830.1561
Email:rsullivan@nelsonww.com
License No. ARC.00405343

Civil:
LANGAN
Attn: Ben Henry
Tel: (817) 328-3217
Email: bhenry@langan.com

Structural:
Salas O'Brien
Attn: Julie Bolding
Tel: 469-782-9753
Email: julie.bolding@salasobrien.com

MEP:
Salas O'Brien
Attn: Carly Wood
Tel: 727-804-7626
Email: carly.wood@salasobrien.com

Description:	No:	Date:
IF Schematic Design Final		09/29/2023
IF COE Package		11/09/2023
IF Design Development 90%		07/19/2024
IF Design Development Final		08/19/2024
IF Construction Document Review		09/20/2024
IF Construction Document Final		12/05/2024
IF CD 90		08/15/2025
IF Permit		08/26/2025

BANK OF AMERICA
Broomfield

CO1-111
NWC Hwy 7 and Palisade Pkwy
Broomfield CO, 80023

PROPERTY ID:	CO1-111
NSRP VERSION:	2.0
BULLETIN:	2-2025

FINISH PLAN

COLORADO LICENSED
ROBERT JOHN SULLIVAN JR.
00405343
ARCHITECT
09/04/2025

NORTH

Project No: 23.0002261.000 Reviewed By: MB

A05.01

C:\Users\cgosier\Revit_Locals\2023\CO1-111 Broomfield_for SDP_cgosier532725.rvt
9/3/2025 4:20:37 PM

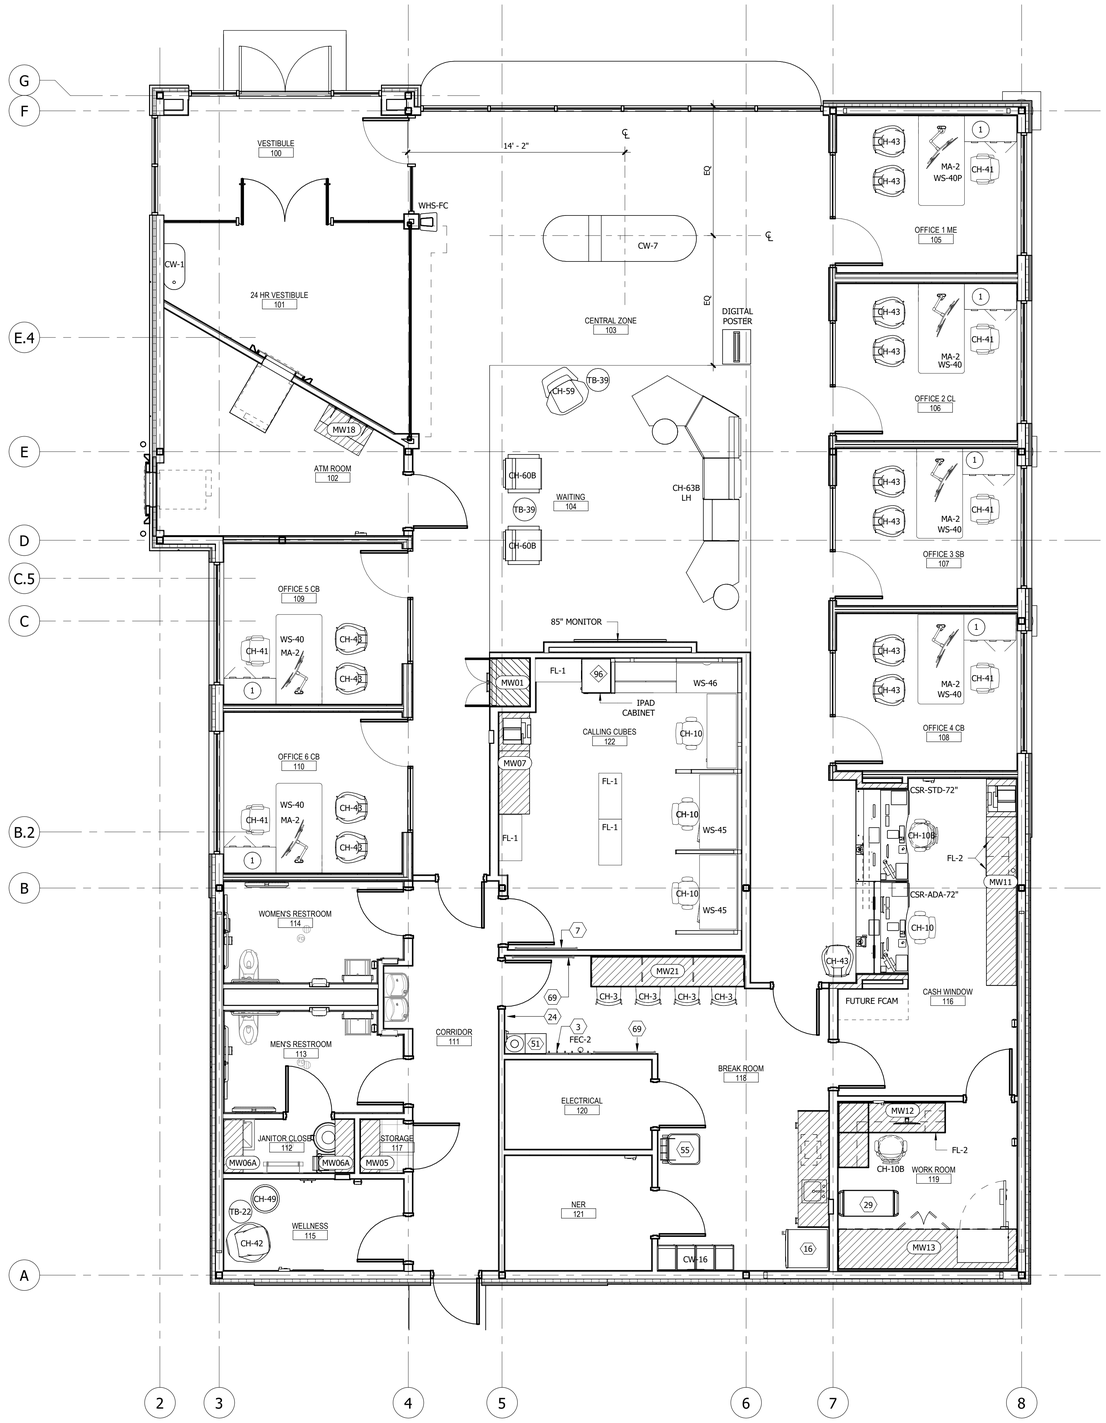

1 A06.01 FURNITURE PLAN
1/4" = 1'-0"

FURNITURE PLAN KEY NOTES:

1 REFER TO A11.01 FOR ELEVATION OF UCR DESK

FURNITURE SCHEDULE:

ADA ACCESSIBLE WORKSTATION, CHAIRS AND CREDENZA ARE PROVIDED AND INSTALLED BY BANK'S FURNITURE VENDOR. CONTRACTOR TO COORDINATE WITH VENDOR, SHOWN FOR CLARIFICATION ONLY.

FURNITURE AND MILLWORK LISTED BELOW TO BE ORDERED BY PJM

BANK VENDOR		
WHS-FC	WELLNESS HAND SANITIZER	1
B&N		
CW-1	CHECK DESK 3'	1
CW-7	CLIENT ENGAGEMENT TABLE	1
BERNHARDT		
CH-42	BERNHARDT CANELLE	1
CH-43	BERNHARDT CHANTAL	13
CH-45	BERNHARDT BARSTOOL MEZZO	4
CH-49	BERNHARDT OTTOMAN APEL	1
CH-52	BERNHARDT OTTOMAN COLOURS	1
CH-53	BERNHARDT OTTOMAN COLOURS	1
TB-22	BERNHARDT QUIET TABLE	1
DMG		
85" SAMSUNG MONITOR	SAMSUNG WALL MOUNTED LED MONITOR	1
HBF		
CH-59	HBF FULTON LOUNGE CHAIR	1
CH-60B	HBF CITYSCAPE-2 LOUNGE CHAIR WITH ARMS	2
CH-63B LH	HBF CITYSCAPE-2 LARGE	1
TB-39	HBF CITYSCAPE TABLE	2
HUMANSCALE		
CH-41	HUMANSCALE PATH CHAIR	6
PROVIDED & INSTALLED BY GC		
CW-16	HOLLMAN BREAK ROOM LOCKERS MODEL FLC1	1
STEELCASE		
CH-3	STEELCASE MOVE CHAIR	4
CH-10	STEELCASE TURNSTONE JACK CHAIR	4
CH-10B	STEELCASE SERIES 1 STOOL	2
FL-1	STEELCASE ANSWER LATERAL FILE	4
FL-2	STEEELCASE 2-HIGH LATERAL FILE	3
MA-2	MONITOR ARM (DUAL) - X2ABTWETB12	6
WS-40	WORKSTATION	5
WS-40P	WORKSTATION W/ PRINTER CABINET	1
WS-45	STEELCASE ANSWER WORKSTATION	2
WS-46	STEELCASE ANSWER WORKSTATION	1

- EQUIPMENT WITHOUT POWER SUPPLY
- EQUIPMENT WITH POWER SUPPLY

NELSON
Nelco Architecture, Inc.

12400 Coit Road, Suite 510
Dallas, TX. 75251
Phone: (972) 644-8830
Fax: (972) 644-8496

Client Representative:
CUSHMAN & WAKEFIELD
Attn: Paul Hurchanik
Tel: 720.582.6073
Email: paul.hurchanik@cushwake.com

Architect:
Nelco Architecture, Inc.
Attn: Harry Koutsis
Tel: 310.693.5271
Email: hkoutsis@nelsonww.com

AOR Contact
Robert J. Sullivan Jr.
Tel: 216.830.1561
Email:rsullivan@nelsonww.com
License No. ARC.00405343

Civil:
LANGAN
Attn: Ben Henry
Tel: (817) 328-3217
Email: bhenry@langan.com

Structural:
Salas O'Brien
Attn: Julie Bolding
Tel: 469-782-9753
Email: julie.bolding@salasobrien.com

MEP:
Salas O'Brien
Attn: Carly Wood
Tel: 727-804-7626
Email: carly.wood@salasobrien.com

Description:	No:	Date:
IF Schematic Design Final		09/29/2023
IF COE Package		11/09/2023
IF Design Development 90%		07/19/2024
IF Design Development Final		08/19/2024
IF Construction Document Review		09/20/2024
IF Construction Document Final		12/05/2024
IF CD 90		08/15/2025
IF Permit		08/26/2025

BANK OF AMERICA
Broomfield

CO1-111
NWC Hwy 7 and Palisade Pkwy
Broomfield CO, 80023

PROPERTY ID: CO1-111
NSRP VERSION: 2.0
BULLETIN: 2-2025

FURNITURE PLAN

COLORADO LICENSED
ROBERT JOHN SULLIVAN JR.
00405343
ARCHITECT
09/04/2025

NORTH

Project No: 23.0002261.000 Reviewed By: MB

A06.01

9/3/2025 4:20:44 PM C:\Users\kgosier\Revit_Locals\2023\CO1-111 Broomfield_for SDP_cgosier53725.rvt

TOILET ROOM KEY NOTES: (No.)

1. FLOOR DRAIN, SEE PLUMBING DRAWINGS.
2. WATER CLOSET PER BOFA STANDARDS.
3. RESTROOM SIGNAGE PROVIDED BY B&N AND INSTALLED BY GC. REFER TO SHEET SEE DETAIL 13/A00.41 FOR LOCATION.
4. WALL MOUNTED OUTLET/RECEPTACLE. SEE ELECTRICAL DRAWINGS.
5. NOT USED.
6. PROVIDE OUTSIDE COVE BASE CORNER TILE.
7. MOUNT J-BOX BELOW LAV FOR VOLTAGE ADAPTOR CONNECTION. PLACE OUT OF CUSTOMER VIEW.
8. GC TO MOUNT THE MIRROR TO THE FACE OF GYPSUM BOARD AND PROVIDE FRP AROUND THE MIRROR'S HOUSING

TOILET ROOM SHEET NOTES:

A. SEE SHEET A00.40 FOR FINISH SCHEDULE.

B. ALL GYPSUM BOARD WALLS TO BE PAINTED P-15.

C. REFER TO SPECIFICATIONS FOR TOILET ACCESSORY PRODUCT INFORMATION.

D. ALL TOILET ACCESSORIES SHALL BE LOCATED AND MOUNTED.

E. CONTRACTOR TO PROVIDE FRT BLOCKING IN WALLS FOR ALL TOILET ROOM ACCESSORIES AND FIXTURES AS REQUIRED.

F. USE MOISTURE RESISTANT GYPSUM BOARD BEHIND TOILET AND LAVATORY.

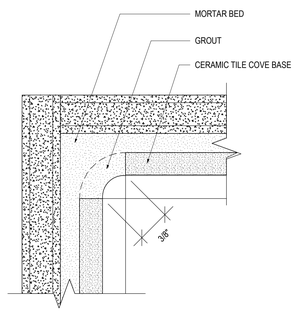

8 A08.01 INSIDE CORNER TILE DETAIL
12" = 1'-0"

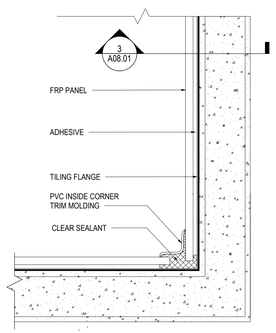

7 A08.01 INSIDE CORNER FRP DETAIL
1/2" = 1'-0"

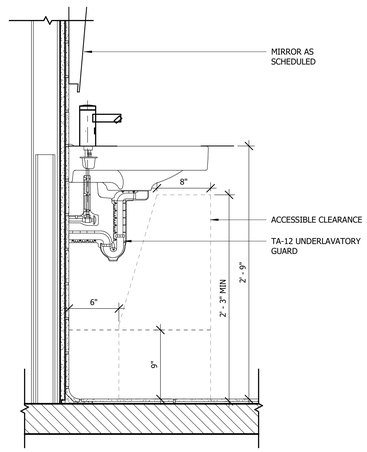

6 A08.01 DETAIL SECTION @ LAVATORY
1 1/2" = 1'-0"

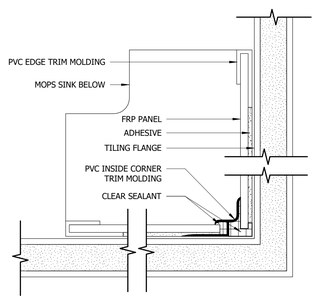

5 A08.01 PLAN SECTION @ MOP SINK
12" = 1'-0"

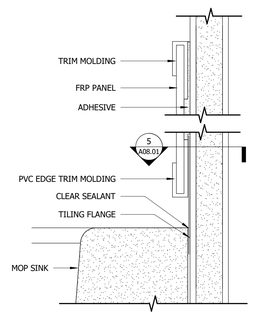

4 A08.01 SECTION @ MOP SINK
12" = 1'-0"

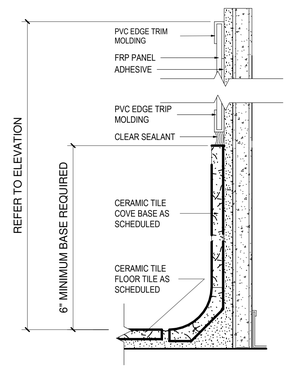

3 A08.01 RESTROOM FRP/TILE DETAIL
6" = 1'-0"

TOILET ROOM FINISH SCHEDULE		
MARK/LOCATION	DESCRIPTION	SIZE/LOCATION
CT-16 MEN/WOMEN	FLOOR TILE	REFER TO FINISH PLAN
WC-3 MEN/WOMEN	WALL COVERING	REFER TO ELEVATION
CT-12C MEN/WOMEN	COVE BASE	6x6x5/16" REFER TO ELEVATION
P-15 MEN/WOMEN	PAINT	TOP OF FRP - 6" ABOVE CEILING
REFER TO A00.40 FOR DETAILED SPECIFICATIONS REGARDING FINISHES		

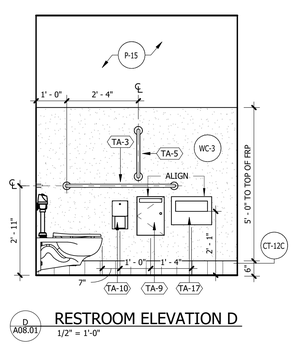

D A08.01 RESTROOM ELEVATION D
1/2" = 1'-0"

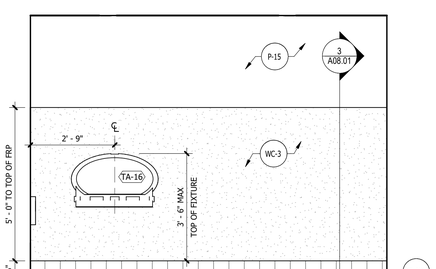

C A08.01 RESTROOM ELEVATION C
1/2" = 1'-0"

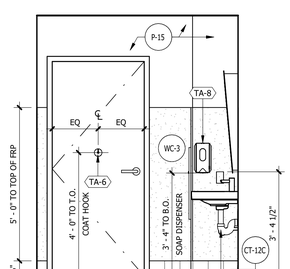

B A08.01 RESTROOM ELEVATION B
1/2" = 1'-0"

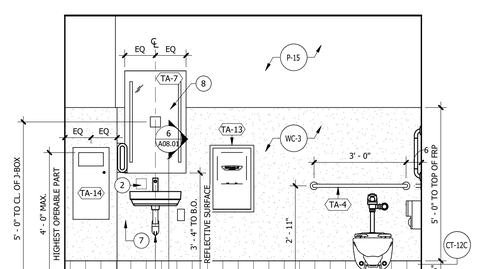

A A08.01 RESTROOM ELEVATION A
1/2" = 1'-0"

TOILET ACCESSORY LEGENDS			
MARK	LOCATION	DESCRIPTION	MOUNTING HEIGT
TA-2	BREAKROOM, WELLNESS	RECESSED PAPER TOWEL DISPENSER	REFER TO ELEVATION
TA-3	MEN, WOMEN	GRAB BAR 42" LONG	35" AFF TO CENTER LINE
TA-4	MEN, WOMEN	GRAB BAR 36" LONG	35" AFF TO CENTER LINE
TA-5	MEN, WOMEN	GRAB BAR 18" LONG	48" AFF TO CENTERLINE
TA-6	MEN, WOMEN	UTLITY HOOK	48" AFF TO TOP OF HOOK
TA-7	MEN, WOMEN	ADA LED BACKLIT MIRROR	40" AFF TO BOTTOM OF REFLECTIVE SURFACE
TA-8	MEN, WOMEN	AUTOMATED TOUCHLESS SOAP DISPENSER	REFER TO ELEVATION
TA-9	WOMEN	SURFACE MOUNTED SANITARY NAPKIN DISPOSAL	REFER TO ELEVATION
TA-10	MEN, WOMEN	TOILET PAPER DISPENSER	19" AFF TO CENTERLINE OF ROLL
TA-12	MEN, WOMEN	UNDERLAVATORY GUARDS	REFER TO ELEVATION
TA-13	MEN, WOMEN	HAND DRYER W/ ADA COMPLIANT RECESS KIT	REFER TO ELEVATION AND ACCESSIBILITY DETAILS
TA-14	MEN, WOMEN	RECESSED WASTE RECEPTACLE	REFER TO ELEVATION
TA-16	MEN, WOMEN	KB208 SURFACE MOUNTED BABY CHANGING STATION	REFER TO ELEVATION
TA-17	MEN, WOMEN	SURFACE MOUNTEED TOILET SEAT COVER DISPENSER	REFER TO ELEVATION
TA-19	WELLNESS	MIRROR	40" AFF TO BOTTOM OF REFLECTIVE SURFACE

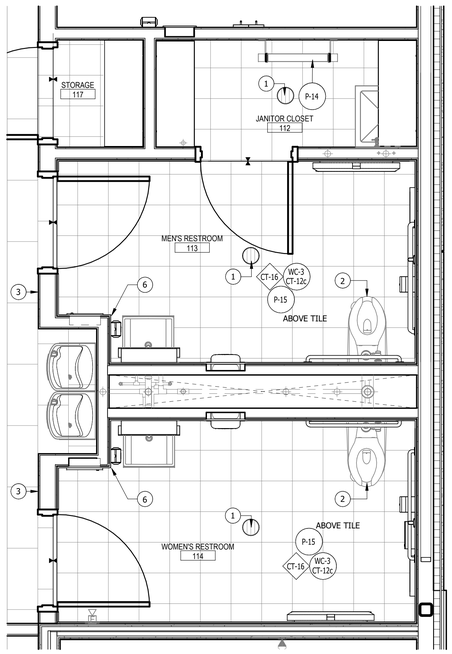

2 A08.01 ENLARGED RESTROOM FINISH PLAN
1/2" = 1'-0"

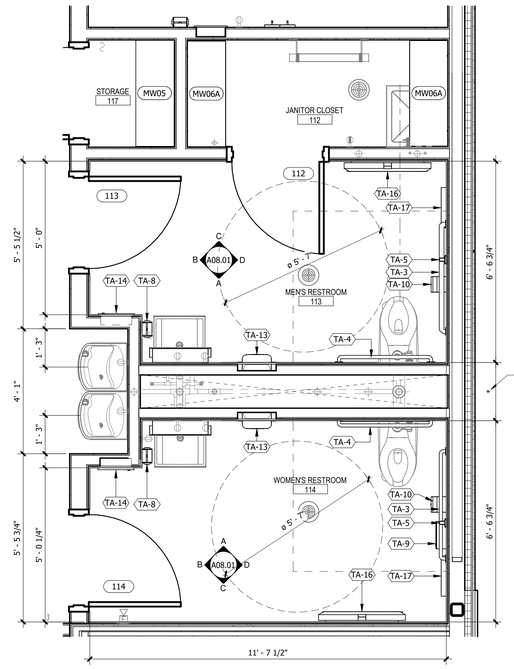

1 A08.01 ENLARGED RESTROOM FLOOR PLAN
1/2" = 1'-0"

NELSON
Nelco Architecture, Inc.

12400 Coit Road, Suite 510
Dallas, TX. 75251
Phone: (972) 644-8830
Fax: (972) 644-8496

Client Representative:
CUSHMAN & WAKEFIELD
Attn: Paul Hurchanik
Tel: 720.582.6073
Email: paul.hurchanik@cushwake.com

Architect:
Nelco Architecture, Inc.
Attn: Harry Koutsis
Tel: 310.693.5271
Email: hkoutsis@nelsonww.com

AOR Contact
Robert J. Sullivan Jr.
Tel: 216.830.1561
Email:rsullivan@nelsonww.com
License No. ARC.00405343

Civil:
LANGAN
Attn: Ben Henry
Tel: (817) 328-3217
Email: bhenry@langan.com

Structural:
Salas O'Brien
Attn: Julie Bolding
Tel: 469-782-9753
Email: julie.bolding@salasobrien.com

MEP:
Salas O'Brien
Attn: Carly Wood
Tel: 727-804-7626
Email: carly.wood@salasobrien.com

Description:	No:	Date:
IF Design Development 90%		07/19/2024
IF Design Development Final		08/19/2024
IF Construction Document Review		09/20/2024
IF Construction Document Final		12/05/2024
IF CD 90		08/15/2025
IF Permit		08/26/2025

BANK OF AMERICA
Broomfield

CO1-111
NWC Hwy 7 and Palisade Pkwy
Broomfield CO, 80023

PROPERTY ID:	CO1-111
NSRP VERSION:	2.0
BULLETIN:	2-2025

ENLARGED RESTROOM PLANS AND ELEVATIONS

COLORADO LICENSED JOHN SULLIVAN 00405343 ARCHITECT
09/04/2025

Project No: 23.0002261.000 Reviewed By: MB

A08.01

9/3/2025 4:20:51 PM C:\Users\jgosier\Revit_Locals\2023\CO1-111 Broomfield_for SDP_cgosier53725.rvt

ATM EQUIPMENT PURCHASE ORDER FORM					
NEW EQUIPMENT TO BE INSTALLED					
ATM MODEL	SLEEVE	CONFIGURATION	SURROUND	LOCATION	COMMENTS
NHA 9T (CEN-1) TTW WU ATM	STANDARD	-	FRAME-R-SUR-54-SINGLE-STD-DU-NG_3.0	24 HR VESTIBULE	-
NHA 9D (CEN-1) TTW DU ATM	STANDARD	-	FRAME-R-SUR-54-SINGLE-STD-NG_3.0	DRIVE UP	-

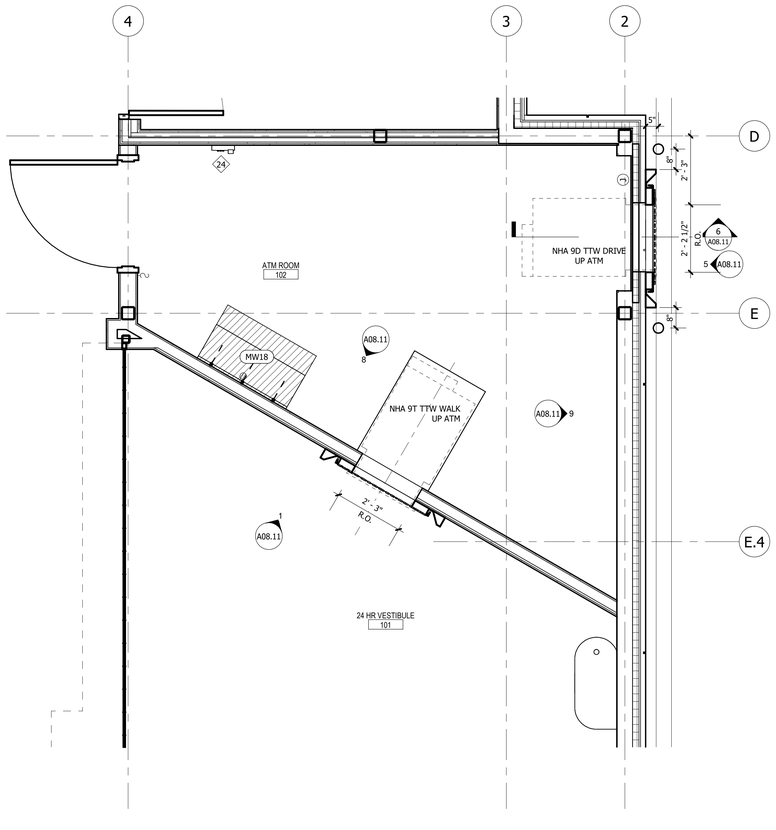

7 A08.11 ATM ROOM PLAN
1/2" = 1'-0"

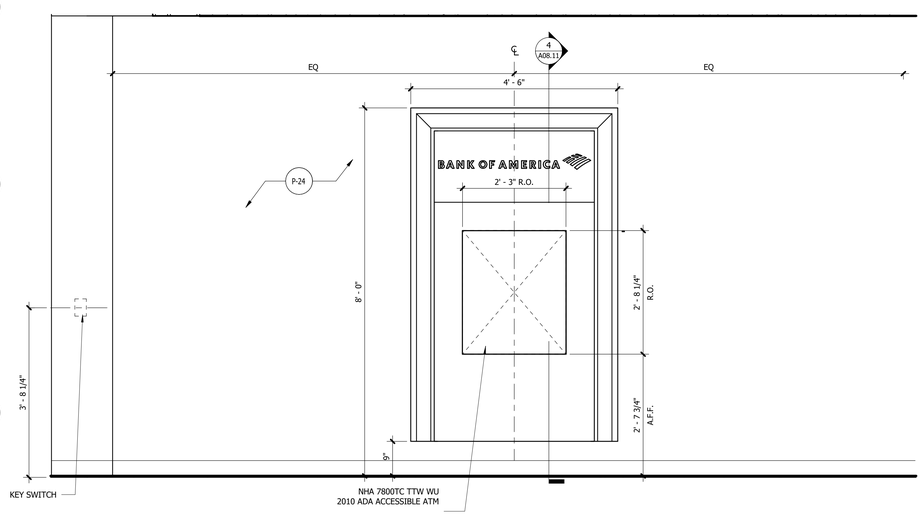

1 A08.11 NHA 7800TC (CEN1) WU ATM ELEVATION
3/4" = 1'-0"

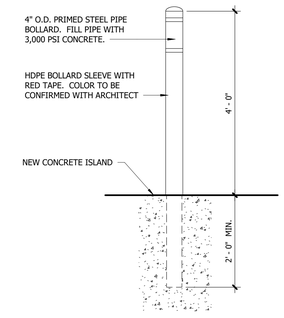

BOLLARD SLEEVE NOTES:
GC SHALL PLACE ORDERS IN A TIMELY FASHION - SHIP DATE IS TYPICALLY 24-48 HOURS AFTER ORDER IS PLACED. SLEEVES SHALL BE WARRANTED AGAINST FADING OR COLOR CHANGE FOR (5) FIVE YEARS FROM DATE OF SUBSTANTIAL COMPLETION. BOLLARD SHALL BE INSTALLED LEVEL. FILL CORES WITH CONCRETE AND STRIKE LEVEL ACROSS TOP OF PIPE. INSTALL COVER W/ INCLUDED FOAM STRIPS PER MANUFACTURER'S DIRECTIONS.

EMCORE COMMERCIAL PRODUCTS
WWW.POSTGUARD.COM
PH: 866.737.8900

2 A08.11 DETAIL - BOLLARD
3/4" = 1'-0"

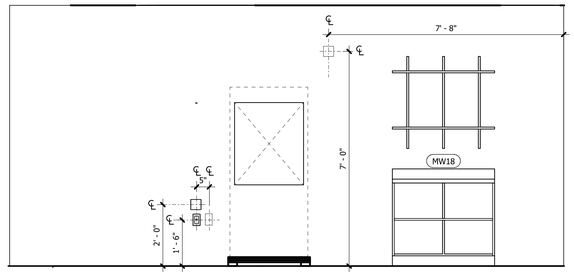

8 A08.11 ATM ROOM SOUTH ELEVATION
1/2" = 1'-0"

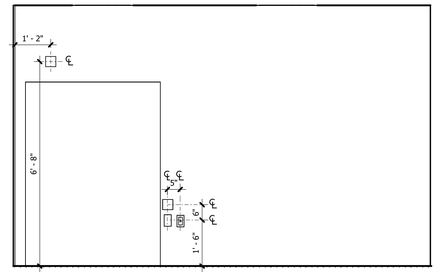

9 A08.11 ATM ROOM WEST ELEVATION
1/2" = 1'-0"

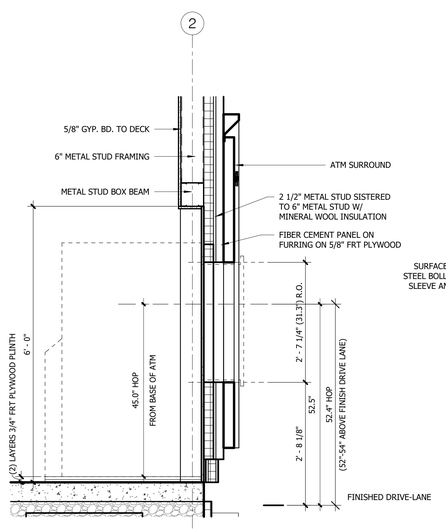

6 A08.11 NHA 9D DU ATM SECTION
3/4" = 1'-0"

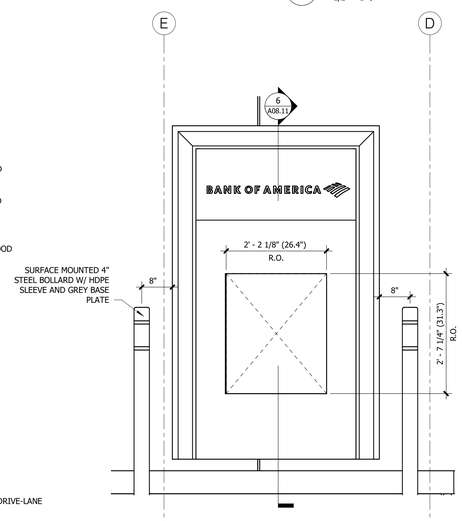

5 A08.11 NHA 9D DU ATM ELEVATION
3/4" = 1'-0"

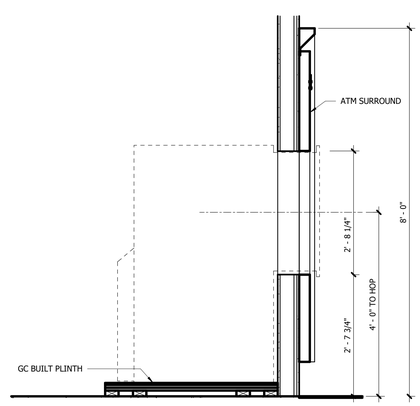

4 A08.11 NHA 9T (CEN-1) TTW WU ATM SECTION
3/4" = 1'-0"

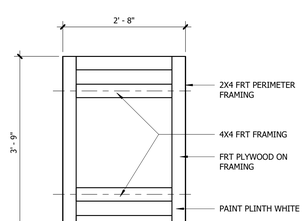

ATM DEPLOYMENT RIGGERS TO LOCATE PLINTH ON FINISH FLOOR AND DRILL ANCHOR BOLT HOLES AS NEEDED

3 A08.11 NHA 9T (CEN-1) ATM PLINTH FRAMING PLAN
3/4" = 1'-0"

NELSON
Nelco Architecture, Inc.

12400 Coit Road, Suite 510
Dallas, TX. 75251
Phone: (972) 644-8830
Fax: (972) 644-8496

Client Representative:
CUSHMAN & WAKEFIELD
Attn: Paul Hurchanik
Tel: 720.582.6073
Email:
paul.hurchanik@cushwake.com

Architect:
Nelco Architecture, Inc.
Attn: Harry Koutsis
Tel: 310.693.5271
Email: hkoutsis@nelsonww.com

AOR Contact
Robert J. Sullivan Jr.
Tel: 216.830.1561
Email:rsullivan@nelsonww.com
License No. ARC.00405343

Civil:
LANGAN
Attn: Ben Henry
Tel: (817) 328-3217
Email: bhenry@langan.com

Structural:
Salas O'Brien
Attn: Julie Bolding
Tel: 469-782-9753
Email: julie.bolding@salasobrien.com

MEP:
Salas O'Brien
Attn: Carly Wood
Tel: 727-804-7626
Email: carly.wood@salasobrien.com

Description:	No:	Date:
IF COE Package		11/09/2023
IF Design Development 90%		07/19/2024
IF Design Development Final		08/19/2024
IF Construction Document Review		09/20/2024
IF Construction Document Final		12/05/2024
IF CD 90		08/15/2025
IF Permit		08/26/2025

BANK OF AMERICA
Broomfield

CO1-111
NWC Hwy 7 and Palisade Pkwy
Broomfield CO, 80023

PROPERTY ID:	CO1-111
NSRP VERSION:	2.0
BULLETIN:	2-2025

ATM DETAILS

COLORADO LICENSED
ROBERT JOHN SULLIVAN JR.
00405343
REGISTERED ARCHITECT
09/04/2025

Project No: 23.0002261.000 Reviewed By: MB

A08.11

9/3/2025 4:20:57 PM C:\Users\vgosien\Revit_Locals\2023\CO1-111 Broomfield_for SDP_cgosien5372S.rvt

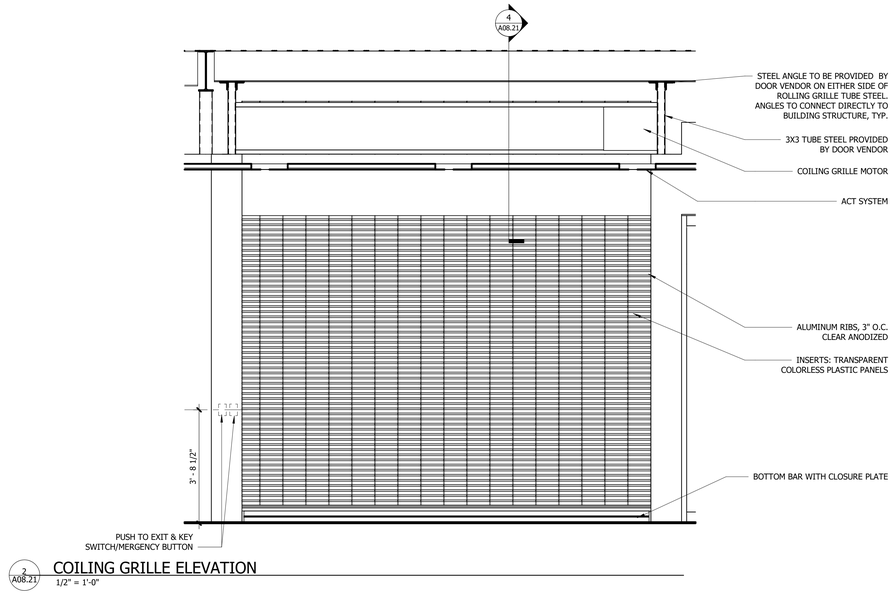

2 A08.21 COILING GRILLE ELEVATION
1/2" = 1'-0"

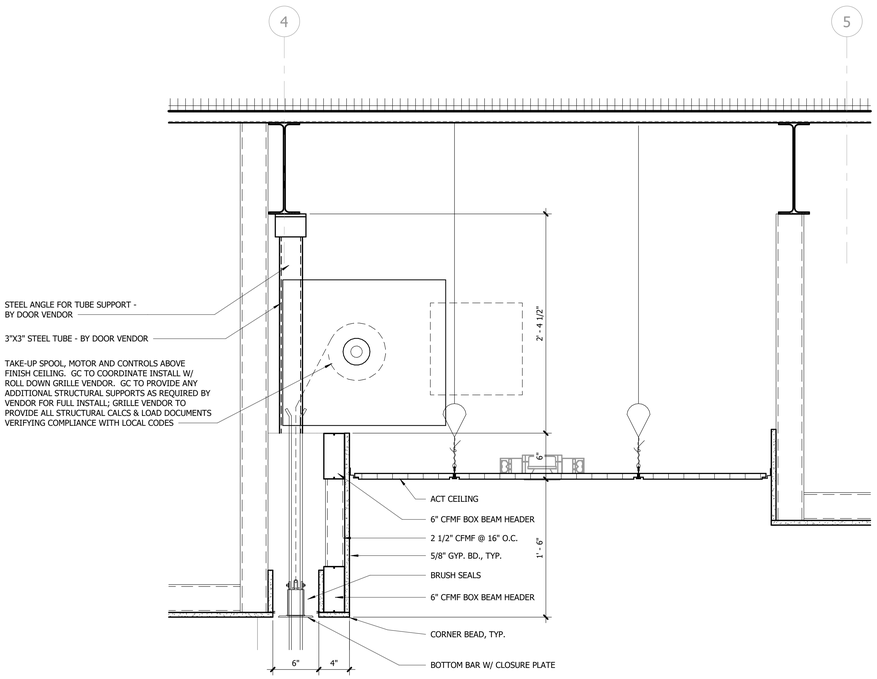

BRUSH INSTALLATION NOTES:
1. (2) BRUSH ASSEMBLIES PER ROLL DOWN GRILLE TO BE PROVIDED BY DOOR VENDOR.
2. DOOR VENDOR IS NOT RESPONSIBLE FOR INSTALLATION OF BRUSH SEALS.
3. **BRUSH ASSEMBLY TO BE INSTALLED AFTER ROLL DOWN GRILLE IS INSTALLED, CEILING FRAMING IS IN PLACE, BUT CEILING IS NOT FINISHED.**

4 A08.21 COILING GRILLE HEAD DETAIL
1 1/2" = 1'-0"

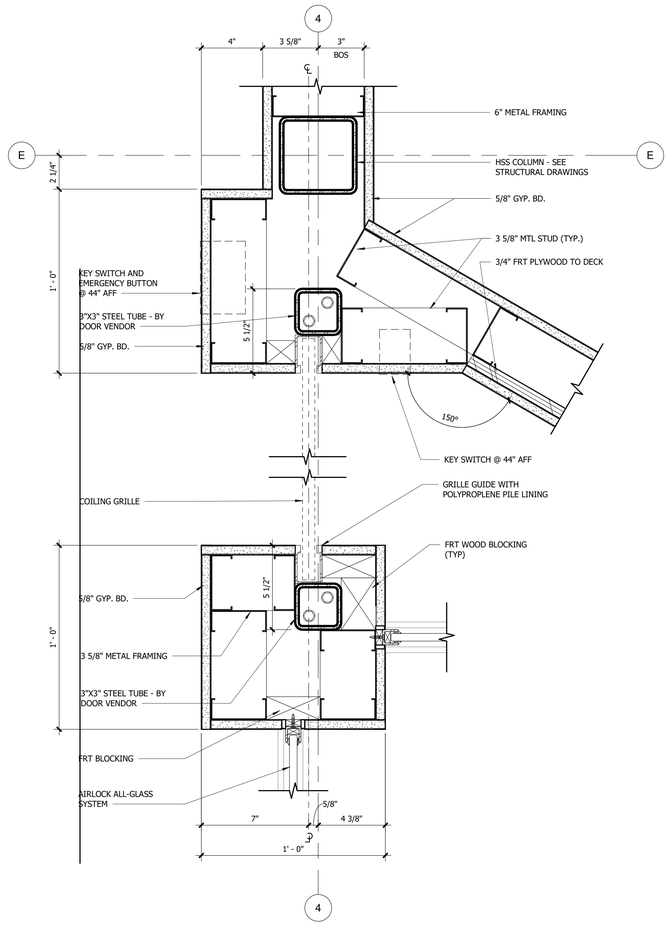

3 A08.21 COILING GRILLE PLAN DETAILS @ JAMB
3" = 1'-0"

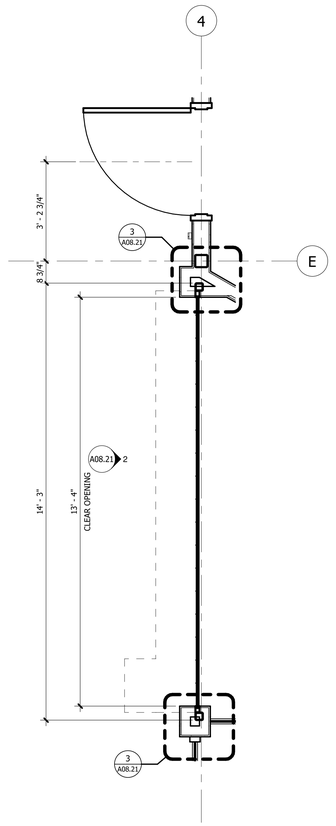

1 A08.21 COILING GRILLE PLAN
1/2" = 1'-0"

NELSON
Nelco Architecture, Inc.

12400 Coit Road, Suite 510
Dallas, TX. 75251
Phone: (972) 644-8830
Fax: (972) 644-8496

Client Representative:
CUSHMAN & WAKEFIELD
Attn: Paul Hurchanik
Tel: 720.582.6073
Email:
paul.hurchanik@cushwake.com

Architect:
Nelco Architecture, Inc.
Attn: Harry Koutsis
Tel: 310.693.5271
Email: hkoutsis@nelsonww.com

AOR Contact
Robert J. Sullivan Jr.
Tel: 216.830.1561
Email:rsullivan@nelsonww.com
License No. ARC.00405343

Civil:
LANGAN
Attn: Ben Henry
Tel: (817) 328-3217
Email: bhenry@langan.com

Structural:
Salas O'Brien
Attn: Julie Bolding
Tel: 469-782-9753
Email: julie.bolding@salasobrien.com

MEP:
Salas O'Brien
Attn: Carly Wood
Tel: 727-804-7626
Email: carly.wood@salasobrien.com

Description:	No:	Date:
IF Design Development Final		08/19/2024
IF Construction Document Review		09/20/2024
IF Construction Document Final		12/05/2024
IF CD 90		08/15/2025
IF Permit		08/26/2025

BANK OF AMERICA
Broomfield

CO1-111
NWC Hwy 7 and Palisade Pkwy
Broomfield CO, 80023

PROPERTY ID:	CO1-111
NSRP VERSION:	2.0
BULLETIN:	2-2025

COILING GRILLE DETAILS

COLORADO LICENSED
ROBERT JOHN SULLIVAN JR.
#0405343
REGISTERED ARCHITECT
09/04/2025

Project No: 23.0002261.000 Reviewed By: MB

A08.21

9/3/2025 4:21:03 PM C:\Users\cgosier\Revit_Locals\2023\CO1-111 Broomfield_for SDP_cgosier537ZS.rvt

EXTERIOR FINISH SCHEDULE:

STUCCO/PLASTER

PT-3 7/8" PAREX ARMOURWALL 300 STUCCO ASSEMBLY; BENJAMIN MOORE: CHARCOAL SLATE FLAT
PT-4 5/8" PAREX ARMOURWALL 300 STUCCO ASSEMBLY; BENJAMIN MOORE: STORMY MONDAY 2112-50

STUCCO ACCESSORIES

SA-2 NARROW CHANNEL SCREED AS SPECIFIED; PAINT TO MATCH STUCCO FINISH COLOR
SA-4 SOFFIT VENT CHANNEL SCREED AS SPECIFIED; COLOR TO MATCH STUCCO FINISH
CJ CONTROL JOINT; PAINT TO MATCH STUCCO FINISH COLOR

ALUMINUM COMPOSITE METAL PANEL (B.O.D. - CITADEL)

EPS-1 CITADEL ENVELOPE 2000 RAINSCREEN (RS); CLEAR ANODIZED SATIN
EPS-3 CITADEL ENVELOPE 2000 RAINSCREEN (RS); ARCTIC WHITE SATIN

APPROVED ACM ALTERNATE:

EPS-1A ARCONIC, REYNOBOND EC-200 DRY JOINT SYSTEM; CLEAR ANODIZED SATIN
EPS-3A ARCONIC, REYNOBOND EC-200 DRY JOINT SYSTEM; PURE WHITE (COLORWELD500)

FORMED METAL WALL PANEL SYSTEM (PURE & FREEFORM)

EPS-5 HORIZONTAL FORMED WALL METAL PANEL; ROMA NOCE #SN043 SATIN

EXTERIOR GLAZING

GL-2 1" TEMPERED INSULATED GLAZING AS SPECIFIED

ALUMINUM GLAZING FRAME

AF-2 ALUMINUM STOREFRONT SYSTEM; CLEAR ANODIZED ALUMINUM FINISH

EXTERIOR PAINT

EXPT-1 EXTERIOR PAINT; BENJAMIN MOORE: CHARCOAL SLATE FLAT

EXTERIOR SEALANT COLOR

GLAZING AT EXTERIOR STOREFRONT	BLACK
METAL PANEL TO METAL PANEL	MATCH CLIP
WINDOW FRAME/STOREFRONT TO STUCCO	MATCH FRAME
WINDOW FRAME/STOREFRONT TO METAL PANEL	MATCH FRAME
METAL PANEL TO STUCCO	MATCH STUCCO

FLASHING BASE

SS-1 BRAKE METAL BASE AT PT-3 - COLOR TO MATCH PT-3
SS-2 BRAKE METAL BASE AT EPS-3 - COLOR TO MATCH EPS-3
SS-3 BRAKE METAL BASE AT EPS-5 - COLOR TO MATCH EPS-5

EXTERIOR GENERAL NOTES:

A. CONTRACTOR TO COORDINATE ELECTRICAL SERVICE FOR WALL MOUNTED SIGNS WITH OWNER. SIGN VENDOR TO DETERMINE EXACT MOUNTING LOCATION(S).
B. SIGNAGE SHOWN FOR REFERENCE ONLY - TO BE COVERED UNDER SEPARATE DESIGN AND PERMIT BY OWNER VENDOR.
C. REFER TO A12.11 FOR ENTRANCE DOOR HARDWARE WIRING DIAGRAM.
D. REFER TO DETAIL SHEETS FOR TYPICAL WINDOW FLASHING DETAILS.

EXTERIOR KEY NOTES: (-)

1. BANK OF AMERICA SIGN BY OWNER. COORDINATE SIGNAGE LOCATIONS AND POWER REQUIREMENTS WITH VENDOR.
2. PROVIDE END FLASHING AND SEALANT AT PARAPET FACE AND ADJACENT CAP.
3. 30' GROUND MOUNTED FLAG POLE - PROVIDED BY CONTRACTOR. FLAG IS FURNISHED BY OWNER AND INSTALLED BY CONTRACTOR.
4. LIGHT FIXTURE MOUNTED ON TOP OF FLAG POLE. SEE ELECTRICAL DRAWINGS FOR MORE INFORMATION.
5. EXTERIOR SECURITY CAMERA. COORDINATE LOCATIONS AND TYPE WITH SECURITY VENDOR.
6. GC TO COORDINATE WITH LOCAL FIRE AUTHORITY FOR MOUNTING HEIGHT AND LOCATION OF THE KNOX BOX.
7. EXTERIOR PROTECTION BOARD TO MATCH ACM PANEL FINISH, TYP.
8. PROVIDE WALL MOUNT FIXTURE FOR BACK EGRESS DOOR. REFER TO GMR DRAWINGS FOR TYPE AND DIMENSIONS.

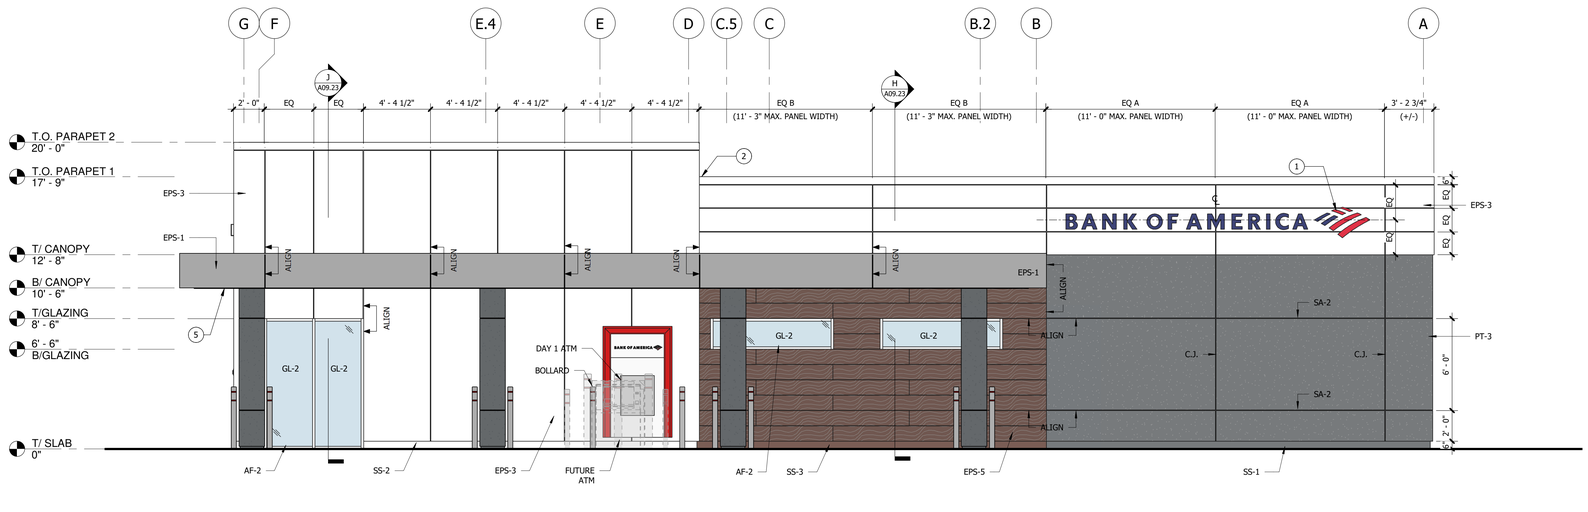

2 A09.01 WEST ELEVATION
1/4" = 1'-0"

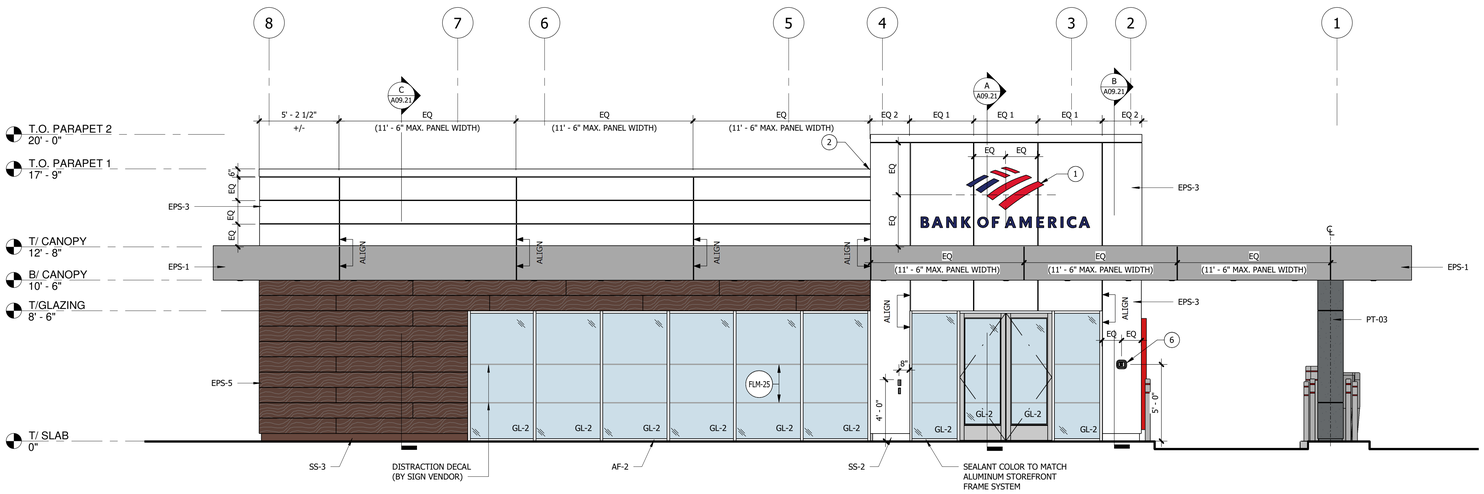

1 A09.01 SOUTH ELEVATION
1/4" = 1'-0"

NELSON
Nelco Architecture, Inc.

12400 Coit Road, Suite 510
Dallas, TX. 75251
Phone: (972) 644-8830
Fax: (972) 644-8496

Client Representative:
CUSHMAN & WAKEFIELD
Attn: Paul Hurchanik
Tel: 720.582.6073
Email: paul.hurchanik@cushwake.com

Architect:
Nelco Architecture, Inc.
Attn: Harry Koutsis
Tel: 310.693.5271
Email: hkoutsis@nelsonww.com

AOR Contact
Robert J. Sullivan Jr.
Tel: 216.830.1561
Email:rsullivan@nelsonww.com
License No. ARC.00405343

Civil:
LANGAN
Attn: Ben Henry
Tel: (817) 328-3217
Email: bhenry@langan.com

Structural:
Salas O'Brien
Attn: Julie Bolding
Tel: 469-782-9753
Email: julie.bolding@salasobrien.com

MEP:
Salas O'Brien
Attn: Carly Wood
Tel: 727-804-7626
Email: carly.wood@salasobrien.com

Description:	No: Date:
IF Schematic Design Final	09/29/2023
IF COE Package	11/09/2023
IF Design Development 90%	07/19/2024
IF Design Development Final	08/19/2024
IF Construction Document Review	09/20/2024
IF Construction Document Final	12/05/2024
IF CD 90	08/15/2025
IF Permit	08/26/2025

BANK OF AMERICA

Broomfield

CO1-111
NWC Hwy 7 and Palisade Pkwy
Broomfield CO, 80023

PROPERTY ID:	CO1-111
NSRP VERSION:	2.0
BULLETIN:	2-2025

EXTERIOR ELEVATIONS

COLORADO LICENSED
ROBERT JOHN SULLIVAN JR.
00405343
ARCHITECT
09/04/2025

Project No: 23.0002261.000 Reviewed By: MB

A09.01

9/3/2025 4:21:09 PM C:\Users\cgosier\Revit_Locals\2023\CO1-111 Broomfield_for SSP_cgosier53725.rvt

EXTERIOR FINISH SCHEDULE:

STUCCO/PLASTER

PT-3	7/8" PAREX ARMOURWALL 300 STUCCO ASSEMBLY; BENJAMIN MOORE: CHARCOAL SLATE FLAT
PT-4	5/8" PAREX ARMOURWALL 300 STUCCO ASSEMBLY; BENJAMIN MOORE: STORMY MONDAY 2112-50

STUCCO ACCESSORIES

SA-2	NARROW CHANNEL SCREED AS SPECIFIED; PAINT TO MATCH STUCCO FINISH COLOR
SA-4	SOFFIT VENT CHANNEL SCREED AS SPECIFIED; COLOR TO MATCH STUCCO FINISH
CJ	CONTROL JOINT; PAINT TO MATCH STUCCO FINISH COLOR

ALUMINUM COMPOSITE METAL PANEL (B.O.D. - CITADEL)

EPS-1	CITADEL ENVELOPE 2000 RAINSCREEN (RS); CLEAR ANODIZED SATIN
EPS-3	CITADEL ENVELOPE 2000 RAINSCREEN (RS); ARCTIC WHITE SATIN

APPROVED ACM ALTERNATE:

EPS-1A	ARCONIC, REYNOBOND EC-200 DRY JOINT SYSTEM; CLEAR ANODIZED SATIN
EPS-3A	ARCONIC, REYNOBOND EC-200 DRY JOINT SYSTEM; PURE WHITE (COLORWELD500)

FORMED METAL WALL PANEL SYSTEM (PURE & FREEFORM)

EPS-5	HORIZONTAL FORMED WALL METAL PANEL; ROMA NOCE #SN043 SATIN

EXTERIOR GLAZING

GL-2	1" TEMPERED INSULATED GLAZING AS SPECIFIED

ALUMINUM GLAZING FRAME

AF-2	ALUMINUM STOREFRONT SYSTEM; CLEAR ANODIZED ALUMINUM FINISH

EXTERIOR PAINT

EXPT-1	EXTERIOR PAINT; BENJAMIN MOORE: CHARCOAL SLATE FLAT

EXTERIOR SEALANT COLOR

GLAZING AT EXTERIOR STOREFRONT	BLACK
METAL PANEL TO METAL PANEL	MATCH CLIP
WINDOW FRAME/STOREFRONT TO STUCCO	MATCH FRAME
WINDOW FRAME/STOREFRONT TO METAL PANEL	MATCH FRAME
METAL PANEL TO STUCCO	MATCH STUCCO

FLASHING BASE

SS-1	BRAKE METAL BASE AT PT-3 - COLOR TO MATCH PT-3
SS-2	BRAKE METAL BASE AT EPS-3 - COLOR TO MATCH EPS-3
SS-3	BRAKE METAL BASE AT EPS-5 - COLOR TO MATCH EPS-5

EXTERIOR GENERAL NOTES:

A. CONTRACTOR TO COORDINATE ELECTRICAL SERVICE FOR WALL MOUNTED SIGNS WITH OWNER. SIGN VENDOR TO DETERMINE EXACT MOUNTING LOCATION(S).
B. SIGNAGE SHOWN FOR REFERENCE ONLY - TO BE COVERED UNDER SEPARATE DESIGN AND PERMIT BY OWNER VENDOR.
C. REFER TO A12.11 FOR ENTRANCE DOOR HARDWARE WIRING DIAGRAM.
D. REFER TO DETAIL SHEETS FOR TYPICAL WINDOW FLASHING DETAILS.

EXTERIOR KEY NOTES: (-)

1. BANK OF AMERICA SIGN BY OWNER. COORDINATE SIGNAGE LOCATIONS AND POWER REQUIREMENTS WITH VENDOR.
2. PROVIDE END FLASHING AND SEALANT AT PARAPET FACE AND ADJACENT CAP.
3. 30' GROUND MOUNTED FLAG POLE - PROVIDED BY CONTRACTOR. FLAG IS FURNISHED BY OWNER AND INSTALLED BY CONTRACTOR.
4. LIGHT FIXTURE MOUNTED ON TOP OF FLAG POLE. SEE ELECTRICAL DRAWINGS FOR MORE INFORMATION.
5. EXTERIOR SECURITY CAMERA. COORDINATE LOCATIONS AND TYPE WITH SECURITY VENDOR.
6. GC TO COORDINATE WITH LOCAL FIRE AUTHORITY FOR MOUNTING HEIGHT AND LOCATION OF THE KNOX BOX.
7. EXTERIOR PROTECTION BOARD TO MATCH ACM PANEL FINISH, TYP.
8. PROVIDE WALL MOUNT FIXTURE FOR BACK EGRESS DOOR. REFER TO GMR DRAWINGS FOR TYPE AND DIMENSIONS.

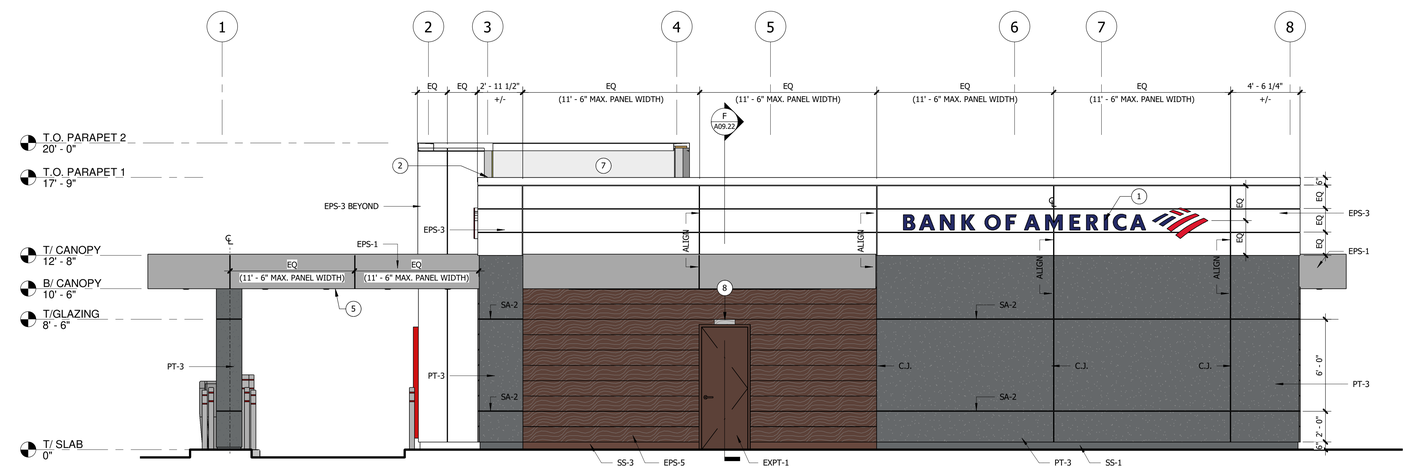

2 A09.02 NORTH ELEVATION
1/4" = 1'-0"

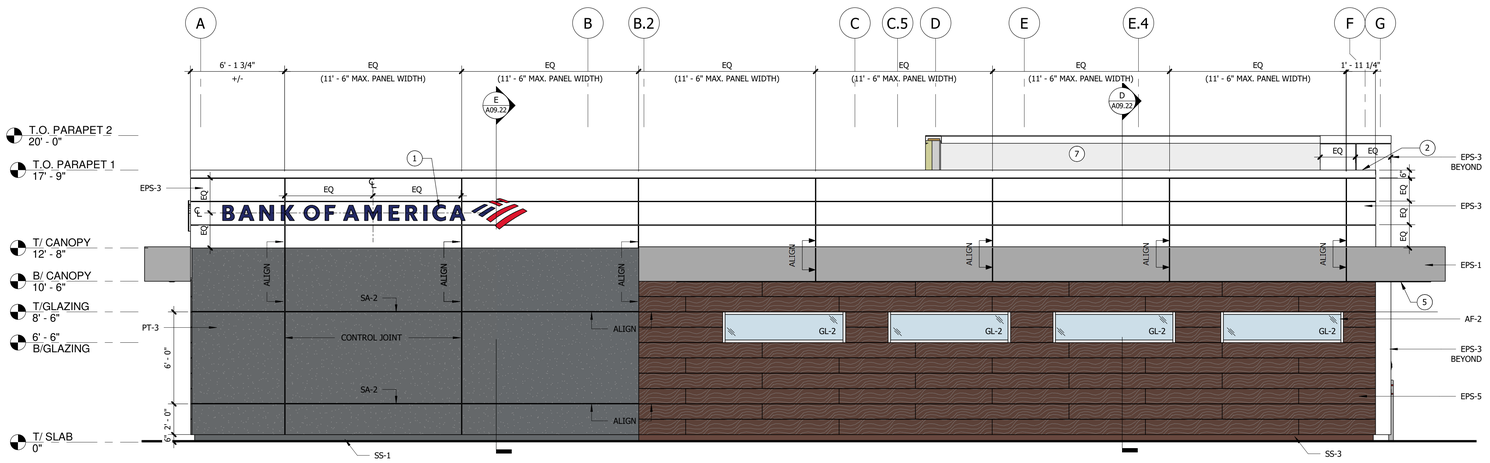

1 A09.02 EAST ELEVATION
1/4" = 1'-0"

NELSON
Nelco Architecture, Inc.

12400 Coit Road, Suite 510
Dallas, TX. 75251
Phone: (972) 644-8830
Fax: (972) 644-8496

Client Representative:
CUSHMAN & WAKEFIELD
Attn: Paul Hurchanik
Tel: 720.582.6073
Email:
paul.hurchanik@cushwake.com

Architect:
Nelco Architecture, Inc.
Attn: Harry Koutsis
Tel: 310.693.5271
Email: hkoutsis@nelsonww.com

AOR Contact
Robert J. Sullivan Jr.
Tel: 216.830.1561
Email:rsullivan@nelsonww.com
License No. ARC.00405343

Civil:
LANGAN
Attn: Ben Henry
Tel: (817) 328-3217
Email: bhenry@langan.com

Structural:
Salas O'Brien
Attn: Julie Bolding
Tel: 469-782-9753
Email: julie.bolding@salasobrien.com

MEP:
Salas O'Brien
Attn: Carly Wood
Tel: 727-804-7626
Email: carly.wood@salasobrien.com

Description:	No:	Date:
IF Schematic Design Final		09/29/2023
IF COE Package		11/09/2023
IF Design Development 90%		07/19/2024
IF Design Development Final		08/19/2024
IF Construction Document Review		09/20/2024
IF Construction Document Final		12/05/2024
IF CD 90		08/15/2025
IF Permit		08/26/2025

BANK OF AMERICA
Broomfield

CO1-111
NWC Hwy 7 and Palisade Pkwy
Broomfield CO, 80023

PROPERTY ID:	CO1-111
NSRP VERSION:	2.0
BULLETIN:	2-2025

EXTERIOR ELEVATIONS

COLORADO LICENSED
ROBERT JOHN SULLIVAN JR.
00405343
ARCHITECT
09/04/2025

Project No: 23.0002261.000 Reviewed By: MB

A09.02

9/3/2025 4:21:20 PM C:\Users\cgosier\Revit_Locals\2023\CO1-111 Broomfield_for SSP_cgosier53725.rvt

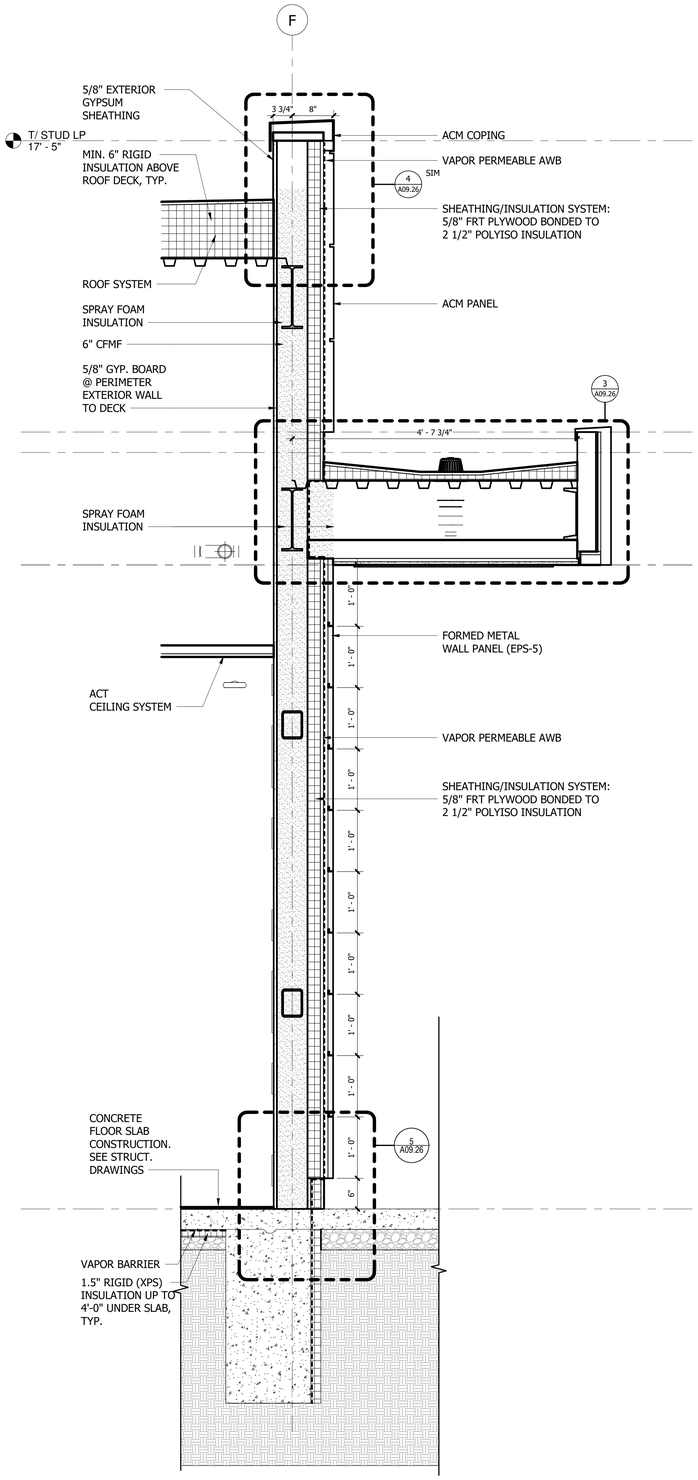

C A09.21 SECTION C
1" = 1'-0"

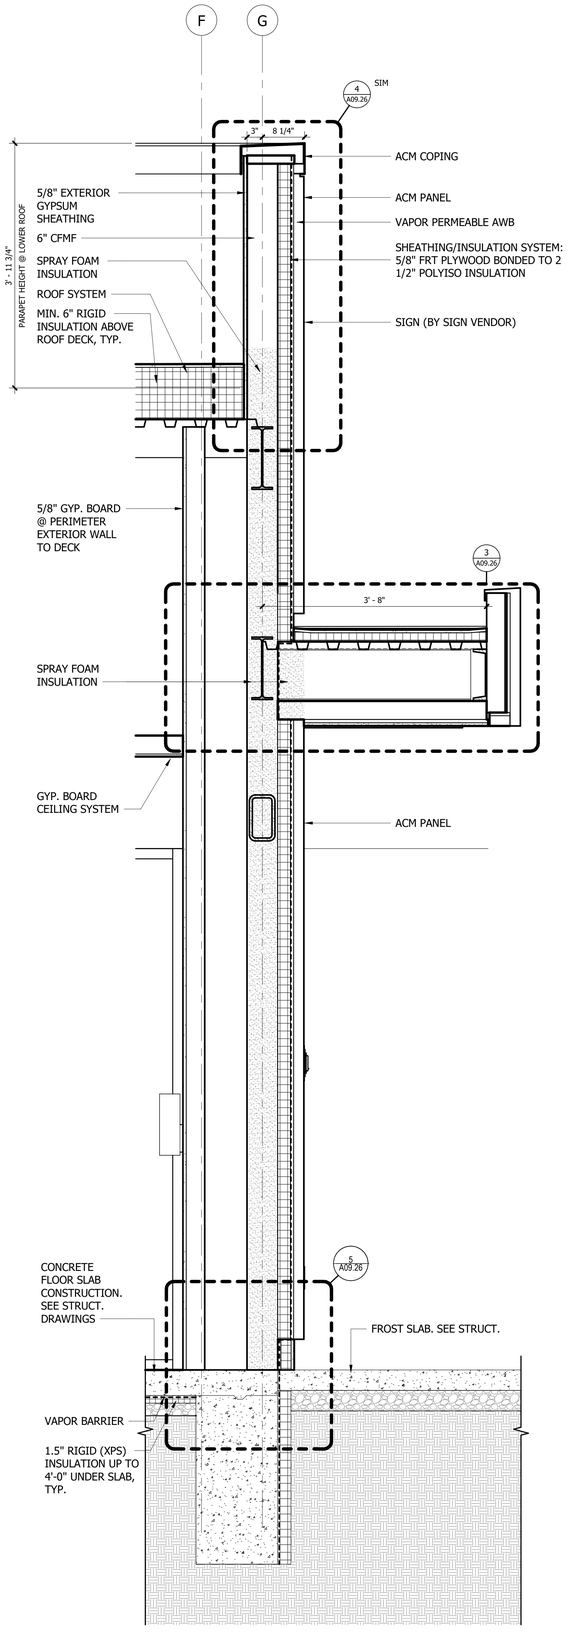

B A09.21 SECTION B @ ENTRANCE
1" = 1'-0"

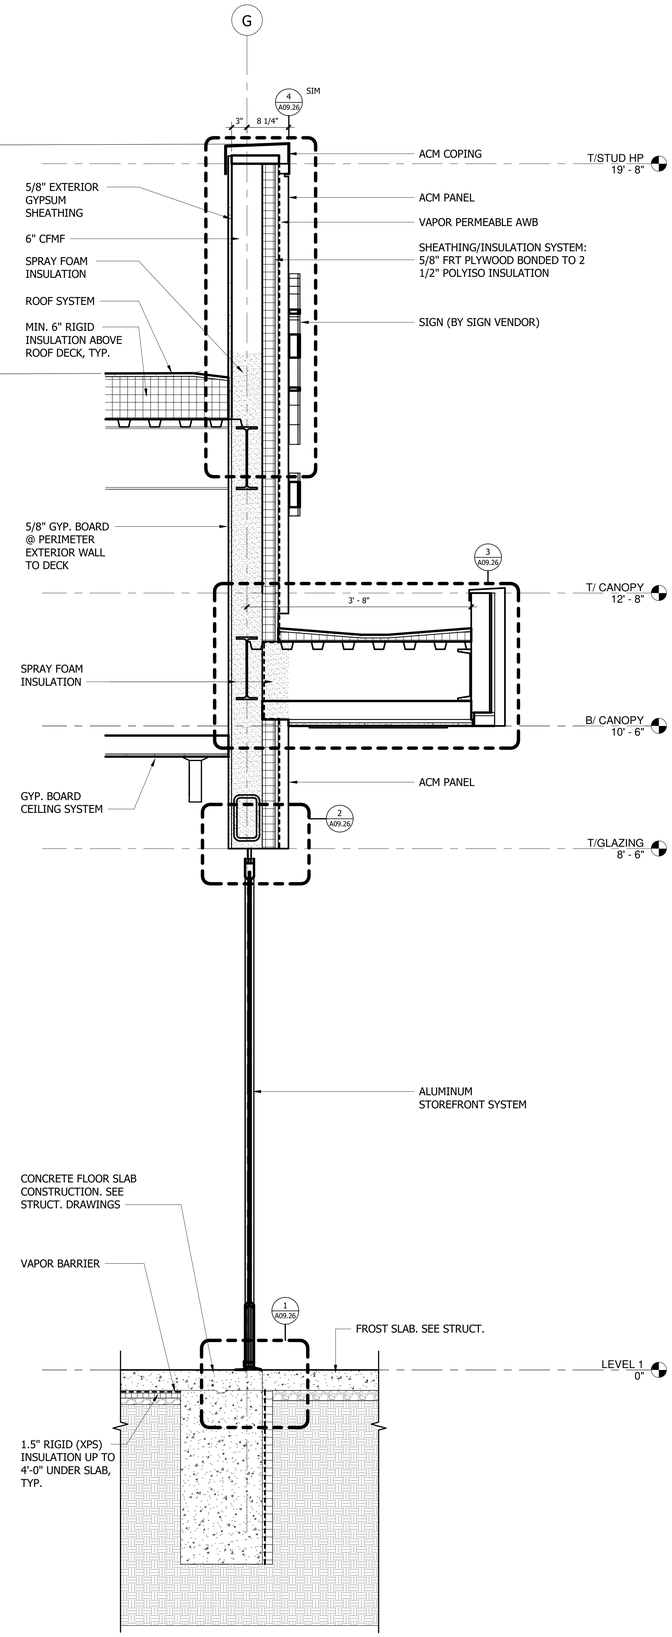

A A09.21 SECTION A @ ENTRANCE DOOR
1" = 1'-0"

NELSON
Nelco Architecture, Inc.

12400 Coit Road, Suite 510
Dallas, TX. 75251
Phone: (972) 644-8830
Fax: (972) 644-8496

Client Representative:
CUSHMAN & WAKEFIELD
Attn: Paul Hurchanik
Tel: 720.582.6073
Email: paul.hurchanik@cushwake.com

Architect:
Nelco Architecture, Inc.
Attn: Harry Koutsis
Tel: 310.693.5271
Email: hkoutsis@nelsonww.com

AOR Contact
Robert J. Sullivan Jr.
Tel: 216.830.1561
Email:rsullivan@nelsonww.com
License No. ARC.00405343

Civil:
LANGAN
Attn: Ben Henry
Tel: (817) 328-3217
Email: bhenry@langan.com

Structural:
Salas O'Brien
Attn: Julie Bolding
Tel: 469-782-9753
Email: julie.bolding@salasobrien.com

MEP:
Salas O'Brien
Attn: Carly Wood
Tel: 727-804-7626
Email: carly.wood@salasobrien.com

Description:	No:	Date:
IF Design Development 90%		07/19/2024
IF Design Development Final		08/19/2024
IF Construction Document Review		09/20/2024
IF Construction Document Final		12/05/2024
IF CD 90		08/15/2025
IF Permit		08/26/2025

BANK OF AMERICA
Broomfield

CO1-111
NWC Hwy 7 and Palisade Pkwy
Broomfield CO, 80023

PROPERTY ID:	CO1-111
NSRP VERSION:	2.0
BULLETIN:	2-2025

WALL SECTIONS

COLORADO LICENSED
ROBERT JOHN SULLIVAN JR.
00405343
REGISTERED ARCHITECT
09/04/2025

Project No: 23.0002261.000 Reviewed By: MB

A09.21

9/3/2025 4:21:21 PM C:\Users\cgosier\Revit_Locals\2023\CO1-111 Broomfield_for SSP_cgosier53725.rvt

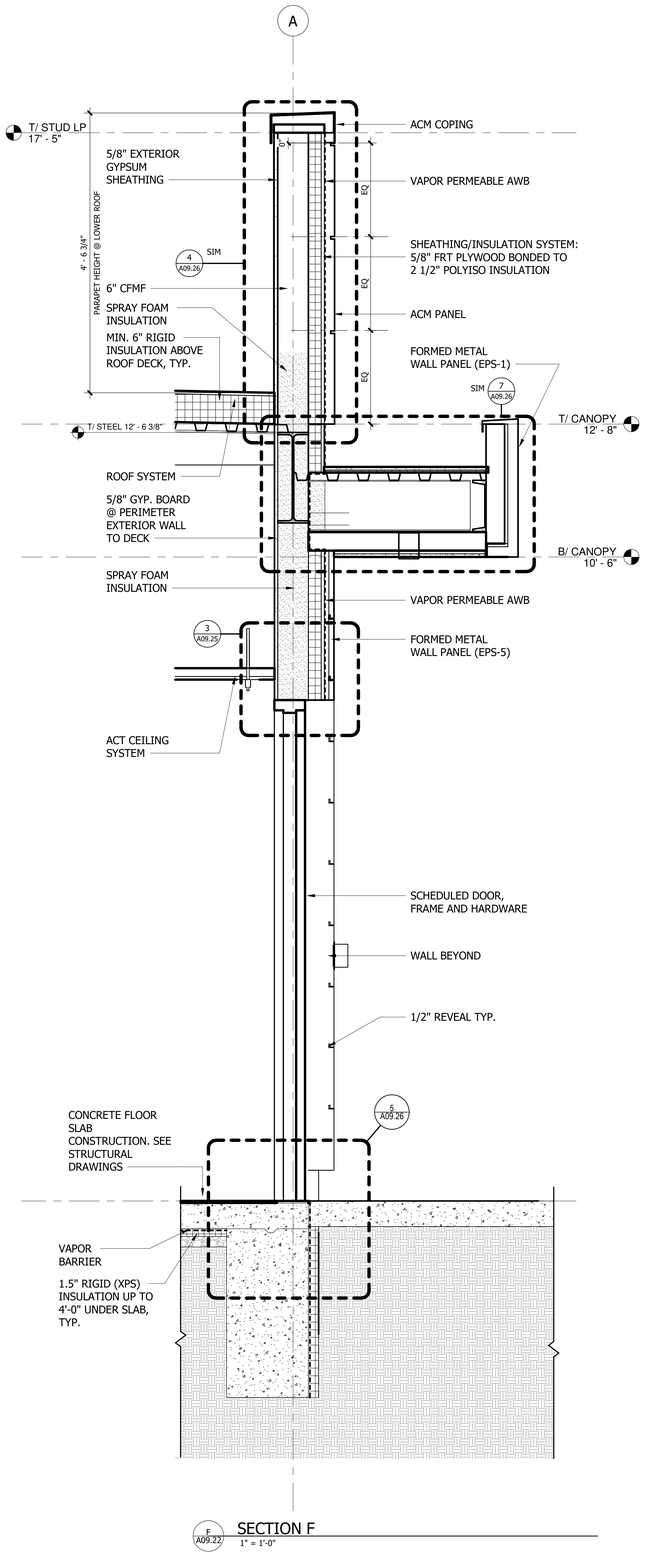

F A09.22 SECTION F
1" = 1'-0"

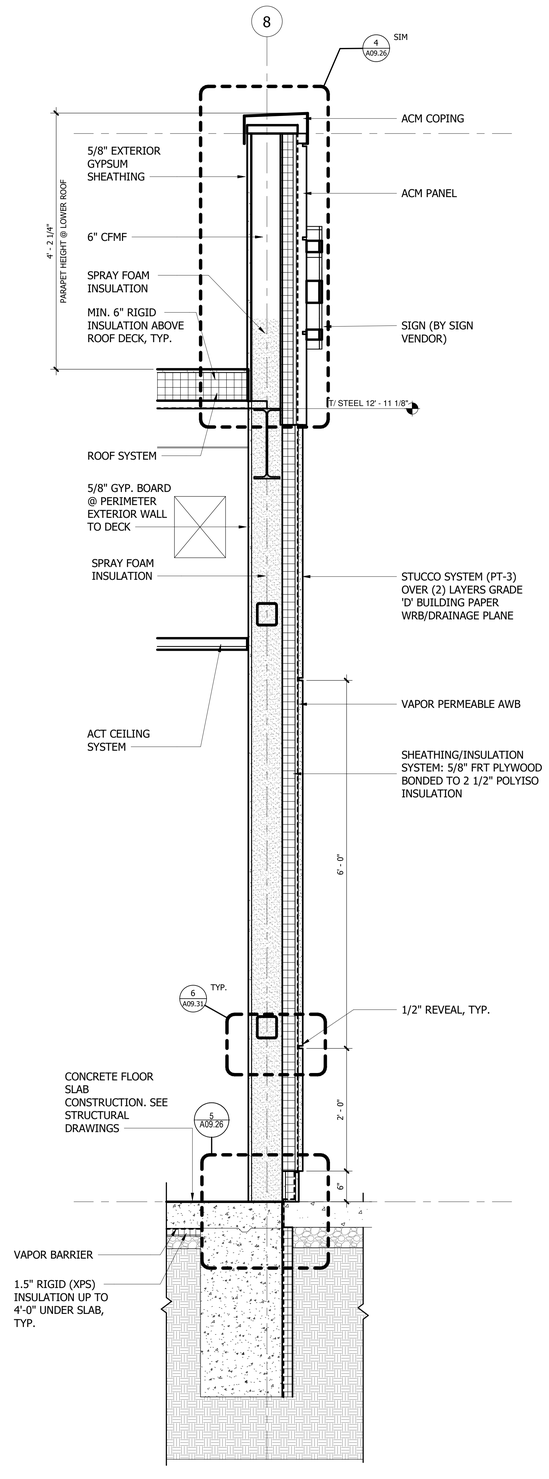

E A09.22 SECTION E
1" = 1'-0"

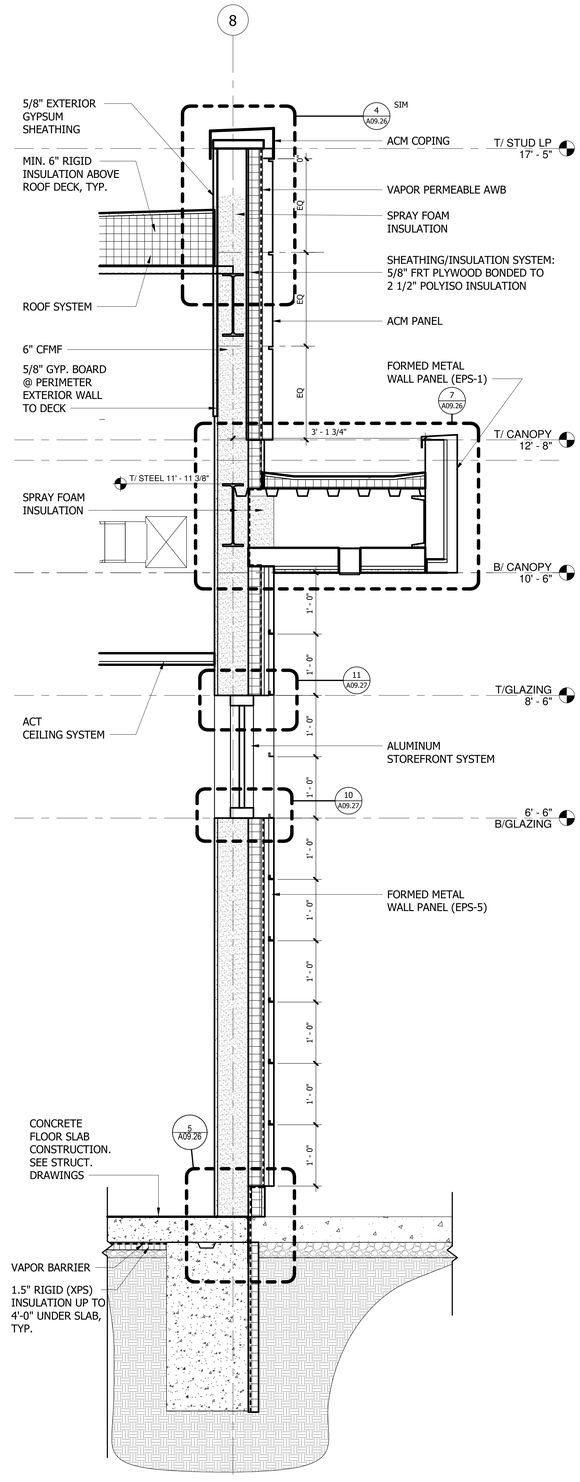

D A09.22 SECTION D
1" = 1'-0"

C:\Users\cgosier\Revit_Locals\2023\CO1-111 Broomfield_for SDP_cgosier53725.rvt

9/3/2025 4:21:24 PM

NELSON
Nelco Architecture, Inc.

12400 Coit Road, Suite 510
Dallas, TX. 75251
Phone: (972) 644-8830
Fax: (972) 644-8496

Client Representative:
CUSHMAN & WAKEFIELD
Attn: Paul Hurchanik
Tel: 720.582.6073
Email:
paul.hurchanik@cushwake.com

Architect:
Nelco Architecture, Inc.
Attn: Harry Koutsis
Tel: 310.693.5271
Email: hkoutsis@nelsonww.com

AOR Contact
Robert J. Sullivan Jr.
Tel: 216.830.1561
Email:rsullivan@nelsonww.com
License No. ARC.00405343

Civil:
LANGAN
Attn: Ben Henry
Tel: (817) 328-3217
Email: bhenry@langan.com

Structural:
Salas O'Brien
Attn: Julie Bolding
Tel: 469-782-9753
Email: julie.bolding@salasobrien.com

MEP:
Salas O'Brien
Attn: Carly Wood
Tel: 727-804-7626
Email: carly.wood@salasobrien.com

Description:	No:	Date:
IF Design Development 90%		07/19/2024
IF Design Development Final		08/19/2024
IF Construction Document Review		09/20/2024
IF Construction Document Final		12/05/2024
IF CD 90		08/15/2025
IF Permit		08/26/2025

BANK OF AMERICA
Broomfield

CO1-111
NWC Hwy 7 and Palisade Pkwy
Broomfield CO, 80023

PROPERTY ID:	CO1-111
NSRP VERSION:	2.0
BULLETIN:	2-2025

WALL SECTIONS

COLORADO LICENSED
ROBERT JOHN SULLIVAN JR.
#0405343
ARCHITECT
09/04/2025

Project No: 23.0002261.000 Reviewed By: MB

A09.22

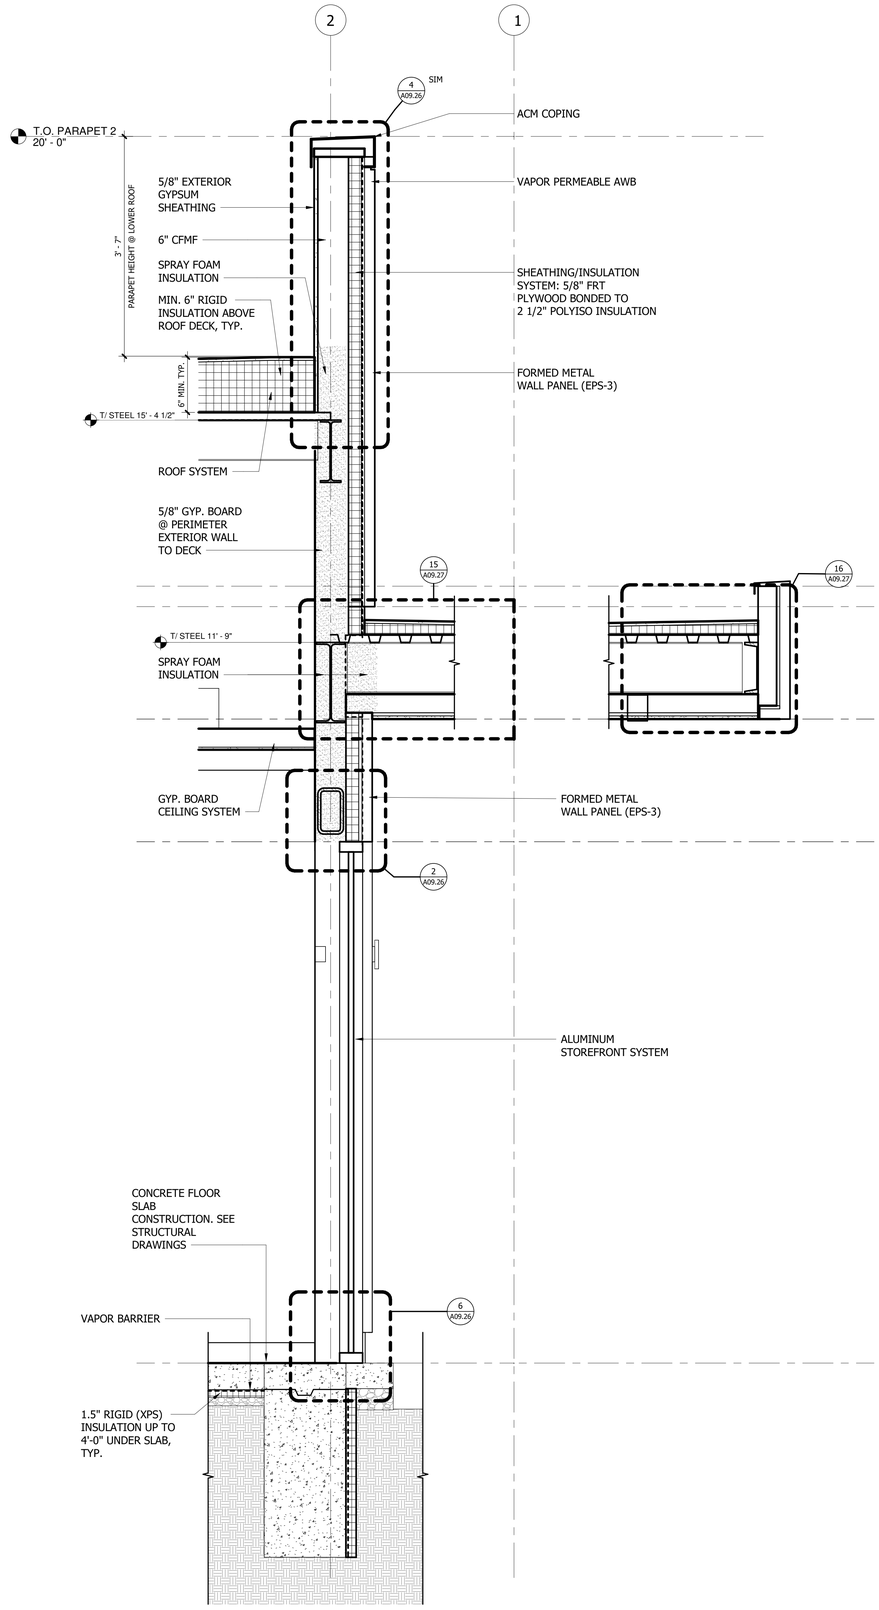

J A09.23 SECTION J
1" = 1'-0"

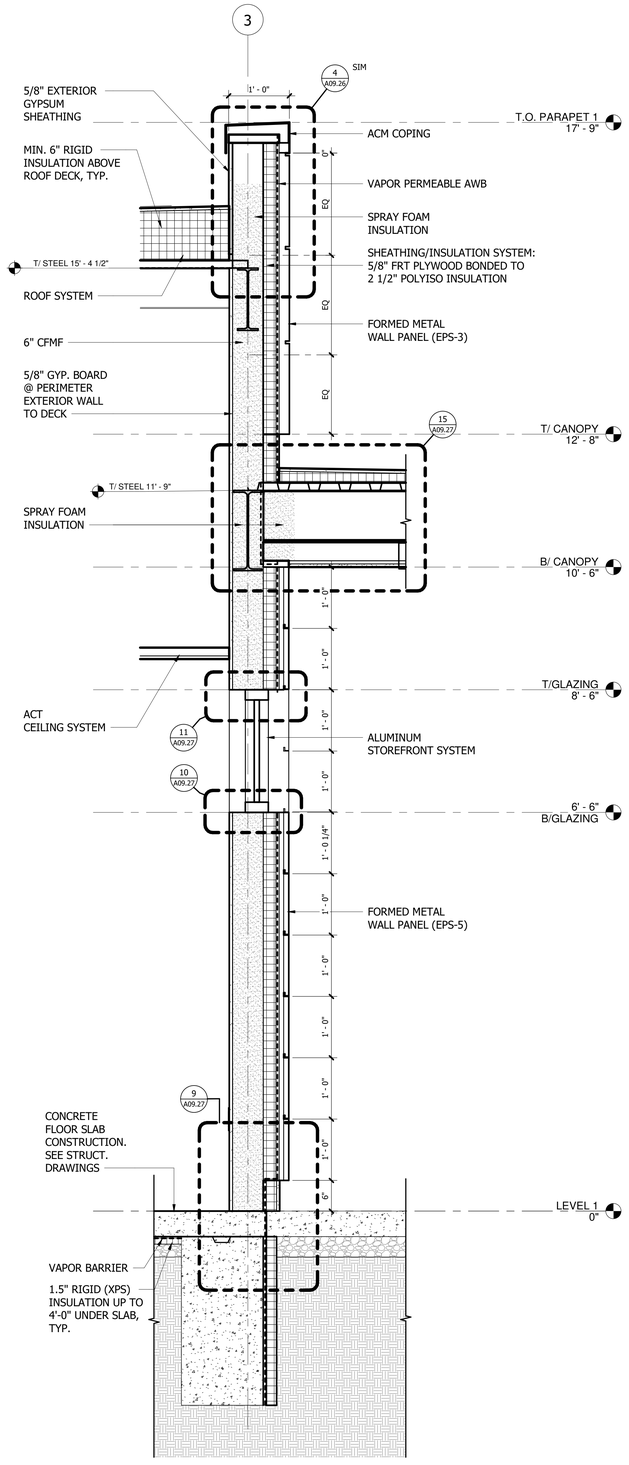

H A09.23 SECTION H
1" = 1'-0"

NELSON
Nelco Architecture, Inc.

12400 Coit Road, Suite 510
Dallas, TX. 75251
Phone: (972) 644-8830
Fax: (972) 644-8496

Client Representative:
CUSHMAN & WAKEFIELD
Attn: Paul Hurchanik
Tel: 720.582.6073
Email:
paul.hurchanik@cushwake.com

Architect:
Nelco Architecture, Inc.
Attn: Harry Koutsis
Tel: 310.693.5271
Email: hkoutsis@nelsonww.com

AOR Contact
Robert J. Sullivan Jr.
Tel: 216.830.1561
Email:rsullivan@nelsonww.com
License No. ARC.00405343

Civil:
LANGAN
Attn: Ben Henry
Tel: (817) 328-3217
Email: bhenry@langan.com

Structural:
Salas O'Brien
Attn: Julie Bolding
Tel: 469-782-9753
Email: julie.bolding@salasobrien.com

MEP:
Salas O'Brien
Attn: Carly Wood
Tel: 727-804-7626
Email: carly.wood@salasobrien.com

Description:	No:	Date:
IF Design Development 90%		07/19/2024
IF Design Development Final		08/19/2024
IF Construction Document Review		09/20/2024
IF Construction Document Final		12/05/2024
IF CD 90		08/15/2025
IF Permit		08/26/2025

BANK OF AMERICA
Broomfield

CO1-111
NWC Hwy 7 and Palisade Pkwy
Broomfield CO, 80023

PROPERTY ID:	CO1-111
NSRP VERSION:	2.0
BULLETIN:	2-2025

WALL SECTIONS

COLORADO LICENSED
ROBERT JOHN SULLIVAN
00405343
ARCHITECT
09/04/2025

Project No: 23.0002261.000 Reviewed By: MB

A09.23

9/3/2025 4:21:26 PM C:\Users\cgoeler\Revit_Locals\2023\CO1-111 Broomfield_for SDP_cgoeler53725.rvt

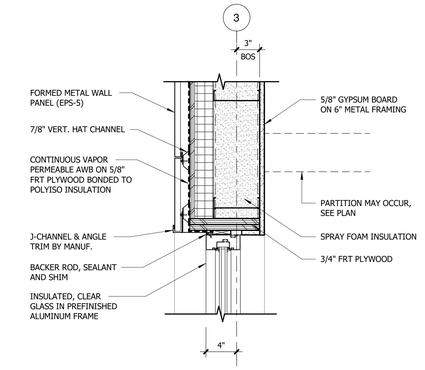

3 A09.25 DETAIL @ WINDOW JAMB
1 1/2" = 1'-0"

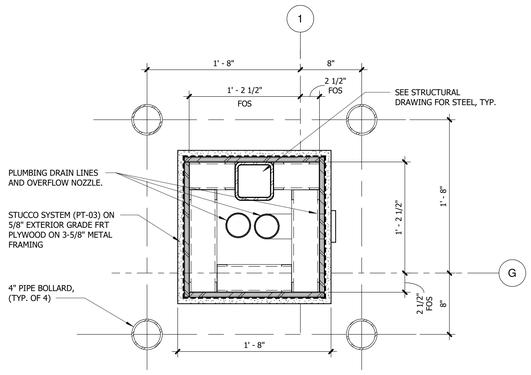

5 A09.25 DETAIL @ CANOPY COLUMN
1 1/2" = 1'-0"

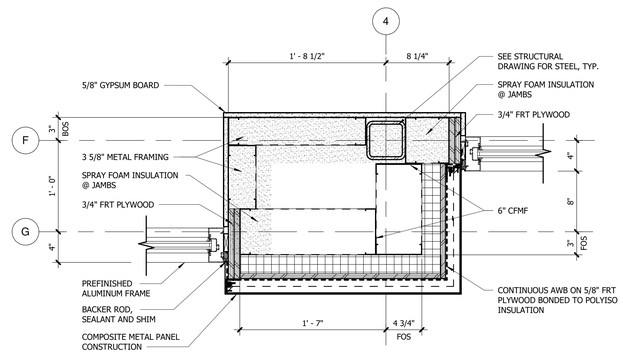

2 A09.25 DETAIL @ STOREFRONT PIER
1 1/2" = 1'-0"

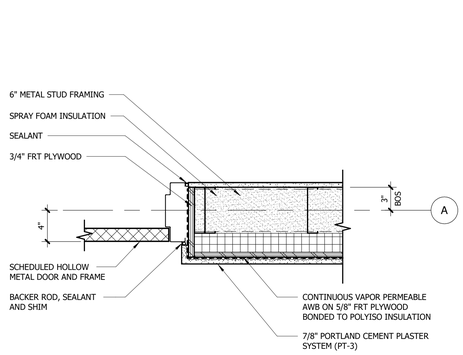

4 A09.25 DETAIL @ DOOR JAMB
1 1/2" = 1'-0"

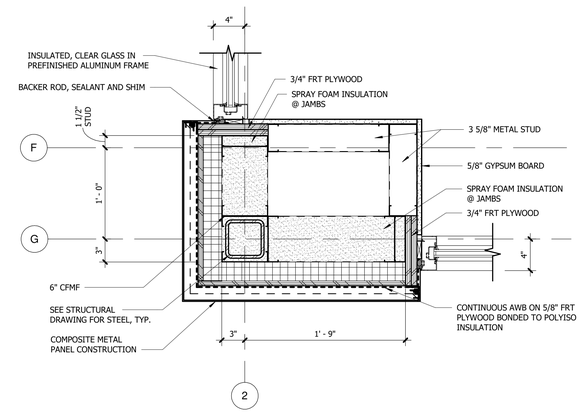

1 A09.25 DETAIL @ STOREFRONT PIER
1 1/2" = 1'-0"

NELSON
Nelco Architecture, Inc.

12400 Coit Road, Suite 510
Dallas, TX. 75251
Phone: (972) 644-8830
Fax: (972) 644-8496

Client Representative:
CUSHMAN & WAKEFIELD
Attn: Paul Hurchanik
Tel: 720.582.6073
Email:
paul.hurchanik@cushwake.com

Architect:
Nelco Architecture, Inc.
Attn: Harry Koutsis
Tel: 310.693.5271
Email: hkoutsis@nelsonww.com

AOR Contact
Robert J. Sullivan Jr.
Tel: 216.830.1561
Email:rsullivan@nelsonww.com
License No. ARC.00405343

Civil:
LANGAN
Attn: Ben Henry
Tel: (817) 328-3217
Email: bhenry@langan.com

Structural:
Salas O'Brien
Attn: Julie Bolding
Tel: 469-782-9753
Email: julie.bolding@salasobrien.com

MEP:
Salas O'Brien
Attn: Carly Wood
Tel: 727-804-7626
Email: carly.wood@salasobrien.com

Description:	No: Date:
IF Design Development 90%	07/19/2024
IF Design Development Final	08/19/2024
IF Construction Document Review	09/20/2024
IF Construction Document Final	12/05/2024
IF CD 90	08/15/2025
IF Permit	08/26/2025

BANK OF AMERICA
Broomfield

CO1-111
NWC Hwy 7 and Palisade Pkwy
Broomfield CO, 80023

PROPERTY ID:	CO1-111
NSRP VERSION:	2.0
BULLETIN:	2-2025

PLAN DETAILS

COLORADO LICENSED
JOHN MICHAEL BOLDING
00405343
ARCHITECT
09/04/2025

Project No: 23.0002261.000 Reviewed By: MB

A09.25

9/3/2025 4:21:28 PM C:\Users\cpoaler\Revit_Locals\2023\CO1-111 Broomfield_for SDP_cpoaler5372S.rvt

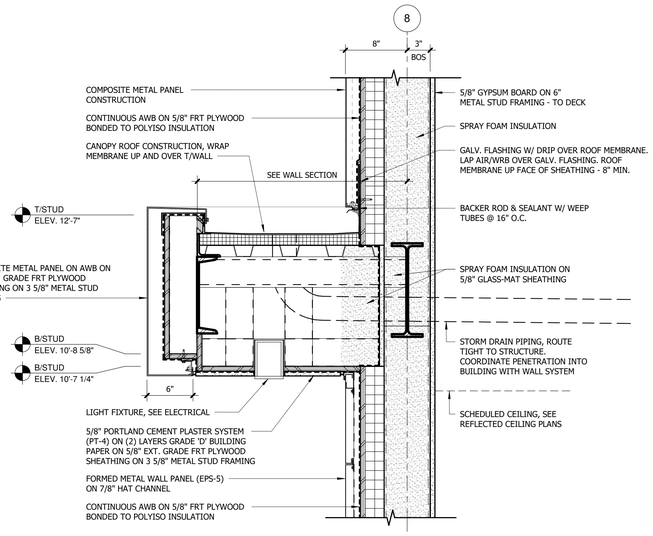

7 A09.26 SECTION DETAIL @ SIDE CANOPY
1 1/2" = 1'-0"

6 A09.26 SECTION DETAIL @ STOREFRONT BASE
1 1/2" = 1'-0"

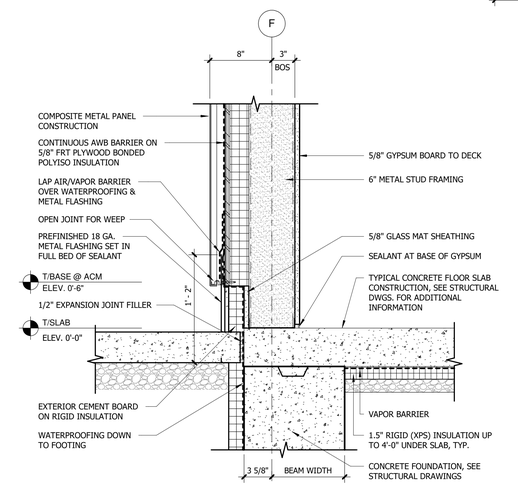

5 A09.26 SECTION DETAIL @ ACM BASE
1 1/2" = 1'-0"

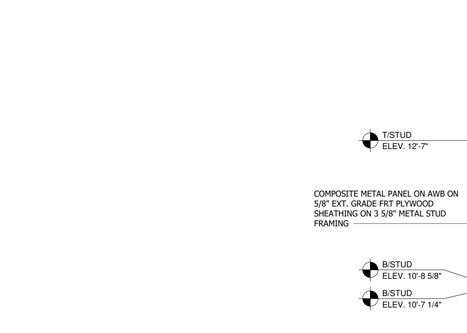

4 A09.26 SECTION DETAIL @ PARAPET
1 1/2" = 1'-0"

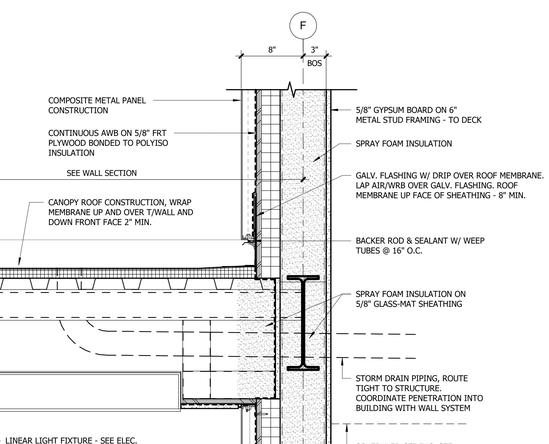

3 A09.26 SECTION DETAIL @ ENTRANCE CANOPY
1 1/2" = 1'-0"

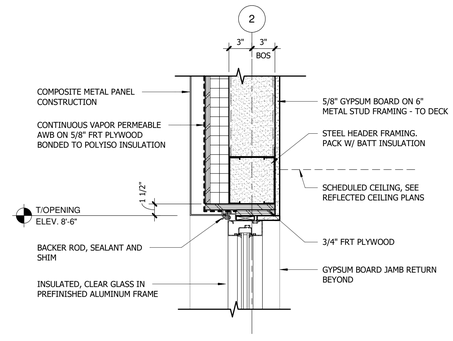

2 A09.26 SECTION DETAIL @ STOREFRONT HEAD
1 1/2" = 1'-0"

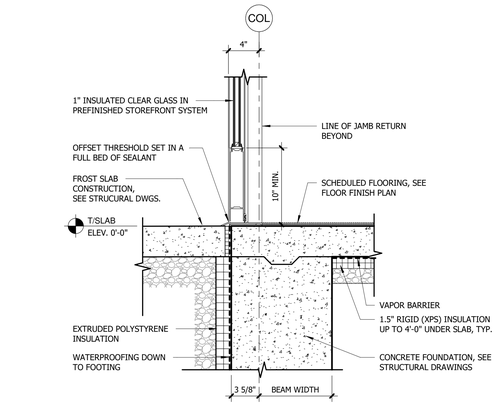

1 A09.26 SECTION DETAIL @ ENTRANCE DOOR
1 1/2" = 1'-0"

NELSON
Nelco Architecture, Inc.

12400 Coit Road, Suite 510
Dallas, TX. 75251
Phone: (972) 644-8830
Fax: (972) 644-8496

Client Representative:
CUSHMAN & WAKEFIELD
Attn: Paul Hurchanik
Tel: 720.582.6073
Email: paul.hurchanik@cushwake.com

Architect:
Nelco Architecture, Inc.
Attn: Harry Koutsis
Tel: 310.693.5271
Email: hkoutsis@nelsonww.com

AOR Contact
Robert J. Sullivan Jr.
Tel: 216.830.1561
Email:rsullivan@nelsonww.com
License No. ARC.00405343

Civil:
LANGAN
Attn: Ben Henry
Tel: (817) 328-3217
Email: bhenry@langan.com

Structural:
Salas O'Brien
Attn: Julie Bolding
Tel: 469-782-9753
Email: julie.bolding@salasobrien.com

MEP:
Salas O'Brien
Attn: Carly Wood
Tel: 727-804-7626
Email: carly.wood@salasobrien.com

Description:	No:	Date:
IF Design Development 90%		07/19/2024
IF Design Development Final		08/19/2024
IF Construction Document Review		09/20/2024
IF Construction Document Final		12/05/2024
IF CD 90		08/15/2025
IF Permit		08/26/2025

BANK OF AMERICA
Broomfield

CO1-111
NWC Hwy 7 and Palisade Pkwy
Broomfield CO, 80023

PROPERTY ID:	CO1-111
NSRP VERSION:	2.0
BULLETIN:	2-2025

SECTION DETAILS

COLORADO LICENSED
ROBERT JOHN SULLIVAN JR.
405343
ARCHITECT
09/04/2025

Project No: 23.0002261.000 Reviewed By: MB

A09.26

9/3/2025 4:21:31 PM C:\Users\cgosier\Revit_Locals\2023\CO1-111 Broomfield_for SDP_cgosier537Z5.rvt

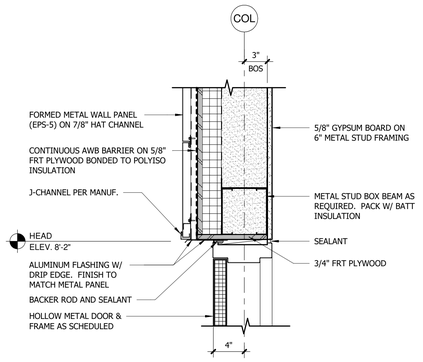

14 A09.27 SECTION DETAIL @ HM DOOR HEAD
1 1/2" = 1'-0"

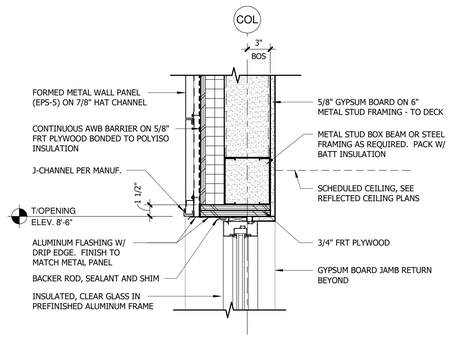

11 A09.27 SECTION DETAIL @ STOREFRONT HEAD
1 1/2" = 1'-0"

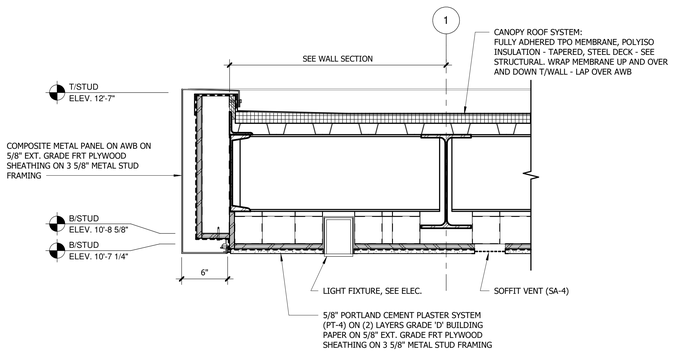

16 A09.27 SECTION DETAIL @ DRIVE UP CANOPY
1 1/2" = 1'-0"

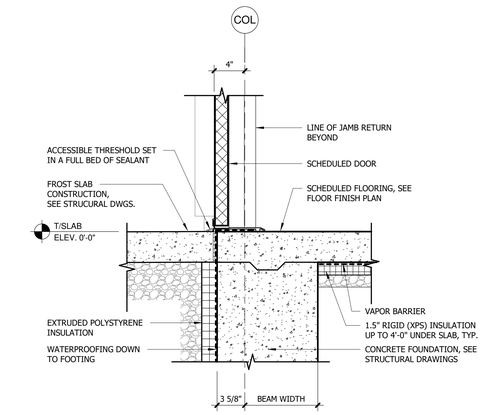

13 A09.27 SECTION DETAIL @ HM DOOR THRESHOLD
1 1/2" = 1'-0"

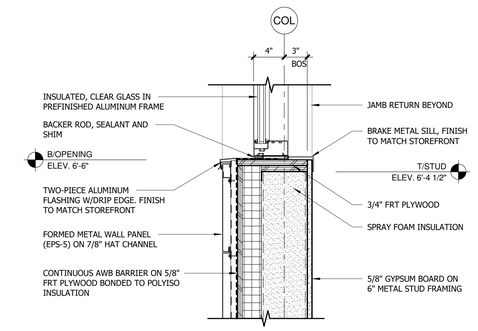

10 A09.27 SECTION DETAIL @ STOREFRONT SILL
1 1/2" = 1'-0"

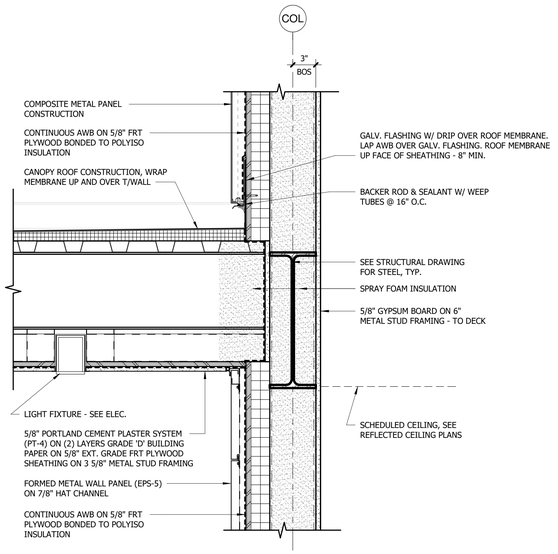

15 A09.27 SECTION DETAIL @ DRIVE UP CANOPY
1 1/2" = 1'-0"

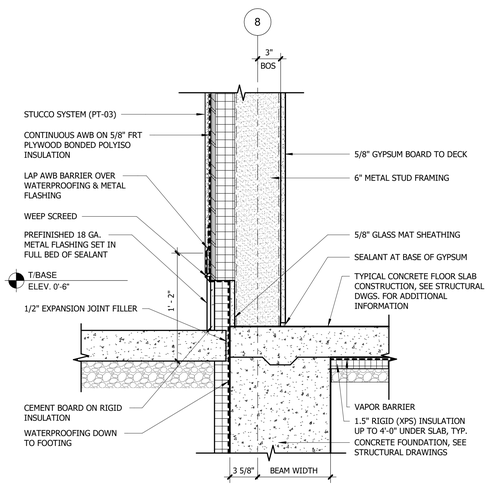

12 A09.27 SECTION DETAIL @ STUCCO BASE
1 1/2" = 1'-0"

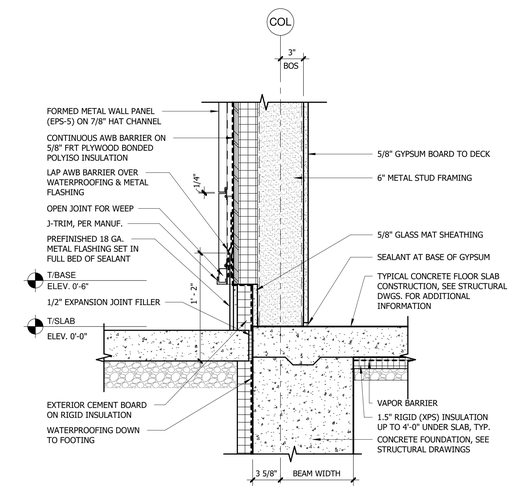

9 A09.27 SECTION DETAIL @ METAL PANEL BASE
1 1/2" = 1'-0"

NELSON
Nelco Architecture, Inc.

12400 Coit Road, Suite 510
Dallas, TX. 75251
Phone: (972) 644-8830
Fax: (972) 644-8496

Client Representative:
CUSHMAN & WAKEFIELD
Attn: Paul Hurchanik
Tel: 720.582.6073
Email: paul.hurchanik@cushwake.com

Architect:
Nelco Architecture, Inc.
Attn: Harry Koutsis
Tel: 310.693.5271
Email: hkoutsis@nelsonww.com

AOR Contact
Robert J. Sullivan Jr.
Tel: 216.830.1561
Email:rsullivan@nelsonww.com
License No. ARC.00405343

Civil:
LANGAN
Attn: Ben Henry
Tel: (817) 328-3217
Email: bhenry@langan.com

Structural:
Salas O'Brien
Attn: Julie Bolding
Tel: 469-782-9753
Email: julie.bolding@salasobrien.com

MEP:
Salas O'Brien
Attn: Carly Wood
Tel: 727-804-7626
Email: carly.wood@salasobrien.com

Description:	No:	Date:
IF Design Development 90%		07/19/2024
IF Design Development Final		08/19/2024
IF Construction Document Review		09/20/2024
IF Construction Document Final		12/05/2024
IF CD 90		08/15/2025
IF Permit		08/26/2025

BANK OF AMERICA
Broomfield

CO1-111
NWC Hwy 7 and Palisade Pkwy
Broomfield CO, 80023

PROPERTY ID:	CO1-111
NSRP VERSION:	2.0
BULLETIN:	2-2025

SECTION DETAILS

COLORADO LICENSED ROBERT JOHN SULLIVAN JR. 00405343 ARCHITECT
09/04/2025

Project No: 23.0002261.000 Reviewed By: MB

A09.27

9/3/2025 4:21:34 PM C:\Users\cpoalen\Revit_Locals\2023\CO1-111 Broomfield_for SDP_cpoalen53725.rvt

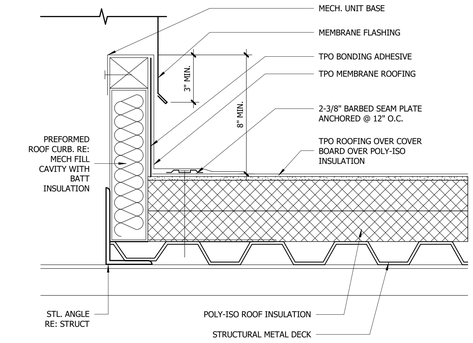

8 A09.30 ROOF CURB DETAIL1
3" = 1'-0"

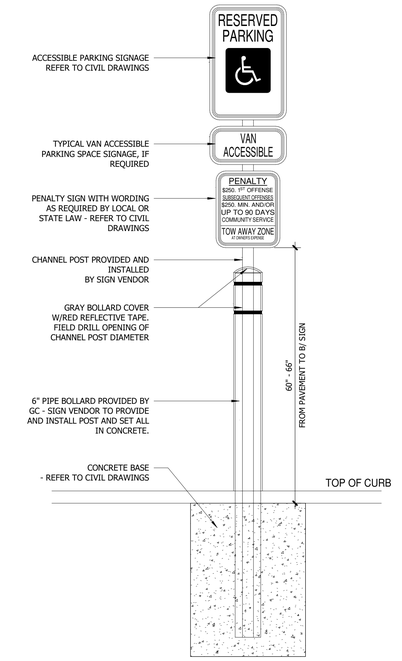

5 A09.30 GROUND MOUNTED SIGNAGE
1/8" = 1'-0"

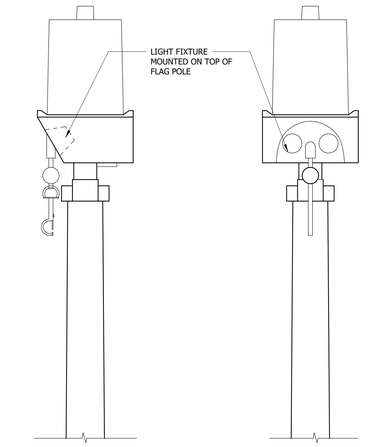

SIDE ELEVATION FRONT ELEVATION

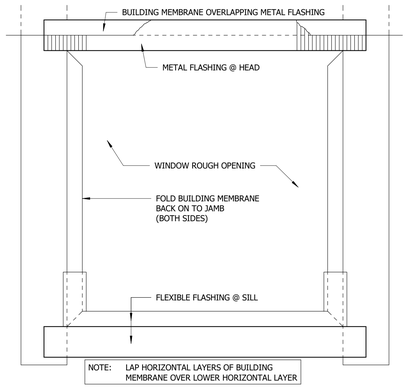

9 A09.30 WINDOW FLASHING DETAILS1
3/4" = 1'-0"

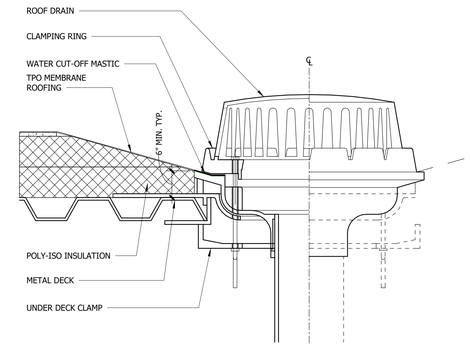

7 A09.30 ROOF DRAIN DETAIL1
3" = 1'-0"

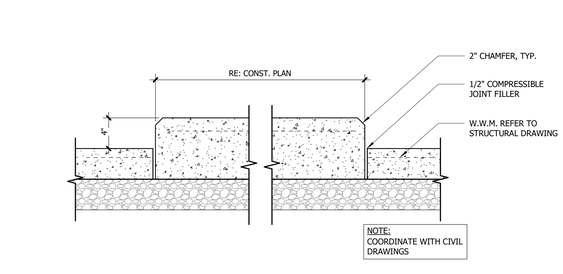

4 A09.30 TYP. DETAIL @ DRIVE-THRU ISLAND1
3" = 1'-0"

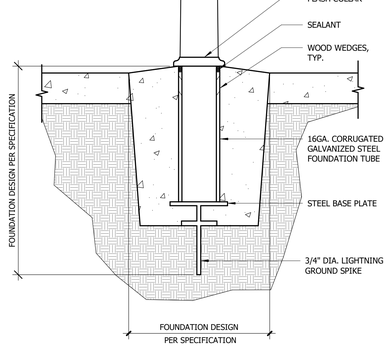

SECTION

2 A09.30 FLAG POLE FOUNDATION DETAIL1
1 1/2" = 1'-0"

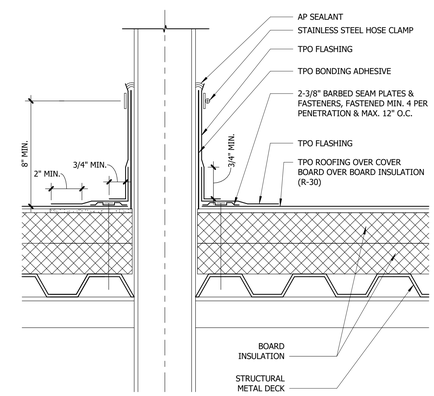

6 A09.30 ROOF PIPE PENETRATION DETAIL1
3" = 1'-0"

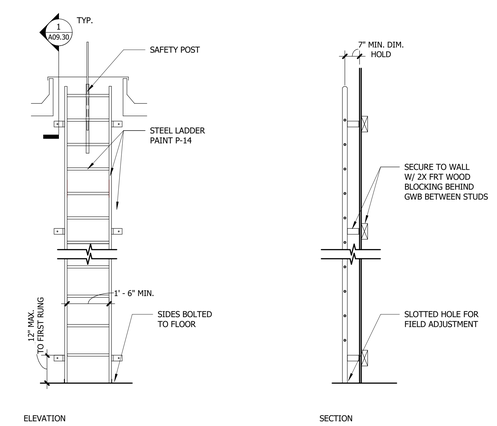

3 A09.30 ROOF LADDER ELEVATION1
3" = 1'-0"

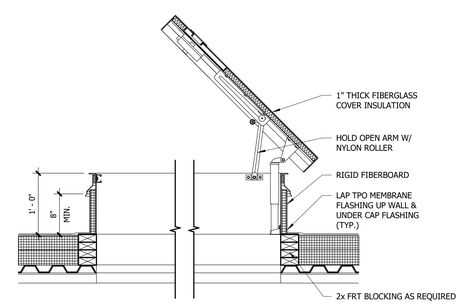

1 A09.30 ROOF HATCH DETAIL1
1" = 1'-0"

NELSON
Nelco Architecture, Inc.

12400 Coit Road, Suite 510
Dallas, TX. 75251
Phone: (972) 644-8830
Fax: (972) 644-8496

Client Representative:
CUSHMAN & WAKEFIELD
Attn: Paul Hurchanik
Tel: 720.582.6073
Email:
paul.hurchanik@cushwake.com

Architect:
Nelco Architecture, Inc.
Attn: Harry Koutsis
Tel: 310.693.5271
Email: hkoutsis@nelsonww.com

AOR Contact
Robert J. Sullivan Jr.
Tel: 216.830.1561
Email:rsullivan@nelsonww.com
License No. ARC.00405343

Civil:
LANGAN
Attn: Ben Henry
Tel: (817) 328-3217
Email: bhenry@langan.com

Structural:
Salas O'Brien
Attn: Julie Bolding
Tel: 469-782-9753
Email: julie.bolding@salasobrien.com

MEP:
Salas O'Brien
Attn: Carly Wood
Tel: 727-804-7626
Email: carly.wood@salasobrien.com

Description:	No:	Date:
IF Design Development 90%		07/19/2024
IF Design Development Final		08/19/2024
IF Construction Document Review		09/20/2024
IF Construction Document Final		12/05/2024
IF CO 90		08/15/2025
IF Permit		08/26/2025

BANK OF AMERICA
Broomfield

CO1-111
NWC Hwy 7 and Palisade Pkwy
Broomfield CO, 80023

PROPERTY ID:	CO1-111
NSRP VERSION:	2.0
BULLETIN:	2-2025

EXTERIOR DETAILS

COLORADO LICENSED
ROBERT JOHN SULLIVAN JR.
00405343
ARCHITECT
09/04/2025

NORTH

Project No: 23.0002261.000 Reviewed By: MB

A09.30

9/3/2025 4:21:37 PM C:\Users\cpoaier\Revit_Locals\2023\CO1-111 Broomfield_for SDP_cpoaier53725.rvt

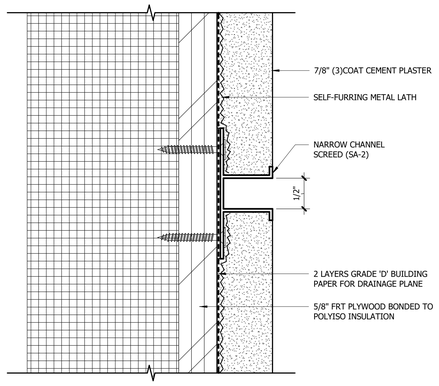

6 A09.31 DETAIL AT NARROW CHANNEL SCREED
12" = 1'-0"

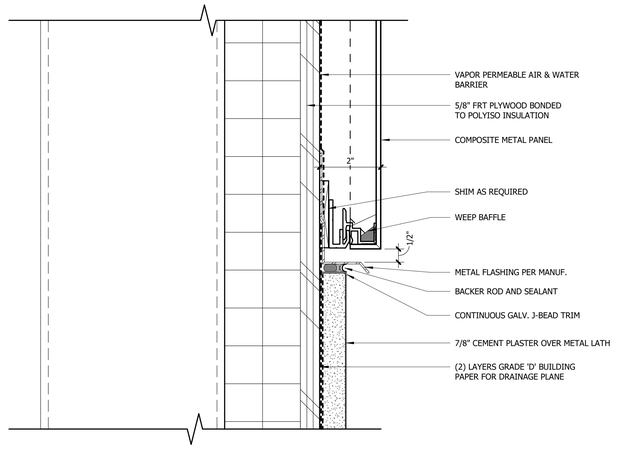

4 A09.31 TRANSITION DETAIL @ ACM TO STUCCO (SECTION)
6" = 1'-0"

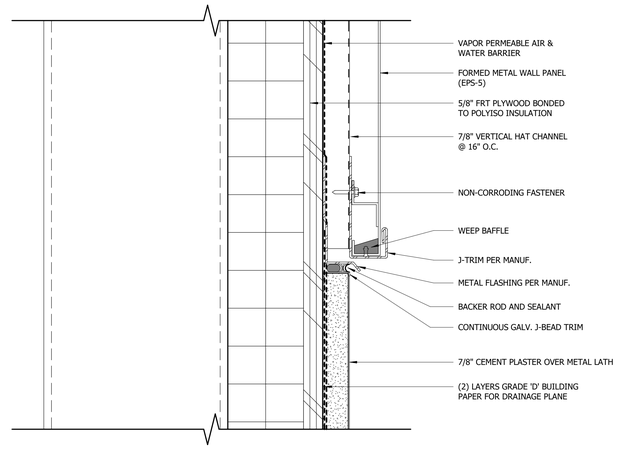

2 A09.31 TRANSITION DETAIL @ METAL PANEL TO STUCCO (SECTION)
6" = 1'-0"

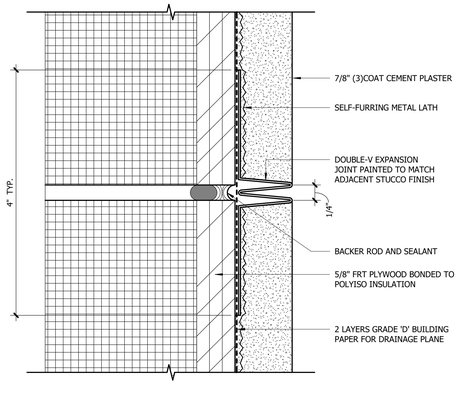

5 A09.31 DETAIL AT VERTICAL CONTROL JOINT
12" = 1'-0"

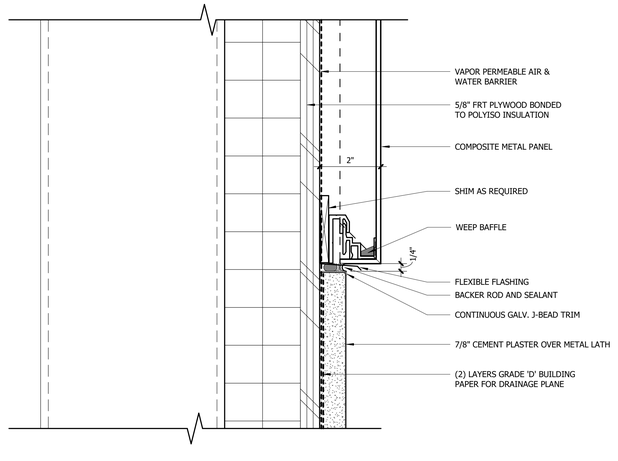

3 A09.31 TRANSITION DETAIL @ ACM TO STUCCO (PLAN)
6" = 1'-0"

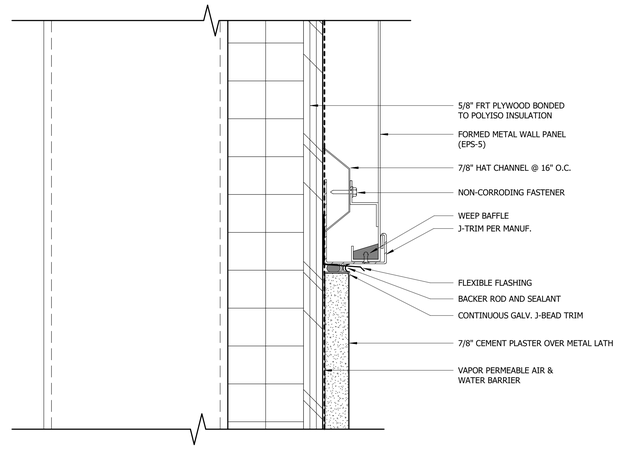

1 A09.31 TRANSITION DETAIL @ METAL PANEL TO STUCCO (PLAN)
6" = 1'-0"

NELSON
Nelco Architecture, Inc.

12400 Coit Road, Suite 510
Dallas, TX. 75251
Phone: (972) 644-8830
Fax: (972) 644-8496

Client Representative:
CUSHMAN & WAKEFIELD
Attn: Paul Hurchanik
Tel: 720.582.6073
Email:
paul.hurchanik@cushwake.com

Architect:
Nelco Architecture, Inc.
Attn: Harry Koutsis
Tel: 310.693.5271
Email: hkoutsis@nelsonww.com

AOR Contact
Robert J. Sullivan Jr.
Tel: 216.830.1561
Email:rsullivan@nelsonww.com
License No. ARC.00405343

Civil:
LANGAN
Attn: Ben Henry
Tel: (817) 328-3217
Email: bhenry@langan.com

Structural:
Salas O'Brien
Attn: Julie Bolding
Tel: 469-782-9753
Email: julie.bolding@salasobrien.com

MEP:
Salas O'Brien
Attn: Carly Wood
Tel: 727-804-7626
Email: carly.wood@salasobrien.com

Description:	No:	Date:
IF Design Development 90%		07/19/2024
IF Design Development Final		08/19/2024
IF Construction Document Review		09/20/2024
IF Construction Document Final		12/05/2024
IF CD 90		08/15/2025
IF Permit		08/26/2025

BANK OF AMERICA
Broomfield

CO1-111
NWC Hwy 7 and Palisade Pkwy
Broomfield CO, 80023

PROPERTY ID:	CO1-111
NSRP VERSION:	2.0
BULLETIN:	2-2025

EXTERIOR TRANSITION DETAILS

COLORADO LICENSED ROBERT JOHN SULLIVAN JR. 00405343 ARCHITECT
09/04/2025

Project No: 23.0002261.000 Reviewed By: MB

A09.31

C:\Users\cgosier\Revit_Locals\2023\CO1-111 Broomfield_for SDP_cgosier537Z5.rvt
9/3/2025 4:21:39 PM

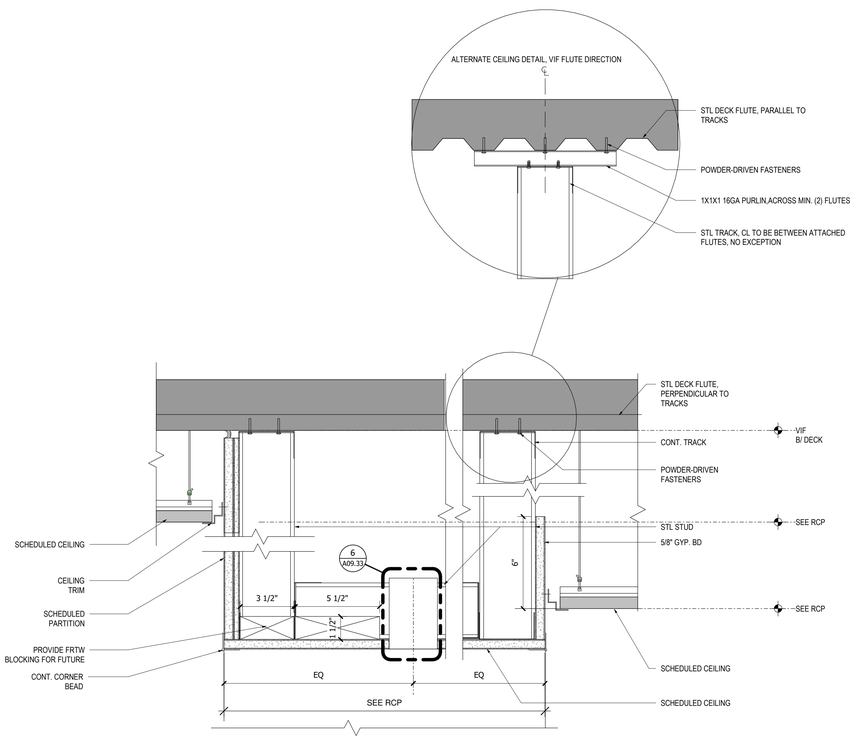

10 A09.33 CEILING DETAIL @ CSR SOFFIT
3" = 1'-0"

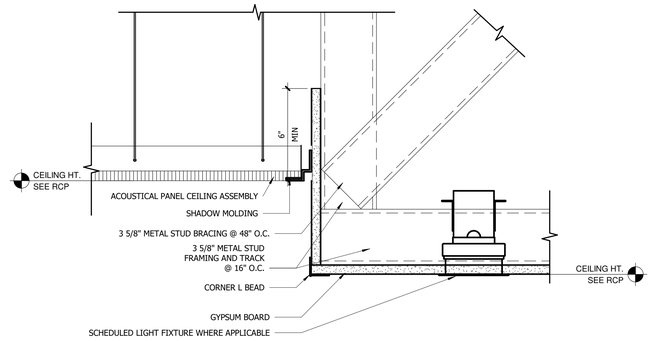

8 A09.33 TYPICAL BULKHEAD DETAIL
3" = 1'-0"

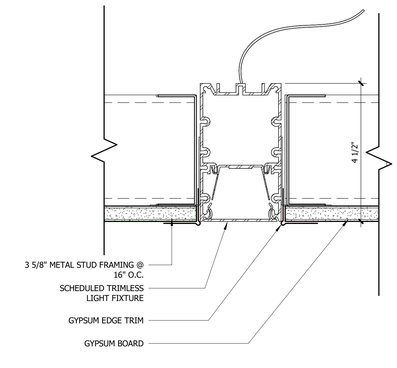

6 A09.33 INTERIOR TRIMLESS FIXTURE DETAIL
6" = 1'-0"

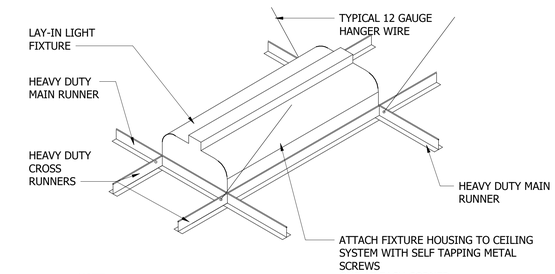

NOTE:
LATERAL BRACING FOR SUSPENDED CEILING MUST BE PROVIDED PER UBC REQUIREMENTS WHERE LOADS ARE LESS THAN 5# PER FOOT & NOT SUPPORTING INTERIOR PARTITIONS.
CEILING BRACING SHALL BE PROVIDED BY FOUR No 12 GAUGE WIRES SECURED TO THE MAIN RUNNER INTERSECTION AND SPLAYED 90 DEGREES FROM THE PLANE OF THE CEILING.
THESE HORIZONTAL RESTRAINT POINTS SHALL BE IN BOTH DIRECTIONS, WITH THE FIRST POINT WITHIN 4'0" FROM THE WALL. ATTACHMENT OF THE RESTRAIN WIRES TO THE STRUCTURE ABOVE SHALL BE ADEQUATE FOR THE LOAD IMPOSED.
INSTALL TWO ADDITIONAL WIRES AT OPPOSITE CORNERS (MAY BE SLACK) OF LIGHT FIXTURE HOUSING AND ATTACHMENT OF CEILING REGISTERS WITH SAME. START OF WIRE TO BE NO LESS THAN 8 INCHES FROM THE PERIMETER WALL.

3 A09.33 LIGHT FIXTURE INSTALLATION
12" = 1'-0"

2 A09.33 CEILING MOUNTED WAP SEC DTL
3" = 1'-0"

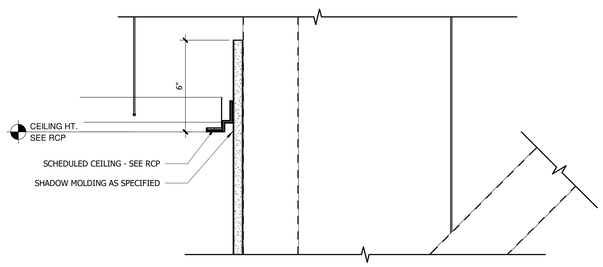

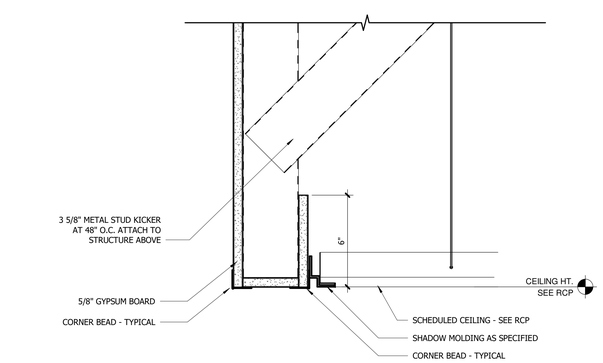

7 A09.33 TYPICAL CEILING TRANSITION DETAIL
3" = 1'-0"

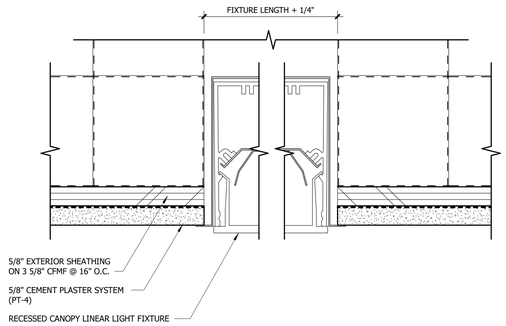

5 A09.33 CANOPY LINEAR LIGHT DETAIL - LONG
6" = 1'-0"

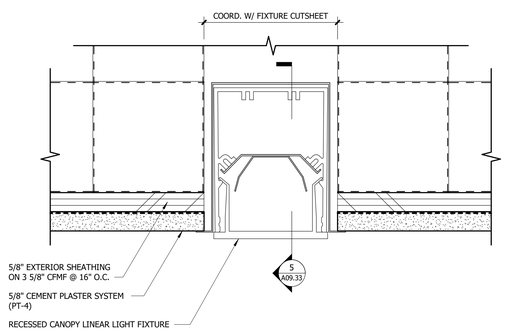

4 A09.33 CANOPY LINEAR LIGHT DETAIL - TRANS
6" = 1'-0"

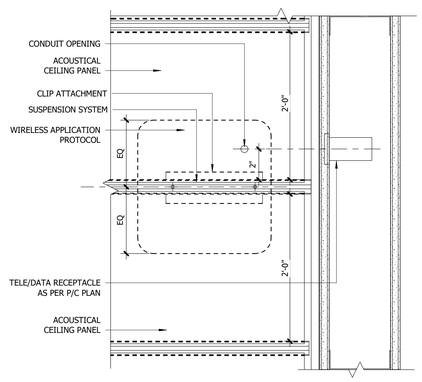

1 A09.33 CEILING MOUNTED WAP PLAN DTL
3" = 1'-0"

NELSON
Nelco Architecture, Inc.

12400 Coit Road, Suite 510
Dallas, TX. 75251
Phone: (972) 644-8830
Fax: (972) 644-8496

Client Representative:
CUSHMAN & WAKEFIELD
Attn: Paul Hurchanik
Tel: 720.582.6073
Email: paul.hurchanik@cushwake.com

Architect:
Nelco Architecture, Inc.
Attn: Harry Koutsis
Tel: 310.693.5271
Email: hkoutsis@nelsonww.com

AOR Contact
Robert J. Sullivan Jr.
Tel: 216.830.1561
Email:rsullivan@nelsonww.com
License No. ARC.00405343

Civil:
LANGAN
Attn: Ben Henry
Tel: (817) 328-3217
Email: bhenry@langan.com

Structural:
Salas O'Brien
Attn: Julie Bolding
Tel: 469-782-9753
Email: julie.bolding@salasobrien.com

MEP:
Salas O'Brien
Attn: Carly Wood
Tel: 727-804-7626
Email: carly.wood@salasobrien.com

Description:	No: Date:
IF Schematic Design Review	08/30/2023
IF Design Development 90%	07/19/2024
IF Design Development Final	08/19/2024
IF Construction Document Review	09/20/2024
IF Construction Document Final	12/05/2024
IF CD 90	08/15/2025
IF Permit	08/26/2025

BANK OF AMERICA
Broomfield

CO1-111
NWC Hwy 7 and Palisade Pkwy
Broomfield CO, 80023

PROPERTY ID:	CO1-111
NSRP VERSION:	2.0
BULLETIN:	2-2025

TYPICAL CEILING DETAILS

COLORADO LICENSED
ROBERT JOHN SULLIVAN JR.
00405343
ARCHITECT
09/04/2025

Project No: 23.0002261.000 Reviewed By: MB

A09.33

C:\Users\cgosier\Revit_Locals\2023\CO1-111 Broomfield_for SDP_cgosier53725.rvt
9/3/2025 4:21:42 PM

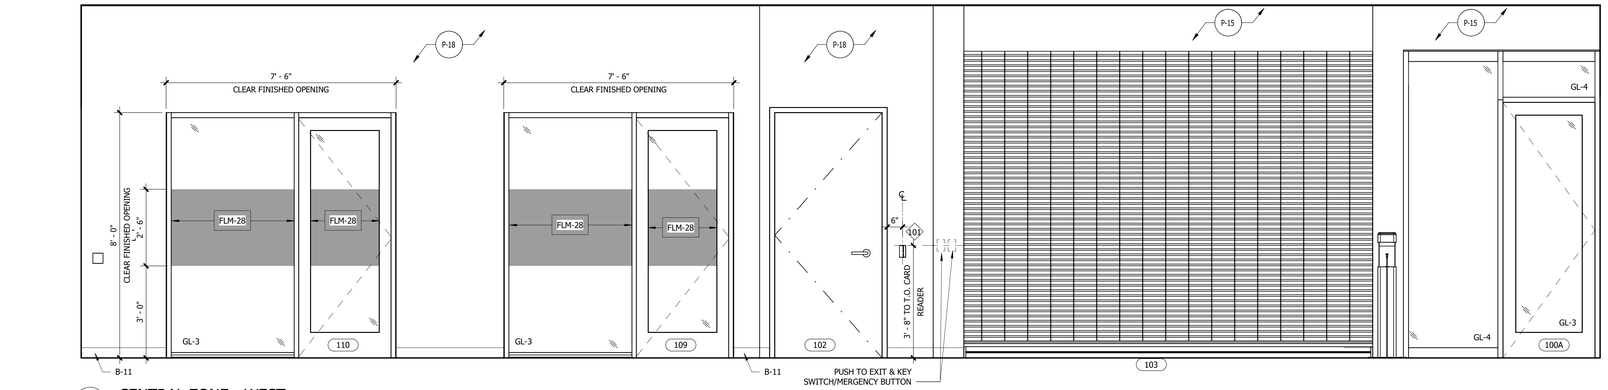

8 A11.01 **CENTRAL ZONE - WEST**
1/2" = 1'-0"

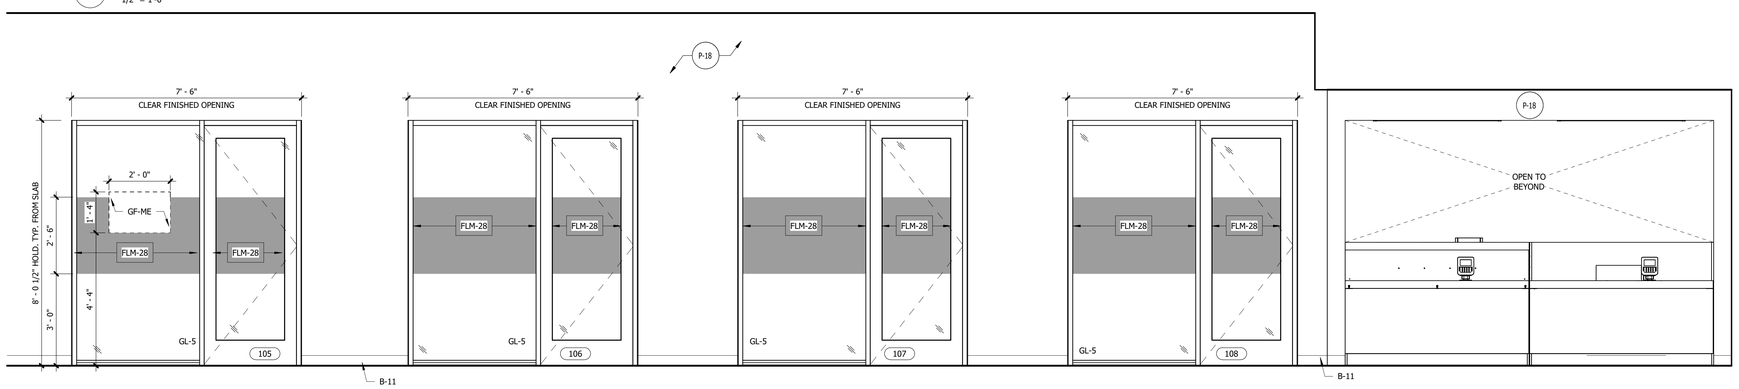

7 A11.01 **CENTRAL ZONE - EAST**
1/2" = 1'-0"

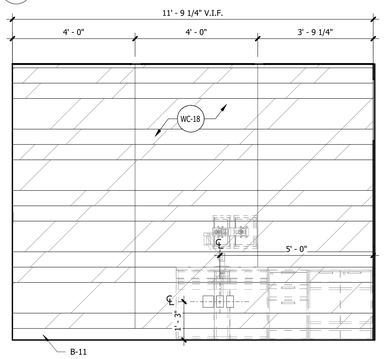

6 A11.01 **OFFICE 2 - SOUTH**
1/2" = 1'-0"

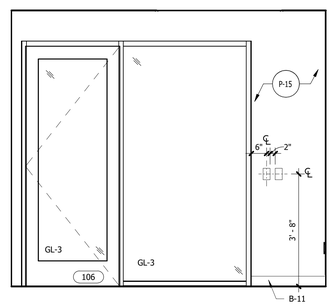

5 A11.01 **OFFICE 2 - WEST**
1/2" = 1'-0"

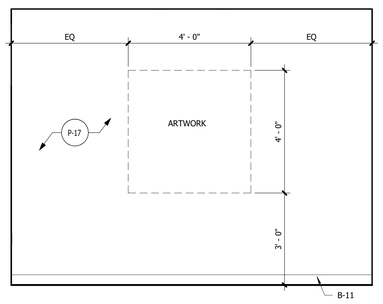

4 A11.01 **OFFICE 2 - NORTH**
1/2" = 1'-0"

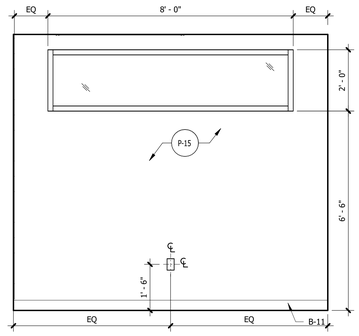

3 A11.01 **OFFICE 2 - EAST**
1/2" = 1'-0"

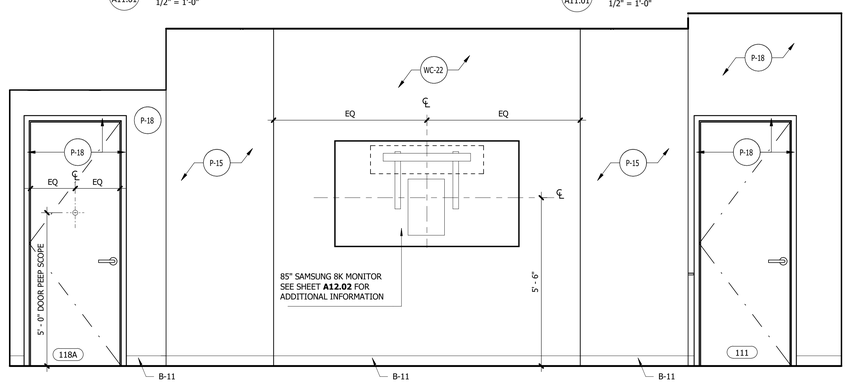

1 A11.01 **MEDIA WALL ELEVATION**
1/2" = 1'-0"

NELSON
Nelco Architecture, Inc.

12400 Coit Road, Suite 510
Dallas, TX. 75251
Phone: (972) 644-8830
Fax: (972) 644-8496

Client Representative:
CUSHMAN & WAKEFIELD
Attn: Paul Hurchanik
Tel: 720.582.6073
Email:
paul.hurchanik@cushwake.com

Architect:
Nelco Architecture, Inc.
Attn: Harry Koutsis
Tel: 310.693.5271
Email: hkoutsis@nelsonww.com

AOR Contact
Robert J. Sullivan Jr.
Tel: 216.830.1561
Email:rsullivan@nelsonww.com
License No. ARC.00405343

Civil:
LANGAN
Attn: Ben Henry
Tel: (817) 328-3217
Email: bhenry@langan.com

Structural:
Salas O'Brien
Attn: Julie Bolding
Tel: 469-782-9753
Email: julie.bolding@salasobrien.com

MEP:
Salas O'Brien
Attn: Carly Wood
Tel: 727-804-7626
Email: carly.wood@salasobrien.com

Description:	No: Date:
IF Schematic Design Review	08/30/2023
IF Design Development 90%	07/19/2024
IF Design Development Final	08/19/2024
IF Construction Document Review	09/20/2024
IF Construction Document Final	12/05/2024
IF CD 90	08/15/2025
IF Permit	08/26/2025

BANK OF AMERICA
Broomfield

CO1-111
NWC Hwy 7 and Palisade Pkwy
Broomfield CO, 80023

PROPERTY ID:	CO1-111
NSRP VERSION:	2.0
BULLETIN:	2-2025

INTERIOR ELEVATIONS

COLORADO LICENSED
ROBERT JOHN SULLIVAN JR.
00405343
ARCHITECT
09/04/2025

Project No: 23.0002261.000 Reviewed By: MB

A11.01

C:\Users\cgosier\Revit_Locals\2023\CO1-111 Broomfield_for SDP_cgosier537ZS.rvt
9/3/2025 4:21:52 PM

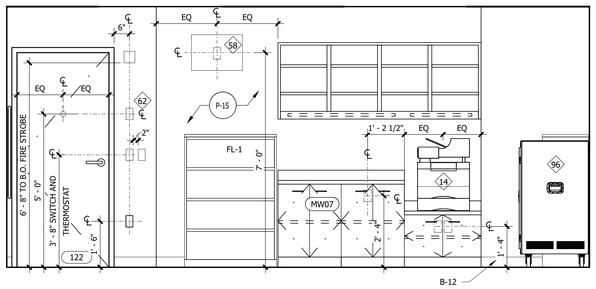

4 A11.02 CALLING CUBE - WEST
1/2" = 1'-0"

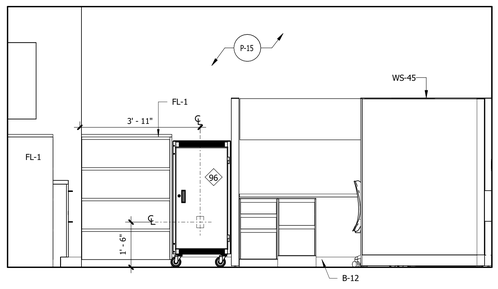

3 A11.02 CALLING CUBE - SOUTH
1/2" = 1'-0"

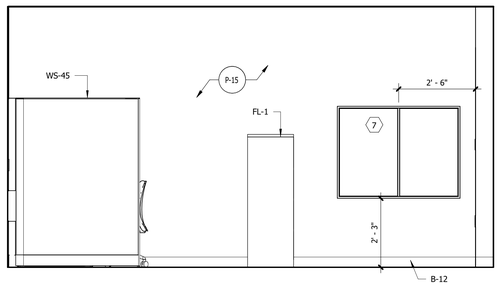

2 A11.02 CALLING CUBE - NORTH
1/2" = 1'-0"

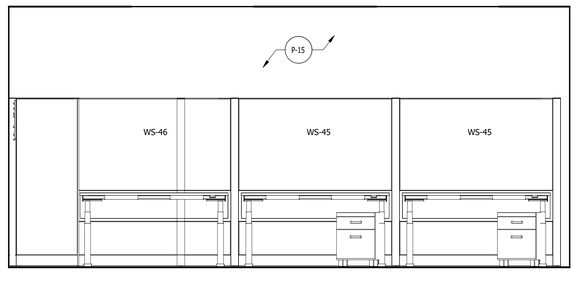

1 A11.02 CALLING CUBE - EAST
1/2" = 1'-0"

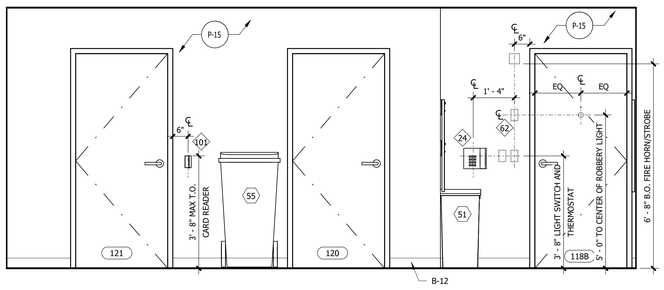

7 A11.02 BREAK ROOM - WEST
1/2" = 1'-0"

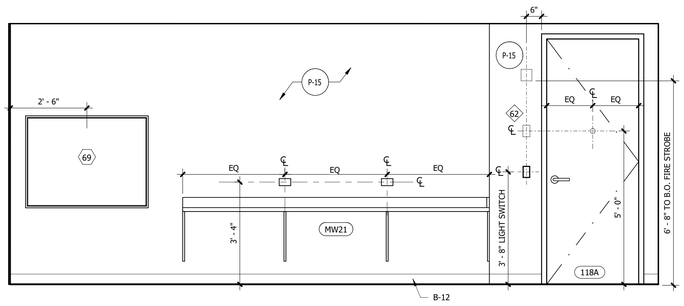

6 A11.02 BREAK ROOM - SOUTH
1/2" = 1'-0"

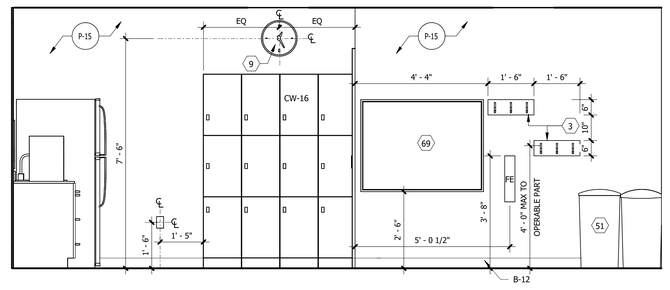

5 A11.02 BREAK ROOM - NORTH
1/2" = 1'-0"

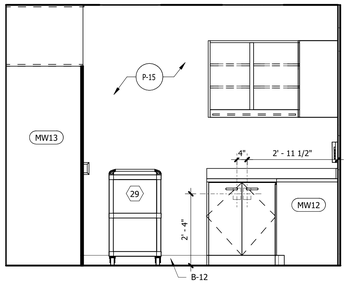

11 A11.02 WORK ROOM - WEST
1/2" = 1'-0"

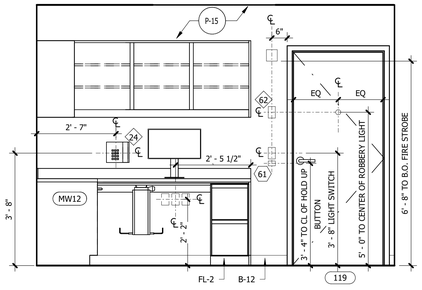

10 A11.02 WORK ROOM - SOUTH
1/2" = 1'-0"

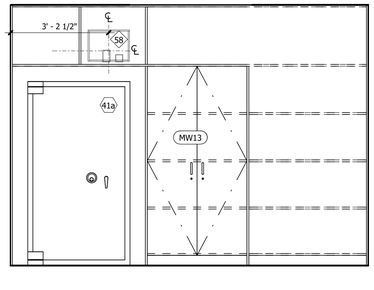

9 A11.02 WORK ROOM - NORTH
1/2" = 1'-0"

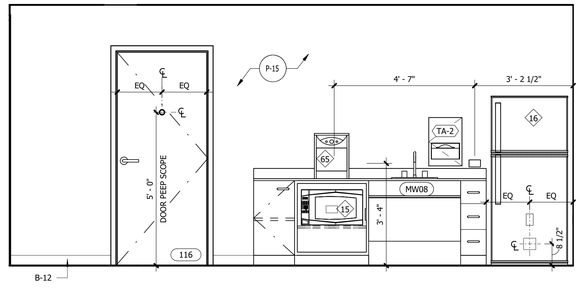

8 A11.02 BREAK ROOM - EAST
1/2" = 1'-0"

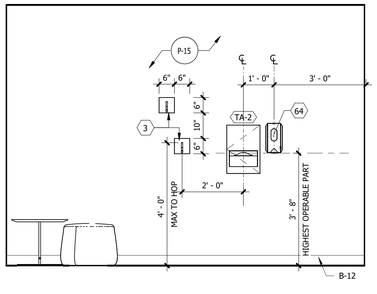

15 A11.02 WELLNESS ROOM - SOUTH
1/2" = 1'-0"

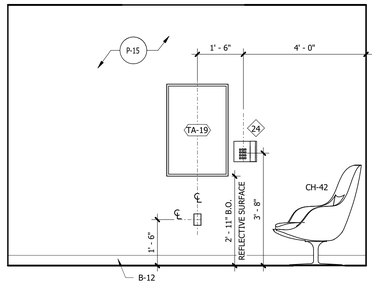

14 A11.02 WELLNESS ROOM - NORTH
1/2" = 1'-0"

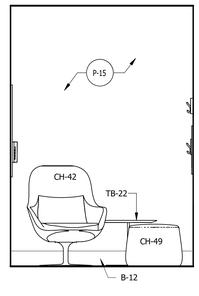

13 A11.02 WELLNESS ROOM - NORTH
1/2" = 1'-0"

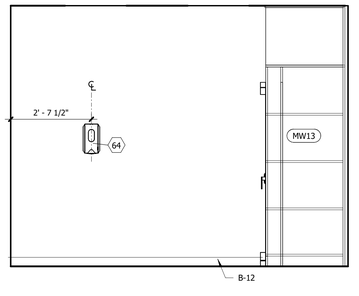

12 A11.02 WORK ROOM - EAST
1/2" = 1'-0"

NELSON
Nelco Architecture, Inc.

12400 Coit Road, Suite 510
Dallas, TX. 75251
Phone: (972) 644-8830
Fax: (972) 644-8496

Client Representative:
CUSHMAN & WAKEFIELD
Attn: Paul Hurchanik
Tel: 720.582.6073
Email:
paul.hurchanik@cushwake.com

Architect:
Nelco Architecture, Inc.
Attn: Harry Koutsis
Tel: 310.693.5271
Email: hkoutsis@nelsonww.com

AOR Contact
Robert J. Sullivan Jr.
Tel: 216.830.1561
Email:rsullivan@nelsonww.com
License No. ARC.00405343

Civil:
LANGAN
Attn: Ben Henry
Tel: (817) 328-3217
Email: bhenry@langan.com

Structural:
Salas O'Brien
Attn: Julie Bolding
Tel: 469-782-9753
Email: julie.bolding@salasobrien.com

MEP:
Salas O'Brien
Attn: Carly Wood
Tel: 727-804-7626
Email: carly.wood@salasobrien.com

Description:	No: Date:
IF Schematic Design Final	09/29/2023
IF COE Package	11/09/2023
IF Design Development 90%	07/19/2024
IF Design Development Final	08/19/2024
IF Construction Document Review	09/20/2024
IF Construction Document Final	12/05/2024
IF CD 90	08/15/2025
IF Permit	08/26/2025

BANK OF AMERICA
Broomfield

CO1-111
NWC Hwy 7 and Palisade Pkwy
Broomfield CO, 80023

PROPERTY ID:	CO1-111
NSRP VERSION:	2.0
BULLETIN:	2-2025

INTERIOR ELEVATIONS

COLORADO LICENSED
JOHN R. SULLIVAN JR.
00405343
ARCHITECT
09/04/2025

Project No: 23.0002261.000 Reviewed By: MB

A11.02

C:\Users\rgosier\Revit_Locals\2023\CO1-111 Broomfield_for SDP_cgosier53725.rvt
9/3/2025 4:21:59 PM

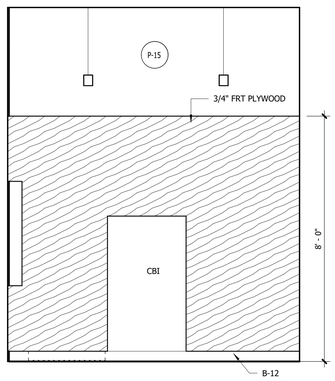

4 A11.03 **ELECTRICAL ELEVATION**
1/2" = 1'-0"

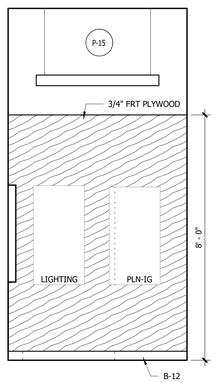

3 A11.03 **ELECTRICAL ELEVATION**
1/2" = 1'-0"

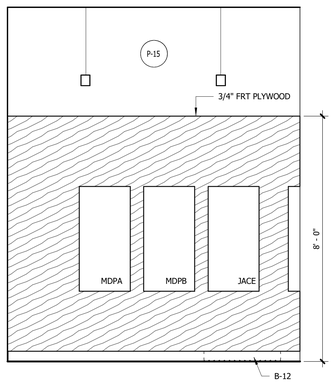

2 A11.03 **ELECTRICAL ELEVATION**
1/2" = 1'-0"

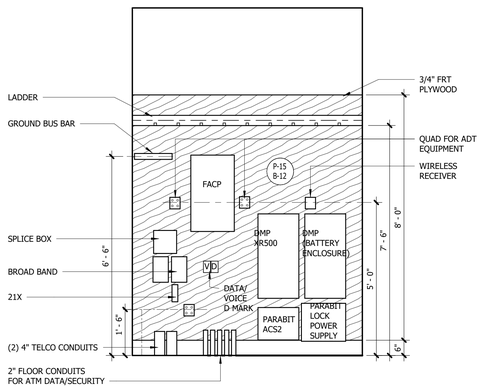

5 A11.03 **NER ELEVATION**
1/2" = 1'-0"

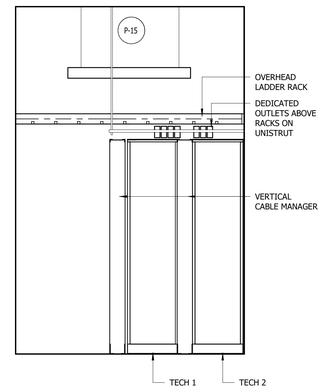

7 A11.03 **NER ELEVATION**
1/2" = 1'-0"

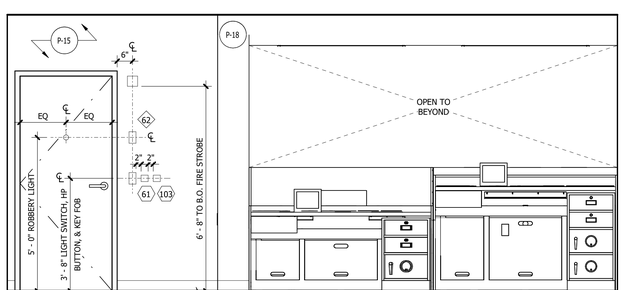

11 A11.03 **CSR LINE**
1/2" = 1'-0"

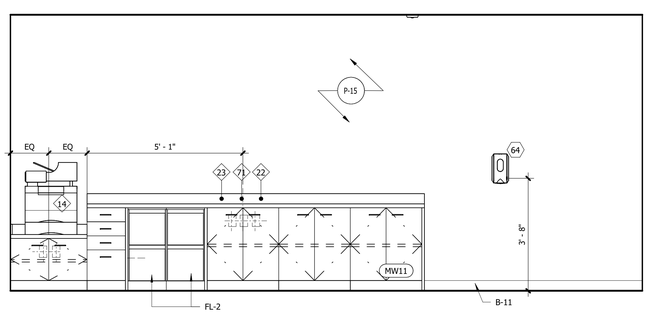

9 A11.03 **EXCEPTION WINDOW**
1/2" = 1'-0"

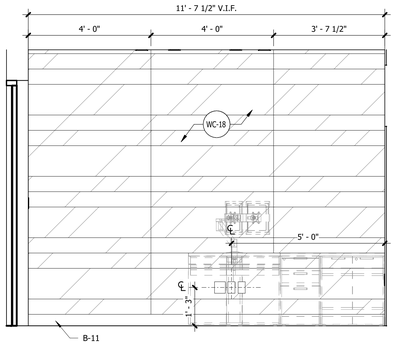

10 A11.03 **OFFICE 6 - NORTH**
1/2" = 1'-0"

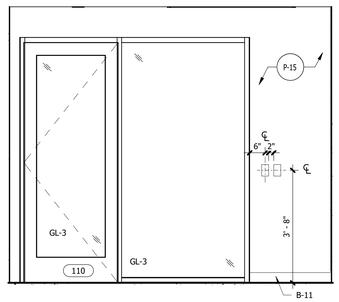

6 A11.03 **OFFICE 6 - EAST**
1/2" = 1'-0"

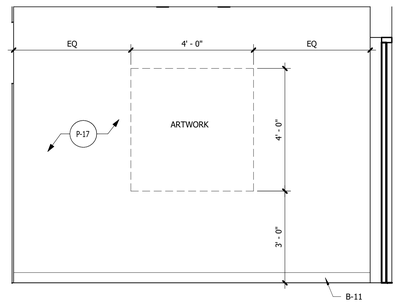

8 A11.03 **OFFICE 6 - SOUTH**
1/2" = 1'-0"

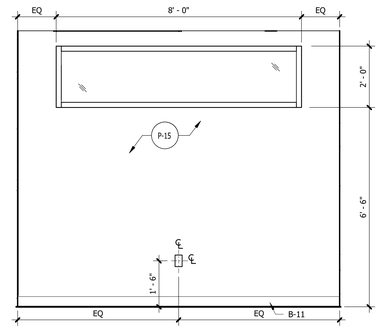

1 A11.03 **OFFICE 6 - WEST**
1/2" = 1'-0"

NELSON
Nelco Architecture, Inc.

12400 Coit Road, Suite 510
Dallas, TX. 75251
Phone: (972) 644-8830
Fax: (972) 644-8496

Client Representative:
CUSHMAN & WAKEFIELD
Attn: Paul Hurchanik
Tel: 720.582.6073
Email:
paul.hurchanik@cushwake.com

Architect:
Nelco Architecture, Inc.
Attn: Harry Koutsis
Tel: 310.693.5271
Email: hkoutsis@nelsonww.com

AOR Contact
Robert J. Sullivan Jr.
Tel: 216.830.1561
Email:rsullivan@nelsonww.com
License No. ARC.00405343

Civil:
LANGAN
Attn: Ben Henry
Tel: (817) 328-3217
Email: bhenry@langan.com

Structural:
Salas O'Brien
Attn: Julie Bolding
Tel: 469-782-9753
Email: julie.bolding@salasobrien.com

MEP:
Salas O'Brien
Attn: Carly Wood
Tel: 727-804-7626
Email: carly.wood@salasobrien.com

Description:	No:	Date:
IF Schematic Design Final		09/29/2023
IF COE Package		11/09/2023
IF Design Development 90%		07/19/2024
IF Design Development Final		08/19/2024
IF Construction Document Review		09/20/2024
IF Construction Document Final		12/05/2024
IF CD 90		08/15/2025
IF Permit		08/26/2025

BANK OF AMERICA
Broomfield

CO1-111
NWC Hwy 7 and Palisade Pkwy
Broomfield CO, 80023

PROPERTY ID:	CO1-111
NSRP VERSION:	2.0
BULLETIN:	2-2025

INTERIOR ELEVATIONS

COLORADO LICENSED
ROBERT JOHN SULLIVAN JR.
00405343
ARCHITECT
09/04/2025

Project No: 23.0002261.000 Reviewed By: MB

A11.03

9/3/2025 4:22:05 PM C:\Users\cgosier\Revit_Locals\2023\CO1-111 Broomfield_for SDP_cgosier537ZS.rvt

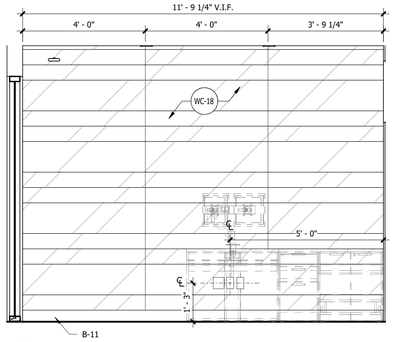

1 A11.04 OFFICE 1 - SOUTH
1/2" = 1'-0"

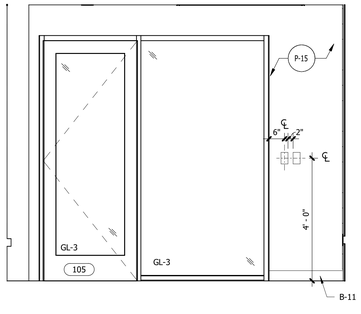

2 A11.04 OFFICE 1 - WEST
1/2" = 1'-0"

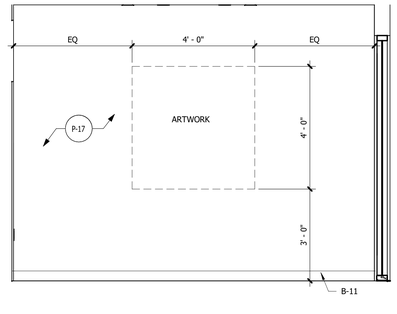

3 A11.04 OFFICE 1 - NORTH
1/2" = 1'-0"

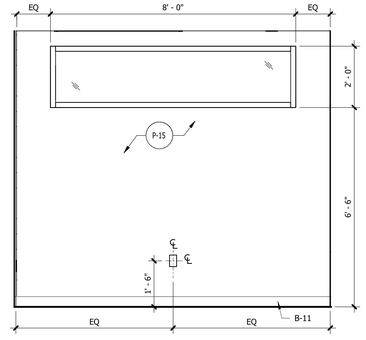

4 A11.04 OFFICE 1 - EAST
1/2" = 1'-0"

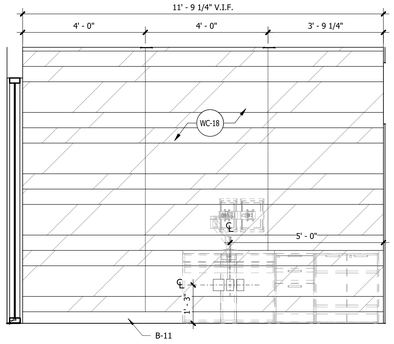

5 A11.04 OFFICE 3 - SOUTH
1/2" = 1'-0"

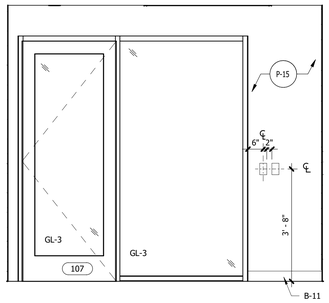

6 A11.04 OFFICE 3 - WEST
1/2" = 1'-0"

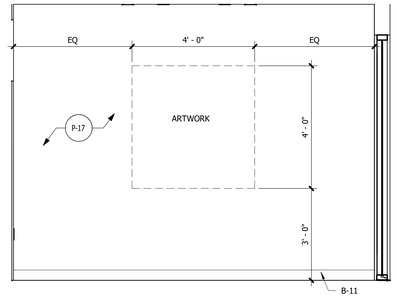

7 A11.04 OFFICE 3 - NORTH
1/2" = 1'-0"

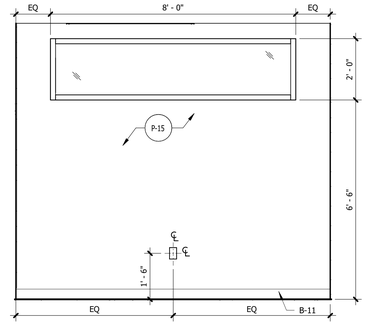

8 A11.04 OFFICE 3 - EAST
1/2" = 1'-0"

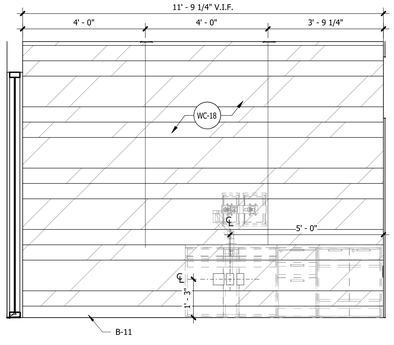

11 A11.04 OFFICE 4 - SOUTH
1/2" = 1'-0"

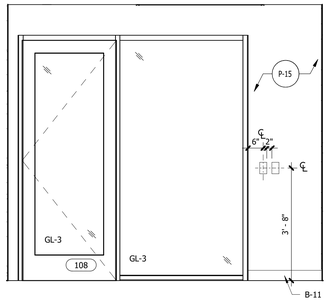

12 A11.04 OFFICE 4 - WEST
1/2" = 1'-0"

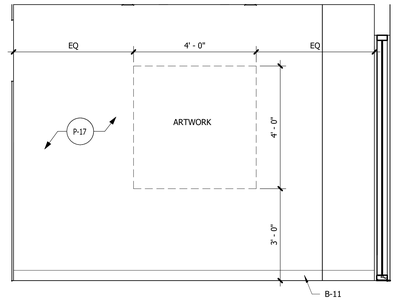

9 A11.04 OFFICE 4 - NORTH
1/2" = 1'-0"

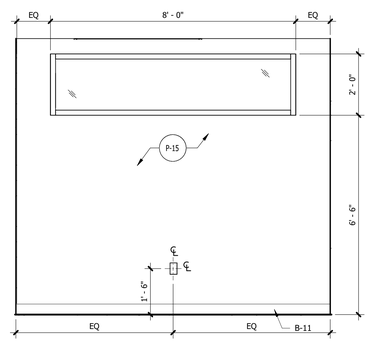

10 A11.04 OFFICE 4 - EAST
1/2" = 1'-0"

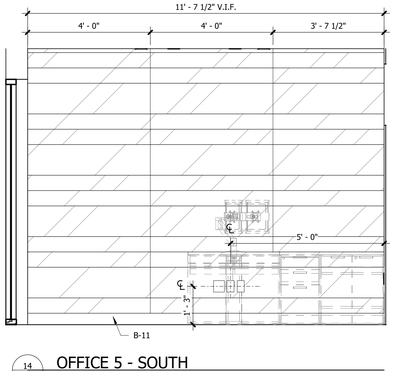

14 A11.04 OFFICE 5 - SOUTH
1/2" = 1'-0"

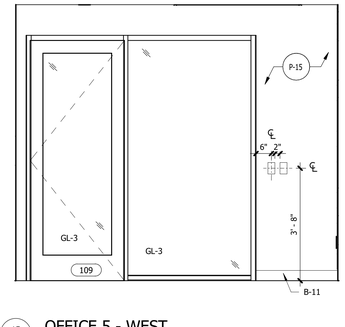

15 A11.04 OFFICE 5 - WEST
1/2" = 1'-0"

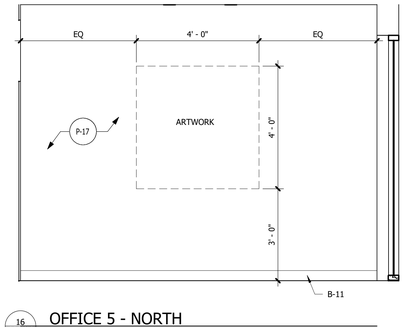

16 A11.04 OFFICE 5 - NORTH
1/2" = 1'-0"

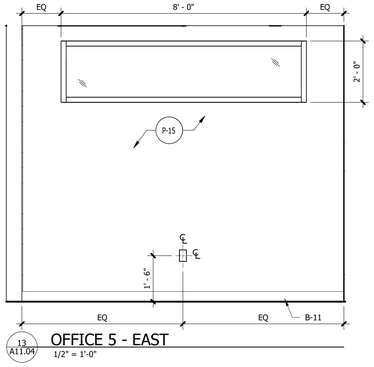

13 A11.04 OFFICE 5 - EAST
1/2" = 1'-0"

NELSON
Nelco Architecture, Inc.

12400 Coit Road, Suite 510
Dallas, TX. 75251
Phone: (972) 644-8830
Fax: (972) 644-8496

Client Representative:
CUSHMAN & WAKEFIELD
Attn: Paul Hurchanik
Tel: 720.582.6073
Email:
paul.hurchanik@cushwake.com

Architect:
Nelco Architecture, Inc.
Attn: Harry Koutsis
Tel: 310.693.5271
Email: hkoutsis@nelsonww.com

AOR Contact
Robert J. Sullivan Jr.
Tel: 216.830.1561
Email:rsullivan@nelsonww.com
License No. ARC.00405343

Civil:
LANGAN
Attn: Ben Henry
Tel: (817) 328-3217
Email: bhenry@langan.com

Structural:
Salas O'Brien
Attn: Julie Bolding
Tel: 469-782-9753
Email: julie.bolding@salasobrien.com

MEP:
Salas O'Brien
Attn: Carly Wood
Tel: 727-804-7626
Email: carly.wood@salasobrien.com

Description:	No:	Date:
IF Schematic Design Review		08/30/2023
IF Design Development 90%		07/19/2024
IF Design Development Final		08/19/2024
IF Construction Document Review		09/20/2024
IF Construction Document Final		12/05/2024
IF CD 90		08/15/2025
IF Permit		08/26/2025

BANK OF AMERICA
Broomfield

CO1-111
NWC Hwy 7 and Palisade Pkwy
Broomfield CO, 80023

PROPERTY ID:	CO1-111
NSRP VERSION:	2.0
BULLETIN:	2-2025

INTERIOR ELEVATIONS

COLORADO LICENSED
ROBERT JOHN SULLIVAN JR.
00405343
ARCHITECT
09/04/2025

Project No: 23.0002261.000 Reviewed By: MB

A11.04

9/3/2025 4:22:12 PM C:\Users\cgosier\Revit_Locals\2023\CO1-111 Broomfield_for SDP_cgosier53725.rvt

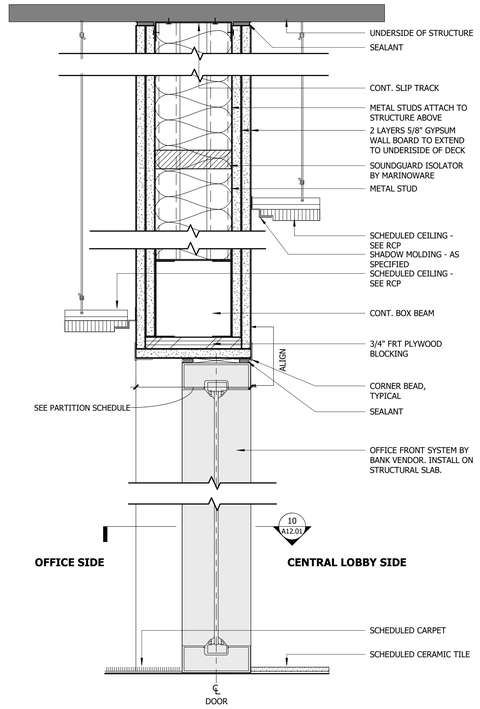

9 A12.01 OFFICE BULKHEAD DETAIL @ GLASS PANEL
3" = 1'-0"

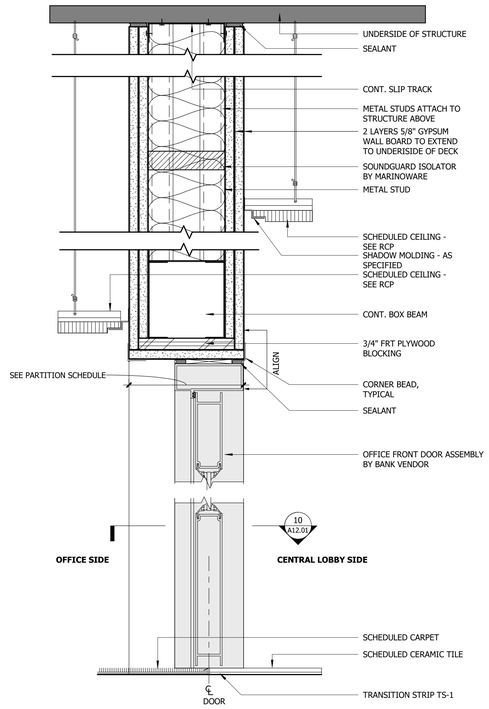

8 A12.01 OFFICE BULKHEAD DETAIL @ DOOR
3" = 1'-0"

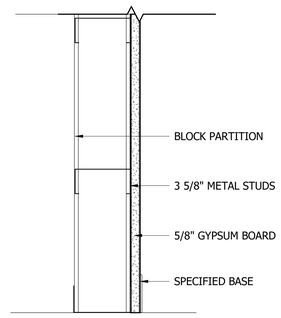

PARTITION TYPE C1

6 A12.01 PARTITION TYPE C1
3" = 1'-0"

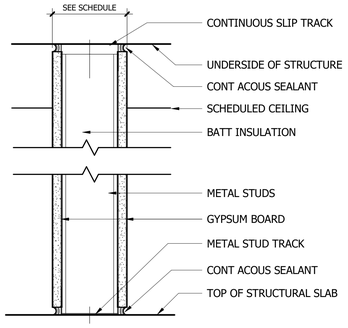

NUMBER	STUD SIZE	SEE SPEC	SEE SPEC	GYPSUM BOARD	WALL THICKNESS	INSULATION	FIRE RATING	U.L. NUMBER	S.T.C. RATING
B	3 5/8"	--	--	5/8"	4 7/8"	YES	--	--	--
B2	6"	--	--	5/8"	7 1/4"	YES	--	--	--

1 A12.01 PARTITION TYPE B, B2
3" = 1'-0"

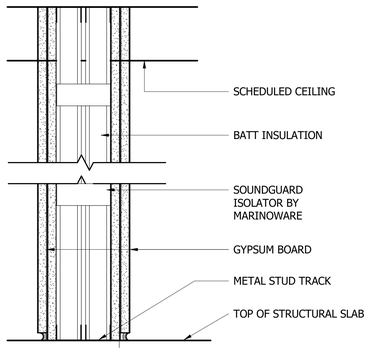

NUMBER	STUD SIZE	SEE SPEC	SEE SPEC	GYPSUM BOARD	WALL THICKNESS	INSULATION	FIRE RATING	U.L. NUMBER	S.T.C. RATING
G	1 5/8"	--	--	5/8"	6 1/8"	YES	--	--	--
G1	1 5/8"	--	--	5/8"	8"	YES	--	--	--

5 A12.01 PARTITION G
3" = 1'-0"

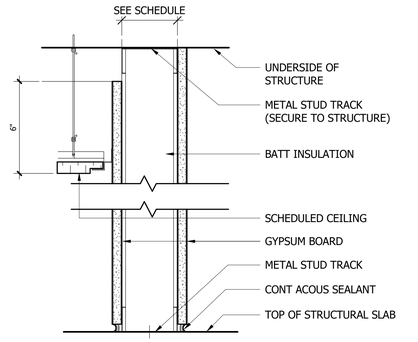

NUMBER	STUD SIZE	SEE SPEC	SEE SPEC	GYPSUM BOARD	WALL THICKNESS	INSULATION	FIRE RATING	U.L. NUMBER	S.T.C. RATING
A6	3 5/8"			5/8"	4 7/8"	YES			
A8	6"			5/8"	7 1/4"	YES			

2 A12.01 PARTITION TYPE A6 & A8
3" = 1'-0"

10 A12.01 OFFICE JAMB DETAIL
3" = 1'-0"

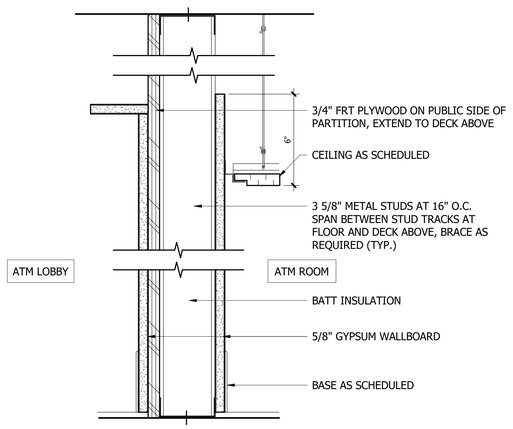

12 A12.01 PARTITION TYPE F
3" = 1'-0"

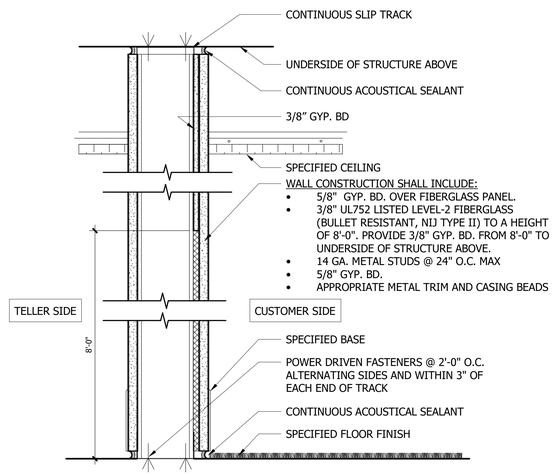

NUMBER	STUD SIZE	SEE SPEC	SEE SPEC	GYPSUM BOARD	WALL THICKNESS	INSULATION	FIRE RATING	U.L. NUMBER	S.T.C. RATING
A1K	3 5/8"	--	--	5/8"	5 1/4"	YES	--	--	--
A5K	6"	--	--	5/8"	7 5/8"	YES	--	--	--

A12.01 PARTITION TYPE A1K & A5K
3" = 1'-0"

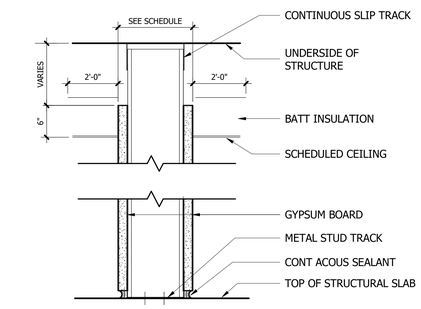

NUMBER	STUD SIZE	SEE SPEC	SEE SPEC	GYPSUM BOARD	WALL THICKNESS	INSULATION	FIRE RATING	U.L. NUMBER	S.T.C. RATING
A1	3 5/8"	--	--	5/8"	4 7/8"	YES	--	--	--
A5	6"	--	--	5/8"	7 1/4"	YES	--	--	--

3 A12.01 PARTITION TYPE A1 & A5
3" = 1'-0"

NELSON
Nelco Architecture, Inc.

12400 Coit Road, Suite 510
Dallas, TX. 75251
Phone: (972) 644-8830
Fax: (972) 644-8496

Client Representative:
CUSHMAN & WAKEFIELD
Attn: Paul Hurchanik
Tel: 720.582.6073
Email: paul.hurchanik@cushwake.com

Architect:
Nelco Architecture, Inc.
Attn: Harry Koutsis
Tel: 310.693.5271
Email: hkoutsis@nelsonww.com

AOR Contact
Robert J. Sullivan Jr.
Tel: 216.830.1561
Email:rsullivan@nelsonww.com
License No. ARC.00405343

Civil:
LANGAN
Attn: Ben Henry
Tel: (817) 328-3217
Email: bhenry@langan.com

Structural:
Salas O'Brien
Attn: Julie Bolding
Tel: 469-782-9753
Email: julie.bolding@salasobrien.com

MEP:
Salas O'Brien
Attn: Carly Wood
Tel: 727-804-7626
Email: carly.wood@salasobrien.com

Description:	No:	Date:
IF Schematic Design Review		08/30/2023
IF Design Development 90%		07/19/2024
IF Design Development Final		08/19/2024
IF Construction Document Review		09/20/2024
IF Construction Document Final		12/05/2024
IF CD 90		08/15/2025
IF Permit		08/26/2025

BANK OF AMERICA
Broomfield

CO1-111
NWC Hwy 7 and Palisade Pkwy
Broomfield CO, 80023

PROPERTY ID: CO1-111
NSRP VERSION: 2.0
BULLETIN: 2-2025

PARTITION TYPES AND DETAILS

COLORADO LICENSED ROBERT JOHN SULLIVAN JR. 00405343 ARCHITECT
09/04/2025

Project No: 23.0002261.000 Reviewed By: MB

A12.01

9/3/2025 4:22:14 PM C:\Users\kgosier\Revit_Locals\2023\CO1-111 Broomfield_for SDP_cgosier537Z5.rvt

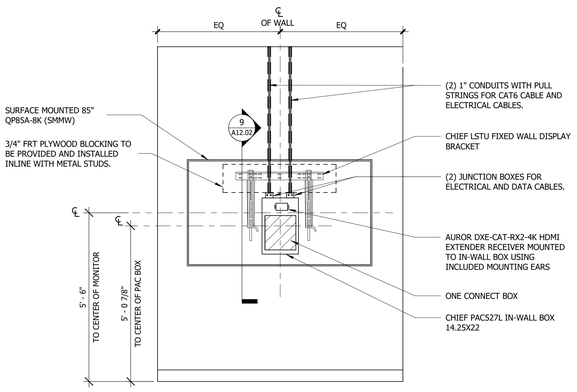

13 A12.02 ENLARGED ELEVATION @ 85" MONITOR - MEDIA
1/2" = 1'-0"

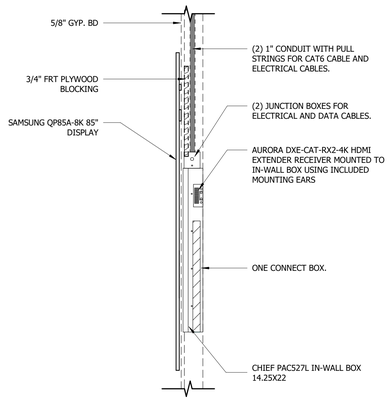

9 A12.02 SECTION @ 85" MONITOR - MEDIA
1" = 1'-0"

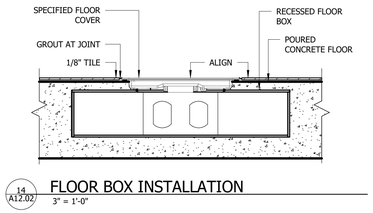

14 A12.02 FLOOR BOX INSTALLATION
3" = 1'-0"

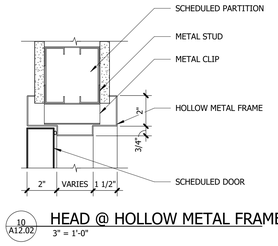

10 A12.02 HEAD @ HOLLOW METAL FRAME
3" = 1'-0"

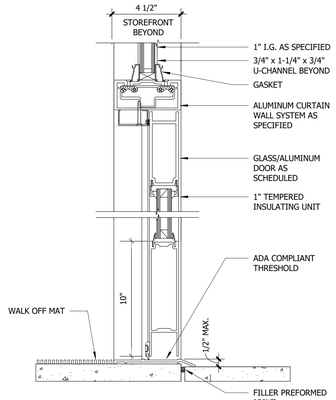

6 A12.02 SECTION @ DOOR
3" = 1'-0"

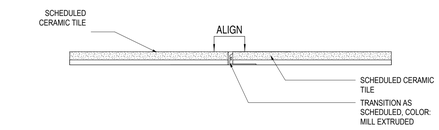

1 A12.02 TS-3A CERAMIC TILE TO CERAMIC TILE TRAN.
6" = 1'-0"

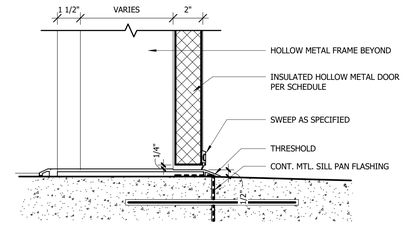

2 A12.02 THRESHOLD @ HM DOOR ASSEMBLY
3" = 1'-0"

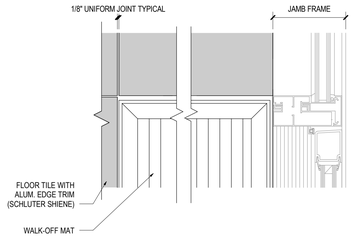

15 A12.02 WALK-OFF MAT TO TILE TRANSITION
3" = 1'-0"

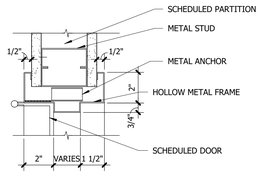

11 A12.02 JAMB @ HOLLOW METAL FRAME
3" = 1'-0"

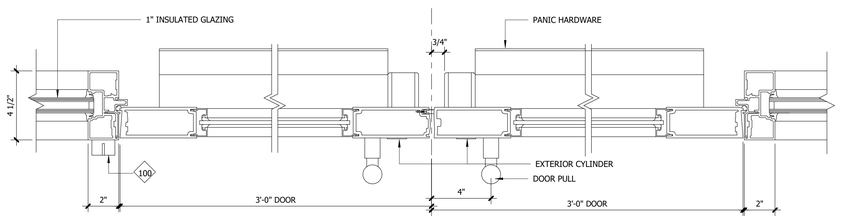

3 A12.02 DETAIL @ STOREFRONT DOORS
3" = 1'-0"

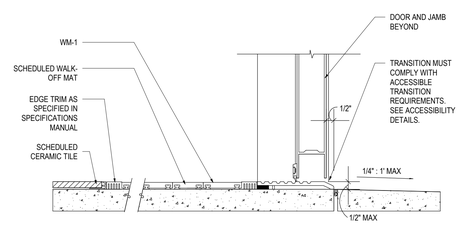

16 A12.02 TS-3 CT TO WM-1 TRANSITION
3" = 1'-0"

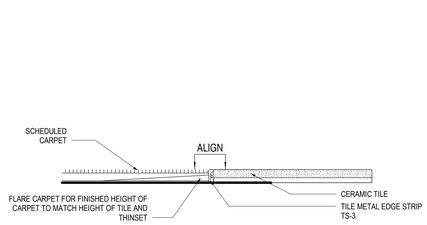

12 A12.02 TS-3 CARPET TO CERAMIC TILE TRANSITION
6" = 1'-0"

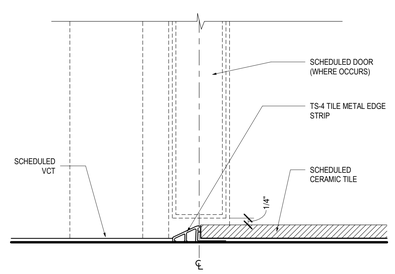

5 A12.02 TS-4 CERAMIC TILE TO VCT TRANSITION
6" = 1'-0"

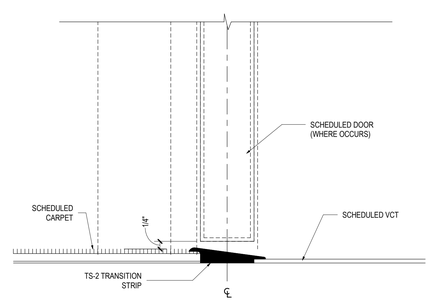

4 A12.02 TS-2 CARPET TO VCT TRANSITION
6" = 1'-0"

NELSON
Nelco Architecture, Inc.

12400 Coit Road, Suite 510
Dallas, TX. 75251
Phone: (972) 644-8830
Fax: (972) 644-8496

Client Representative:
CUSHMAN & WAKEFIELD
Attn: Paul Hurchanik
Tel: 720.582.6073
Email:
paul.hurchanik@cushwake.com

Architect:
Nelco Architecture, Inc.
Attn: Harry Koutsis
Tel: 310.693.5271
Email: hkoutsis@nelsonww.com

AOR Contact
Robert J. Sullivan Jr.
Tel: 216.830.1561
Email:rsullivan@nelsonww.com
License No. ARC.00405343

Civil:
LANGAN
Attn: Ben Henry
Tel: (817) 328-3217
Email: bhenry@langan.com

Structural:
Salas O'Brien
Attn: Julie Bolding
Tel: 469-782-9753
Email: julie.bolding@salasobrien.com

MEP:
Salas O'Brien
Attn: Carly Wood
Tel: 727-804-7626
Email: carly.wood@salasobrien.com

Description:	No:	Date:
IF Design Development 90%		07/19/2024
IF Design Development Final		08/19/2024
IF Construction Document Review		09/20/2024
IF Construction Document Final		12/05/2024
IF CD 90		08/15/2025
IF Permit		08/26/2025

BANK OF AMERICA
Broomfield

CO1-111
NWC Hwy 7 and Palisade Pkwy
Broomfield CO, 80023

PROPERTY ID:	CO1-111
NSRP VERSION:	2.0
BULLETIN:	2-2025

DETAILS

COLORADO LICENSED
JOHN M. SULLIVAN
#00405343
ARCHITECT
09/04/2025

Project No: 23.0002261.000 Reviewed By: MB

A12.02

C:\Users\jgosler\Revit_Locals\2023\CO1-111 Broomfield_for SDP_cgosler53725.rvt
9/3/2025 4:22:18 PM

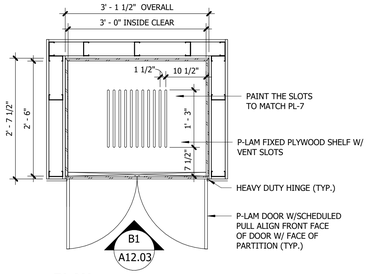

A1 PLAN

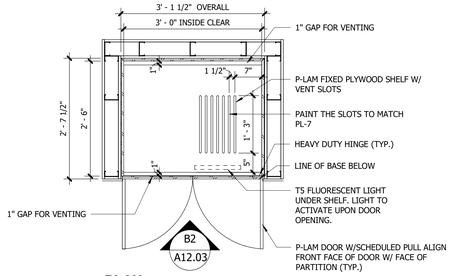

A2 PLAN

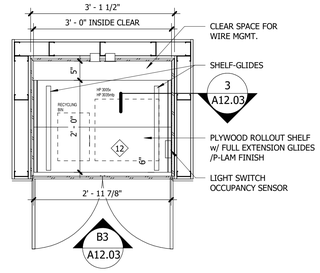

A3 PLAN

NOTE: ALL MILLWORK TO BE 3/4" SUBSTRATE CLAD TO RECEIVE PL-7 MATTE P-LAM UNLESS OTHERWISE NOTED

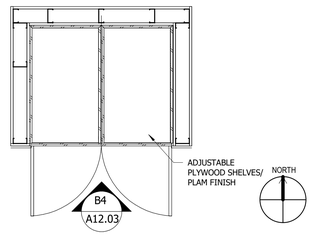

A4 PLAN

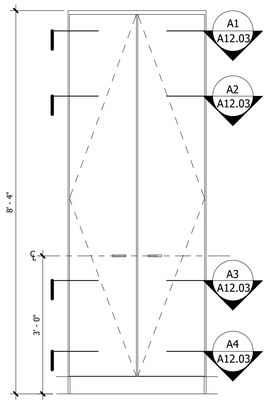

B1 ELEVATION

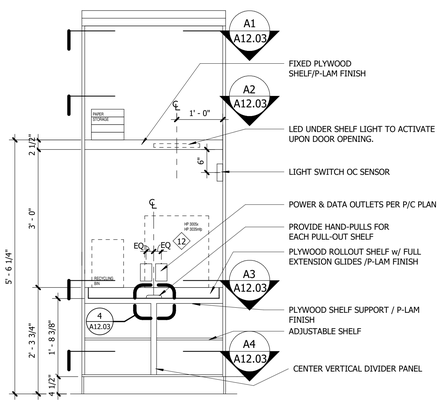

B2 ELEVATION

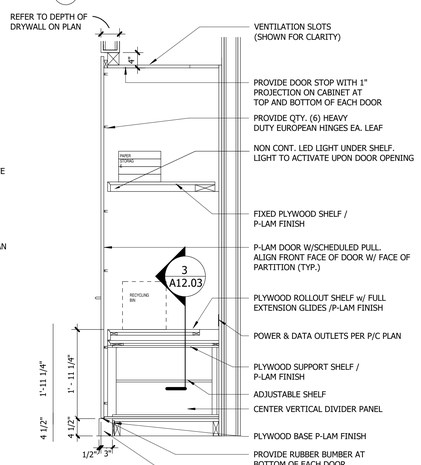

B3 ELEVATION

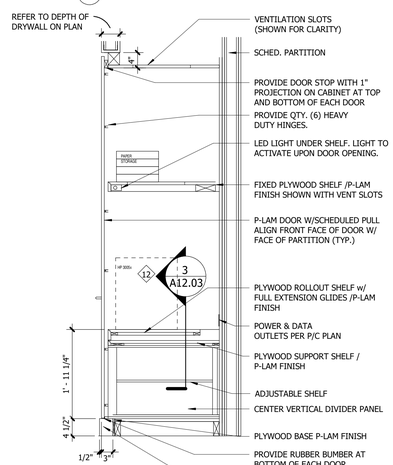

B4 ELEVATION

6 A12.03 PRINTER CABINET DETAILS - MW01
3/4" = 1'-0"

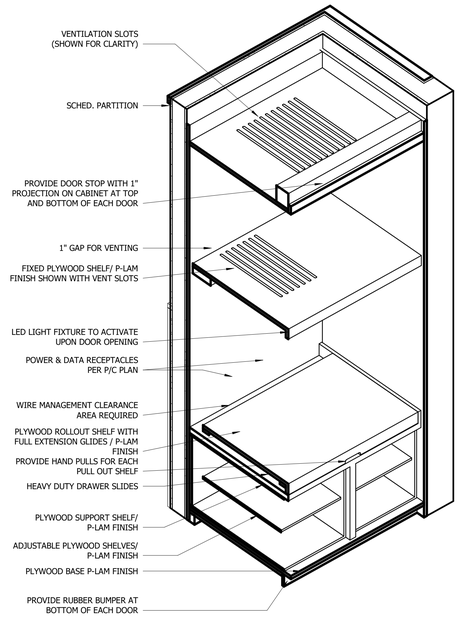

7 A12.03 PRINTER CABINET MW01 - ISOMETRIC

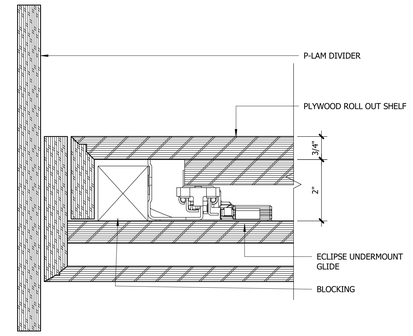

3 A12.03 SHELF GLIDE DETAIL
6" = 1'-0"

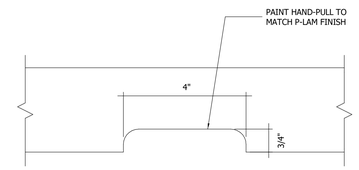

4 A12.03 HAND-PULL DETAIL
6" = 1'-0"

SHEET NOTES

A. ALL MILLWORK INTERIORS TO BE WHITE MELAMINE, UNO.
B. ALL EXPOSED MILLWORK SURFACES TO BE PLASTIC LAMINATE (PL-7) AS SPECD ON ELEVATIONS
C. PROVIDE SIDE SPLASHES AT ALL MILLWORK ADJOINING AN ADJACENT PARTITION
D. PROVIDE FRTW BLOCKING AT ALL MILLWORK VERTICAL SURFACE CLEATS AND MOUNTING LOCATIONS
E. ALL MILLWORK TO BE 3/4" SUBSTRATE CLAD TO RECEIVE PLASTIC LAMINATE (PL-7)

NELSON
Nelco Architecture, Inc.

12400 Coit Road, Suite 510
Dallas, TX. 75251
Phone: (972) 644-8830
Fax: (972) 644-8496

Client Representative:
CUSHMAN & WAKEFIELD
Attn: Paul Hurchanik
Tel: 720.582.6073
Email: paul.hurchanik@cushwake.com

Architect:
Nelco Architecture, Inc.
Attn: Harry Koutsis
Tel: 310.693.5271
Email: hkoutsis@nelsonww.com

AOR Contact
Robert J. Sullivan Jr.
Tel: 216.830.1561
Email:rsullivan@nelsonww.com
License No. ARC.00405343

Civil:
LANGAN
Attn: Ben Henry
Tel: (817) 328-3217
Email: bhenry@langan.com

Structural:
Salas O'Brien
Attn: Julie Bolding
Tel: 469-782-9753
Email: julie.bolding@salasobrien.com

MEP:
Salas O'Brien
Attn: Carly Wood
Tel: 727-804-7626
Email: carly.wood@salasobrien.com

Description:	No:	Date:
IF Design Development 90%		07/19/2024
IF Design Development Final		08/19/2024
IF Construction Document Review		09/20/2024
IF Construction Document Final		12/05/2024
IF CD 90		08/15/2025
IF Permit		08/26/2025

BANK OF AMERICA
Broomfield

CO1-111
NWC Hwy 7 and Palisade Pkwy
Broomfield CO, 80023

PROPERTY ID:	CO1-111
NSRP VERSION:	2.0
BULLETIN:	2-2025

MILLWORK DETAILS - MW01

COLORADO LICENSED ROBERT J. SULLIVAN JR. 00405343 ARCHITECT
09/04/2025

Project No: 23.0002261.000 Reviewed By: MB

A12.03

9/3/2025 4:22:20 PM C:\Users\rjsosler\Revit_Locals\2023\CO1-111 Broomfield_for SDP_rjsosler53725.rvt

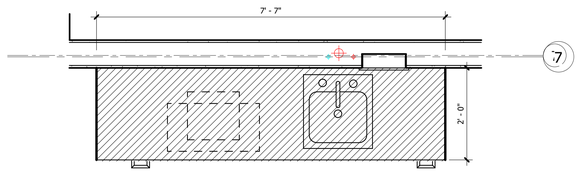

9 A12.04 MW08 PLAN
3/4" = 1'-0"

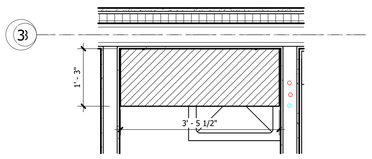

5 A12.04 MW06 PLAN
3/4" = 1'-0"

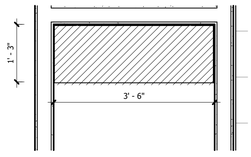

1 A12.04 MW05 PLAN
3/4" = 1'-0"

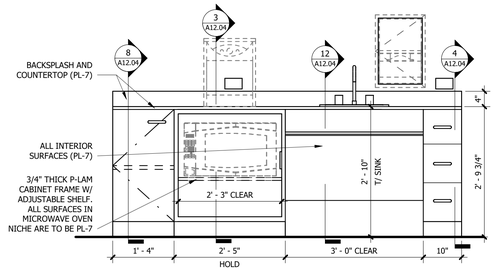

10 A12.04 MW08 ELEVATION
3/4" = 1'-0"

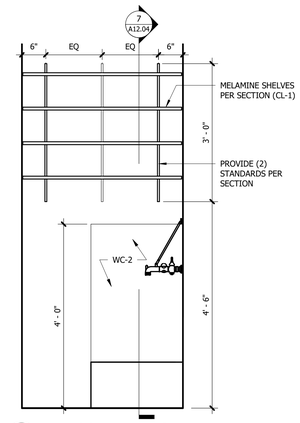

6 A12.04 MW06 ELEVATION
3/4" = 1'-0"

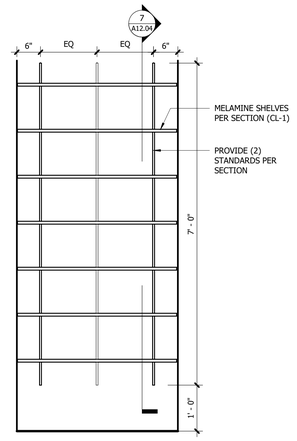

2 A12.04 MW05A & MW05B ELEVATION
3/4" = 1'-0"

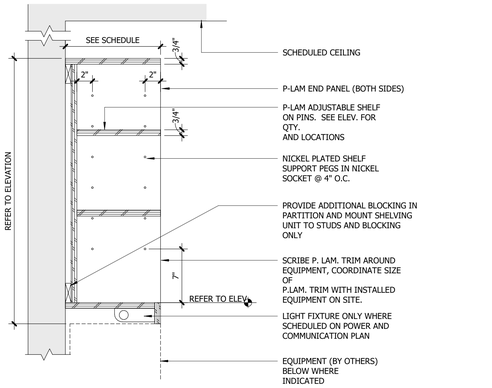

11 A12.04 SECTION @ SHELVING OVERHEAD
1 1/2" = 1'-0"

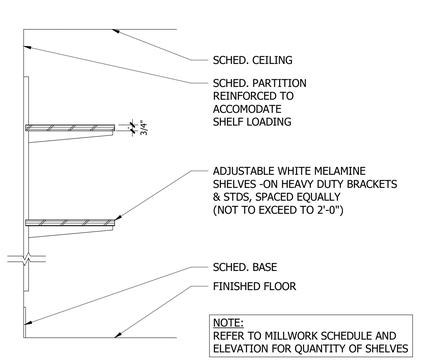

7 A12.04 SECTION @ ADJ. WALL SHELVES
3/4" = 1'-0"

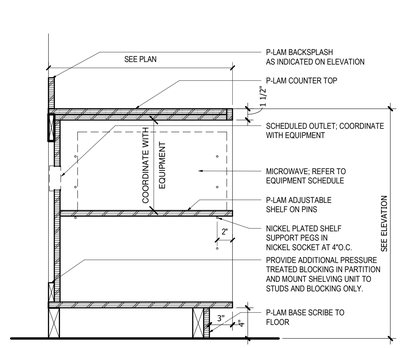

3 A12.04 COUNTER WITH SHELVING
1 1/2" = 1'-0"

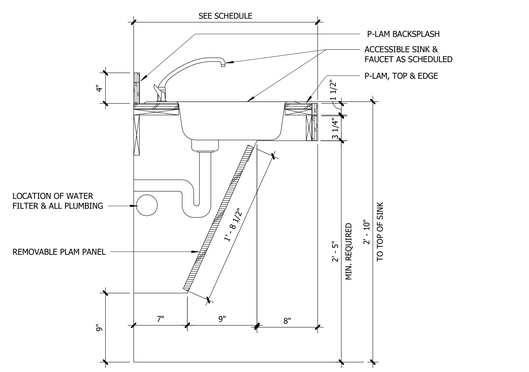

12 A12.04 BASE CABINET W/ ADA ACCESS
1 1/2" = 1'-0"

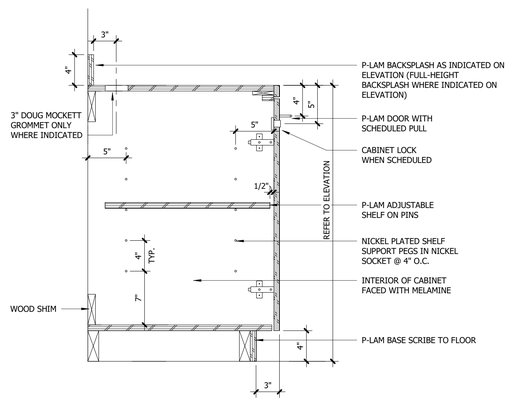

8 A12.04 SECTION @ BASE CABINET
1 1/2" = 1'-0"

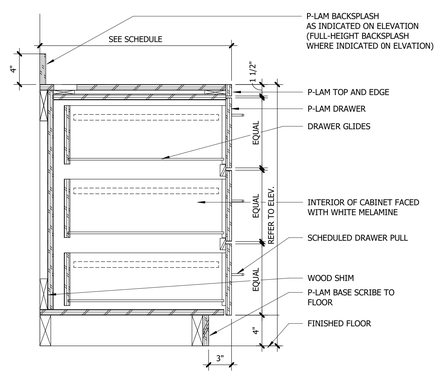

4 A12.04 SECTION @ BASE CABINET W/ DRAWERS
1 1/2" = 1'-0"

SHEET NOTES

A. ALL MILLWORK INTERIORS TO BE WHITE MELAMINE, UNO.
B. ALL EXPOSED MILLWORK SURFACES TO BE PLASTIC LAMINATE (PL-7) AS SPEC'D ON ELEVATIONS
C. PROVIDE SIDE SPLASHES AT ALL MILLWORK ADJOINING AN ADJACENT PARTITION
D. PROVIDE FRTW BLOCKING AT ALL MILLWORK VERTICAL SURFACE CLEATS AND MOUNTING LOCATIONS
E. ALL MILLWORK TO BE 3/4" SUBSTRATE CLAD TO RECEIVE PLASTIC LAMINATE (PL-7)

NELSON
Nelco Architecture, Inc.

12400 Coit Road, Suite 510
Dallas, TX. 75251
Phone: (972) 644-8830
Fax: (972) 644-8496

Client Representative:
CUSHMAN & WAKEFIELD
Attn: Paul Hurchanik
Tel: 720.582.6073
Email:
paul.hurchanik@cushwake.com

Architect:
Nelco Architecture, Inc.
Attn: Harry Koutsis
Tel: 310.693.5271
Email: hkoutsis@nelsonww.com

AOR Contact
Robert J. Sullivan Jr.
Tel: 216.830.1561
Email:rsullivan@nelsonww.com
License No. ARC.00405343

Civil:
LANGAN
Attn: Ben Henry
Tel: (817) 328-3217
Email: bhenry@langan.com

Structural:
Salas O'Brien
Attn: Julie Bolding
Tel: 469-782-9753
Email: julie.bolding@salasobrien.com

MEP:
Salas O'Brien
Attn: Carly Wood
Tel: 727-804-7626
Email: carly.wood@salasobrien.com

Description:	No:	Date:
IF Design Development 90%		07/19/2024
IF Design Development Final		08/19/2024
IF Construction Document Review		09/20/2024
IF Construction Document Final		12/05/2024
IF CD 90		08/15/2025
IF Permit		08/26/2025

BANK OF AMERICA
Broomfield

CO1-111
NWC Hwy 7 and Palisade Pkwy
Broomfield CO, 80023

PROPERTY ID:	CO1-111
NSRP VERSION:	2.0
BULLETIN:	2-2025

MILLWORK DETAILS - MW05, MW06 & MW08

COLORADO LICENSED
ROBERT JOHN SULLIVAN JR.
00405343
ARCHITECT
09/04/2025

Project No: 23.0002261.000 Reviewed By: MB

A12.04

C:\Users\cgosier\Revit_Locals\2023\CO1-111 Broomfield_for SDP_cgosier537Z5.rvt
9/3/2025 4:22:24 PM

SHEET NOTES

A. ALL MILLWORK INTERIORS TO BE WHITE MELAMINE, UNO.
B. ALL EXPOSED MILLWORK SURFACES TO BE PLASTIC LAMINATE (PL-7) AS SPECI'D ON ELEVATIONS
C. PROVIDE SIDE SPLASHES AT ALL MILLWORK ADJOINING AN ADJACENT PARTITION
D. PROVIDE FRTW BLOCKING AT ALL MILLWORK VERTICAL SURFACE CLEATS AND MOUNTING LOCATIONS
E. ALL MILLWORK TO BE 3/4" SUBSTRATE CLAD TO RECEIVE PLASTIC LAMINATE (PL-7)

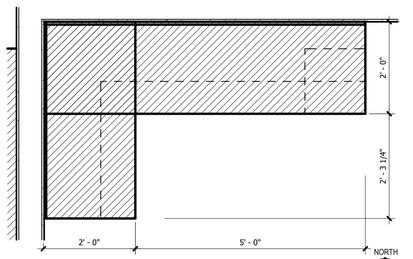

9 A12.05 MW12 PLAN
3/4" = 1'-0"

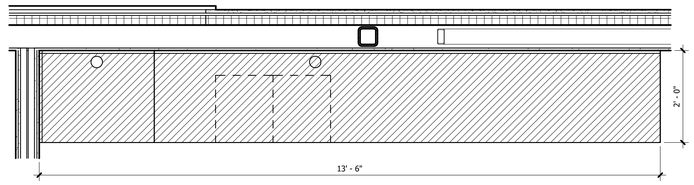

5 A12.05 MW11 PLAN
3/4" = 1'-0"

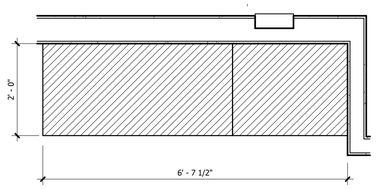

1 A12.05 MW07 PLAN
3/4" = 1'-0"

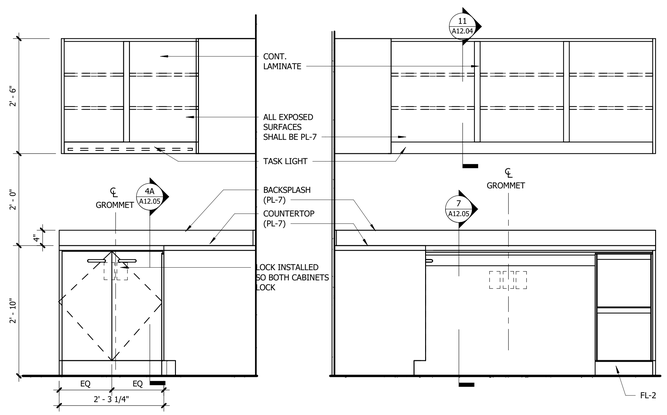

10 A12.05 MW12 ELEVATION
3/4" = 1'-0"

11 A12.05 MW12 ELEVATION
3/4" = 1'-0"

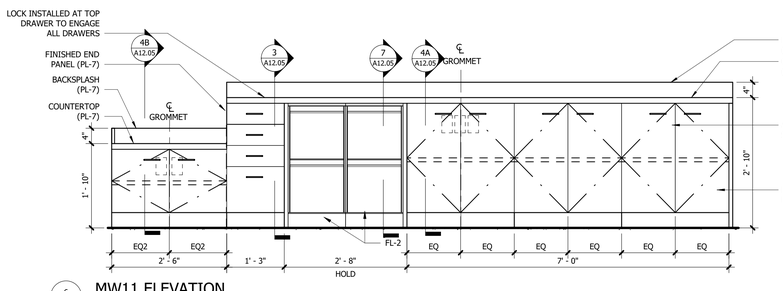

6 A12.05 MW11 ELEVATION
3/4" = 1'-0"

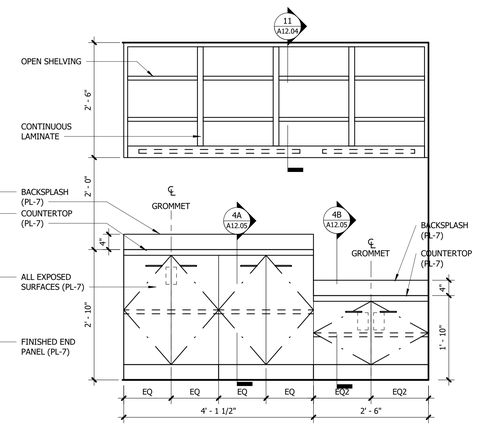

2 A12.05 MW07 ELEVATION
3/4" = 1'-0"

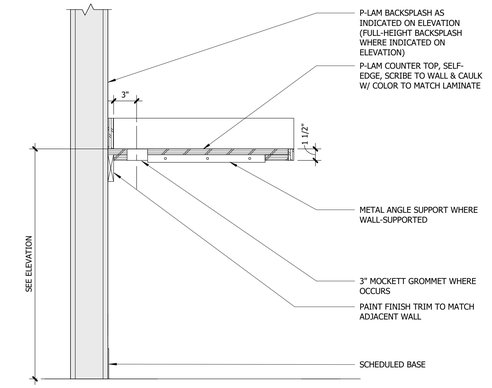

7 A12.05 SECTION @ OPEN COUNTER MW11
1 1/2" = 1'-0"

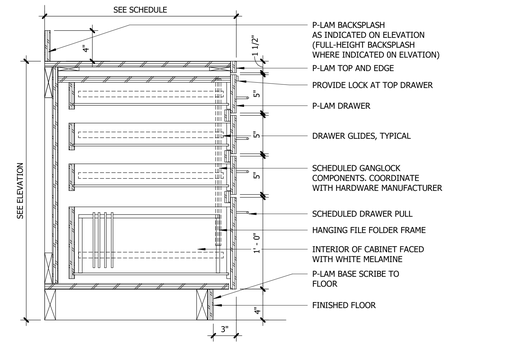

3 A12.05 SECTION @ BASE CABINET W/ DRAWERS AND FILE
1 1/2" = 1'-0"

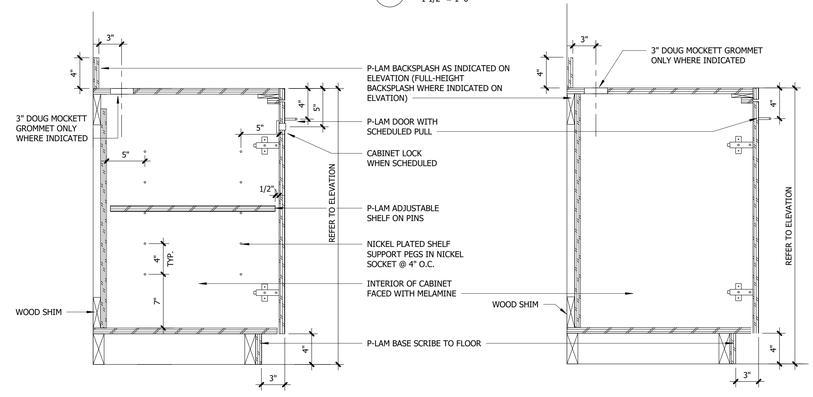

4A A12.05 SECTION @ BASE CABINET
1 1/2" = 1'-0"

4B A12.05 SECTION @ BASE CABINET
1 1/2" = 1'-0"

NELSON
Nelco Architecture, Inc.

12400 Coit Road, Suite 510
Dallas, TX. 75251
Phone: (972) 644-8830
Fax: (972) 644-8496

Client Representative:
CUSHMAN & WAKEFIELD
Attn: Paul Hurchanik
Tel: 720.582.6073
Email:
paul.hurchanik@cushwake.com

Architect:
Nelco Architecture, Inc.
Attn: Harry Koutsis
Tel: 310.693.5271
Email: hkoutsis@nelsonww.com

AOR Contact
Robert J. Sullivan Jr.
Tel: 216.830.1561
Email:rsullivan@nelsonww.com
License No. ARC.00405343

Civil:
LANGAN
Attn: Ben Henry
Tel: (817) 328-3217
Email: bhenry@langan.com

Structural:
Salas O'Brien
Attn: Julie Bolding
Tel: 469-782-9753
Email: julie.bolding@salasobrien.com

MEP:
Salas O'Brien
Attn: Carly Wood
Tel: 727-804-7626
Email: carly.wood@salasobrien.com

Description:	No:	Date:
IF Design Development 90%		07/19/2024
IF Design Development Final		08/19/2024
IF Construction Document Review		09/20/2024
IF Construction Document Final		12/05/2024
IF CD 90		08/15/2025
IF Permit		08/26/2025

BANK OF AMERICA
Broomfield

CO1-111
NWC Hwy 7 and Palisade Pkwy
Broomfield CO, 80023
PROPERTY ID: CO1-111
NSRP VERSION: 2.0
BULLETIN: 2-2025

MILLWORK DETAILS - MW07,MW11 & MW12

COLORADO LICENSED
ROBERT JOHN SULLIVAN JR.
00405343
ARCHITECT
09/04/2025

Project No: 23.0002261.000 Reviewed By: MB

A12.05

9/3/2025 4:22:28 PM C:\Users\kgosier\Revit_Locals\2023\CO1-111 Broomfield_for SSP_cgosier537ZS.rvt

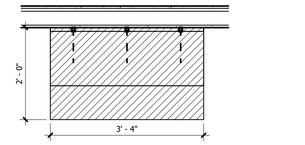

8 A12.06 MW18 PLAN
3/4" = 1'-0"

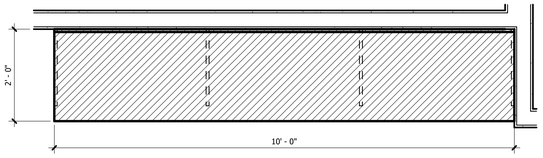

5 A12.06 MW21 PLAN
3/4" = 1'-0"

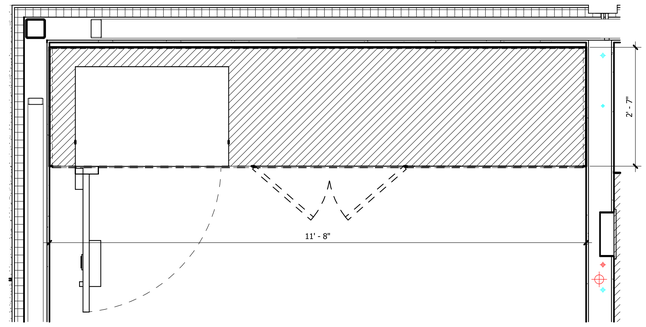

1 A12.06 MW13 PLAN
3/4" = 1'-0"

NORTH

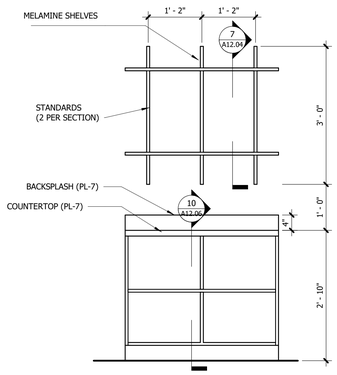

9 A12.06 MW18 ELEV
3/4" = 1'-0"

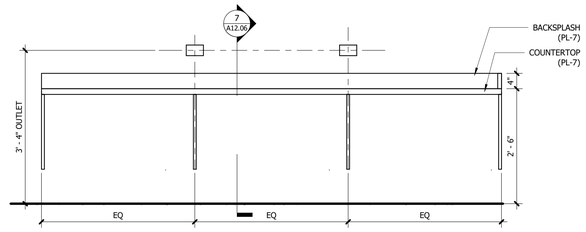

6 A12.06 MW21 ELEVATION
3/4" = 1'-0"

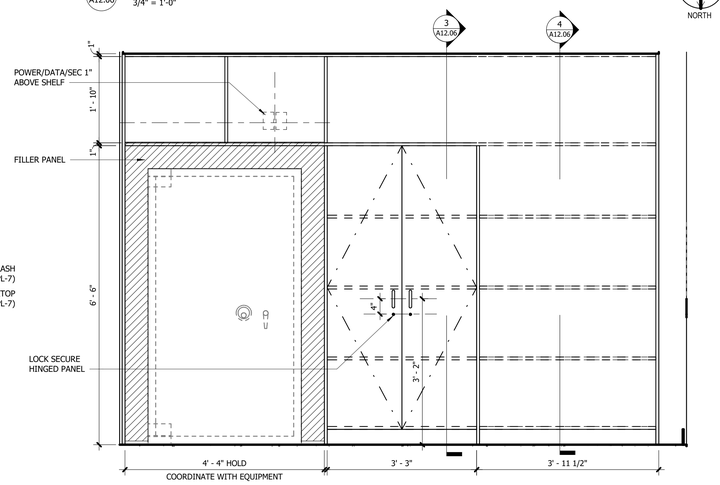

2 A12.06 MW13 ELEVATION
3/4" = 1'-0"

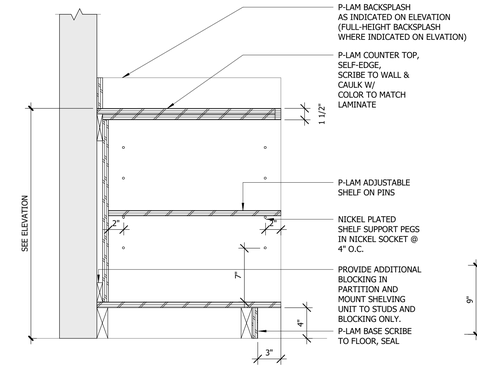

10 A12.06 SECTION @ COUNTER W/ SHELVING
1 1/2" = 1'-0"

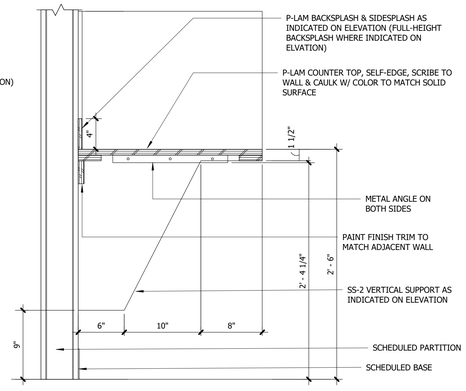

7 A12.06 SECTION @ BREAK ROOM COUNTER
1 1/2" = 1'-0"

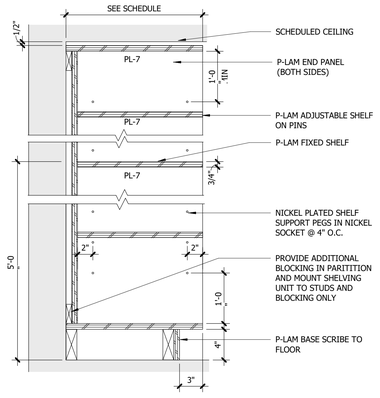

4 A12.06 SECTION @ SHELVING UNIT
1 1/2" = 1'-0"

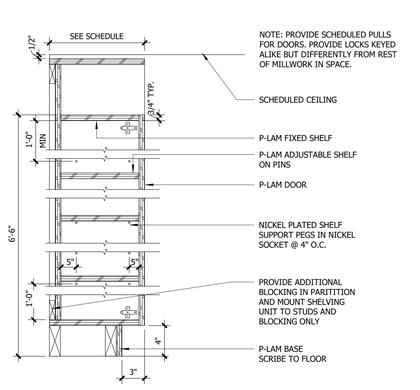

3 A12.06 SECTION @ SECURE TRASH CABINET
1 1/2" = 1'-0"

SHEET NOTES

A. ALL MILLWORK INTERIORS TO BE WHITE MELAMINE, UNO.
B. ALL EXPOSED MILLWORK SURFACES TO BE PLASTIC LAMINATE (PL-7) AS SPECI'D ON ELEVATIONS
C. PROVIDE SIDE SPLASHES AT ALL MILLWORK ADJOINING AN ADJACENT PARTITION
D. PROVIDE FRTW BLOCKING AT ALL MILLWORK VERTICAL SURFACE CLEATS AND MOUNTING LOCATIONS
E. ALL MILLWORK TO BE 3/4" SUBSTRATE CLAD TO RECEIVE PLASTIC LAMINATE (PL-7)

NELSON
Nelco Architecture, Inc.

12400 Coit Road, Suite 510
Dallas, TX. 75251
Phone: (972) 644-8830
Fax: (972) 644-8496

Client Representative:
CUSHMAN & WAKEFIELD
Attn: Paul Hurchanik
Tel: 720.582.6073
Email:
paul.hurchanik@cushwake.com

Architect:
Nelco Architecture, Inc.
Attn: Harry Koutsis
Tel: 310.693.5271
Email: hkoutsis@nelsonww.com

AOR Contact
Robert J. Sullivan Jr.
Tel: 216.830.1561
Email:rsullivan@nelsonww.com
License No. ARC.00405343

Civil:
LANGAN
Attn: Ben Henry
Tel: (817) 328-3217
Email: bhenry@langan.com

Structural:
Salas O'Brien
Attn: Julie Bolding
Tel: 469-782-9753
Email: julie.bolding@salasobrien.com

MEP:
Salas O'Brien
Attn: Carly Wood
Tel: 727-804-7626
Email: carly.wood@salasobrien.com

Description:	No:	Date:
IF Design Development 90%		07/19/2024
IF Design Development Final		08/19/2024
IF Construction Document Review		09/20/2024
IF Construction Document Final		12/05/2024
IF CD 90		08/15/2025
IF Permit		08/26/2025

BANK OF AMERICA
Broomfield

CO1-111
NWC Hwy 7 and Palisade Pkwy
Broomfield CO, 80023

PROPERTY ID:	CO1-111
NSRP VERSION:	2.0
BULLETIN:	2-2025

MILLWORK DETAILS - MW13 & MW21

COLORADO LICENSED
ROBERT JOHN SULLIVAN JR.
00405343
REGISTERED ARCHITECT
09/04/2025

Project No: 23.0002261.000 Reviewed By: MB

A12.06

9/3/2025 4:22:32 PM C:\Users\cgosier\Revit_Locals\2023\CO1-111 Broomfield_for SSP_cgosier53725.rvt

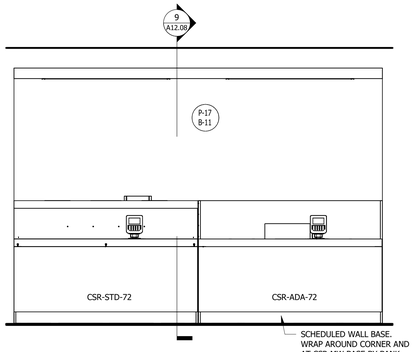

5 A12.08 CSR LINE ELEVATION - FRONT
1/2" = 1'-0"

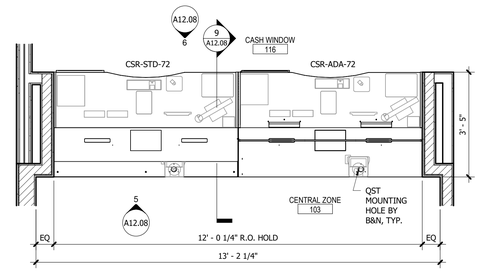

1 A12.08 CONSTRUCTION PLAN - CSR LINE
1/2" = 1'-0"

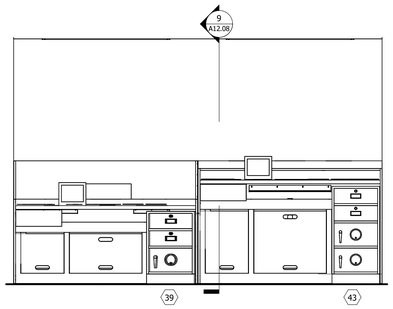

6 A12.08 CSR LINE ELEVATION - BACK
1/2" = 1'-0"

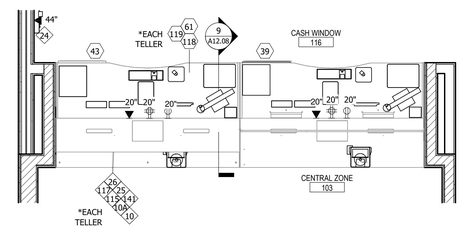

2 A12.08 POWER COMM PLAN - CSR LINE
1/2" = 1'-0"

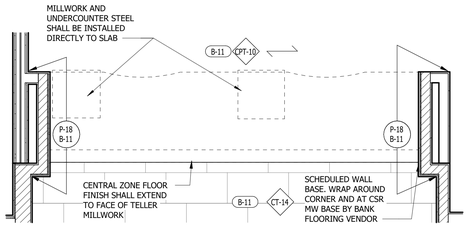

3 A12.08 FINISH PLAN - CSR LINE
1/2" = 1'-0"

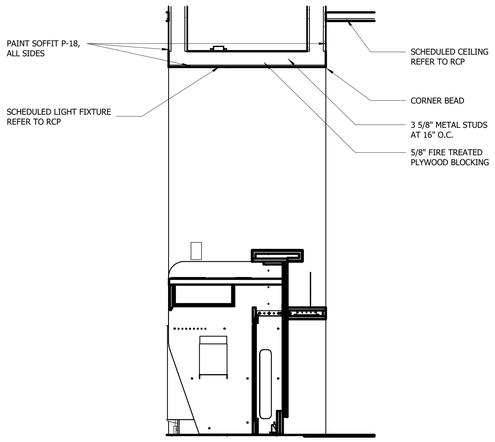

9 A12.08 CSR LINE SECTION
3/4" = 1'-0"

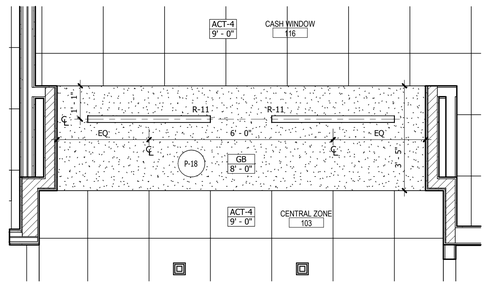

4 A12.08 REFLECTED CEILING PLAN - CSR LINE
1/2" = 1'-0"

NELSON
Nelco Architecture, Inc.

12400 Coit Road, Suite 510
Dallas, TX. 75251
Phone: (972) 644-8830
Fax: (972) 644-8496

Client Representative:
CUSHMAN & WAKEFIELD
Attn: Paul Hurchanik
Tel: 720.582.6073
Email:
paul.hurchanik@cushwake.com

Architect:
Nelco Architecture, Inc.
Attn: Harry Koutsis
Tel: 310.693.5271
Email: hkoutsis@nelsonww.com

AOR Contact
Robert J. Sullivan Jr.
Tel: 216.830.1561
Email:rsullivan@nelsonww.com
License No. ARC.00405343

Civil:
LANGAN
Attn: Ben Henry
Tel: (817) 328-3217
Email: bhenry@langan.com

Structural:
Salas O'Brien
Attn: Julie Bolding
Tel: 469-782-9753
Email: julie.bolding@salasobrien.com

MEP:
Salas O'Brien
Attn: Carly Wood
Tel: 727-804-7626
Email: carly.wood@salasobrien.com

Description:	No: Date:
IF Design Development 90%	07/19/2024
IF Design Development Final	08/19/2024
IF Construction Document Review	09/20/2024
IF Construction Document Final	12/05/2024
IF CD 90	08/15/2025
IF Permit	08/26/2025

BANK OF AMERICA
Broomfield

CO1-111
NWC Hwy 7 and Palisade Pkwy
Broomfield CO, 80023

PROPERTY ID:	CO1-111
NSRP VERSION:	2.0
BULLETIN:	2-2025

CSR LINE

COLORADO LICENSED ROBERT JOHN SULLIVAN JR. 00405343 REGISTERED ARCHITECT
09/04/2025

Project No: 23.0002261.000 Reviewed By: checker

A12.08

9/3/2025 4:22:41 PM C:\Users\cgosier\Revit_Locals\2023\CO1-111 Broomfield_for SDP_cgosier537ZS.rvt

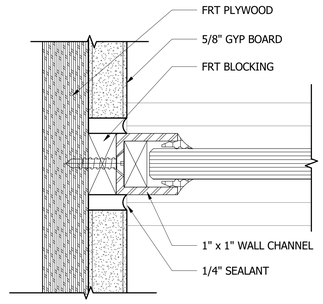

8 A12.10 DETAIL @ WALL TERMINATION
12" = 1'-0"

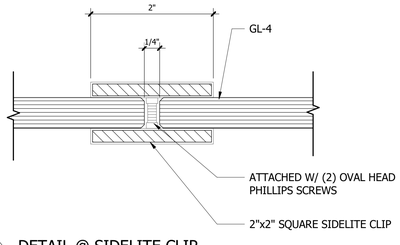

9 A12.10 DETAIL @ SIDELITE CLIP
12" = 1'-0"

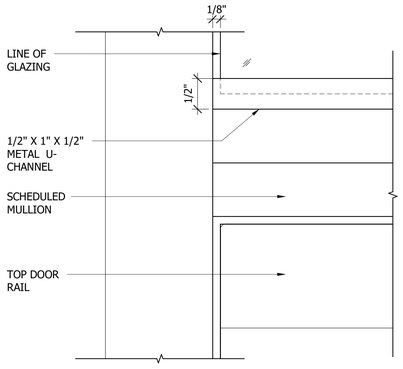

11 A12.10 DETAIL @ GLAZING
12" = 1'-0"

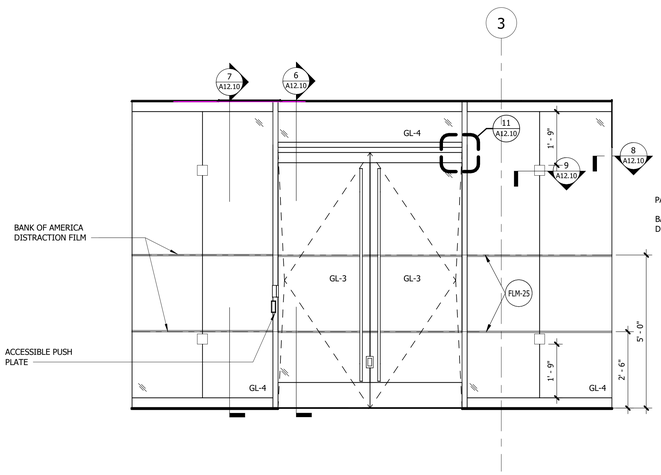

2 A12.10 24 HR VESTIBULE ELEV
1/2" = 1'-0"

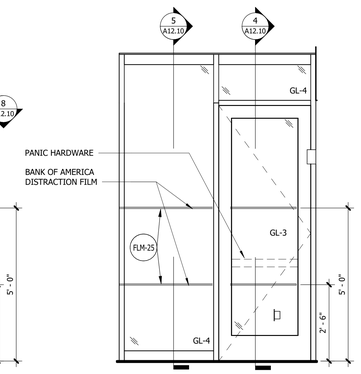

2 A12.10 24 HR VESTIBULE ELEVATION
1/2" = 1'-0"

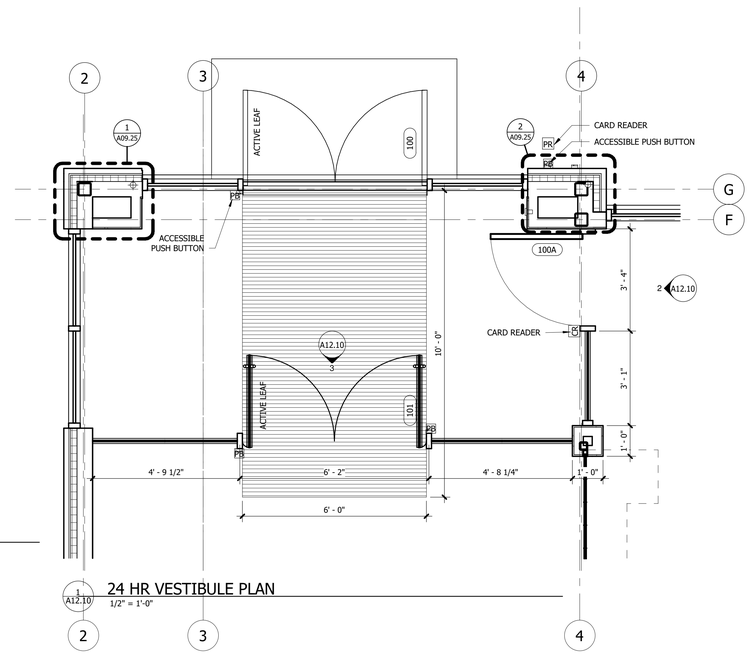

1 A12.10 24 HR VESTIBULE PLAN
1/2" = 1'-0"

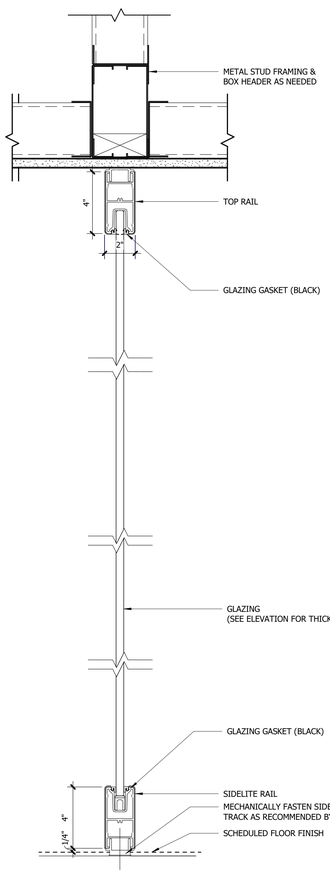

7 A12.10 SECTION @ SIDELITE @ DOUBLE DOORS
3" = 1'-0"

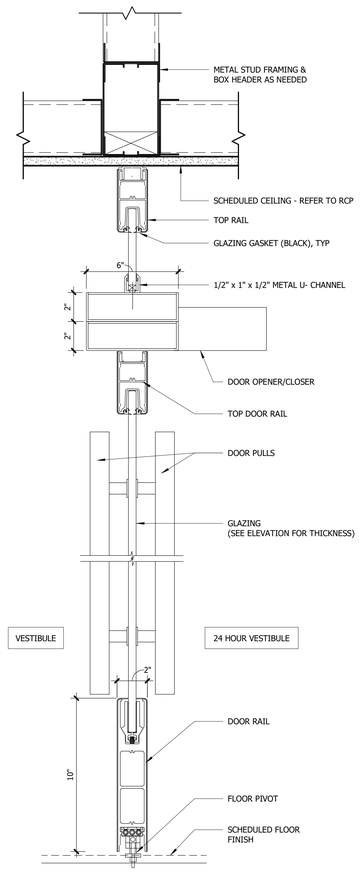

6 A12.10 SECTION @ VESTIBULE DOUBLE DOOR
3" = 1'-0"

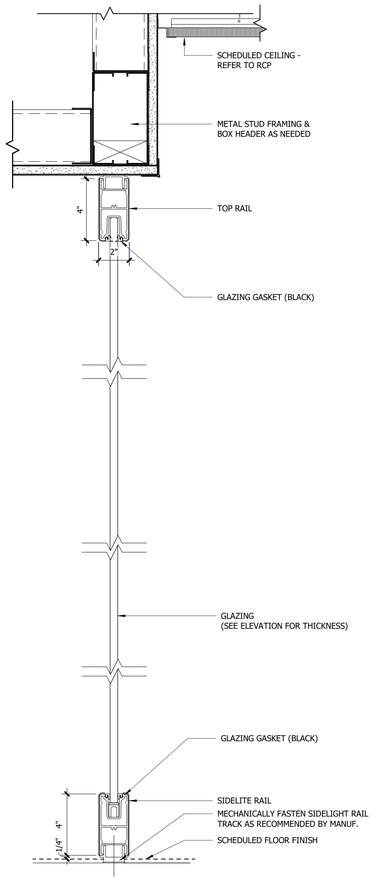

5 A12.10 SECTION @ SIDELITE W BLKHD
3" = 1'-0"

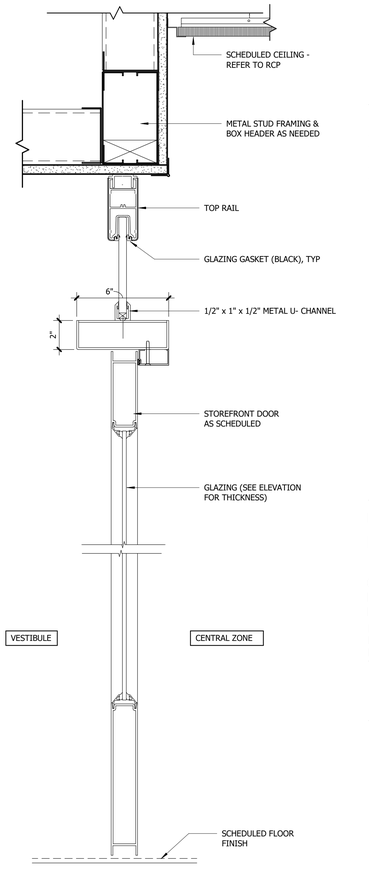

4 A12.10 SECTION @ VESTIBULE SINGLE DOOR
3" = 1'-0"

NELSON
Nelco Architecture, Inc.

12400 Coit Road, Suite 510
Dallas, TX. 75251
Phone: (972) 644-8830
Fax: (972) 644-8496

Client Representative:
CUSHMAN & WAKEFIELD
Attn: Paul Hurchanik
Tel: 720.582.6073
Email: paul.hurchanik@cushwake.com

Architect:
Nelco Architecture, Inc.
Attn: Harry Koutsis
Tel: 310.693.5271
Email: hkoutsis@nelsonww.com

AOR Contact
Robert J. Sullivan Jr.
Tel: 216.830.1561
Email:rsullivan@nelsonww.com
License No. ARC.00405343

Civil:
LANGAN
Attn: Ben Henry
Tel: (817) 328-3217
Email: bhenry@langan.com

Structural:
Salas O'Brien
Attn: Julie Bolding
Tel: 469-782-9753
Email: julie.bolding@salasobrien.com

MEP:
Salas O'Brien
Attn: Carly Wood
Tel: 727-804-7626
Email: carly.wood@salasobrien.com

Description:	No:	Date:
IF Design Development 90%		07/19/2024
IF Design Development Final		08/19/2024
IF Construction Document Review		09/20/2024
IF Construction Document Final		12/05/2024
IF CD 90		08/15/2025
IF Permit		08/26/2025

BANK OF AMERICA
Broomfield

CO1-111
NWC Hwy 7 and Palisade Pkwy
Broomfield CO, 80023

PROPERTY ID:	CO1-111
NSRP VERSION:	2.0
BULLETIN:	2-2025

24 HR VESTIBULE DETAILS

Project No: 23.0002261.000 Reviewed By: MB

A12.10

C:\Users\jpoplen\Revit_Locals\2023\CO1-111 Broomfield_for SDP_cpoplen5372S.rvt
9/3/2025 4:22:44 PM

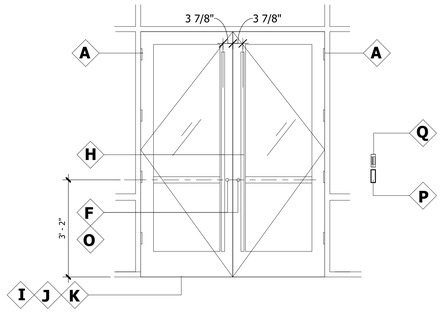

A AL-2C
DOOR 100 (SECURE SIDE)
SCALE: 1/2" = 1'-0"

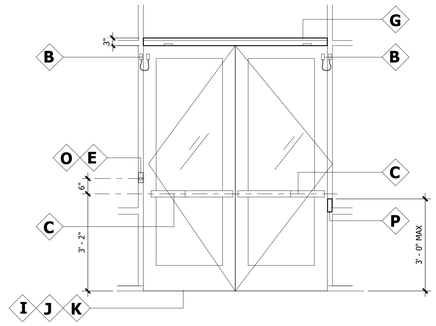

B AL-2C
DOOR 100 (EGRESS SIDE)
SCALE: 1/2" = 1'-0"

FUNCTION STATEMENTS:

FROM EXTERIOR - LOCKED CONDITION AFTER HOURS:

DOOR 100: ACCESS VIA THE PARABIT CONTROLLER WITH VALID CARD WHICH UNLOCKS EXIT DEVICE ON EXTERIOR ENTRANCE DOORS. CUSTOMERS PULL TRIM FOR ENTRANCE INTO 24 HOUR VESTIBULE FOR ATM BANKING SERVICE.

DOOR 100A: ACCESS IS ONLY AVAILABLE BY BANK EMPLOYEE VIA THE CARD READER.

DOOR 101: FREE EGRESS AT ALL TIMES

IN THE EVENT OF A POWER FAILURE, THE EXTERIOR DOORS WILL FAIL SECURE FROM THE EXTERIOR.

FROM EXTERIOR - UNLOCKED CONDITION DURING BUSINESS HOURS:

DOOR 100: THE PARABIT CONTROLLER HOLDS EXTERIOR ENTRANCE DOORS UNLOCKED ON A TIME SCHEDULE. CUSTOMERS PULL TRIM FOR ENTRANCE INTO 24 HOUR VESTIBULE.

DOOR 100A: THE CARD READER CONTROLLER HOLDS THE INTERIOR DOORS UNLOCKED ON A TIME SCHEDULE. CUSTOMERS PULL TRIM FOR ENTRANCE INTO BANKING FACILITY.

DOOR 101: FREE EGRESS AT ALL TIMES

FROM INTERIOR:

DOOR 100: FREE EGRESS AT ALL TIMES VIA THE PANIC HARDWARE.

DOOR 100A: FREE EGRESS AT ALL TIMES VIA THE PANIC HARDWARE.

DOOR 101: FREE EGRESS AT ALL TIMES

IN THE EVENT OF A POWER FAILURE, FREE EGRESS WILL STILL BE AVAILABLE VIA THE PANIC HARDWARE.

EMERGENCY LOCKDOWN FROM INTERIOR DURING BUSINESS HOURS:

DOOR 100: IN THE EVENT OF AN EMERGENCY, A BANK EMPLOYEE USES A KEY TO OPERATE THE KEYSWITCH WHICH WILL OVERRIDE THE EXTERIOR PARABIT ACCESS SYSTEM AND SECURE THE DOOR FROM THE EXTERIOR [RED LED]. **FREE EGRESS WILL STILL BE AVAILABLE VIA THE PANIC HARDWARE.** AFTER THE EVENT, THE BANK EMPLOYEE USES A KEY TO OPERATE THE KEYSWITCH AND THE DOOR WILL RESUME OPERATION UNDER THE PARABIT CONTROLLER SYSTEM [GREEN LED].

DOOR 100A: THERE IS NO CHANGE IN OPERATION OF THESE DOORS DURING AN EMERGENCY LOCKDOWN. FREE EGRESS WILL STILL BE AVAILABLE VIA THE PANIC HARDWARE.

DOOR 101: FREE EGRESS AT ALL TIMES

EMERGENCY LOCKDOWN FROM EXTERIOR DURING BUSINESS HOURS:

DOOR 100: IN THE EVENT OF AN EVACUATION, A BANK EMPLOYEE USES A KEY TO OPERATE THE KEYSWITCH WHICH WILL OVERRIDE THE PARABIT ACCESS SYSTEM AND SECURE THE DOORS FROM ANY POSSIBLE RE-ENTRY FROM EXTERIOR [RED LED]. CUSTOMERS AND BANK EMPLOYEES WILL STILL HAVE FREE EGRESS VIA THE PANIC HARDWARE; HOWEVER, RE-ENTRY FROM EXTERIOR WILL NOT. AFTER THE EVENT, THE BANK EMPLOYEE WILL ENTER THE BANK BY KEYING INTO THE KEYED DOOR LEAF AND WILL HAVE 10 SECONDS TO OPERATE THE INTERIOR KEYSWITCH AND DOORS WILL RESUME OPERATION UNDER PARABIT CONTROLLER SYSTEM [GREEN LED].

DOOR 100A: THERE IS NO CHANGE IN OPERATION OF THESE DOORS DURING AN EMERGENCY LOCKDOWN. FREE EGRESS WILL STILL BE AVAILABLE VIA THE PANIC HARDWARE.

DOOR 101: FREE EGRESS AT ALL TIMES

DOOR HARDWARE

ITEM	DESCRIPTION
A	HINGE
B	TRANSFER: ELECTRICAL POWER TRANSFER
C	PANIC HARDWARE
D	NOT USED
E	KEY SWITCH: (RECESS MOUNTED ON INTERIOR OF JAMB FRAME)
F	CYLINDER: (TEMPORARY CYLINDER USED DURING CONSTRUCTION; TO BE REPLACED WITH ITEM "O" AFTER CONSTRUCTION)
G	POWER OPERATOR AND CLOSER
H	PULL HANDLE
I	SWEEP
J	WEATHERSTRIP
K	THRESHOLD
L	NOT USED
M	NOT USED
N	NOT USED
O	PERMANENT CYLIDER
P	PUSH PLATE
Q	CARD/PARABIT READER (FLUSH MOUNTED ON EXTERIOR JAMB FRAME). SEE DETAIL 3/12.02

NELSON
Nelco Architecture, Inc.

12400 Coit Road, Suite 510
Dallas, TX. 75251
Phone: (972) 644-8830
Fax: (972) 644-8496

Client Representative:
CUSHMAN & WAKEFIELD
Attn: Paul Hurchanik
Tel: 720.582.6073
Email:
paul.hurchanik@cushwake.com

Architect:
Nelco Architecture, Inc.
Attn: Harry Koutsis
Tel: 310.693.5271
Email: hkoutsis@nelsonww.com

AOR Contact
Robert J. Sullivan Jr.
Tel: 216.830.1561
Email:rsullivan@nelsonww.com
License No. ARC.00405343

Civil:
LANGAN
Attn: Ben Henry
Tel: (817) 328-3217
Email: bhenry@langan.com

Structural:
Salas O'Brien
Attn: Julie Bolding
Tel: 469-782-9753
Email: julie.bolding@salasobrien.com

MEP:
Salas O'Brien
Attn: Carly Wood
Tel: 727-804-7626
Email: carly.wood@salasobrien.com

Description:	No:	Date:
IF Design Development 90%		07/19/2024
IF Design Development Final		08/19/2024
IF Construction Document Review		09/20/2024
IF Construction Document Final		12/05/2024
IF CD 90		08/15/2025
IF Permit		08/26/2025

BANK OF AMERICA
Broomfield

CO1-111
NWC Hwy 7 and Palisade Pkwy
Broomfield CO, 80023

PROPERTY ID:	CO1-111
NSRP VERSION:	2.0
BULLETIN:	2-2025

DOOR AL-2C HARDWARE

COLORADO LICENSED
ROBERT JOHN SULLIVAN JR.
00405343
REGISTERED ARCHITECT
09/04/2025

Project No: 23.0002261.000 Reviewed By: MB

A12.11

C:\Users\cgosier\Revit_Locals\2023\CO1-111 Broomfield_for SDP_cgosier53725.rvt
9/3/2025 4:22:46 PM

ABBREVIATIONS

A.B.	ANCHOR BOLT	LBS	POUNDS
ADDL	ADDITIONAL	LDG	LANDING
ADJ.	ADJACENT	LLH	LONG LEG HORIZONTAL
ADH.	ADHESIVE	LLV	LONG LEG VERTICAL
AFF	ABOVE FINISH FLOOR	LSH	LONG SIDE HORIZONTAL
ALT.	ALTERNATE	LSV	LONG SIDE VERTICAL
ARCH.	ARCHITECT	LT	LIGHT
		LVL	LEVEL
B.L.	BRICK LEDGE	LW	LIGHT WEIGHT
BLDG	BUILDING		
BM	BEAM	MAT.	MATERIAL
B.O.D.	BOTTOM OF DECK	MAX.	MAXIMUM
BOTT.	BOTTOM	MECH.	MECHANICAL
BRG	BEARING	MEZZ.	MEZZANINE
BTWN	BETWEEN	MFR	MANUFACTURER
		MID.	MIDDLE
CANT.	CANTILEVER	MIN.	MINIMUM
CIP	CAST IN PLACE	MISC.	MISCELLANEOUS
C.J.	CONSTRUCTION JOINT	M.L.	MATCH LINE
C.L.	CENTERLINE	MTL	METAL
CLR	CLEAR		
CMU	CONCRETE MASONRY UNIT	(N)	NEW
C.O.	CUT OFF	NIC	NOT IN CONTRACT
COL. (S)	COLUMN(S)	NO.	NUMBER
COMP.	COMPOSITE	N.S.	NEAR SIDE
CONC.	CONCRETE	NSG	NON-SHRINK GROUT
CONNX	CONNECTION	NTS	NOT TO SCALE
CONST.	CONSTRUCTION	NW	NORMAL WEIGHT
CONT.	CONTINUOUS		
CONTR.	CONTRACTOR	O.C.	ON CENTER
CTR	CENTER	O.D.	OUTSIDE DIAMETER
		O.F.	OUTSIDE FACE
D.B.	DROPPED BEAM	O.H.	OPPOSITE HAND
D.B.A.	DEFORMED BAR ANCHOR	OPNG	OPENING
DBL	DOUBLE		
DET./DTL.	DETAIL	P.A.F.	POWDER ACTUATED FASTENERS
DEMO. OR (D)	DEMOLISH	PARA.	PARALLEL
DFL	DOUGLAS FIR-LARCH	PC.	PRECAST
DIA.	DIAMETER	PCF	POUNDS PER CUBIC FOOT
DIAG.	DIAGONAL	PEMB	PRE-ENGINEERED METAL BUILDING
DIM.	DIMENSIONAL	PERIM.	PERIMETER
DIR.	DIRECTION	PERP.	PERPENDICULAR
DISC.	DISCONTINUOUS	PJ	PANEL JOINT
DWGS	DRAWINGS	PL	PLATE
DWL(S)	DOWEL(S)	PLY.	PLYWOOD
		PREFAB.	PRE-FABRICATED
EA.	EACH	PSF	POUNDS PER SQUARE FOOT
E.F.	EACH FACE	PSI	POUNDS PER SQUARE INCH
E.J.	EXPANSION JOINT	PT	POST-TENSIONED
EL.	ELEVATION	PTRN	PENETRATION
ELEV.	ELEVATOR		
EMBED.	EMBEDMENT	R	REMAINDER OR RADIUS
ENGR	ENGINEER	REF.	REFER TO OR REFERENCE
EQ.	EQUAL	REINF.	REINFORCEMENT/REINFORCE
E.W.	EACH WAY	REQD	REQUIRED
EXIST. OR (E)	EXISTING	RTU	ROOF TOP UNIT
EXP.	EXPANSION		
EXT.	EXTERIOR	S.A.	STUD ANCHOR
		S.B.	STRAP BEAM
FDN	FOUNDATION	SCHED.	SCHEDULE
F.F.	FINISH FLOOR	SECT.	SECTION
F.F.E.	FINISH FLOOR ELEVATION	SHT	SHEET
FLR	FLOOR	SHR.	SHRINKAGE
FSTN	FASTEN	SIM.	SIMILAR
F.S.	FAR SIDE	S.O.G.	SLAB-ON-GROUND
FT	FEET	SPA.	SPACING
FTG	FOOTING	SPEC.	SPECIFICATION
F.V.	FIELD VERIFY	SS	STAINLESS STEEL
		STD	STANDARD
GA.	GAGE	STIFF.	STIFFENER
GALV.	GALVANIZE	STL	STEEL
GEOTECH.	GEOTECHNICAL	SW	SHEAR WALL
GR	GRADE	SYM.	SYMETRICAL
G.T.	GIRDER TRUSS	SYP	SOUTHERN YELLOW PINE
HAS	HEADED ANCHOR STUD	T&B	TOP AND BOTTOM
HDR	HEADER	TEMP.	TEMPERATURE
HI	HIGH	TEN.	TENSION
HK	HOOK	TERM.	TERMINATE
HORIZ.	HORIZONTAL	THK	THICKNESS
HR	HARD ROCK	T.O.	TOP OF
HSS	HOLLOW STEEL SECTION	T.O.C.	TOP OF CONCRETE
HT	HEIGHT	T.O.F.	TOP OF FOOTING
		T.O.P.	TOP OF PIER
I.D.	INSIDE DIAMETER	T.O.S.	TOP OF STEEL / TOP OF SLAB
I.F.	INSIDE FACE	TS	TUBE STEEL
IN.	INCH	TYP.	TYPICAL
INFO.	INFORMATION		
INT.	INTERIOR	U.N.O.	UNLESS NOTED OTHERWISE
INTERM.	INTERMEDIATE		
		VAR	VARIES
JT	JOINT	VERT.	VERTICAL
JST	JOIST		
		W/	WITH
K	KIPS	W/O	WITHOUT
K.O.	KNOCK OUT	WP	WORK POINT
		WT	WEIGHT
		WWF	WELDED WIRE FABRIC

STRUCTURAL DESIGN

1. STRUCTURAL DESIGN STANDARDS:

   2021 INTERNATIONAL BUILDING CODE
   LOCAL AMENDMENTS TO BUILDING CODE
   ASCE 7-16

2. STRUCTURAL DESIGN LOADS:

RISK CATEGORY	II
FLOOR LIVE LOAD	100 psf
ROOF LIVE LOAD	20 psf
ROOF SOLAR PANEL SYS. WEIGHT	5 psf
SOLAR PANEL SYS. EFF. WIND	+/- 33 psf
SNOW LOAD:	
GROUND SNOW LOAD	40 psf
ROOF SNOW LOAD	30 psf
IMPORTANCE FACTOR, Is	1.0
FLAT & DRIFT SNOW LOADS:	REF. **1/S1.14**
WIND LOAD:	
WIND SPEED, Vult	115 MPH
IMPORTANCE FACTOR, Iw	1.0
EXPOSURE CATEGORY	C
MWFRS LATERAL LOAD	24 psf (ULT)
NET C&C ROOF UPLIFT, EDGE	REF. **2/S1.14**
NET C&C ROOF UPLIFT, FIELD	REF. **2/S1.14**
C&C WALL LOAD, EDGE	18.5 psf (EDGE STRIP "a" = 6 ft.)
C&C WALL LOAD, FIELD	15 psf
(ALL C&C WIND LOADS SHOWN ARE SERVICE LOADS & BASED ON 10 SF)	
SEISMIC LOAD:	
SITE CLASS	C
SEISMIC DESIGN CATEGORY	B
IMPORTANCE FACTOR, Ie	1.0
S_S	0.196
S_1	0.056
S_{DS}	0.17
S_{D1}	0.056
BASE SHEAR	40 kips
SEISMIC FORCE-RESISTING SYSTEM	ORDINARY ECCENTRIC BRACED FRAMES (R=3.0)
SEISMIC RESPONSE COEFFICIENT, C_S	0.056

SYMBOL KEY

SYMBOL	DESCRIPTION
A	GRIDLINE IDENTIFIER
EA	EXISTING GRIDLINE IDENTIFIER
DTL # / SHEET # (00 / S0)	DETAIL MARKER
DTL # / SHEET # (00 / S0)	ELEVATION MARKER
F.F. EL. XX'-X"	FINISH FLOOR ELEVATION MARKER
TOP OR BOTT. XX'-XX"	SPOT ELEVATION MARKER
WP	WORK POINT MARKER
Step Up / Step Down with Slope / Slope Down	ELEVATION CHANGE IN SLAB OR DECK
	DECK OR SLAB SPAN DIRECTION
COLUMN SIZE / BASE PL	STEEL COLUMN
BEAM SIZE, WXXxXX (X) C=X", NO. OF HEADED STUDS, REACTION (SERVICE LOAD) R=XX, CAMBER	STEEL BEAM
BEAM SIZE WXXxXX, MOMENT CONNX, MOMENT CONNX	STEEL BEAM MOMENT CONNX
	STEEL BEAM SPLICE
VERTICAL BRACE, FLOOR OR ROOF BEAM	VERTICAL STEEL BRACE - REF. ELEVATION

GENERAL NOTES

1. THE DRAWINGS AND SPECIFICATIONS DO NOT INDICATE THE MEANS AND METHODS OF CONSTRUCTION UNLESS NOTED OTHERWISE. THE CONTRACTOR IS RESPONSIBLE FOR ENSURING ALL MEANS AND METHODS MEET THE REQUIREMENTS OF THE LATEST OSHA REGULATIONS.
2. ALL DETAILS AND SECTIONS ARE INTENDED TO BE TYPICAL AND SHALL BE CONSTRUED TO APPLY TO ANY SIMILAR SITUATION ELSEWHERE, EXCEPT WHERE A DIFFERENT DETAIL OR SECTION IS SHOWN.
3. RESPONSES TO QUESTIONS AND RFI'S, COMMENTS MADE DURING THE REVIEW OF SUBMITTALS, AND DIRECTIVES PROVIDED IN ANY FORM BY THE ENGINEER TO THE CONTRACTOR DURING THE CONSTRUCTION PROCESS ARE INTENDED TO BE CLARIFICATIONS OF THE CONTRACT DOCUMENTS AND ARE NOT INTENDED TO REPRESENT A CHANGE IN COST OF THE PROJECT TO THE OWNER UNLESS A CHANGE ORDER REQUEST IS PROVIDED WITH DETAILED PRICING INFORMATION TO THE ARCHITECT BEFORE PURCHASING, DETAILING, FABRICATING, OR INSTALLING ANY COMPONENT RELATED TO SUCH CLARIFICATIONS AND CORRECTIONS.
4. THE CONTRACTOR SHALL BE SOLELY RESPONSIBLE FOR ALL EXCAVATION PROCEDURES IF APPLICABLE, INCLUDING LAGGING, SHORING, AND PROTECTION OF ADJACENT PROPERTY, STRUCTURES, STREETS AND UTILITIES IN ACCORDANCE WITH THE LOCAL BUILDING DEPARTMENT.
5. IT IS THE CONTRACTOR'S RESPONSIBILITY TO ASSEMBLE AND COORDINATE THE REQUIREMENTS OF ALL COMPONENTS OF THE CONTRACT DOCUMENTS AND VERIFY EXISTING CONDITIONS OF THE SITE. REF. ARCHITECTURAL AND ALL OTHER TRADES DOCUMENTS FOR SIZE AND LOCATION OF PIPES, VENTS, CHASES, DUCTS, OPENINGS, DEPRESSIONS, RECESSES, SLOPES, BLOCKOUTS, CURBS, EMBEDMENTS, AND DETAILS NOT SHOWN ON THESE STRUCTURAL DRAWINGS. ALL DIMENSIONS ARE TO BE CHECKED AND VERIFIED WITH THE ARCHITECTURAL DRAWINGS. THE GENERAL CONTRACTOR SHALL REPORT ANY DISCREPANCY BETWEEN THESE DOCUMENTS AND THOSE OF THE ARCHITECT AND ALL PROJECT CONSULTANTS OR ANY ERROR, OMISSION OR DIFFICULTY AFFECTING HIS WORK TO THE ARCHITECT AND STRUCTURAL ENGINEER FOR REVIEW.
6. THE DESIGN LOADS LISTED IN THE STRUCTURAL DESIGN CRITERIA SHALL NOT BE EXCEEDED DURING CONSTRUCTION. THE GENERAL CONTRACTOR SHALL MAKE ADEQUATE PROVISIONS FOR CONSTRUCTION LOADS, MATERIAL STORAGE, TEMPORARY BRACING, SHORING AND FORMWORK AS REQUIRED TO KEEP ALL ELEMENTS OF THE STRUCTURE PLUMB AND IN TRUE ALIGNMENT DURING ALL PHASES OF CONSTRUCTION. DESIGN OF TEMPORARY BRACING AND SHORING SHOULD BE PROPERLY DESIGNED UNDER THE SUPERVISION OF A LICENSED STRUCTURAL ENGINEER. PERMANENT BRACING MEMBERS SHOWN ON STRUCTURAL DRAWINGS ARE REQUIRED FOR THE COMPLETED STRUCTURE AND MAY NOT BE ADEQUATE DURING CONSTRUCTION.
7. SPECIAL INSPECTIONS SHALL BE DONE BY A QUALIFIED, INDEPENDENT INSPECTION COMPANY. JOB SITE VISITS BY THE ENGINEER SHOULD BE CONSIDERED A PERIODIC CHECK TO INFORM THE OWNER OF DEFECTS IN THE WORK OF THE CONTRACTOR AND DO NOT CONSTITUTE, OR SUBSTITUTE, INSPECTIONS UNLESS SPECIFICALLY CONTRACTED FOR.
8. STRUCTURAL MEMBERS AND FOUNDATIONS SUPPORTING MECHANICAL EQUIPMENT HAVE BEEN DESIGNED FOR THE WEIGHT OF THE UNITS SHOWN IN THE STRUCTURAL DRAWINGS. ANY CHANGES IN SIZE, WEIGHT, OR QUANTITY OF UNITS SHALL BE REPORTED TO THE ARCHITECT PRIOR TO FABRICATION OR INSTALLATION OF STRUCTURAL MEMBERS OR RELATED MATERIALS.
9. NOTICE IN WRITING OF ANY PROPOSED SUBSTITUTIONS OR ANY PROPOSED DEVIATIONS TO THE STRUCTURE AS REQUIRED BY THESE DOCUMENTS SHALL BE SUBMITTED WITH A CURRENT ICC REPORT.
10. DIMENSIONS SHOWN IN STRUCTURAL PLANS, SECTIONS, AND DETAILS TAKE PRECEDENT OVER SCALE. REFER TO ARCHITECTURAL DRAWINGS FOR ALL DIMENSIONS NOT INDICATED IN THE STRUCTURAL DRAWINGS.
11. THESE PLANS MUST BE SUBMITTED TO THE GEOTECHNICAL ENGINEER FOR REVIEW PRIOR TO CONSTRUCTION.
12. IT IS THE RESPONSIBILITY OF THE CONTRACTOR TO OBTAIN ALL CONTRACT DOCUMENTS AND LATEST ADDENDA AND TO SUBMIT SUCH DOCUMENTS TO ALL SUBCONTRACTORS AND MATERIAL SUPPLIERS PRIOR TO THE SUBMITTAL OF SHOP DRAWINGS, FABRICATION OF ANY STRUCTURAL MEMBERS, AND ERECTION IN THE FIELD.
13. THE CONTRACTOR IS RESPONSIBLE FOR ARRANGING PRECONSTRUCTION MEETINGS FOR THE FOUNDATION AND SUPERSTRUCTURE ELEMENTS WITH A MINIMUM OF TWO WEEKS OF NOTICE PRIOR TO START OF THE RELEVANT WORK. ATTENDEES SHALL INCLUDE THE CONTRACTORS, APPROPRIATE SUBCONTRACTORS, FABRICATORS, INSPECTORS, ARCHITECT/ENGINEERS. ON THE MEETING AGENDA SHALL BE REVIEW OF WORK SCOPE, PROJECT SCHEDULE OF THE ELEMENT IN QUESTION, CONTACT INFORMATION OF RESPONSIBLE PARTIES, INSPECTION POINTS, REVIEW OF MATERIALS AND ANY SPECIAL DESIGN ISSUES, CLARIFICATIONS TESTING AND ACCEPTANCE, AND ANY OTHER TOPICS DEEMED APPROPRIATE BY THE CONTRACTOR OR THE ARCHITECT.
14. THE ROOF STRUCTURE AND ITS SUPPORTING ELEMENTS HAVE BEEN DESIGNED WITH THE ASSUMPTION THAT SUFFICIENT DRAINAGE HAS BEEN PROVIDED TO PREVENT ANY PONDING OF WATER. IT IS THE RESPONSIBILITY OF THE BUILDING OWNER TO MAINTAIN THE ROOF DRAINAGE SYSTEM SUCH THAT IT FUNCTIONS AS INTENDED.

SUBMITTALS

1. SHOP DRAWINGS SHALL BE PREPARED FOR ALL STRUCTURAL COMPONENTS. IT SHALL BE THE RESPONSIBILITY OF THE GENERAL CONTRACTOR TO MAKE CERTAIN THAT ALL CONSTRUCTION IS IN FULL AGREEMENT WITH THE LATEST CONSTRUCTION DOCUMENTS.
2. CONTRACTOR SHALL ALLOW TWO WEEKS FOR THE ENGINEER'S REVIEW OF EACH SUBMITTAL. SUBMITTALS WHICH DO NOT REFLECT THE CONTRACTOR'S APPROVAL, SIGNATURE AND DATE, OR DO NOT APPEAR TO HAVE BEEN REVIEWED BY THE CONTRACTOR WILL BE RETURNED WITHOUT REVIEW. THE CONTRACTOR SHALL BE RESPONSIBLE FOR DELAYS CAUSED BY REJECTION OF INADEQUATE OR INCORRECT SHOP DRAWINGS.
3. OMISSION FROM THE SHOP DRAWINGS OF ANY REQUIREMENTS AND/OR CORRECTIONS/COMMENTS ON THE SHOP DRAWINGS DURING REVIEW SHALL NOT RELIEVE THE CONTRACTOR FROM COMPLIANCE WITH THE REQUIREMENTS OF THE CONSTRUCTION DOCUMENTS EVEN IF THE SHOP DRAWINGS HAVE BEEN REVIEWED AND RETURNED. APPROVAL IS FOR GENERAL COMPLIANCE WITH THE STRUCTURAL CONTRACT DOCUMENTS ONLY. APPROVAL ASSUMES NO RESPONSIBILITY FOR DIMENSIONS, QUANTITIES AND CONDITIONS THAT PERTAIN TO FABRICATION AND INSTALLATION OR FOR PROCESSES AND TECHNIQUES OF CONSTRUCTION. APPROVAL OF A SPECIFIC ITEM SHALL NOT INCLUDE APPROVAL OF AN ASSEMBLY OF WHICH THE ITEM IS A COMPONENT. CALCULATION REVIEW AND COMMENTS DO NOT INFER A DETAILED CHECK OF THE CALCULATIONS.
4. ALL ITEMS DEVIATING FROM THE STRUCTURAL DRAWINGS OR FROM PREVIOUSLY SUBMITTED SHOP DRAWINGS SHALL BE CLOUDED.
5. THE USE OF REPRODUCTIONS OR ELECTRONIC FILES OF THE STRUCTURAL DRAWINGS FOR THE PREPARATION OF SHOP DRAWINGS IS NOT ACCEPTABLE WITHOUT PRIOR WRITTEN AUTHORIZATION OF THE ENGINEER OF RECORD. IF SUCH AUTHORIZATION IS OBTAINED, DO NOT SUBMIT SHOP DRAWINGS WITH THE CONTRACT DOCUMENTS TITLE BLOCK AND/OR THE SEAL OF THE REGISTERED ENGINEER OF RECORD AFFIXED. ALTERATION OF A SEALED DOCUMENT WITHOUT PROPER NOTIFICATION OF THE RESPONSIBLE ENGINEER IS AN OFFENSE OF THE ENGINEERING PRACTICING ACT.
6. THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE DETAILED DESIGN OF CERTAIN ITEMS, REFERRED TO AS DEFERRED. DOCUMENTS FOR DEFERRED SHOP DRAWINGS, INCLUDING CALCULATIONS, SHALL BE SUBMITTED TO THE ENGINEER OF RECORD FOR REVIEW FOR GENERAL CONFORMANCE TO THE CONTRACT DOCUMENTS.
7. DELEGATED STRUCTURAL DESIGN AND DEFERRED SUBMITTALS INCLUDE:
   1. STEEL STAIRS, GUARDRAILS AND HANDRAILS
   2. COLD FORMED STEEL FRAMING
   3. METAL CANOPIES
   4. POST-TENSIONED TENDONS AND FORCES CALCULATIONS
   5. CURTAIN WALL AND STOREFRONT SYSTEMS
   6. GRAVITY-TYPE SITE RETAINING WALLS
8. THE DEFERRED SUBMITTAL ITEMS SHALL NOT BE INSTALLED UNTIL THE DEFERRED SUBMITTAL DOCUMENTS HAVE BEEN APPROVED BY THE ENGINEER OF RECORD AND THE BUILDING OFFICIAL.

GEOTECHNICAL REPORT

1. FOUNDATION DESIGN AND SUBSURFACE INFORMATION IS BASED ON THE RECOMMENDATIONS GIVEN IN THE FOLLOWING GEOTECHNICAL INVESTIGATION REPORT:

GEOTECHNICAL CONSULTANT:	TERRACON
REPORT NUMBER:	No. 25235209
REPORT DATE:	May 24, 2024
SYSTEM TYPE:	CAST-IN-PLACE CONCRETE PIERS AND STRUCTURED SLAB OVER VOID
VOID FORM DEPTH:	24"
MOISTURE RETARDER:	15 MIL

2. THE CONTRACTOR MUST READ THE GEOTECHNICAL INVESTIGATION REPORT AND BE THOROUGHLY FAMILIAR WITH SITE AND SUBGRADE INFORMATION GIVEN THEREIN. ALL SUBGRADE PREPARATION AND FOUNDATION CONSTRUCTION SHALL BE PERFORMED IN STRICT COMPLIANCE WITH THE STRUCTURAL DOCUMENTS AND THE GEOTECHNICAL REPORT, AND SHALL BE OBSERVED, TESTED, AND APPROVED BY A QUALIFIED GEOTECHNICAL ENGINEER PRIOR TO PROCEEDING WITH FOUNDATION CONSTRUCTION.

SUBGRADE PREPARATION

1. ALL ORGANIC AND DELETERIOUS MATERIAL, AS WELL AS ANY EXISTING PAVING, FOUNDATIONS, OR EXISTING FILL SHALL BE REMOVED FROM THE BUILDING PAD AREA PRIOR TO PLACEMENT OF FILL.
2. SOIL BELOW THE BUILDING PAD SHALL BE MOISTURE CONDITIONED AS NOTED BELOW:

DEPTH OF NON-EXPANSIVE SOIL CAP:	1 foot
DEPTH OF MOISTURE CONDITIONING:	N/A
TOTAL DEPTH OF IMPROVED ZONE:	1 foot
EXTEND IMPROVED ZONE BEYOND BUILDING BY:	10 feet
EXTEND IMPROVED ZONE BEYOND BUILDING FLATWORK BY:	5 feet

1

3. ALL FILL SHALL BE PLACED IN LOOSE LIFTS AND COMPACTED AT ELEVATED MOISTURE CONTENT AS DETAILED IN THE ABOVE REFERENCED GEOTECHNICAL REPORT. CARE SHALL BE EXERCISED IN PLACEMENT AND COMPACTION OF FILL IN ALL LEAVE-OUTS. VAPOR BARRIER SHALL BE PLACED AND LAPPED PER MANUFACTURERS RECOMMENDATIONS.
4. THE FINAL BUILDING PAD SHALL BE APPROVED BY THE OWNERS GEOTECHNICAL REPRESENTATIVE PRIOR TO POURING CONCRETE.

DRILLED CONCRETE PIERS

1. DRILLED PIER DESIGNS ARE BASED UPON THE INFORMATION LISTED BELOW. REFER TO PLANS AND DETAILS FOR PIER SIZE, REINFORCING, AND PENETRATION INTO BEARING STRATUM.
   BEARING MATERIAL: SOFT/HARD CLAYSTONE
   ALLOWABLE END BEARING PRESSURE: 20,000 PSF
   ALLOWABLE COMPRESSION SKIN FRICTION RESISTANCE: 1,750 PSF
   ALLOWABLE UPLIFT SKIN FRICTION RESISTANCE: 1,750 PSF
   EMBEDMENT DEPTH DISCOUNTED FOR TENSION/COMPRESSION SKIN FRICTION: 15 FT
   SOIL INDUCED UPLIFT PRESSURE: 75 x PIER DIA. (FT) KIPS
   DEPTH OF SOIL UPLIFT ZONE: 15 FT
   MINIMUM PIER DIAMETER: 18 IN. OR L/D < 30
   SHEAR RINGS: 3 IN. (H) x 3 IN. (D) @ 16 IN. O.C. W/IN BOT. 15 FT OF PIER
2. PIER CONSTRUCTION AND CONCRETING SHALL BE IN ACCORDANCE WITH THE RECOMMENDATIONS IN THE GEOTECHNICAL REPORT AND AS PER THE CURRENT VERSION OF ACI 336. FILL PIER EXCAVATIONS WITH CONCRETE AS SOON AS PRACTICAL, BUT NO LONGER THAN 8 HOURS AFTER THE START OF DRILLING IN THE PENETRATION ZONE. ANY ACCUMULATED WATER SHALL BE PUMPED FROM THE PIER HOLES PRIOR TO CONCRETE PLACEMENT. REFER TO THE GEOTECHNICAL REPORT FOR CASING REQUIREMENTS.
3. PIERS NOT SPECIFICALLY LOCATED ON PLAN SHALL BE LOCATED ON THE CENTERLINE OF THE COLUMN ABOVE. WHERE NO COLUMN OCCURS, LOCATE PIER ON CENTERLINE OF WALL OR BEAM.
4. PIER REINFORCING AND CONCRETE SHALL BE PLACED IMMEDIATELY AFTER DRILLER OPERATIONS ARE COMPLETE. IN NO CASE SHALL A PIER BE DRILLED THAT CANNOT BE POURED BY THE END OF THE WORKDAY. WHERE THE CLEAR DISTANCE BETWEEN TWO PIERS IS LESS THAN THE PIER DIAMETER OF THE LARGER PIER, THE CONTRACTOR SHALL WAIT AT LEAST 48 HOURS AFTER CASTING THE FIRST PIER BEFORE DRILLING THE SECOND PIER.
5. THE CONTRACTOR SHALL VERIFY DEPTH OF PIERS BEFORE PIER STEEL IS CUT. PIER STEEL MAY BE DELIVERED TO THE JOBSITE IN STANDARD LENGTHS AND CUT AS REQUIRED.
6. TOP OF PIER SHALL BE OF THE SPECIFIED DIAMETER. BELLING AT THE TOP OF PIERS IS PROHIBITED. FORM TOP OF PIER IF REQUIRED TO MAINTAIN THE SPECIFIED DIAMETER. ANY CONCRETE EXTENDING BEYOND THE SPECIFIED DIAMETER SHALL BE REMOVED.
7. ALL PIERS SHALL BE INSPECTED BY A REPRESENTATIVE OF A QUALIFIED GEOTECHNICAL LABORATORY IN ORDER TO ENSURE THAT THE PROPER BEARING MATERIAL HAS BEEN REACHED IN ACCORDANCE WITH THE RECOMMENDATIONS GIVEN IN THE GEOTECHNICAL REPORT.
8. TEMPLATE SHALL BE UTILIZED TO SET DOWELS AND ANCHOR BOLTS IN PIERS. DETAILS OF THE TEMPLATES SHALL BE PROVIDED IN THE PIER SHOP DRAWINGS.
9. CASING SHALL HAVE AN INSIDE DIAMETER EQUAL TO THE PIER DIAMETER SHOWN IN THE PIER SCHEDULE
10. THE PRICE FOR CASING OF PIERS AND/OR UNDERWATER CONCRETE PLACEMENT OF PIERS SHALL BE INCLUDED WITHIN THE BASE BID. THE CONTRACTOR SHALL PROVIDE A UNIT PRICE (ADD AND DEDUCT) FOR EACH CASING SIZE CALLED OUT ON THE PLANS. PAYMENT FOR CASING SHALL BE BASED UPON THE NET LENGTH OF CASING UTILIZED ON THE PROJECT. THE CONTRACTOR'S BID SCHEDULE SHALL ALSO INCLUDE UNDERWATER CONCRETE PLACEMENT.
11. THE DRILLED SHAFT CONTRACT SHALL CONTAIN PROVISIONS FOR PENETRATION OR REMOVAL OF HARD ROCK AND OBSTRUCTIONS.

ISOLATION OF STRUCTURE FOR EXPANSIVE SOILS

1. EXPANSIVE CLAYS ARE PRESENT AT THIS SITE. THE FOLLOWING PRACTICES SHALL BE FOLLOWED, IN ADDITION TO OTHER MEASURES DESCRIBED IN THE GEOTECHNICAL REPORT, AS A MINIMUM TO PREVENT DAMAGE TO THE STRUCTURE:
   A. GRADE SOIL AROUND BUILDING AWAY FROM THE BUILDING.
   B. EMPLOY APPROPRIATE MEASURES TO PREVENT PONDING OF WATER IN THE BUILDING PAD AREAS. MAINTAIN THE BUILDING PAD AT SPECIFIED MOISTURE CONTENT.
   C. PLACE BACKFILL AROUND THE PERIMETER GRADE BEAMS AND OR BASEMENT WALLS IMMEDIATELY AFTER THEY ARE CAST. ANY STANDING WATER BEFORE BACKFILL PLACEMENT MUST BE PUMPED DRY AND THE UNDERLYING SOIL MUST BE RETESTED TO MEET THE REQUIREMENTS OF THE GEOTECHNICAL REPORT.
2. A VOID SHALL BE CONSTRUCTED BELOW ALL STRUCTURAL ELEMENTS SUPPORTED BY PIERS TO SEPARATE THESE ELEMENTS FROM THE SOIL. THE USE OF SIDE RETAINERS IS REQUIRED TO PREVENT SOIL INTRUSION INTO THE VOID AS DESCRIBED IN THE GEOTECHNICAL REPORT. IT IS THE CONTRACTOR'S RESPONSIBILITY TO ENSURE THAT THE VOID SHALL BE AS SHOWN IN THE GEOTECHNICAL REPORT NOTES.
3. GRADE BEAM & WALL SIDES SHALL BE WOOD-FORMED. EARTH-FORMING IS NOT ALLOWED.

SPECIAL INSPECTIONS & TESTING

SPECIAL INSPECTIONS ARE REQUIRED TO BE PERFORMED IN ACCORDANCE WITH THE FOLLOWING SECTIONS OR TABLES FROM THE 2021 INTERNATIONAL BUILDING CODE:

IBC Section	SPECIAL INSPECTIONS	APPLICABLE	NON-APPLICABLE	QUALIFICATIONS OF SPECIAL INSPECTOR & FREQUENCY OF INSPECTION
1704.2.5	INSPECTION OF FABRICATORS (STRUCTURAL STEEL)	X		Fabricator to provide documentation of certification per 1704.2.5.1
1705.2	STEEL CONSTRUCTION	X		City - approved agency; Inspect per IBC 1705.2.1 through 1705.2.4; ref AISC 360, chapter N
1705.3	CONCRETE CONSTRUCTION	X		City - approved agency; continuous for placement, sampling, and prestressing; periodic for all other per table 1705.3
1705.4	CMU MASONRY CONSTRUCTION		X	City - approved agency; continuous for grout, reinforcement, anchors, and specimens; periodic for all other per TMS 402 & TMS 602. Table 3 & 4, Level 2
1705.5	WOOD CONSTRUCTION		X	City - approved agency; inspect high-load diaphragms & long-span plated trusses per IBC 1705.5.1 & 1705.5.2
1705.6	SOILS	X		City - approved agency; continuous during fill placement; periodic for all other, per table 1705.6
1705.7	DRIVEN DEEP (PILE) FOUNDATIONS		X	City - approved agency; continuous, per table 1705.7
1705.8	CAST-IN-PLACE (PIER) FOUNDATIONS	X		City - approved agency; continuous, per table 1705.8
1705.9	HELICAL PILE FOUNDATIONS		X	City - approved agency; inspect per IBC 1705.9
1705.11	SPECIAL INSPECTIONS FOR WIND RESISTANCE		X	City - approved agency; Inspect per IBC 1705.11.1 through 1705.11.3
1705.12	SPECIAL INSPECTIONS FOR SEISMIC RESISTANCE		X	City - approved agency; Inspect per IBC 1705.12.1 through 1705.12.9
1705.1.1	SPECIAL CASES (UNUSUAL IN NATURE)	X		Inspection of below-slab moisture retarder installation to verify conformance to mfr's specifications; Inspection of post-installed conc. anchors per Table 17.05.3 to verify conformance to mfr's installation procedures.

CAST-IN-PLACE CONCRETE

1. ALL CONCRETE CONSTRUCTION SHALL BE IN ACCORDANCE WITH ACI STANDARD "BUILDING CODE REQUIREMENTS FOR STRUCTURAL CONCRETE" (ACI 318).
2. MAINTAIN SCHEDULED STRUCTURAL DEPTH OF MEMBERS AS A MINIMUM WHILE FOLLOWING SLOPES AND GRADES SHOWN ON PLANS.
3. ALL CONCRETE THAT WILL BE COLORED OR STAINED MUST BE WET CURED.
4. ALL CONSTRUCTION JOINTS IN BEAMS, JOISTS, SLABS, AND WALLS SHALL BE PROVIDED WITH SHEAR KEYS AS SHOWN IN DETAILS. SUBMIT LOCATIONS OF ALL CONSTRUCTION JOINTS TO ENGINEER FOR REVIEW.
5. HOT WEATHER CONCRETING SHALL CONFORM TO ACI 305 AND COLD WEATHER CONCRETING SHALL CONFORM TO ACI 306.
6. FOUNDATION WALLS (INCLUDING LOADING DOCKS AND ELEVATOR PITS) SHALL HAVE TEMPORARY BRACING BEFORE BACKFILL IS PLACED AGAINST THEM. TEMPORARY BRACING SHALL NOT BE REMOVED UNTIL WALL IS PERMANENTLY BRACED BY FLOOR DIAPHRAGMS (SLAB-ON-GROUND OR STRUCTURED SLAB) THAT HAVE REACHED AT LEAST 75% OF DESIGN STRENGTH, UNLESS NOTED OTHERWISE.
7. GRADE BEAM DIMENSIONS AND/OR LOCATIONS MAY NOT BE ALTERED WITHOUT APPROVAL OF THE ENGINEER OF RECORD.
8. FOUNDATION PENETRATIONS SHALL BE SUBJECT TO APPROVAL BY THE ARCHITECT/ENGINEER.
9. PROVIDE WATERSTOPS AT ALL BELOW GRADE CONSTRUCTION JOINTS IN CONCRETE ELEMENTS WHERE THERE IS EARTH SUBGRADE AT THE JOINT ON ONE SIDE OF THE CONCRETE MEMBER AND INTERIOR SPACE ON THE OTHER, REGARDLESS OF WHETHER THE WATERSTOP IS SPECIFICALLY INDICATED IN THE DETAIL. PROVIDE WATERSTOPS AT OTHER LOCATIONS INDICATED IN THE DOCUMENTS PRIOR TO CONSTRUCTION.
10. NO CONDUIT, SLEEVE, OR PIPE IS PERMITTED TO BE EMBEDDED IN THE CONCRETE WITHOUT PRIOR WRITTEN APPROVAL FROM THE ENGINEER OR UNLESS SPECIFICALLY DETAILED OTHERWISE. ALL CONDUITS, PIPES, AND SLEEVES EMBEDDED IN CONCRETE SHALL COMPLY WITH THE SPACING AND SIZE REQUIREMENTS OF ACI 318.
11. REFER TO THE GEOTECHNICAL REPORT FOR RISK OF GROUNDWATER PRESENCE AND ITS POTENTIAL IMPACT ON NEW CONSTRUCTION. CONTRACTOR MUST CARRY AN APPROPRIATE ALLOWANCE IN THE BIDS FOR THE MEASURES SUCH AS SITE DEWATERING AND PIER CASINGS, ETC.

CONCRETE MIX

1. ALL CONCRETE SHALL BE LABORATORY DESIGNED AND CONTROLLED AND SHALL MEET THE REQUIREMENTS OF THE LATEST EDITION OF "BUILDING CODE REQUIREMENTS FOR REINFORCED CONCRETE" (ACI 318). SAND AND COARSE AGGREGATES SHALL MEET THE REQUIREMENTS OF ASTM C-33 OR C-330. PORTLAND CEMENT SHALL BE TYPE I OR II AND SHALL MEET THE REQUIREMENTS OF ASTM C-150. IN ADDITION, CONCRETE SHALL COMPLY WITH THE FOLLOWING REQUIREMENTS:

USAGE	28-DAY STRENGTH (PSI)	SLUMP (IN.)	MAX. AGG. SIZE (IN.)
PIERS	3,000	4-6	1 1/2"
GRADE BEAMS	4,000	3-5	1"
SLAB OVER VOID	4,000	3-5	3/4"
FOOTINGS	4

REINFORCING STEEL

1. ALL CONCRETE REINFORCEMENT SHALL BE NEW BILLET STEEL CONFORMING TO ASTM A615, GRADE 60.
2. REINFORCING STEEL THAT REQUIRES WELDING SHALL CONFORM TO ASTM A706, WITH GRADES AS SHOWN ABOVE
3. ALL REINFORCING BARS SHALL BE LAPPED 40 BAR DIAMETERS (2'-0" MINIMUM) AT SPLICES UNLESS NOTED OTHERWISE ON PLANS OR DETAILS. DEVIATIONS IN SPLICE LOCATIONS AND LENGTHS ARE NOT ALLOWED UNLESS APPROVED BY THE STRUCTURAL ENGINEER OF RECORD.
4. WELDED WIRE FABRIC SHALL CONFORM TO ASTM A185. ALL LAPS IN WELDED WIRE FABRIC SHALL BE ONE MESH PLUS TWO INCHES.
5. CONCRETE REINFORCEMENT AND ACCESSORIES SHALL BE DETAILED AND FABRICATED IN ACCORDANCE WITH ACI 315 AND ACI 318.
6. LAP SPLICES OF CONTINUOUS BEAM REINFORCEMENT SHALL BE MADE AT MIDSPAN FOR TOP BARS AND AT SUPPORTS FOR BOTTOM BARS.
7. PROVIDE CORNER BARS AT INTERSECTIONS OF WALLS, GRADE BEAMS AND STRIP FOOTINGS IN ACCORDANCE WITH THE TYPICAL DETAILS. BARS THAT HOOK AT DISCONTINUOUS ENDS SHALL HAVE THE HOOK PLACED HORIZONTALLY AT EXTERIOR CORNERS IN LIEU OF CORNER BARS.
8. MINIMUM CONCRETE PROTECTION FOR REINFORCEMENT SHALL BE AS NOTED BELOW. REFER TO ACI 318 SECTION 20.6 FOR CONDITIONS NOT NOTED:

CONDITION	PROTECTION
PIERS	3 IN.
FOOTINGS	3 IN.
SLAB-ON-GROUND	MID-SLAB
SLAB OVER VOID	3/4 IN. TOP 1 1/2 IN. BOTTOM
GRADE BEAMS & WALLS	2 IN. FORMED SIDES 3 IN. BACKFILLED SIDES
ELEVATED SLAB	3/4 IN.
ELEVATED BEAMS,JOISTS	1 1/2 IN.

STRUCTURAL STEEL

1. STRUCTURAL STEEL SHAPES AND PLATES SHALL CONFORM TO THE FOLLOWING:

ITEM	ASTM SPECIFICATION
WIDE FLANGE	A992, GRADE 50
TUBE STEEL (HSS)	A500, GRADE B
TUBE STEEL (HSS)	A500, GRADE C
STEEL PIPE	A53, GRADE B
CHANNEL	A36
ANGLES, PLATES, MISC. STL.	A36

2. ALL BOLTS FOR STRUCTURAL STEEL MEMBERS SHALL CONFORM TO THE FOLLOWING:

ITEM	ASTM SPECIFICATION
ANCHOR BOLTS	F1554, GRADE 55
CONNECTION BOLTS	ASTM F3125, GRADE A325
EXPANSION ANCHORS	ESR-1917 & ESR-3785 (HILTI KB-TZ) ESR-3037 & ER-240 (SIMPSON STRONG-BOLT 2)
ADHESIVE ANCHORS	ASTM F1554, GRADE 55

3. STEEL BEAMS SHALL BE ERECTED WITH NATURAL CAMBER UP.
4. WHERE CAMBER OF STEEL BEAMS IS SPECIFIED ON THE PLANS, CAMBER OF STEEL BEAMS MUST COMPLY WITHIN LIMITS SET BY AISC. SUPPORT CAMBERED STEEL MEMBERS IN A MANNER THAT WILL NOT RESULT IN ANY LOSS OF CAMBER DURING SHIPPING AND HANDLING. THE TESTING LAB SHALL VERIFY THE SPECIFIED BEAM CAMBERS AT THE JOBSITE WITH THE BEAMS LYING FLAT ON THE GROUND (WEBS PARALLEL TO THE GROUND). BEAMS WHOSE CAMBER FALLS OUTSIDE THE TOLERANCE SHALL BE RETURNED TO THE SHOP FOR CORRECTION.
5. STEEL MEMBERS SHALL NOT BE SPLICED EXCEPT WHERE INDICATED ON THE DRAWINGS UNLESS APPROVED IN WRITING BY THE STRUCTURAL ENGINEER.
6. BOLTS FOR STEEL BEAM AND COLUMN CONNECTIONS SHALL BE ¾" DIAMETER ASTM F 3125, GRADE A325-N HIGH-STRENGTH WITH HARDENED WASHERS, UNLESS NOTED OTHERWISE. ALL BOLTED CONNECTIONS ARE BEARING TYPE. ALL BOLTS SHALL BE TIGHTENED SNUG TIGHT, UNLESS NOTED OTHERWISE.
7. THE DESIGN OF THE STRUCTURAL STEEL CONNECTIONS, WHICH ARE NOT FULLY DETAILED IN THESE DRAWINGS, IS THE RESPONSIBILITY OF THE CONTRACTOR AND THE STEEL FABRICATOR. THE DESIGN OF THE CONNECTIONS SHALL BE PERFORMED BY A LICENSED PROFESSIONAL ENGINEER WORKING FOR THE FABRICATOR IN ACCORDANCE WITH THE LATEST ADOPTED EDITION OF THE AISC 303 - CODE OF STANDARD PRACTICE FOR STEEL BUILDINGS AND BRIDGES.
8. REFER TO THE SIMPLE SHEAR STEEL BEAM CONNECTION DETAIL FOR ADDITIONAL CONNECTION REQUIREMENTS AND INFORMATION.
9. UNLESS NOTED OTHERWISE, ALL MOMENT CONNECTIONS SHALL BE MADE WITH FULL PENETRATION WELDS AND SHALL BE DESIGNED TO DEVELOP THE FULL CAPACITY OF THE MEMBER.
10. PROVIDE DOUBLE NUTS AND DOUBLE WASHERS FOR STEEL COLUMN ANCHOR BOLTS TO ALLOW FOR ADJUSTMENT IN BASE PLATE ELEVATION. PROVIDE HIGH STRENGTH, NON SHRINK, NON METALLIC GROUT BELOW BASE PLATES.
11. ALL STRUCTURAL STEEL, EXCEPT EMBEDDED ITEMS, SHALL BE PAINTED WITH ONE SHOP COAT OF RUST INHIBITIVE PAINT. DO NOT PAINT TOP FLANGE OF COMPOSITE STEEL BEAMS OR SURFACE OF COLUMNS TO WHICH SHEAR STUD CONNECTORS WILL BE WELDED.
12. ALL STRUCTURAL STEEL AND CONNECTIONS EXPOSED TO WEATHER SHALL BE HOT DIP GALVANIZED G-90 COATING. COOLING TOWER GRILLAGE SHALL BE GALVANIZED WITH G-135 COATING. ANY DAMAGE TO THE GALVANIC MATERIAL DURING WELDING SHALL BE TOUCHED UP WITH GALVANIZING REPAIR PAINT. HIGH-ZINC-DUST-CONTENT PAINT FOR REGALVANIZING WELDS AND REPAIR PAINTING GALVANIZED STEEL WITH DRY FILM CONSTRAINING NOT LESS THAN 93 PERCENT ZINC DUST BY WEIGHT, AND COMPLYING WITH DOD-P-21035A OR SSPC-PAINT 20.
13. ARCHITECTURALLY EXPOSED STRUCTURAL STEEL (AESS): WHERE NOTED ON PLANS OR BY THE ARCHITECT SHALL CONFORM TO AISC 303, SECTION 10.
14. LEDGER ANGLE FOR FASCIA BRICK SUPPORT SHALL BE INSTALLED SUCH THAT THE SWEEP OR CAMBER DOES NOT EXCEED 1/8 INCH DEVIATION FROM STRAIGHT LINE.

WELDING

1. WELDED CONSTRUCTION SHALL CONFORM TO THE FOLLOWING AMERICAN WELDING SOCIETY STANDARDS:

ITEM	SPECIFICATION
STRUCTURAL STEEL	AWS D1.1
METAL DECK	AWS D1.3
REINFORCING STEEL	AWS D1.4

2. ELECTRODES FOR FIELD AND SHOP WELDS SHALL BE E70XX, U.N.O.
3. ELECTRODES FOR WELDING OF REINFORCING STEEL SHALL BE E80XX.
4. ELECTRODES FOR WELDING OF METAL DECK SHALL CONFORM TO AWS D1.3.
5. WHEN WELDS ARE NOT CALLED OUT ON THE DRAWINGS, THEY ARE MINIMUM SIZE FILLET WELDS PER AWS D1.1. FILLET WELDS NOT SPECIFIED AS TO LENGTH ARE CONTINUOUS.
6. ALL GROOVE WELDS ARE FULL PENETRATION UNLESS NOTED OTHERWISE.

LIGHT GAUGE STEEL FRAMING

1. LIGHT GAUGE METAL STUDS AND TRACKS SHALL BE FORMED FROM STRUCTURAL STEEL MEETING THE REQUIREMENTS OF ASTM A1003, GRADE 33, WITH G-60 ZINC COATING PER ASTM A924 AND SHALL BE MANUFACTURED IN ACCORDANCE WITH ASTM C955.
2. PROVIDE MANUFACTURER'S STANDARD VERTICAL DEFLECTION CLIPS AT NON-LOAD-BEARING WALLS, CAPABLE OF ISOLATING THE WALL FRAMING FROM A MAX. 1 INCH VERTICAL UPWARD OR DOWNWARD MOVEMENT OF THE PRIMARY STRUCTURE.
3. REFER TO ARCHITECTURAL DRAWINGS FOR WALL FRAMING DEPTHS. LIGHT GAUGE WALL FRAMING SHALL MEET THE PERFORMANCE REQUIREMENTS BELOW:

CONDITION	WIND LOAD	DEFLECTION LIMIT
EXTERIOR NON-LOAD-BEARING	PER ASCE 7-16	SPAN/600
INTERIOR NON-LOAD-BEARING	5 PSF	SPAN/240

4. LIGHT GAUGE SUPPLIER SHALL SUBMIT FOR APPROVAL SHOP DRAWINGS INDICATING THE LOCATIONS OF STUDS, TRACKS, BRIDGING, DIAGONAL BRACING, STRAPPING, CLIPS, CLOSURES AND CONNECTORS. SHOP DRAWINGS SHALL INCLUDE CALCULATIONS INDICATING CONFORMANCE TO ALL REQUIREMENTS OF THE BUILDING CODE AND THE ARCHITECTURAL AND STRUCTURAL DRAWINGS, AND SHALL INCLUDE THE SEAL AND SIGNATURE OF A REGISTERED ENGINEER IN THE STATE IN WHICH THE PROJECT IS LOCATED.
5. THE FOLLOWING MINIMUM EXTERIOR STUD GAUGES AND SPACINGS SHALL BE PROVIDED UNLESS THE LIGHT-GAUGE SUPPLIERS ENGINEERED SUBMITTAL INCLUDED CALCULATIONS INDICATING THAT OTHER GAUGES AND SPACINGS MEET THE PERFORMANCE REQUIREMENTS NOTED ABOVE:
   STUDS WITHIN 6 FT OF BUILDING CORNERS: 600S162-54 @ 12" O.C.
   ALL OTHER EXTERIOR STUDS: 600S162-54 @ 16" O.C.

METAL DECK

1. REFER TO DRAWINGS FOR DECK TYPES, THICKNESS AND ATTACHMENT PATTERNS.
2. ALL STEEL DECK SHALL COMPLY WITH STEEL DECK INSTITUTE (SDI) SPECIFICATIONS.
3. THE METAL DECK IS REQUIRED TO ACT AS A DIAPHRAGM. REFER TO THE DIAPHRAGM FASTENER DIAGRAM AND/OR SCHEDULE FOR REQUIRED ATTACHMENT PATTERN.
4. ALL METAL DECKING SHALL BE GALVANIZED WITH G60 COATING CONFORMING TO ASTM 924.
5. COORDINATE METAL DECK LENGTH WITH THE FINAL JOIST AND BEAM LAYOUT, THE FINAL JOIST AND BEAM LAYOUT CAN BE DIFFERENT THAN THAT SHOWN IN THE CONTRACT DRAWINGS DEPENDING ON WHETHER THE JOIST BEARING SEATS ARE BUTTED OR LAPPED. THE JOIST LOCATIONS SHOWN IN THE CONTRACT DRAWINGS DO NOT ACCOUNT FOR THE SMALL DIFFERENCE IN JOIST LOCATION DUE TO THE VARIOUS JOIST BEARING CONDITIONS THAT COULD EXIST IN THE FIELD.
6. SHEET STEEL FOR DECK AND ACCESSORIES SHALL CONFORM TO ASTM A653-94 STRUCTURAL QUALITY WITH A YIELD STRENGTH OF 33 KSI.
7. STEEL DECK ATTACHMENTS INDICATED IN THE DRAWINGS ARE THE MINIMUM REQUIRED FOR DIAPHRAGM DESIGN. DECK SUPPLIER SHALL COORDINATE WITH THE SPECIFICATIONS AND ARCHITECTURAL DRAWINGS FOR ADDITIONAL REQUIREMENTS SUCH AS FACTORY MUTUAL (FM) OR UNDERWRITERS LABORATORY (UL) REQUIREMENTS.
8. THE METAL DECK IS DESIGNED TO BE CONTINUOUS OVER THREE OR MORE SPANS. THE METAL DECK SUPPLIER SHALL ADJUST THE THICKNESS OR GAUGE OF THE DECK AT LOCATIONS WHERE SINGLE OR DOUBLE SPAN CONDITIONS ARE PROVIDED. DECK SHALL BE DESIGNED TO PROVIDE EQUIVALENT OR GREATER LOAD CAPACITY AS THE SPECIFIED DECK SUPPORTED OVER THREE CONTINUOUS SPANS.
9. SUSPENDED CEILINGS, LIGHT FIXTURES, DUCTS, OR OTHER UTILITIES SHALL NOT BE SUPPORTED BY DECKS WITHOUT CONCRETE TOPPING.

Salas O'Brien
salasobrien.com
Dallas
12655 North Central Expressway, Suite 720
Dallas, TX 75243

Registration: F-4111
Project No: 2450-70132-00

NELSON
Nelco Architecture, Inc.

12400 Coit Road, Suite 510
Dallas, TX. 75251
Phone: (972) 644-8830
Fax: (972) 644-8496

Client Representative:
CUSHMAN & WAKEFIELD
Attn: Paul Hurchanik
Tel: 720.582.6073
Email:
paul.hurchanik@cushwake.com

Architect:
Nelco Architecture, Inc.
Attn: Harry Koutsis
Tel: 310.693.5271
Email: hkoutsis@nelsonww.com

AOR Contact
Robert J. Sullivan Jr.
Tel: 216.830.1561
Email:rsullivan@nelsonww.com
License No. AR-987677

Civil:
LANGAN
Attn: Ben Henry
Tel: (817) 328-3217
Email: bhenry@langan.com

Structural:
Salas O'Brien
Attn: Julie Bolding
Tel: (469) 782-9753
Email: julie.bolding@salasobrien.com

MEP:
Salas O'Brien
Attn: Carly Wood
Tel: 727-804-7626
Email: carly.wood@salasobrien.com

Description:	No:	Date:
Issue for Permit		10/04/2024
CD_F		11/01/2024
90% CD	1	08/07/2025
IFP		08/26/2025

BANK OF AMERICA
Broomfield

CO1-111
NWC Hwy 7 and Palisade Pkwy
Broomfield CO, 80023

PROPERTY ID:	CO1-111
NSRP VERSION:	2.0
BULLETIN:	2-2024

STRUCTURAL INFORMATION

COLORADO LICENSED
SCOTT R. ARMSTRONG
36989
PROFESSIONAL ENGINEER

08/26/2025

NORTH

0 4' 8' 16'

Project No: 23.0002261.000 Reviewed By: AR

S1.11

8/26/2025 12:41:22 PM Autodesk Docs://BofA FCI_0_Broomfield CO\1-111\2450-70132-00 BofA Broomfield CO_R23.rvt

Salas O'Brien
salasobrien.com
Dallas
12655 North Central Expressway, Suite 720
Dallas, TX 75243

Registration: F-4111
Project No: 2450-70132-00

NELSON
Nelco Architecture, Inc.

12400 Coit Road, Suite 510
Dallas, TX. 75251
Phone: (972) 644-8830
Fax: (972) 644-8496

Client Representative:
CUSHMAN & WAKEFIELD
Attn: Paul Hurchanik
Tel: 720.582.6073
Email:
paul.hurchanik@cushwake.com

Architect:
Nelco Architecture, Inc.
Attn: Harry Koutsis
Tel: 310.693.5271
Email: hkoutsis@nelsonww.com

AOR Contact
Robert J. Sullivan Jr.
Tel: 216.830.1561
Email:rsullivan@nelsonww.com
License No. AR-987677

Civil:
LANGAN
Attn: Ben Henry
Tel: (817) 328-3217
Email: bhenry@langan.com

Structural:
Salas O'Brien
Attn: Julie Bolding
Tel: (469) 782-9753
Email: julie.bolding@salasobrien.com

MEP:
Salas O'Brien
Attn: Carly Wood
Tel: 727-804-7626
Email: carly.wood@salasobrien.com

Description:	No:	Date:
Issue for Permit		10/04/2024
CD_F		11/01/2024
90% CD	1	08/07/2025
IFP		08/26/2025

MAP VALUE REPRESENTS MAX TOTAL AT HIGH SIDE OF DRIFT (FLAT + DRIFT).



NOTE: THIS LOADING IS TO BE USED FOR THE DRIFT LOADING CONDITION. REF. GSN FOR BALANCED CONDITION LOADING.

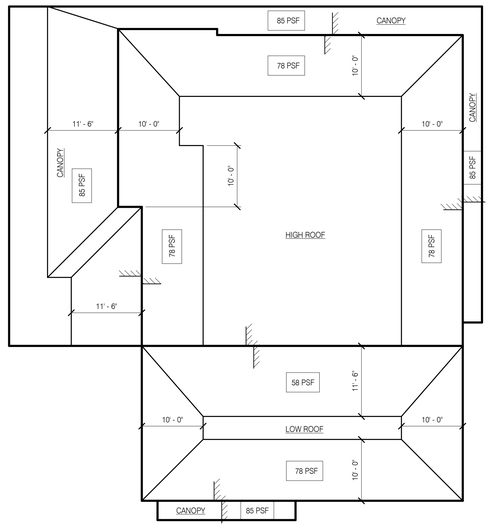

PLAN NORTH

1 SNOW DRIFT LOAD MAP 1" = 10'-0"

NET UPLIFT (ASD)

ZONE	SUCTION
1	-17.0 PSF
2	-25.0 PSF
3	-36.0 PSF

NOTES:
1. VALUES BASED ON 10 SF
2. NET UPLIFT (ASD) = 0.6(D) + 0.6(W)

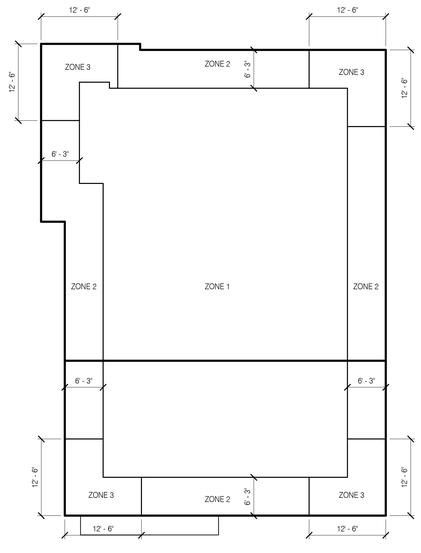

PLAN NORTH

2 WIND SUCTION LOAD MAP 1" = 10'-0"

1 BUILDING FOOTPRINT MIRRORED NORTH-SOUTH

0 4' 8' 16'

NORTH

BANK OF AMERICA
Broomfield

CO1-111
NWC Hwy 7 and Palisade Pkwy
Broomfield CO, 80023

PROPERTY ID:	CO1-111
NSRP VERSION:	2.0
BULLETIN:	2-2024

LOAD MAPS

COLORADO LICENSED SCOTT A. ARMSTRONG 36989 PROFESSIONAL ENGINEER

08/26/2025

Project No: 23.0002261.000 Reviewed By: AR

S1.14

8/26/2025 12:41:22 PM Autodesk Docs://BofA FCI_0_Broomfield CO1-111/2450-70132-00 BofA Broomfield CO_R23.rvt

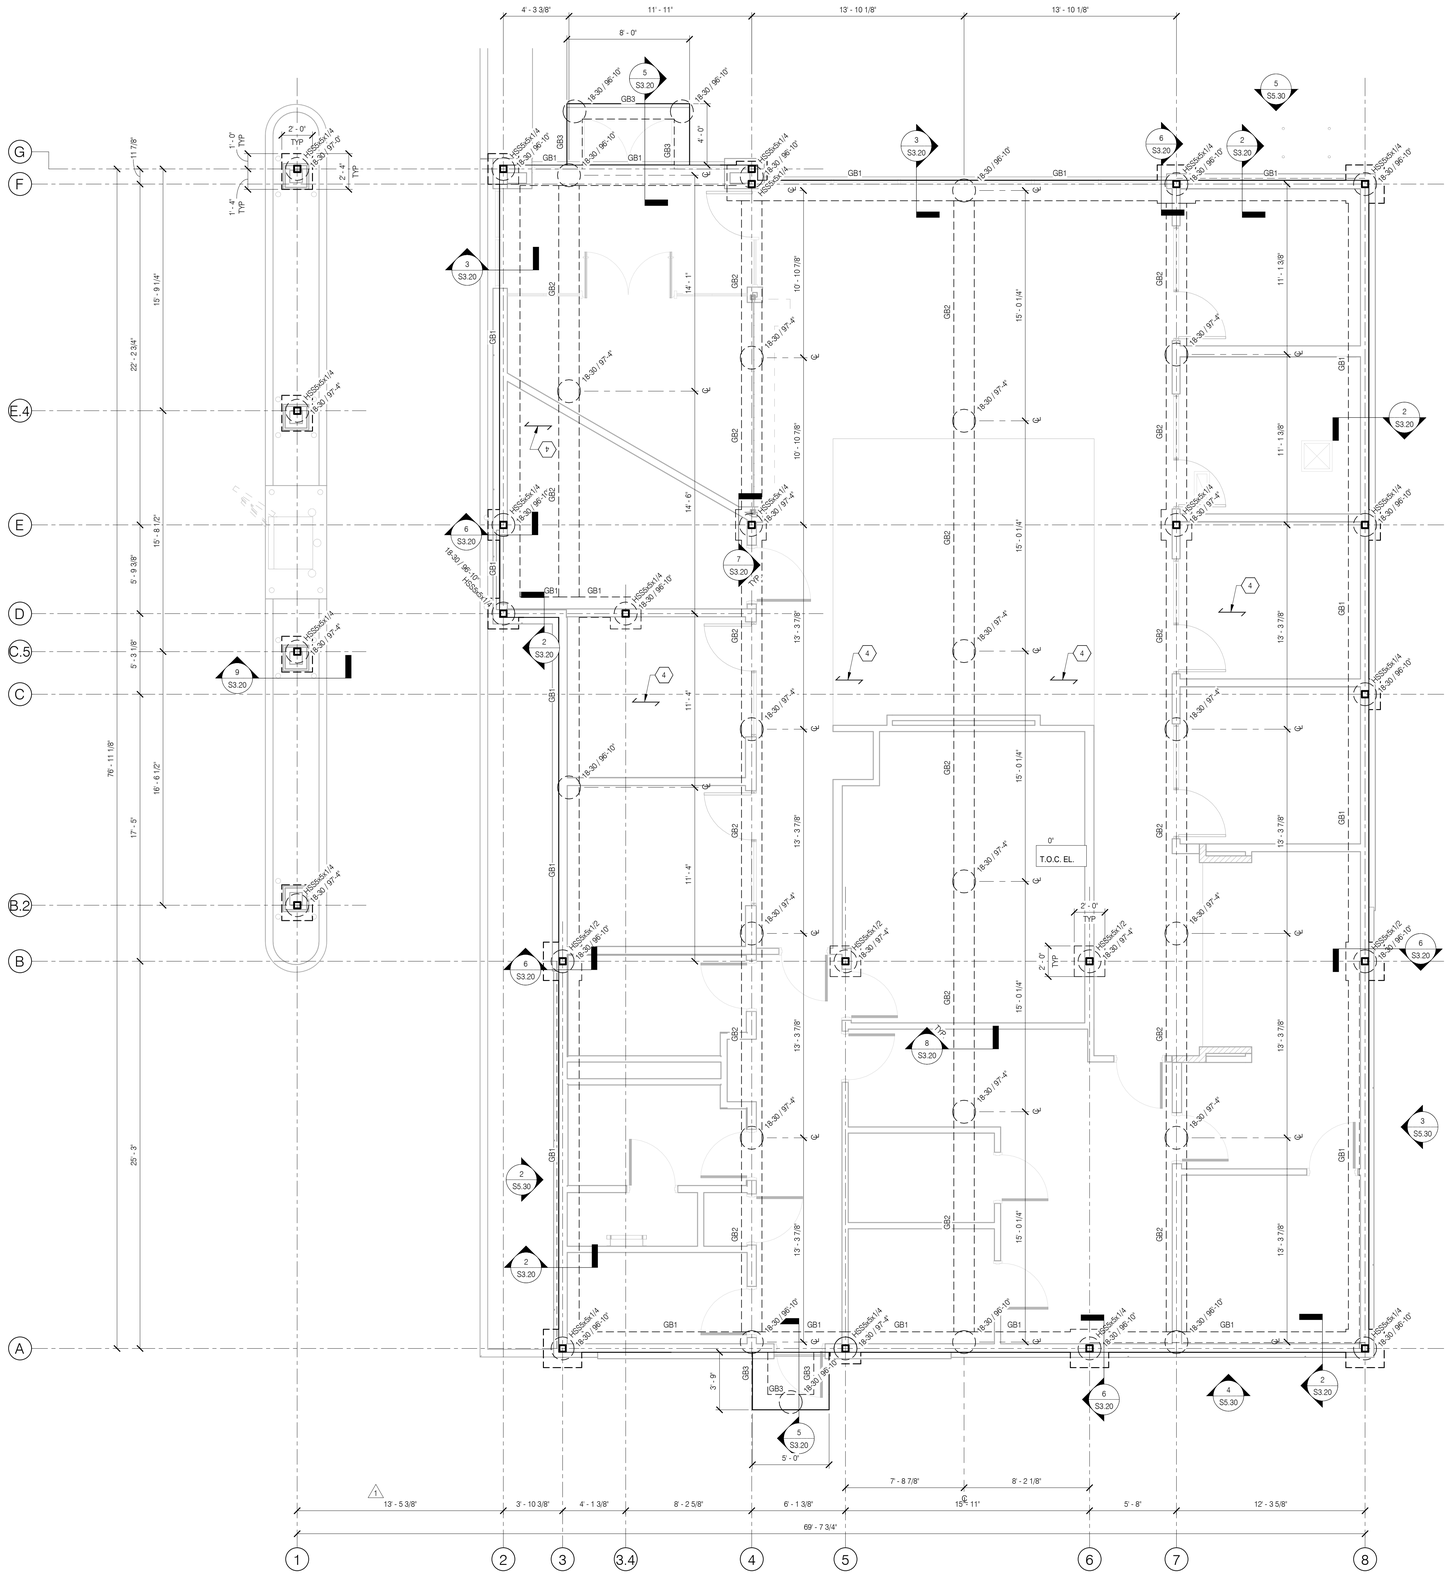

1 FOUNDATION PLAN — 1/4" = 1'-0"

PLAN NOTES

1. FINISHED FLOOR ELEVATION = T.O. CONCRETE SLAB = EL. 100'-0" UNLESS NOTED OTHERWISE. REFER TO ARCHITECTURAL OR CIVIL DRAWINGS FOR DATUM ELEVATION.
2. COORDINATE ALL WORK THIS SHEET WITH THE STRUCTURAL NOTES ON SHEET S1 SERIES AND WITH THE PROJECT SPECIFICATIONS.
3. REFER TO SHEET S3 SERIES FOR FOUNDATION DETAILS.
4. ELEVATED CONCRETE FLOOR SLAB:
   - SLAB THICKNESS: 8 inches
   - CONCRETE SPECIFICATION: REFER TO S1.10 AND SPECIFICATIONS
   - SLAB REINFORCEMENT: REF. 10/S3.10 LAPPED AT SPLICES REF. DETAIL 9/S3.10
   - NOTE: DO NOT SAWCUT CONTROL JOINTS IN STRUCTURAL SLAB.
5. REFER SHEET S5.10 FOR BASE PLATE DETAILS.
6. UNLESS NOTED OTHERWISE, CENTER FOOTING ON COLUMN CENTERLINES. IF NO COLUMN IS PRESENT, CENTER FOOTING ON THE GRADE BEAM.
7. G.C. TO VERIFY GRADE BEAM DEPTH MEETS MINIMUM EMBEDMENT OF X' BELOW LOWEST EXTERIOR ADJACENT GRADE AT ALL LOCATIONS PER GEO TECH REPORT.

GRADE BEAM SCHEDULE

MARK	WIDTH	DEPTH	REINFORCEMENT TOP & BOTTOM	REINFORCEMENT MID.	STIRRUPS	NOTES
GB1	16"	30"	3-#8	--	#3 @ 12" O.C.	
GB2	16"	24"	3-#7	--	#3 @ 10" O.C.	
GB3	12"	30"	3-#5	--	#3 @ 12" O.C.	

1 BUILDING FOOTPRINT MIRRORED NORTH-SOUTH

0 4' 8' 16' NORTH

Salas O'Brien
salasobrien.com
Dallas
12655 North Central Expressway, Suite 720
Dallas, TX 75243

Registration: F-4111
Project No: 2450-70132-00

NELSON
Nelco Architecture, Inc.

12400 Coit Road, Suite 510
Dallas, TX. 75251
Phone: (972) 644-8830
Fax: (972) 644-8496

Client Representative:
CUSHMAN & WAKEFIELD
Attn: Paul Hurchanik
Tel: 720.582.6073
Email: paul.hurchanik@cushwake.com

Architect:
Nelco Architecture, Inc.
Attn: Harry Koutsis
Tel: 310.693.5271
Email: hkoutsis@nelsonww.com

AOR Contact
Robert J. Sullivan Jr.
Tel: 216.830.1561
Email:rsullivan@nelsonww.com
License No. AR-987677

Civil:
LANGAN
Attn: Ben Henry
Tel: (817) 328-3217
Email: bhenry@langan.com

Structural:
Salas O'Brien
Attn: Julie Bolding
Tel: (469) 782-9753
Email: julie.bolding@salasobrien.com

MEP:
Salas O'Brien
Attn: Carly Wood
Tel: 727-804-7626
Email: carly.wood@salasobrien.com

Description:	No:	Date:
Issue for Permit		10/04/2024
CD_F		11/01/2024
90% CD	1	08/07/2025
IFP		08/26/2025

BANK OF AMERICA
Broomfield

CO1-111
NWC Hwy 7 and Palisade Pkwy
Broomfield CO, 80023

PROPERTY ID: CO1-111
NSRP VERSION: 2.0
BULLETIN: 2-2024

FOUNDATION PLAN

COLORADO LICENSED SCOTT A. ARMSTRONG 36989 PROFESSIONAL ENGINEER

08/26/2025

Project No: 23.0002261.000 Reviewed By: AR

S2.10

8/26/2025 12:41:23 PM Autodesk Docs://BofA FC2.0_Broomfield CO1-111/2450-70132-00 BofA Broomfield CO_R23.rvt

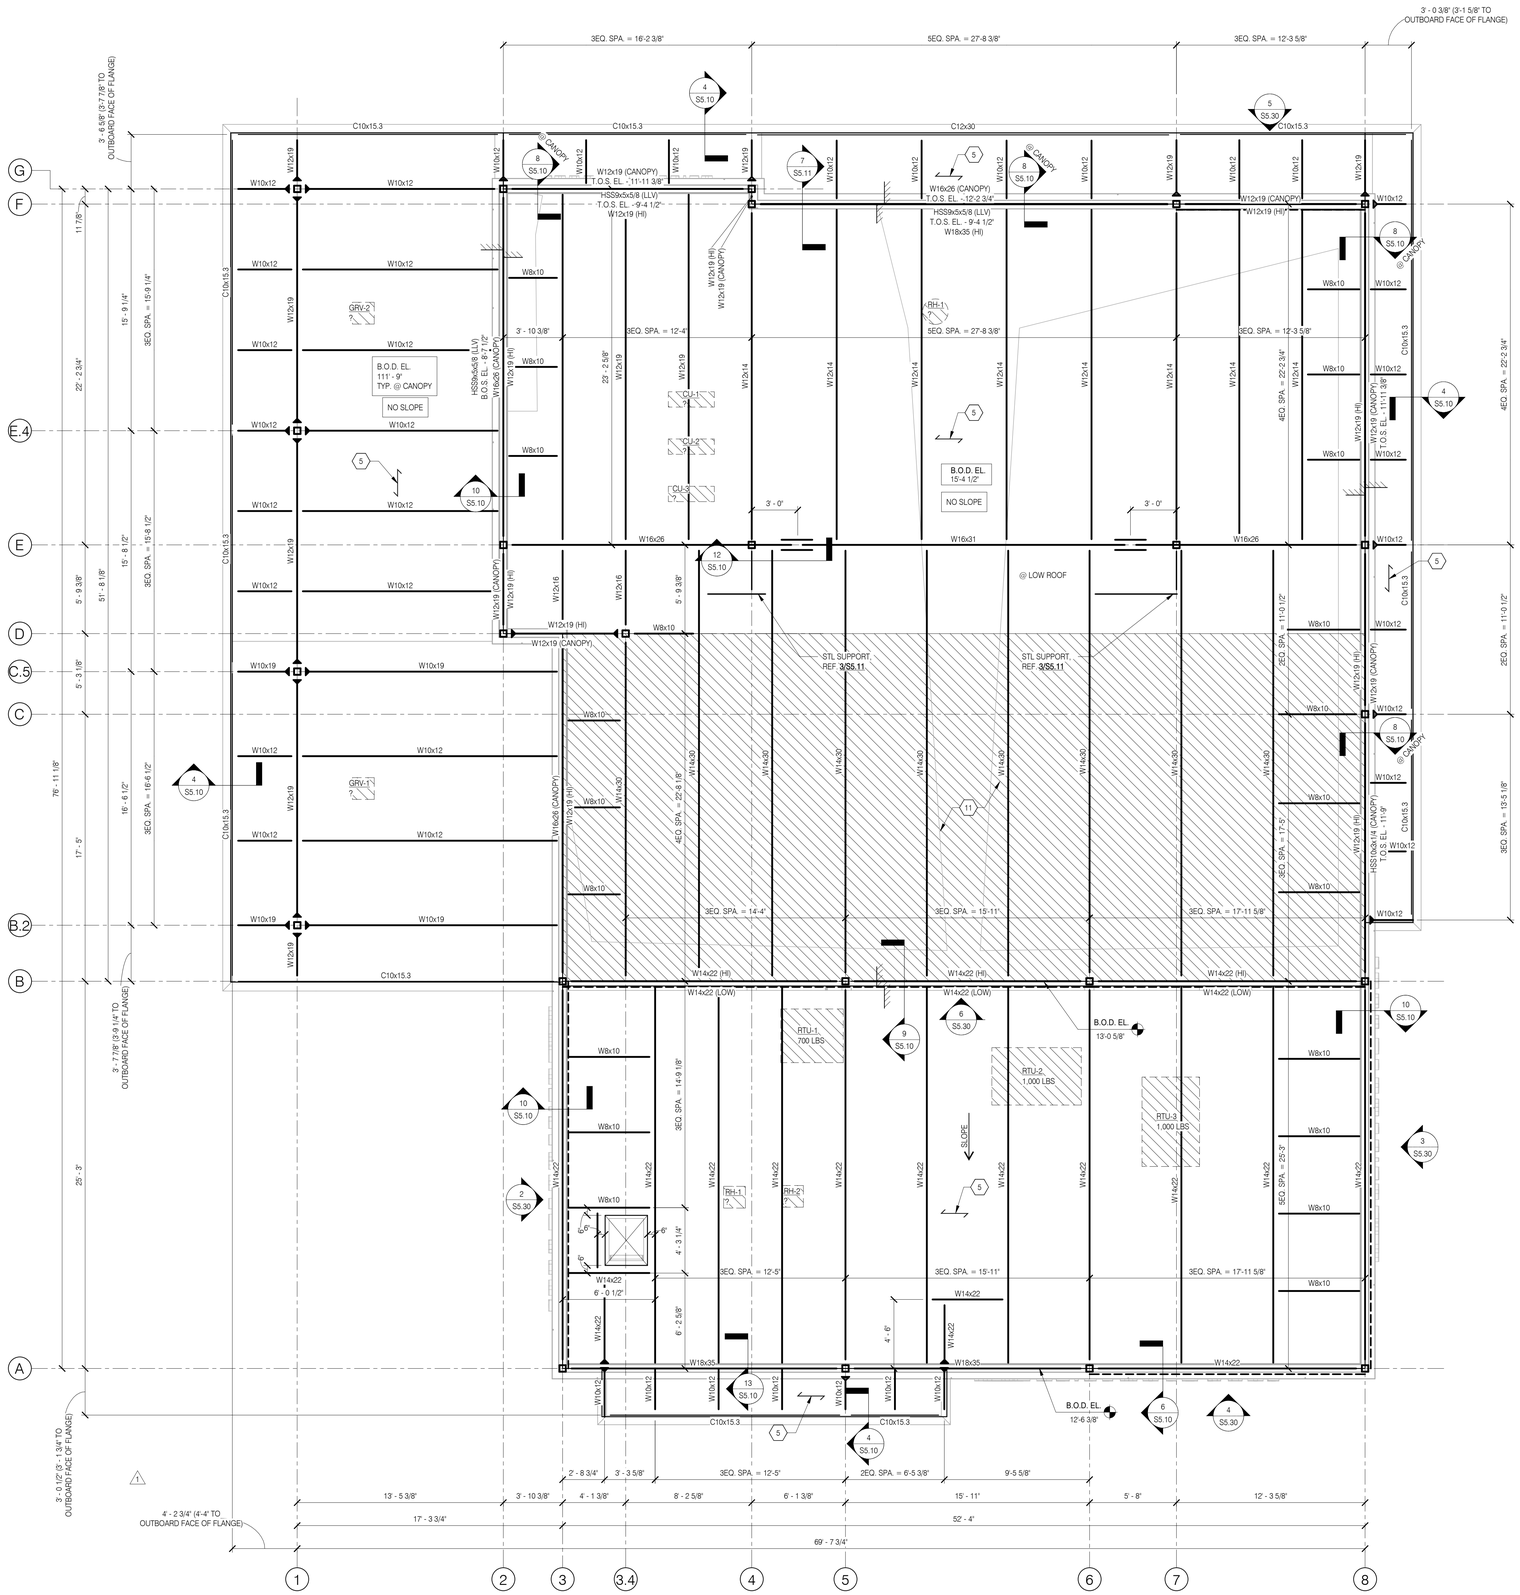

PLAN NOTES

1. T.O. STEEL ELEVATIONS REF. PLAN. REFER TO ARCHITECTURAL OR CIVIL DRAWINGS FOR DATUM ELEVATION.
2. COORDINATE ALL WORK THIS SHEET WITH THE STRUCTURAL NOTES ON SHEET AND WITH THE PROJECT SPECIFICATIONS.
3. REFER TO THE **S5** SERIES SHEETS FOR FRAMING DETAILS.
4. REFER TO FOUNDATION PLANS FOR COLUMN & BASEPLATE SIZES.
5. 1 1/2", 22 GA. TYPE B ROOF DECK. ATTACH TO STEEL SUPPORTS W/ THE FOLLOWING POWDER ACTUATED FASTENERS (PAF):

   SUPPORTS THINNER THAN 3/8"
   FASTENER: HILTI X-HSN 24 PAF
   FASTENER PATTERN: 36/4
   SIDELAP: HILTI SLC SIDELAP SCREWS @ 12" O.C.

   SUPPORTS 3/8" THICK OR THICKER
   FASTENER: HILTI X-ENP-19-L-15 PAF
   FASTENER PATTERN: 36/4
   SIDELAP: HILTI SLC SIDELAP SCREWS @ 12" O.C.
6. BRACE COLUMNS THAT DO NOT HAVE BEAMS/JOISTS FRAMING INTO THEM IN BOTH PERPENDICULAR DIRECTIONS. REF. **3/S5.11** & **4/S5.11**.
7. '(XXk)-XXk)' INDICATES THE DOWNWARD (+) AND UPWARD (-) REACTIONS WHICH INCLUDES DL, LL, & WL. 'DRAG STRUT (XXk)' INDICATES THE AXIAL LOAD IN THE BEAM OR JOIST DUE TO WIND LOAD. ALL VALUES ARE SERVICE LEVEL LOADS.
8. FOR CLARITY, DETAILS MAY SHOW ONLY ONE SIDE OF FRAMING CONDITION.
9. FOR CLARITY, ALL ROOF OPENINGS MAY NOT BE SHOWN ON ROOF FRAMING PLAN. FOR EXACT SIZE, NUMBER, AND LOCATION OF OPENINGS, SEE ARCHITECTURAL, MECHANICAL, PLUMBING, AND ELECTRICAL DRAWINGS. FOR FRAMING AT OPENINGS, SEE TYPICAL DETAILS.
10. EQUIPMENT WEIGHTS SHOWN AS XX.# WHERE XX IS IN POUNDS. WEIGHT SHOWN INCLUDES ALL INERTIA BASES AND/OR HOUSEKEEPING PADS. IF WEIGHT OF ACTUAL EQUIPMENT IS GREATER THAN SHOWN, OR ADDITIONAL EQUIPMENT NOT SHOWN EXISTS, NOTIFY STRUCTURAL ENGINEER IMMEDIATELY.
11. HATCH REPRESENTS SOLAR PANEL ZONE FOR FUTURE. REFER TO S1.10 FOR SOLAR PANEL DESIGN LOADING. SOLAR BALLASTED SYSTEM SHALL NOT BE PERMITTED.

1 ROOF FRAMING PLAN — 1/4" = 1'-0"

PLAN NORTH

1 BUILDING FOOTPRINT MIRRORED NORTH-SOUTH

0 4' 8' 16'

NORTH

Salas O'Brien
salasobrien.com
Dallas
12655 North Central Expressway, Suite 720
Dallas, TX 75243

Registration: F-4111
Project No: 2450-70132-00

NELSON
Nelco Architecture, Inc.

12400 Coit Road, Suite 510
Dallas, TX. 75251
Phone: (972) 644-8830
Fax: (972) 644-8496

Client Representative:
CUSHMAN & WAKEFIELD
Attn: Paul Hurchanik
Tel: 720.582.6073
Email: paul.hurchanik@cushwake.com

Architect:
Nelco Architecture, Inc.
Attn: Harry Koutsis
Tel: 310.693.5271
Email: hkoutsis@nelsonww.com

AOR Contact
Robert J. Sullivan Jr.
Tel: 216.830.1561
Email:rsullivan@nelsonww.com
License No. AR-987677

Civil:
LANGAN
Attn: Ben Henry
Tel: (817) 328-3217
Email: bhenry@langan.com

Structural:
Salas O'Brien
Attn: Julie Bolding
Tel: (469) 782-9753
Email: julie.bolding@salasobrien.com

MEP:
Salas O'Brien
Attn: Carly Wood
Tel: 727-804-7626
Email: carly.wood@salasobrien.com

Description:	No:	Date:
Issue for Permit		10/04/2024
CD_F		11/01/2024
90% CD	1	08/07/2025
IFP		08/26/2025

BANK OF AMERICA
Broomfield

CO1-111
NWC Hwy 7 and Palisade Pkwy
Broomfield CO, 80023

PROPERTY ID:	CO1-111
NSRP VERSION:	2.0
BULLETIN:	2-2024

ROOF FRAMING PLAN

COLORADO LICENSED SCOTT R. ARMSTRONG 36989 PROFESSIONAL ENGINEER

08/26/2025

Project No: 23.0002261.000 Reviewed By: AR

S2.20

8/26/2025 12:41:24 PM Autodesk Docs://BofA FC2_0_Broomfield CO1-111/2450-70132-00 BofA Broomfield CO_R23.rvt

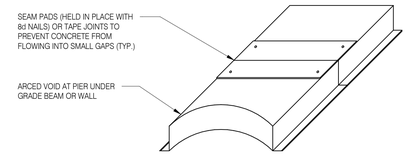

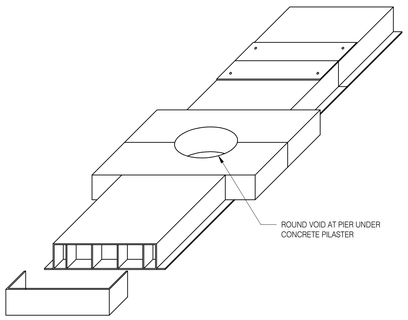

NOTES
1. LONGITUDINAL (MAIN) REINF. SHALL BE PLACED PARALLEL TO SPAN.
2. REFER TO PLAN FOR SLAB SPAN DIRECTION.
3. TRANSVERSE (SHRINKAGE) REINF. SHALL BE PLACED PERPENDICULAR TO THE SLAB SPAN DIRECTION.
4. REINF. CLEAR COVERAGE (Cc) SHALL BE AS FOLLOWS:

	TOP	BOTTOM
INTERIOR:	1"	1 1/2"
EXTERIOR:	1 1/2"	1 1/2"

ONE WAY SLAB LEGEND

ONE WAY SLAB SCHEDULE				
SLAB MARK	SLAB THICKNESS (IN)	LONGITUDINAL (MAIN) REINF.		TRANSVERSE REINF. (TOP & BOT.)
		TOP REINF.	BOT. REINF.	
1	8"	#6 BARS @ 16" O.C.	#6 BARS @ 16" O.C.	#4 BARS @ 18" O.C.

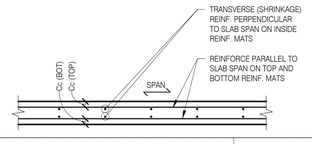

10 TYPICAL ONE WAY SLAB DETAIL — NTS

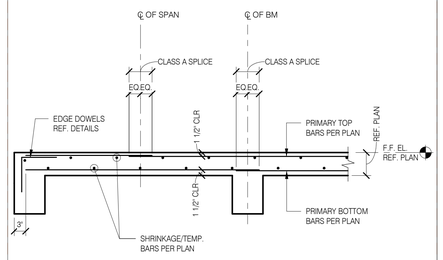

9 TYP. ONE-WAY SLAB REINF. DETAIL — NTS

NOTE
BRACE WALL UNTIL CONCRETE REACHES 75% OF f'c.

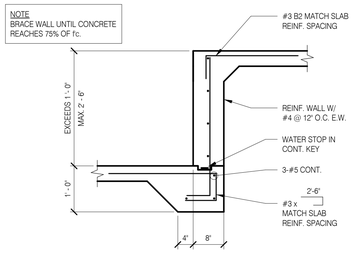

G. TYPICAL SLAB DROP - BTWN 1'-0" AND 5'-0"

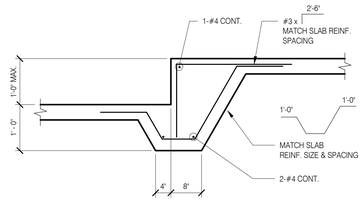

F. TYPICAL SLAB DROP - 1'-0" OR LESS

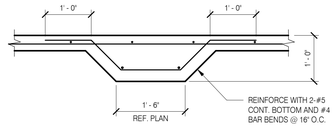

E. TYPICAL THICKENED SLAB

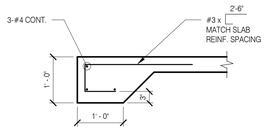

NOTES
1. GRADE SHALL BE SMOOTH, EVEN, LEVEL & DRY BEFORE INSTALLING VOID BOXES. REFER TO VOID DETAILS FOR APPLICATION.
2. VOID CAN BE WOOD-FORMED IN LIEU OF CARDBOARD FORMED AT CONTRACTORS OPTION.



8 TYP. VOID FORMS AT PIERS — NTS

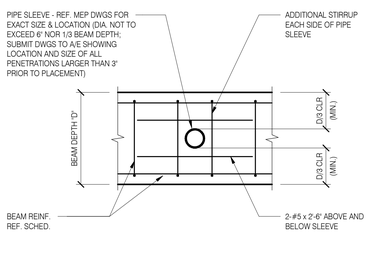

7 TYP. HORIZ. GR. BM PENETRATION — NTS

D. TYPICAL THICKENED SLAB EDGE

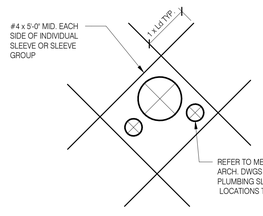

C. TYPICAL REINFORCEMENT AT SLAB PENETRATIONS



B. TYPICAL REINF. AT RE-ENTRANT CORNERS

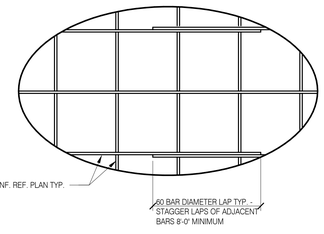

A. TYPICAL REINFORCEMENT

6 TYP. SLAB-ON-GROUND DETAILS — NTS

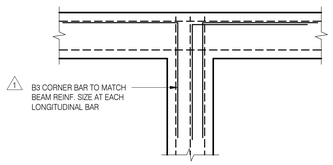

C. GRADE BEAM INTERSECTION

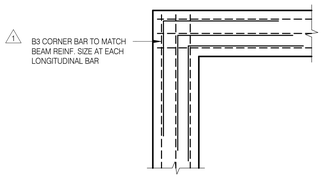

B. GRADE BEAM CORNER

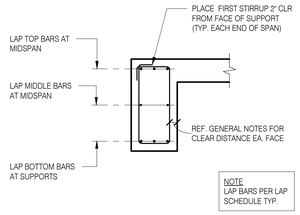

NOTE
LAP BARS PER LAP SCHEDULE TYP.

A. TYPICAL SECTION

5 TYP. GRADE BEAM REINF. DETAIL — NTS

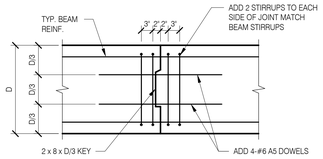

NOTE
CONSTRUCTION JOINT SHALL BE LOCATED IN THE MIDDLE THIRD OF THE SPAN BETWEEN SUPPORTS. DO NOT LOCATE A CONSTRUCTION JOINT IN AN END SPAN

3 TYP. BEAM CONSTR. JOINT — NTS

NOTATION



REF. LAP SPLICE SCHED. FOR ADDITIONAL INFORMATION

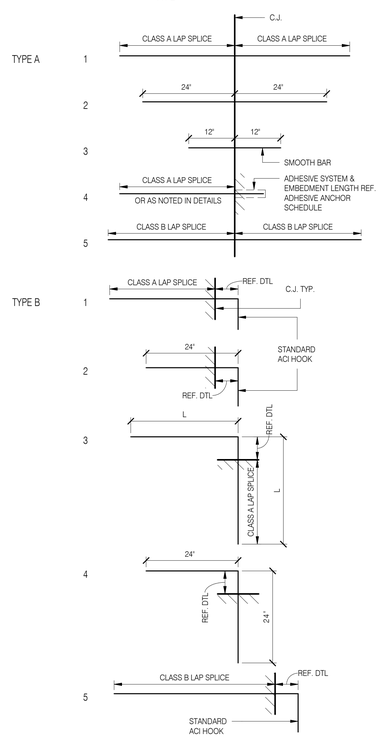

4 REBAR DOWEL SCHEDULE — NTS



ADHESIVE ANCHORS	
DIAMETER SIZE	EMBEDMENT
3/8"	3 1/2"
1/2"	4 1/2"
5/8"	5 5/8"
3/4"	6 3/4"
7/8"	7 7/8"
1"	9"

ADHESIVE DOWELS	
REBAR SIZE	EMBEDMENT
#3	3 3/8"
#4	4 1/2"
#5	5 5/8"
#6	6 3/4"
#7	7 7/8"
#8	9"

NOTES
1. ADHESIVE TO BE ONE OF THE FOLLOWING PRODUCTS:
   - HILTI HIT - HY 200 SAFE SET
   - SIMPSON SET - 3G
2. ANCHOR RODS SHALL BE ONE OF FOLLOWING:
   - FOR HILTI SYSTEM: HILTI HAS RODS OR HIT-Z RODS
   - FOR SIMPSON SYSTEM: A36 THREADED RODS
3. FOLLOW MANUFACTURER'S RECOMMENDATIONS FOR INSTALLATION.
4. EMBEDMENTS SHOWN ARE TYPICAL FOR EACH ANCHOR SIZE U.N.O.
5. SPECIAL INSPECTIONS ARE REQUIRED FOR ADHESIVE ANCHORS.

2 ADH. ANCHOR & DWL SCHEDULE — NTS

fc	SPLICE CLASS	BAR SIZE								
		#3	#4	#5	#6	#7	#8	#9	#10	#11
psi	fy	60ksi	60ksi	60ksi	60ksi	60ksi	60ksi	60ksi	60ksi	60ksi
3000	CLASS A 1.0 Ld	17	22	28	33	48	55	62	70	78
	CLASS B 1.3 Ld	22	29	36	43	63	72	81	91	101
4000	CLASS A 1.0 Ld	15	19	24	29	42	48	54	61	67
	CLASS B 1.3 Ld	19	25	31	37	54	62	70	79	87
5000	CLASS A 1.0 Ld	13	17	22	26	38	43	48	54	60
	CLASS B 1.3 Ld	17	23	28	34	49	56	63	71	78
6000	CLASS A 1.0 Ld	12	16	20	24	34	39	44	50	55
	CLASS B 1.3 Ld	16	21	26	31	45	51	57	64	71
7000	CLASS A 1.0 Ld	12	15	18	22	32	36	41	46	51
	CLASS B 1.3 Ld	14	19	24	28	41	47	53	60	66

NOTES
1. TENSION DEVELOPMENT LENGTH = Ld. LENGTHS LISTED IN TABLE ARE IN INCHES.
2. USE THE ABOVE DEVELOPMENT LENGTH AND LAP SPLICE TABLE FOR BEAMS, JOISTS, COLUMNS, WALLS, SLABS, ETC. WHEN THE CLEAR SPACE BETWEEN BARS IS GREATER THAN OR EQUAL TO TWO BAR DIAMETERS AND CLEAR COVER IS NOT LESS THAN ONE BAR DIAMETER.
3. WHEN THE CLEAR SPACE BETWEEN BARS IS LESS THAN TWO BAR DIAMETERS, MULTIPLY DEVELOPMENT AND SPLICE LENGTHS LISTED IN TABLE BY 1.50.
4. PROVIDE LAP SPLICE LENGTH BASED ON THE LARGER BAR BEING LAPPED WHEN BARS OF DIFFERENT SIZES ARE LAP SPLICED.
5. FOR TOP BARS, MULTIPLY THE DEVELOPMENT AND SPLICE LENGTHS BY 1.3. TOP BARS ARE DEFINED AS HORIZONTAL REINFORCEMENT SO PLACED THAT MORE THAN 12 INCHES OF FRESH CONCRETE IS CAST IN THE MEMBER BELOW THE BAR.

1 TENSION LAP SPLICE SCHEDULE — NTS

Salas O'Brien
salasobrien.com
Dallas
12655 North Central Expressway, Suite 720
Dallas, TX 75243

Registration: F-4111
Project No: 2450-70132-00

NELSON
Nelco Architecture, Inc.

12400 Coit Road, Suite 510
Dallas, TX. 75251
Phone: (972) 644-8830
Fax: (972) 644-8496

Client Representative:
CUSHMAN & WAKEFIELD
Attn: Paul Hurchanik
Tel: 720.582.6073
Email: paul.hurchanik@cushwake.com

Architect:
Nelco Architecture, Inc.
Attn: Harry Koutsis
Tel: 310.693.5271
Email: hkoutsis@nelsonww.com

AOR Contact
Robert J. Sullivan Jr.
Tel: 216.830.1561
Email:rsullivan@nelsonww.com
License No. AR-987677

Civil:
LANGAN
Attn: Ben Henry
Tel: (817) 328-3217
Email: bhenry@langan.com

Structural:
Salas O'Brien
Attn: Julie Bolding
Tel: (469) 782-9753
Email: julie.bolding@salasobrien.com

MEP:
Salas O'Brien
Attn: Carly Wood
Tel: 727-804-7626
Email: carly.wood@salasobrien.com

Description:	No:	Date:
Issue for Permit		10/04/2024
CD_F		11/01/2024
90% CD	1	08/07/2025
IFP		08/26/2025

BANK OF AMERICA
Broomfield

CO1-111
NWC Hwy 7 and Palisade Pkwy
Broomfield CO, 80023

PROPERTY ID: CO1-111
NSRP VERSION: 2.0
BULLETIN: 2-2024

TYPICAL CONCRETE DETAILS

COLORADO LICENSED SCOTT A. ARMSTRONG 36989 PROFESSIONAL ENGINEER
08/26/2025

Project No: 23.0002261.000 Reviewed By: AR

S3.10

8/26/2025 12:41:25 PM Autodesk Docs://BofA FCI2.0_Broomfield CO1-111/2450-70132-00 BofA Broomfield CO_R23.rvt

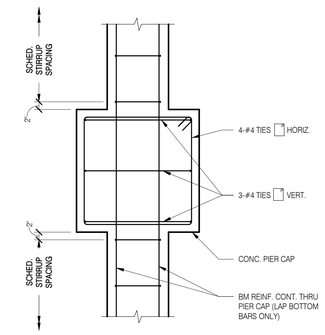

B. REBAR LAYOUT

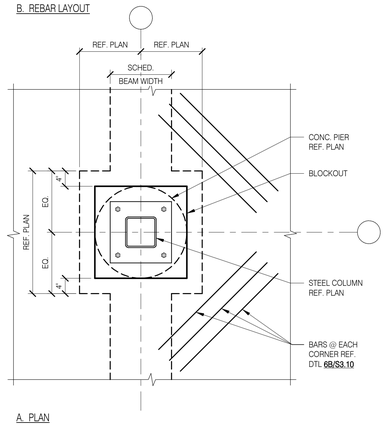

A. PLAN

13 PIER CAP - SS - INTERIOR — 3/4" = 1'-0"

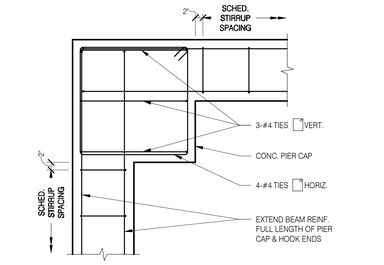

B. REBAR LAYOUT

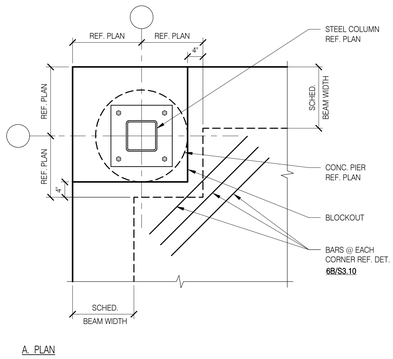

A. PLAN

11 TYP. CORNER PIER CAP — NTS

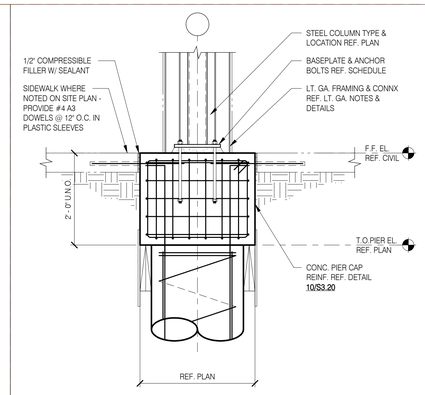

9 CANOPY FOUNDATION DETAIL — NTS

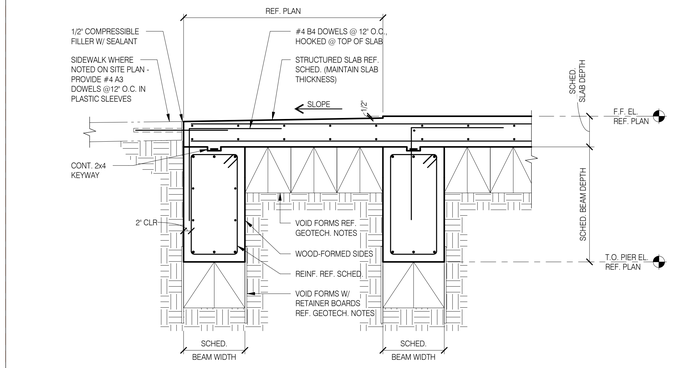

5 TYPICAL STRUCTURAL STOOP — NTS

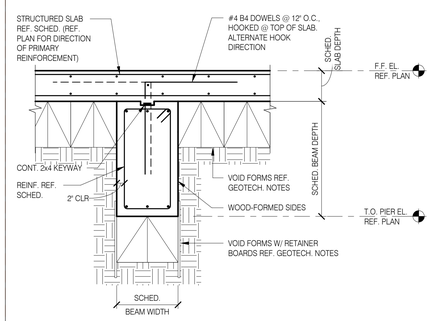

8 TYP. INTERIOR GRADE BEAM — NTS

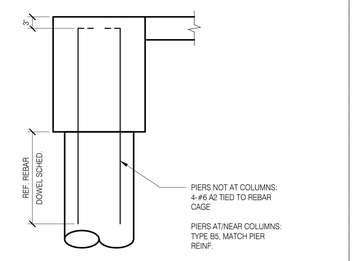

TOP OF PIER AT BEAM / PIER CAP / PILASTER / WALL

4 TYP. TOP OF PIER DETAIL — 3/4" = 1'-0"

REF. 4/S3.20 FOR ADDL INFO.

STRAIGHT SHAFT PIER SCHEDULE			
SHAFT DIA.	VERT. REINF.	TIE SIZE	TIE PITCH
18	8-#6	#3	12"

C. STRAIGHT SHAFT PIER SCHEDLE

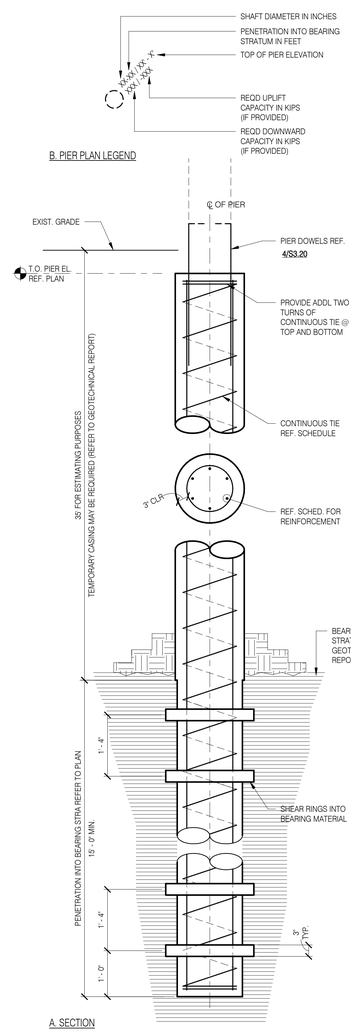

B. PIER PLAN LEGEND

A. SECTION

1 TYPICAL DRILLED PIER DETAILS — NTS

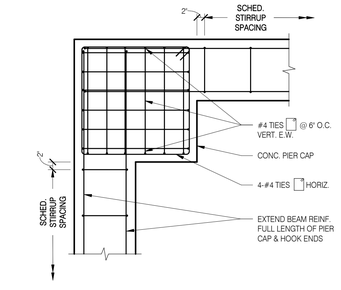

B. REBAR LAYOUT

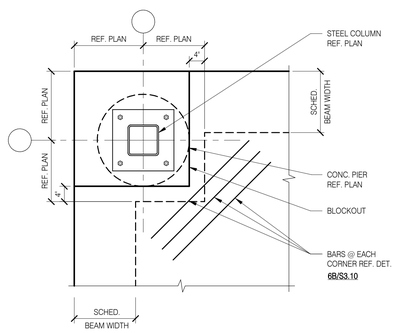

A. PLAN

12 COR. PIER CAP @ BRACE FRAME — NTS

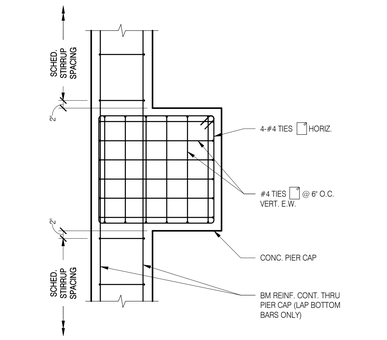

B. REBAR LAYOUT

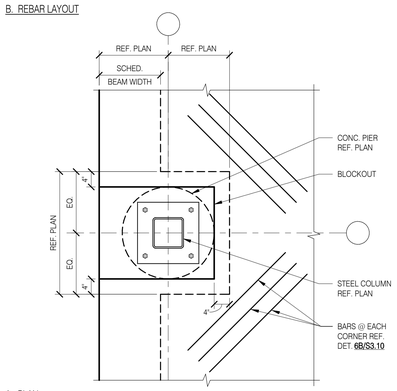

A. PLAN

10 EXT. PIER CAP @ BRACE FRAME — NTS

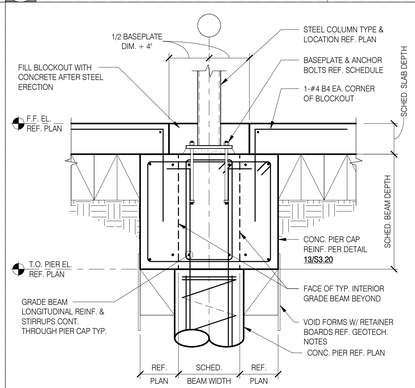

7 TYP. GRADE BEAM AT INTER. COL. — 3/4" = 1'-0"

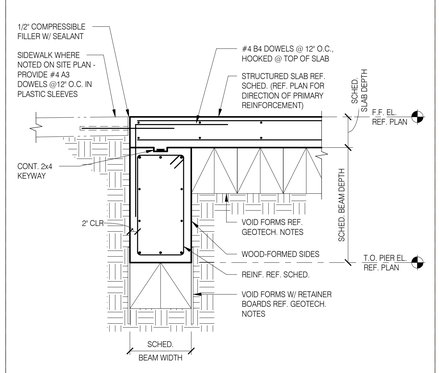

3 TYP. GRADE BEAM @ ENTRY — NTS

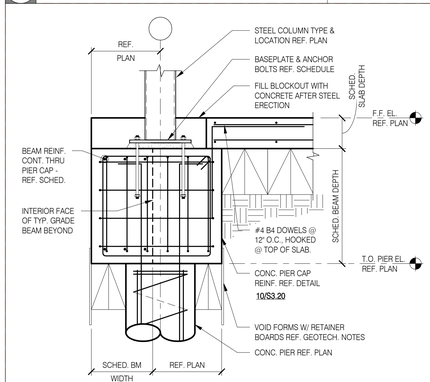

6 TYP. PERIM. GR. BM @ COLUMN — NTS

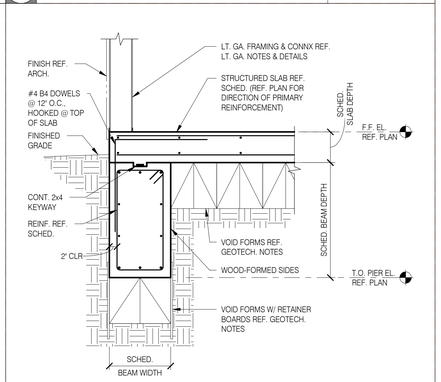

2 TYP. PERIMETER GRADE BEAM — NTS

Salas O'Brien
salasobrien.com
Dallas
12655 North Central Expressway, Suite 720
Dallas, TX 75243

Registration: F-4111
Project No: 2450-70132-00

NELSON
Nelco Architecture, Inc.

12400 Coit Road, Suite 510
Dallas, TX. 75251
Phone: (972) 644-8830
Fax: (972) 644-8496

Client Representative:
CUSHMAN & WAKEFIELD
Attn: Paul Hurchanik
Tel: 720.582.6073
Email: paul.hurchanik@cushwake.com

Architect:
Nelco Architecture, Inc.
Attn: Harry Koutsis
Tel: 310.693.5271
Email: hkoutsis@nelsonww.com

AOR Contact
Robert J. Sullivan Jr.
Tel: 216.830.1561
Email:rsullivan@nelsonww.com
License No. AR-987677

Civil:
LANGAN
Attn: Ben Henry
Tel: (817) 328-3217
Email: bhenry@langan.com

Structural:
Salas O'Brien
Attn: Julie Bolding
Tel: (469) 782-9753
Email: julie.bolding@salasobrien.com

MEP:
Salas O'Brien
Attn: Carly Wood
Tel: 727-804-7626
Email: carly.wood@salasobrien.com

Description:	No:	Date:
Issue for Permit		10/04/2024
CD_F		11/01/2024
90% CD	1	08/07/2025
IFP		08/26/2025

BANK OF AMERICA
Broomfield

CO1-111
NWC Hwy 7 and Palisade Pkwy
Broomfield CO, 80023

PROPERTY ID:	CO1-111
NSRP VERSION:	2.0
BULLETIN:	2-2024

TYPICAL FOUNDATION DETAILS

COLORADO LICENSED SCOTT A. ARMSTRONG 36989 PROFESSIONAL ENGINEER

08/26/2025

Project No: 23.0002261.000 Reviewed By: AR

S3.20

8/26/2025 12:41:26 PM Autodesk Docs://BofA FC2.0_Broomfield CO1-111/2450-70132-00 BofA Broomfield CO_R23.rvt

Salas O'Brien
salasobrien.com
Dallas
12655 North Central Expressway, Suite 720
Dallas, TX 75243

Registration: F-4111
Project No: 2450-70132-00

NELSON
Nelco Architecture, Inc.

12400 Coit Road, Suite 510
Dallas, TX. 75251
Phone: (972) 644-8830
Fax: (972) 644-8496

Client Representative:

CUSHMAN & WAKEFIELD
Attn: Paul Hurchanik
Tel: 720.582.6073
Email:
paul.hurchanik@cushwake.com

Architect:

Nelco Architecture, Inc.
Attn: Harry Koutsis
Tel: 310.693.5271
Email: hkoutsis@nelsonww.com

AOR Contact
Robert J. Sullivan Jr.
Tel: 216.830.1561
Email:rsullivan@nelsonww.com
License No. AR-987677

Civil:

LANGAN
Attn: Ben Henry
Tel: (817) 328-3217
Email: bhenry@langan.com

Structural:

Salas O'Brien
Attn: Julie Bolding
Tel: (469) 782-9753
Email: julie.bolding@salasobrien.com

MEP:

Salas O'Brien
Attn: Carly Wood
Tel: 727-804-7626
Email: carly.wood@salasobrien.com

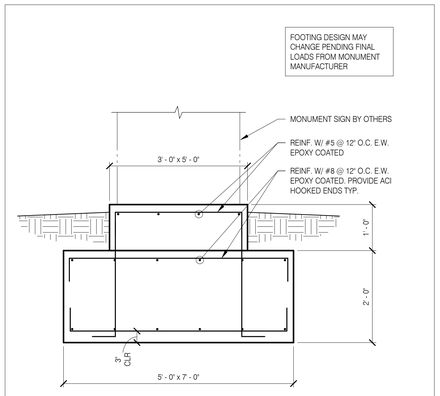

3 SECTION AT MONUMENT SIGN — NTS

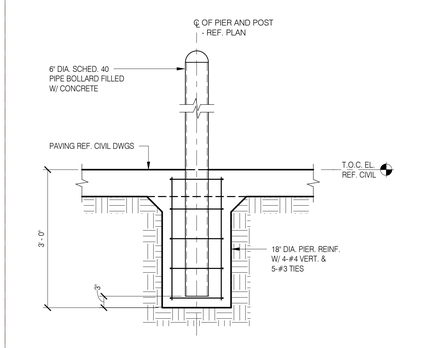

2 BOLLARD DETAIL — NTS

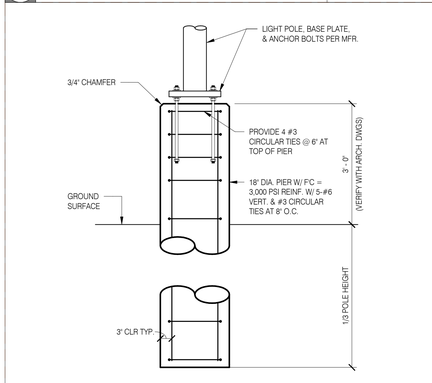

1 TYPICAL FLAG POLE BASE — NTS

Description:	No:	Date:
90% CD	1	08/07/2025
IFP		08/26/2025

BANK OF AMERICA
Broomfield

CO1-111
NWC Hwy 7 and Palisade Pkwy
Broomfield CO, 80023

PROPERTY ID:	CO1-111
NSRP VERSION:	2.0
BULLETIN:	2-2024

TYPICAL SITE DETAILS

COLORADO LICENSED SCOTT C. ARMSTRONG 36989 PROFESSIONAL ENGINEER

08/26/2025

Project No: 23.0002261.000 Reviewed By: AR

S3.21

8/26/2025 12:41:26 PM Autodesk Docs://BofA FC2.0_Broomfield CO1-111/2450-70132-00 BofA Broomfield CO_R23.rvt

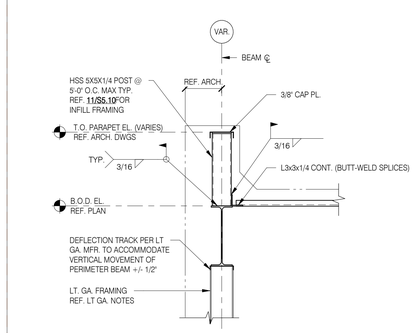

10 SECTION AT PERIMETER 3/4" = 1'-0"

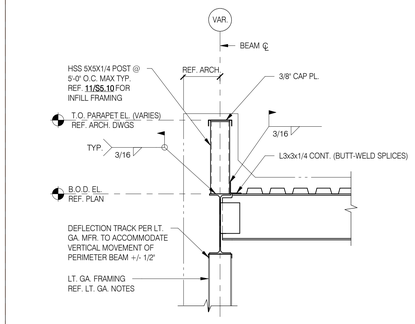

6 SECTION AT PERIMETER 3/4" = 1'-0"

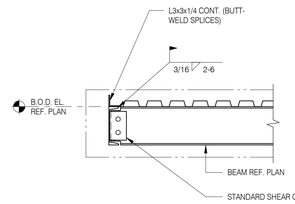

4 PERIMETER ROOF EDGE 3/4" = 1'-0"

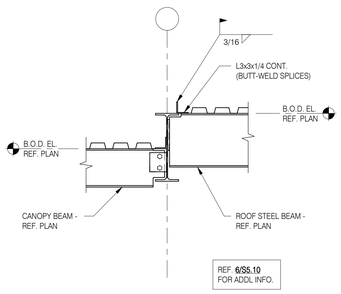

13 CANOPY STEP SECTION 3/4" = 1'-0"

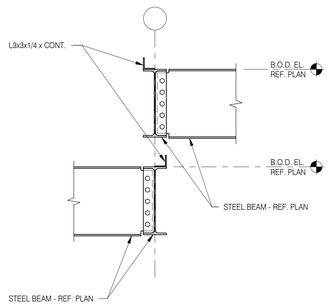

9 ROOF STEP AT GRID B 3/4" = 1'-0"

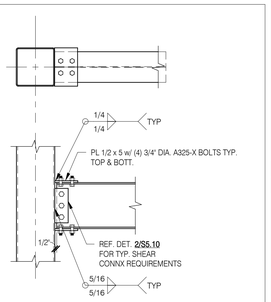

MC5: BOLTED BEAM - HSS/PIPE COLUMN MOMENT CONNECTION AT SIDE OF COLUMN

MC3: BEAM-BEAM MOMENT CONNECTION

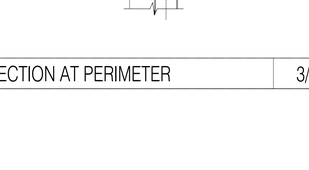

MC2: BEAM-HSS COLUMN MOMENT CONNECTION



MC1: BEAM-HSS COLUMN MOMENT CONNECTION

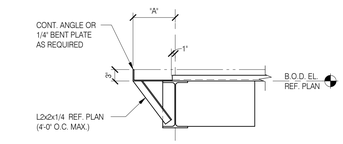

B. TYPICAL ROOF DECK EDGE - "A" = EXCEEDS 6" TO 16" MAX.

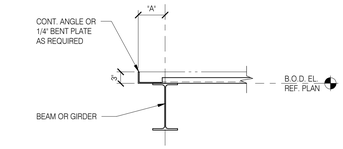

A. TYPICAL ROOF DECK EDGE - "A" = 6" MAX.

3 TYP. ROOF DETAILS NTS



SC3: BEAM TO BEAM



SC4: BEAM OVER HSS COLUMN



SC1: BEAM TO HSS COLUMN



SC2: HSS BEAM TO HSS COLUMN

SHEAR CONNECTION DESIGN CRITERIA

A. DESIGN FOR UNFACTORED REACTIONS NOTED ON PLANS.

B. IF REACTIONS ARE NOT NOTED ON PLANS: DESIGN NON-COMPOSITE BEAM CONNECTIONS FOR 1/2 THE TOTAL DESIGN UNIFORM LOAD FOR THE BEAM SPAN FROM THE AISC - UNIFORM LOAD TABLES; DESIGN COMPOSITE BEAM CONNECTIONS FOR 1.7 TIMES THE NON-COMPOSITE REACTION AS DESCRIBED ABOVE.

C. DETAIL CONNECTIONS PER AISC - ASD 15TH EDITION SPECIFICATION USING MIN. 5/16" THICK DOUBLE CLIP ANGLES OF MIN. 3/8" SHEAR PLATE. USE 3/4" DIA. A 325-N BOLTS OR LARGER FOR ALL STRUCTURAL CONNECTIONS U.N.O.. SHEAR PLATE CONNECTIONS SHALL BE BOLTED @ BEAM AND WELDED @ SUPPORT. DOUBLE CLIP ANGLES CAN BE EITHER BOLTED OR WELDED PROVIDED THEY COMPLY WITH LOADING REQUIREMENTS AND AISC STANDARDS.

D. IN ADDITION TO SHEAR CONNECTION DESIGN CRITERIA PER NOTES A - C, PROVIDE A MINIMUM OF THE FOLLOWING NUMBER OF CONNECTION BOLTS AS FOLLOWS:

W8 - W12	2 BOLTS
W14 - W16	3 BOLTS
W18 - W21	4 BOLTS
W24	5 BOLTS

E. SUBMIT SEALED CALCULATIONS OF ALL NON-STANDARD CONNECTIONS FOR ENGINEER'S REVIEW .

F. SUBMIT SEALED CALCULATIONS OF BRACE CONNECTIONS FOR ENGINEERS REVIEW .

2 TYPICAL SHEAR CONNECTIONS NTS



CB5



CB6



CB3



CB4



CB1



CB2

COLUMN BASEPLATE SCHEDULE

BASEPLATE NAME	PLATE THICKNESS	BOLT DIAMETER	BOLT TYPE	EMBEDMENT
CB1:	3/4"	3/4"	STANDARD HEX	1' - 0"
CB2:	3/4"	3/4"	STANDARD HEX	1' - 0"
CB3:	3/4"	3/4"	STANDARD HEX	1' - 0"
CB4:	3/4"	1"	STANDARD HEX	1' -6"
CB5:	3/4"	1"	STANDARD HEX	1' -6"
CB6:	3/4"	1"	STANDARD HEX	1' -6"

NOTES:
1. REF. GENERAL NOTES FOR PLATE GRADE AND BOLT SPECIFICATION.
2. PROVIDE GRADE 55 ANCHOR BOLTS FOR ALL BRACE/MOMENT FRAMES UNO.

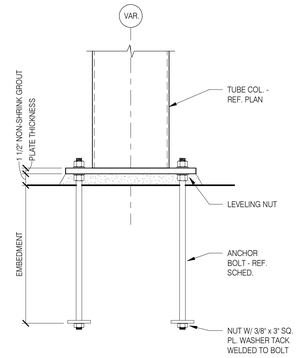

1 BASEPLATE AT HSS COL. NTS

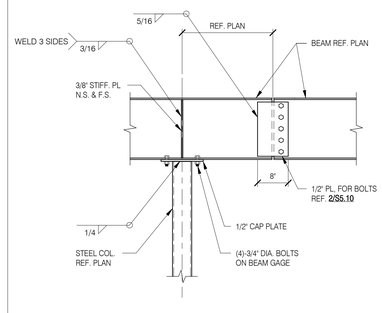

12 STEEL BMS TO STEEL COL. CONNX 3/4" = 1'-0"

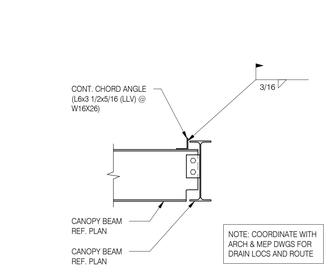

8 CANOPY BM @ DRAIN LOCS 3/4" = 1'-0"

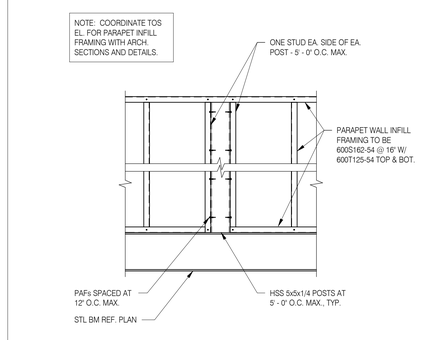

11 PARAPET INFILL FRAMING 3/4" = 1'-0"

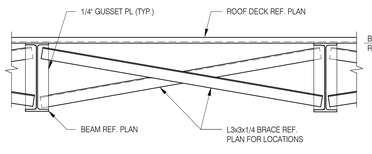

7 ANGLE BRIDGING 3/4" = 1'-0"

5 TYPICAL MOMENT CONNECTIONS NTS

Salas O'Brien
salasobrien.com
Dallas
12655 North Central Expressway, Suite 720
Dallas, TX 75243

Registration: F-4111
Project No: 2450-70132-00

NELSON
Nelco Architecture, Inc.

12400 Coit Road, Suite 510
Dallas, TX. 75251
Phone: (972) 644-8830
Fax: (972) 644-8496

Client Representative:
CUSHMAN & WAKEFIELD
Attn: Paul Hurchanik
Tel: 720.582.6073
Email: paul.hurchanik@cushwake.com

Architect:
Nelco Architecture, Inc.
Attn: Harry Koutsis
Tel: 310.693.5271
Email: hkoutsis@nelsonww.com

AOR Contact
Robert J. Sullivan Jr.
Tel: 216.830.1561
Email:rsullivan@nelsonww.com
License No. AR-987677

Civil:
LANGAN
Attn: Ben Henry
Tel: (817) 328-3217
Email: bhenry@langan.com

Structural:
Salas O'Brien
Attn: Julie Bolding
Tel: (469) 782-9753
Email: julie.bolding@salasobrien.com

MEP:
Salas O'Brien
Attn: Carly Wood
Tel: 727-804-7626
Email: carly.wood@salasobrien.com

Description:	No:	Date:
Issue for Permit		10/04/2024
CD_F		11/01/2024
90% CD	1	08/07/2025
IFP		08/26/2025

BANK OF AMERICA
Broomfield

CO1-111
NWC Hwy 7 and Palisade Pkwy
Broomfield CO, 80023

PROPERTY ID: CO1-111
NSRP VERSION: 2.0
BULLETIN: 2-2024

TYPICAL STEEL DETAILS

COLORADO LICENSED SCOTT A. ARMSTRONG 36989 PROFESSIONAL ENGINEER

08/26/2025

Project No: 23.0002261.000 Reviewed By: AR

S5.10

8/26/2025 12:41:28 PM Autodesk Docs://BofA FCI2.0_Broomfield CO1-111/2450-70132-00 BofA Broomfield CO_R23.rvt

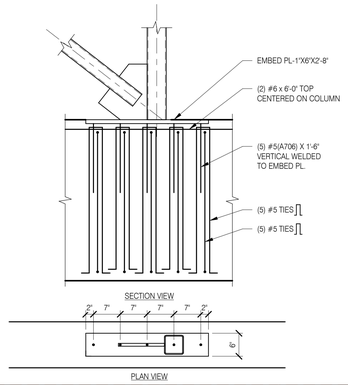

6 BRACED FRAME AT STEM WALL — NTS

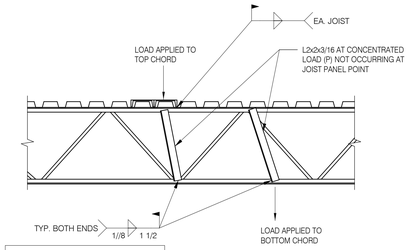

NOTES
1. WHEN CONCENTRATED LOADS EXCEED 100# AND 'X' EXCEEDS 4' ADD ADDITIONAL WEB MEMBER AS SHOWN FROM THE POINT OF LOAD TO THE NEAREST PANEL POINT ON THE OPPOSITE CHORD.
2. ADD ADDITIONAL CHANNEL ADJACENT TO CHANNEL SHOWN IF HVAC CURB DOES NOT ALIGN W/ FLUTE SPACING

5 BAR JST REINF. POINT LOADS — 3/4" = 1'-0"

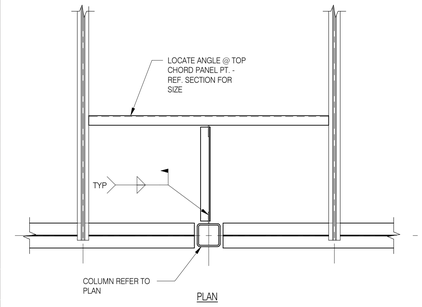

PLAN

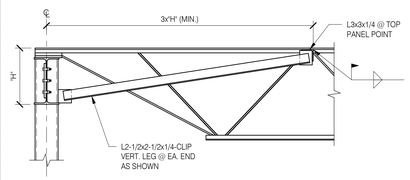

SECTION

3 COLUMN BRACE - JOISTS PERP. — 3/4" = 1'-0"

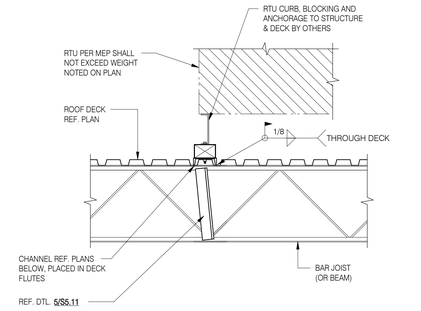

B. TYPICAL RTU SUPPORT SECTION

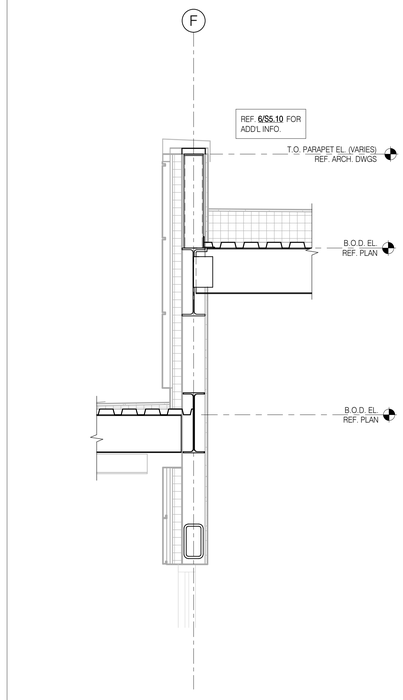

7 ROOF SECTION — 3/4" = 1'-0"

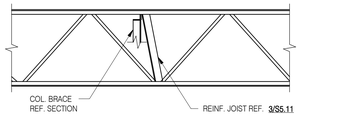

ELEVATION

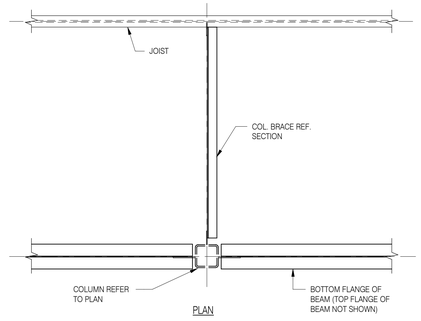

PLAN



SECTION

4 COL. BRACE - JOISTS PARALLEL — 3/4" = 1'-0"

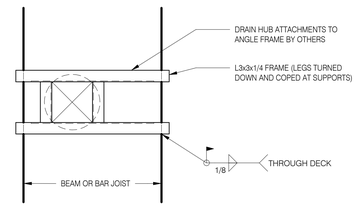

NOTE
CONTR TO COORDINATE FRAME SIZES REQUIRED FOR DRAIN HUBS

B. ROOF DRAIN HUB SUPPORT

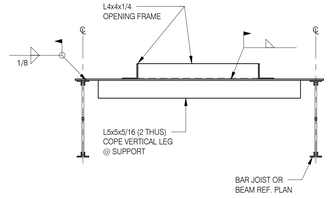

NOTE
DETAIL APPLIES TO DUCT PENETRATIONS, ROOF ACCESS HATCHES OR OTHER OPENINGS NO LARGER THAN 20 sq. ft. & SUPPORTING EQUIPMENT NO HEAVIER THAN 250 lbs.

A. MISCELLANEOUS OPENING

2 TYP. ROOF PENETRATION DETAILS — NTS

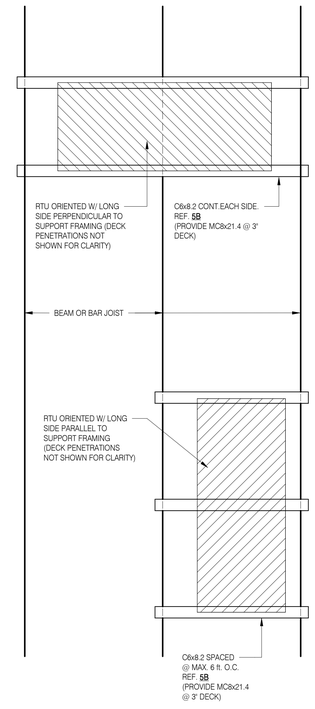

A. TYPICAL RTU SUPPORT PLAN

1 RTU SUPPORT DETAILS — NTS

Salas O'Brien
salasobrien.com
Dallas
12655 North Central Expressway, Suite 720
Dallas, TX 75243

Registration: F-4111
Project No: 2450-70132-00

NELSON
Nelco Architecture, Inc.

12400 Coit Road, Suite 510
Dallas, TX. 75251
Phone: (972) 644-8830
Fax: (972) 644-8496

Client Representative:
CUSHMAN & WAKEFIELD
Attn: Paul Hurchanik
Tel: 720.582.6073
Email: paul.hurchanik@cushwake.com

Architect:
Nelco Architecture, Inc.
Attn: Harry Koutsis
Tel: 310.693.5271
Email: hkoutsis@nelsonww.com

AOR Contact
Robert J. Sullivan Jr.
Tel: 216.830.1561
Email:rsullivan@nelsonww.com
License No. AR-987677

Civil:
LANGAN
Attn: Ben Henry
Tel: (817) 328-3217
Email: bhenry@langan.com

Structural:
Salas O'Brien
Attn: Julie Bolding
Tel: (469) 782-9753
Email: julie.bolding@salasobrien.com

MEP:
Salas O'Brien
Attn: Carly Wood
Tel: 727-804-7626
Email: carly.wood@salasobrien.com

Description:	No:	Date:
Issue for Permit		10/04/2024
CD_F		11/01/2024
90% CD	1	08/07/2025
IFP		08/26/2025

BANK OF AMERICA
Broomfield

CO1-111
NWC Hwy 7 and Palisade Pkwy
Broomfield CO, 80023

PROPERTY ID: CO1-111
NSRP VERSION: 2.0
BULLETIN: 2-2024

TYPICAL STEEL DETAILS

COLORADO LICENSED SCOTT A. ARMSTRONG 36989 PROFESSIONAL ENGINEER

08/26/2025

Project No: 23.0002261.000 Reviewed By: AR

S5.11

8/26/2025 12:41:29 PM Autodesk Docs://BofA FC2.0_Broomfield CO1-111/2450-70132-00 BofA Broomfield CO_R23.rvt

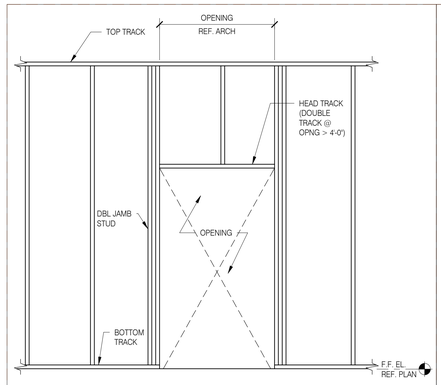

9 OPNG IN NON-LOAD-BRG WALLS NTS

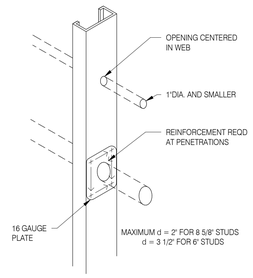

NOTE
FLANGES SHALL NOT BE NOTCHED OR CUT

6 PENETRATION THRU STUDS NTS

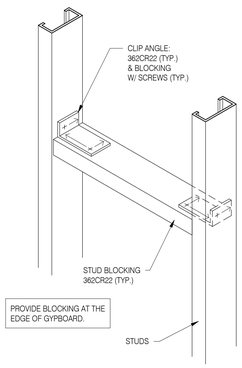

4 TYPICAL BLOCKING DETAIL NTS

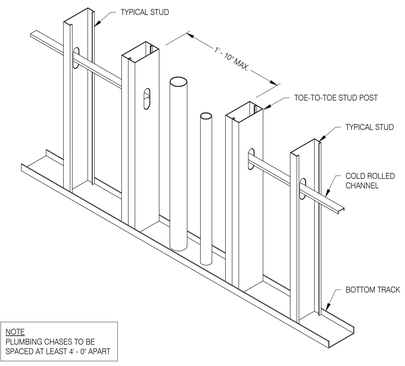

NOTE
PLUMBING CHASES TO BE SPACED AT LEAST 4 -0" APART

8 MECH. CHASE FRAMING IN WALL NTS

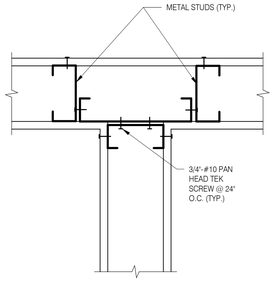

WALL INTERSECTION FRAMING

FASTENER SCHEDULE	
LEVEL	SPACING
1-3	16" O.C.
4	8" O.C.

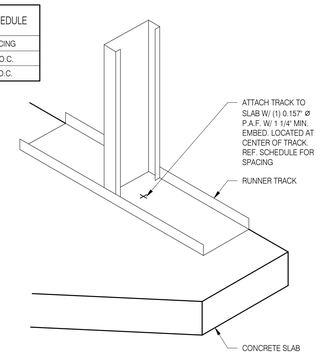

3 WALL CONNECTION AT SLAB NTS

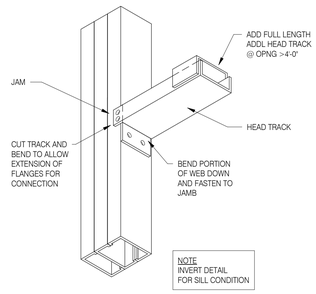

NOTE
INVERT DETAIL FOR SILL CONDITION

TYPICAL DETAIL

2 HEAD TRACK @ NON LOAD BRG NTS

HEADER SCHEDULE - WALLS						
LOCATION	WALL TYPE	INTERIOR/ EXTERIOR	MAX. SPAN	SIZE	Fy (ksi)	REMARK
BELOW ROOF STRUCTURE	LOAD BEARING	INTERIOR AND EXTERIOR	4'-0"	2-60CSJ18	33	NOTE: ALSO TO BE USED BELOW 2nd FLR. FOR THE EXT. WALLS PARALLEL TO SLAB SPAN.
BELOW ROOF STRUCTURE	LOAD BEARING	INTERIOR AND EXTERIOR	6'-0"	2-60CSJ16	50	
BELOW ROOF STRUCTURE	LOAD BEARING	INTERIOR AND EXTERIOR	8'-0"	2-60CSJ14	50	
BELOW 2nd FLR. SLAB	LOAD BEARING	INTERIOR AND EXTERIOR	3'-4"	2-60CSJ16	50	
BELOW 2nd FLR. SLAB	LOAD BEARING	INTERIOR AND EXTERIOR	5'-0"	2-80CSJ14	50	
ALL FLOORS	NON LOAD BRG.	INTERIOR	3'-4"	SINGLE TRACK 18 GAUGE	33	
ALL FLOORS	NON LOAD BRG.	INTERIOR	6'-0"	DOUBLE TRACK 18 GAUGE	33	
ALL FLOORS	NON LOAD BRG.	INTERIOR	8'-0"	2-362CSJ20	33	

NOTES:
(a) LOCATION AND CLEAR SPANS OF OPENINGS IN WALLS SHALL BE PER ARCHITECTURAL DRAWINGS.
(b) ABOVE SIZES ARE FOR TYPICAL OPENING CONDITIONS. USE THE BEAM SIZES SHOWN ON PLANS FOR SPECIFIC CONDITIONS.

WALL OPENINGS DETAILS & SCHEDULE

FASTENER SCHEDULE		
ITEM	TYPE & SIZE	SPACING
1/2" GYPBOARD TO STUDS	7/8" PLYTEK	6" O.C. @ EDGES 12" O.C. @ SUPPORTS
5/8" GYPBOARD TO STUDS	1 1/8" PLYTEK	6" O.C. @ EDGES 12" O.C. @ SUPPORTS
STUD TO STUD (BACK TO BACK)	3/4" #8 TEKS PAN HEADS	1 @ 24" O.C. THROUGH WEB
DIAGONAL BRACING TO STUD	1/2" #8 TEKS LOW PROFILE PAN HEAD	1 @ EACH STUD
STUD TO TOP PLATE (TRACK)	3/4" #8 TEKS LOW PROFILE PAN HEAD	1 @ EACH FLANGE
STUD TO BOTTOM PLATE (TRACK)	3/4" #8 TEKS LOW PROFILE PAN HEAD	1 @ EACH FLANGE

METAL STUD PROPERTIES							
MEMBER	HEIGHT (IN.)	FLANGE (IN.)	LIP (IN.)	AREA $(IN.)^2$	IX $(IN.)^4$	LOCATION	SPACING
600T125-33	6"	1 1/4"	--	0.294	1.428	BOTTOM TRACK	CONT.
600T200-97	6"	2"	--	1.015	5.773	TOP TRACK	CONT.
362S137-33	3 5/8"	1 3/8"	3/8"	0.236	0.479	INTERIOR WALLS	@ 16" O.C.
600S137-33	6"	1 3/8"	3/8"	0.318	1.582	EXTERIOR WALLS	@ 16" O.C.

PROPERTIES PROVIDED BY DIETRICH INDUSTRIES, INC.

SILL TRACK ANCHORAGE	
APPLICATION	ANCHORAGE
EXTERIOR WALLS	HILTI 1/4" KWIK BOLT II @ 8" O.C.
INTERIOR WALLS	HILTI DNI 32 P8 @ 12" O.C.

METAL STUD, FASTENER & SILL TRACK ANCHORAGE SCHEDULES

7 METAL STUDS SCHEDULES NTS

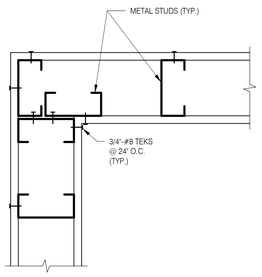

INTERIOR CORNER FRAMING

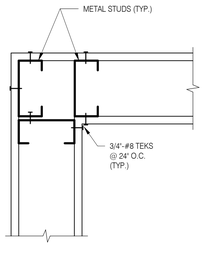

EXTERIOR CORNER FRAMING

5 TYPICAL WALL FRAMING CONNX NTS

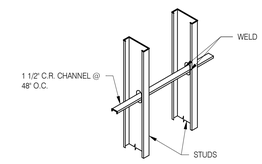

F. BRIDGING AND BRACING
CONTINUOUS BRIDGING



E. LOAD-BEARING WALL
BUILT-UP POST



D. LOAD-BEARING WALL
BEARING HEADER

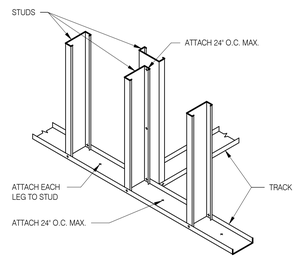

E. LOAD-BEARING WALL
PARTITION INTERSECTION



A. EXTERIOR SILL



B. INTERIOR SILL

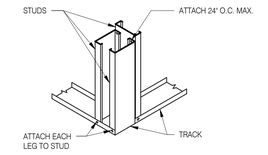

C. LOAD-BEARING WALL
THREE STUD CORNER

1 TYPICAL WALL FRAMING DETAILS NTS

Salas O'Brien
salasobrien.com
Dallas
12655 North Central Expressway, Suite 720
Dallas, TX 75243

Registration: F-4111
Project No: 2450-70132-00

NELSON
Nelco Architecture, Inc.

12400 Coit Road, Suite 510
Dallas, TX. 75251
Phone: (972) 644-8830
Fax: (972) 644-8496

Client Representative:
CUSHMAN & WAKEFIELD
Attn: Paul Hurchanik
Tel: 720.582.6073
Email: paul.hurchanik@cushwake.com

Architect:
Nelco Architecture, Inc.
Attn: Harry Koutsis
Tel: 310.693.5271
Email: hkoutsis@nelsonww.com

AOR Contact
Robert J. Sullivan Jr.
Tel: 216.830.1561
Email:rsullivan@nelsonww.com
License No. AR-987677

Civil:
LANGAN
Attn: Ben Henry
Tel: (817) 328-3217
Email: bhenry@langan.com

Structural:
Salas O'Brien
Attn: Julie Bolding
Tel: (469) 782-9753
Email: julie.bolding@salasobrien.com

MEP:
Salas O'Brien
Attn: Carly Wood
Tel: 727-804-7626
Email: carly.wood@salasobrien.com

Description:	No:	Date:
Issue for Permit		10/04/2024
CD_F		11/01/2024
90% CD	1	08/07/2025
IFP		08/26/2025

BANK OF AMERICA
Broomfield

CO1-111
NWC Hwy 7 and Palisade Pkwy
Broomfield CO, 80023

PROPERTY ID:	CO1-111
NSRP VERSION:	2.0
BULLETIN:	2-2024

COLD FORMED STEEL FRAMING DETAILS

COLORADO LICENSED SCOTT A. ARMSTRONG 36989 PROFESSIONAL ENGINEER

08/26/2025

Project No: 23.0002261.000 Reviewed By: AR

S5.20

8/26/2025 12:41:30 PM Autodesk Docs://BofA FC2.0_Broomfield CO1-111/2450-70132-00 BofA Broomfield CO_R23.rvt

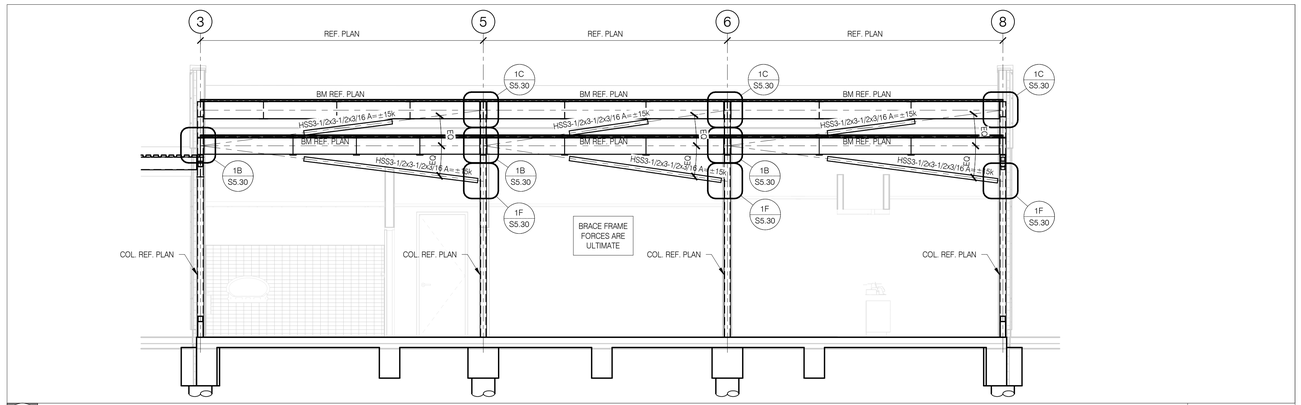

6 VERT. BRACE ELEVATION - GRID B — 1/4" = 1'-0"

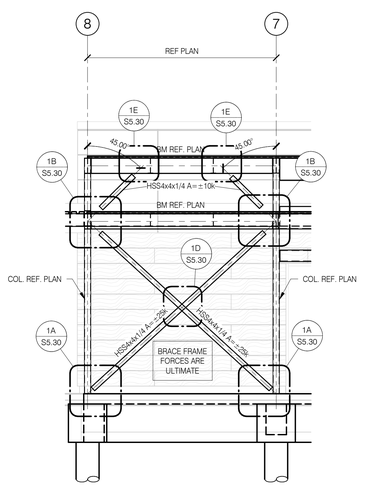

5 VERT. BRACE ELEVATION - GRID G — 1/4" = 1'-0"

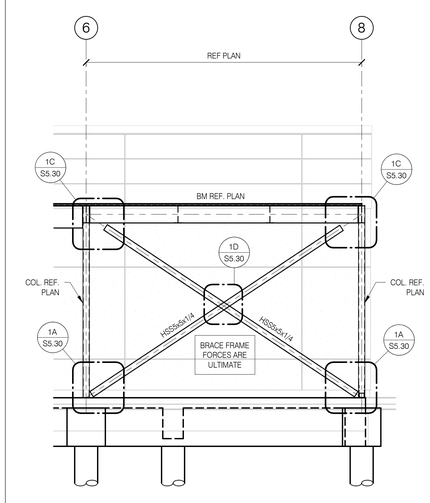

4 VERT. BRACE ELEVATION - GRID A — 1/4" = 1'-0"

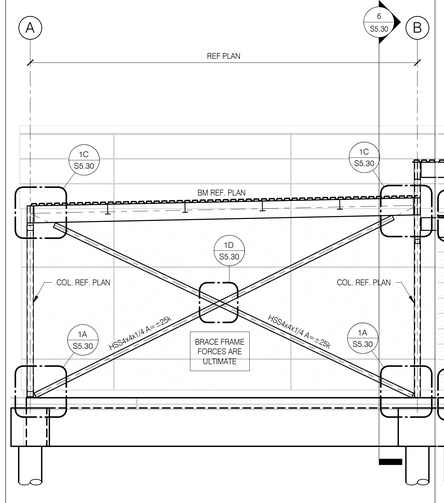

3 VERT. BRACE ELEVATION - GRID 8 — 1/4" = 1'-0"

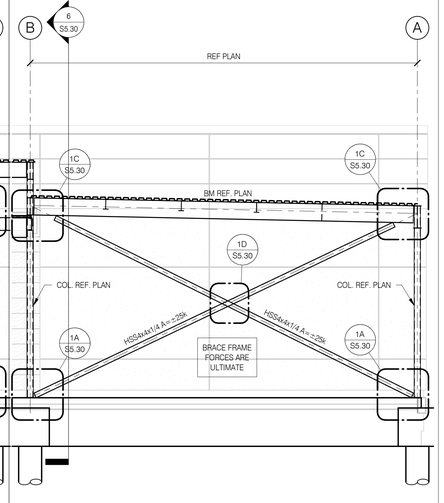

2 VERT. BRACE ELEVATION - GRID 3 — 1/4" = 1'-0"

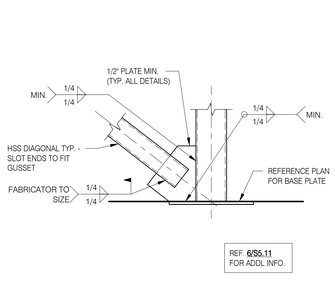

A. BRACE TO COLUMN AT BASE PLATE

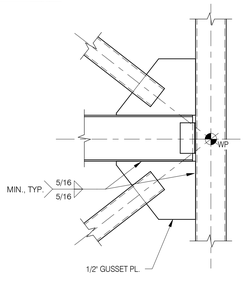

B. BRACE TO COLUMN AT FLOOR OR ROOF



C. BRACE TO COL. AT ROOF

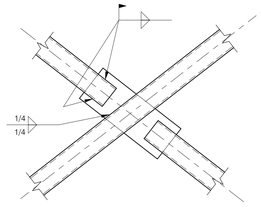

D. BRACE INTERSECTION

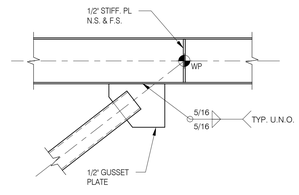

E. KNEE BRACE TO BEAM

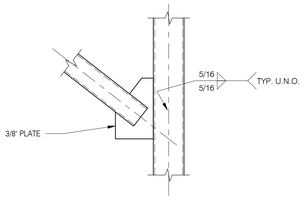

F. KNEE BRACE TO COLUMN FLANGE

NOTE
FABRICATOR TO SIZE THE BRACE CONNECTIONS FOR FORCES SHOWN ON BRACE FRAME ELEVATIONS.

1 BRACED FRAME DETAILS — 3/4" = 1'-0"

Salas O'Brien
salasobrien.com
Dallas
12655 North Central Expressway, Suite 720
Dallas, TX 75243

Registration: F-4111
Project No: 2450-70132-00

NELSON
Nelco Architecture, Inc.

12400 Coit Road, Suite 510
Dallas, TX. 75251
Phone: (972) 644-8830
Fax: (972) 644-8496

Client Representative:
CUSHMAN & WAKEFIELD
Attn: Paul Hurchanik
Tel: 720.582.6073
Email:
paul.hurchanik@cushwake.com

Architect:
Nelco Architecture, Inc.
Attn: Harry Koutsis
Tel: 310.693.5271
Email: hkoutsis@nelsonww.com

AOR Contact
Robert J. Sullivan Jr.
Tel: 216.830.1561
Email:rsullivan@nelsonww.com
License No. AR-987677

Civil:
LANGAN
Attn: Ben Henry
Tel: (817) 328-3217
Email: bhenry@langan.com

Structural:
Salas O'Brien
Attn: Julie Bolding
Tel: (469) 782-9753
Email: julie.bolding@salasobrien.com

MEP:
Salas O'Brien
Attn: Carly Wood
Tel: 727-804-7626
Email: carly.wood@salasobrien.com

Description:	No:	Date:
Issue for Permit		10/04/2024
CD_F		11/01/2024
90% CD	1	08/07/2025
IFP		08/26/2025

BANK OF AMERICA
Broomfield

CO1-111
NWC Hwy 7 and Palisade Pkwy
Broomfield CO, 80023

PROPERTY ID: CO1-111
NSRP VERSION: 2.0
BULLETIN: 2-2024

BRACED FRAME DETAILS

COLORADO LICENSED
SCOTT R. ARMSTRONG
36989
PROFESSIONAL ENGINEER

08/26/2025

Project No: 23.0002261.000 Reviewed By: AR

S5.30

8/26/2025 12:41:30 PM Autodesk Docs://BofA FC2_0_Broomfield CO\-111\2450-70132-00 BofA Broomfield CO_R23.rvt

SYSTEM VENTILATION (OUTSIDE AIR) SCHEDULE

(PER INTERNATIONAL MECHANICAL CODE 2021 WITH BROOMFIELD CITY AMENDMENTS, TABLE 403.1.1 / ASHRAE 62.1 VENTILATION RATE PROCEDURE)

UNIT TAG	ZONE SERVED	AREA (SF)	EST. OCC. (SF/PERSON)	MAXIMUM # OCC (3)	CFM O.A. (PER SQ FT)	CFM O.A. (PER PERSON)	EFFECT. FACTOR (1)	CODE O.A. REQUIREMENT (2) (CFM)
RTU-1	OFFICE 5 CB [109]	122	200	1	0.06	5	0.8	15
	OFFICE 6 CB [110]	122	200	1	0.06	5	0.8	15
	CORRIDOR [111]	148	200	0	0.06	5	0.8	12
	WELLNESS [115]	70	200	1	0.06	5	0.8	12
	TOTAL	462		3				54
							x1.3 (5)	70.2
								75 (4)
RTU-2	CENTRAL ZONE [103]	726	200	2	0.06	5	0.8	67
	WAITING [104]	344	200	4	0.06	5	0.8	51
	BREAK ROOM [118]	293	200	4	0.06	5	0.8	69
	CALLING CUBES [122]	290	200	3	0.06	5	0.8	41
	TOTAL	1653		13				228
							x1.3 (5)	296.4
								300 (4)
RTU-3	OFFICE 1 ME [105]	124	200	1	0.06	5	0.8	16
	OFFICE 2 CL [106]	124	200	1	0.06	5	0.8	16
	OFFICE 3 SB [107]	124	200	1	0.06	5	0.8	16
	OFFICE 4 CB [108]	124	200	1	0.06	5	0.8	16
	CASH WINDOW [116]	268	200	1	0.06	5	0.8	26
	WORK ROOM [119]	129	200	1	0.06	5	0.8	16
	TOTAL	893		6				106
							x1.3 (5)	137.8
								140 (4)
FCU-2	VESTIBULE [100]	127	200	1	0.06	5	0.8	9
	24 HR VESTIBULE [101]	154	200	1	0.06	5	0.8	26
	TOTAL	281		1				35
							x1.3 (5)	45.5
								50 (4)

(1) EFFECTIVENESS SHOWN IS FOR CEILING SUPPLY OF WARM AIR 15°F OR MORE ABOVE SPACE TEMPERATURE AND CEILING RETURN.

(2) REQUIRED OUTSIDE AIR AIRFLOW = [(CFM OUTSIDE AIR PER PERSON x ESTIMATED OCCUPANCY) + (CFM OUTSIDE AIR PER SQUARE FOOT x AREA)]/AIR DISTRIBUTION EFFECTIVENESS.

(3) ACTUAL OCCUPANCY IS USED IN CALCULATIONS WHERE KNOWN.

(4) UNIT SCHEDULED TO CFM SHOWN. REFER TO EQUIPMENT SCHEDULES.

(5) 30% GREATER IS A BAC REQUIREMENT.

MECHANICAL LEGEND

SYMBOLS	DESCRIPTION
	SUPPLY AIR DEVICE
	RETURN/EXHAUST AIR DEVICE
	LINED DUCTWORK
OR	FLEXIBLE DUCT CONNECTION
	EXISTING EQUIPMENT TO REMAIN
	EXISTING EQUIPMENT RELOCATED
	EXISTING EQUIPMENT TO BE REMOVED
OR	END CAP (PIPE OR DUCT)
R D	DUCT RISE/DUCT DROP
	BACK DRAFT DAMPER
MD	MANUAL DAMPER
FD FD	FIRE DAMPER (HORIZONTAL/VERTICAL)
FSD FSD	MOTOR OPERATED FIRE SMOKE DAMPER (HORIZ./VERT.)
M	MOTOR OPERATED DAMPER
T S H	THERMOSTAT/SENSOR/HUMIDISTAT
SD	DUCT SMOKE DETECTOR
D	DRAIN
CWS CWR	CONDENSER WATER SUPPLY/CONDENSER WATER RETURN
CHWS CHWR	CHILLED WATER SUPPLY/CHILLED WATER RETURN
HWS HWR	HEATING WATER SUPPLY/HEATING WATER RETURN
RS RL	REFRIGERANT LINE (SUCTION/LIQUID)
OR	BALL VALVE
OR	BUTTERFLY VALVE (BV)
OR	GATE VALVE (GV)
OR	3-WAY CONTROL VALVE
OR	NON-SLAM CHECK VALVE (CV)
	PRESSURE REDUCING VALVE
	STRAINER
	GAUGE COCK
OR	PRESSURE GAUGE
OR	THERMOMETER
OR	TEST WELL
	UNION
	FLANGE
	PUMP

NOTE: THIS IS A STANDARD LEGEND. ALL ITEMS MAY NOT APPEAR ON DRAWINGS.

MECHANICAL ABBREVIATIONS

ABBREVIATION	DEFINITION	ABBREVIATION	DEFINITION
A/C	ABOVE CEILING	MAX	MAXIMUM
AD	ACCESS DOOR	MBH	1000 BTU/HOUR
ADJ	ADJUSTABLE	MD	MANUAL DAMPER
AFF	ABOVE FINISHED FLOOR	MIN	MINIMUM
ARCH	ARCHITECT	MOD	MOTOR OPERATED DAMPER
BEL	BELOW	MOV	MOTOR OPERATED VALVE
BD	BACKDRAFT DAMPER	MTD	MOUNTED
B/F	BELOW FLOOR	N/A	NOT APPLICABLE
BTUH	BRITISH THERMAL UNIT/HOUR	NC	NOISE CRITERIA
C	CONVECTOR	N.C.	NORMALLY CLOSED
CAP	CAPACITY	N.I.C.	NOT IN CONTRACT
CD	CEILING DIFFUSER	N.O.	NORMALLY OPEN
CF	CUBIC FEET	NO.	NUMBER OR DESIGNATION
CFM	CUBIC FEET PER MINUTE	NOM	NOMINAL
CLG	CEILING	NPSHA	NET POSITIVE SUCTION HEAD AVAIL
CO	CLEANOUT	OA	OUTSIDE AIR
CONC	CONCRETE	OBD	OPPOSED BLADE DAMPER
CONN	CONNECTION	OC	ON CENTERS
CONT	CONTINUATION	OPNG	OPENING
D	DRAIN	△P	PRESSURE DROP
DB	DRY BULB	PH	ELECTRICAL PHASE
DG	DOOR GRILLE	PIU	POWERED INDUCTION UNIT
DIA	DIAMETER (ø)	PLBG	PLUMBING
DIFF	DIFFUSER	PRV	PRESSURE REDUCING VALVE
DN	DOWN	PSIA	POUNDS PER SQ. IN. ABSOLUTE
DWGS	DRAWINGS	PSIG	POUNDS PER SQ. IN. GAUGE
EA	EACH	RA	RETURN AIR
EAT	ENTERING AIR TEMPERATURE	RAG	RETURN AIR GRILLE
EG	EXHAUST GRILLE	RAR	RETURN AIR REGISTER
ELEC	ELECTRICAL	REG	REGISTER
ENG	ENGINEER	R/H	RELATIVE HUMIDITY
ER	EXHAUST REGISTER	RL	REFRIGERANT LIQUID
ESP	EXTERNAL STATIC PRESSURE (IN WG)	RPM	ROTATIONS PER MINUTE
EWT	ENTERING WATER TEMPERATURE	RS	REFRIGERANT SUCTION
EXH	EXHAUST	SA	SUPPLY AIR
FA	FREE AREA	SD	SMOKE DETECTOR
FD	FIRE DAMPER	SF	SQUARE FEET
FLR	FLOOR	SG	SUPPLY GRILLE
FLEX	FLEXIBLE	SP	STATIC PRESSURE (IN. W.G.)
FOD	FACE OPERATED DAMPER	SQ	SQUARE
FPM	FEET PER MINUTE	SR	SUPPLY REGISTER
FSD	FIRE/SMOKE DAMPER	SS	STAINLESS STEEL
FT	FEET	STR	STRUCTURAL
GAL	GALLON(S)	TE	TOILET EXHAUST
GPM	GALLONS PER MINUTE	TG	TRANSFER GRILLE
GR	GRILLE	THRU	THROUGH
HD	HEAD (FT WC)	TRANS	TRANSITION
HP	HORSEPOWER	T/STAT	THERMOSTAT
HR	HOUR	TYP	TYPICAL
IN	INCHES	UC	UNDERCUT
KW	KILOWATT	UNO	UNLESS NOTED OTHERWISE
L&S	LOUVER & SCREEN	VAV	VARIABLE AIR VOLUME UNIT
LAT	LEAVING AIR TEMPERATURE	VEL	VELOCITY
LBG	LINEAR BAR GRILLE	W/	WITH
LBS.	POUNDS	WB	WET BULB
LSD	LINEAR SLOT DIFFUSER	WC	WATER COLUMN
LF	LINEAR FEET	WG	WATER GAUGE
LWT	LEAVING WATER TEMPERATURE	°F	DEGREES FAHRENHEIT

NOTE: THESE ARE STANDARD ABBREVIATIONS. ALL ITEMS MAY NOT APPEAR ON DRAWINGS.

SHEET LIST

SHEET NUMBER	SHEET NAME
M00.01	MECHANICAL GENERAL
M00.02	MECHANICAL DETAILS
M00.03	MECHANICAL SCHEDULES
M00.04	MECHANICAL LOAD CALCULATIONS
M00.05	MECHANICAL LOAD CALCULATIONS
M01.01	MECHANICAL NEW WORK PLAN
M01.02	MECHANICAL ZONING PLAN
M02.01	MECHANICAL ROOF PLAN
M03.01	MECHANICAL CONTROLS

MECHANICAL GENERAL NOTES:

1. THESE DRAWINGS ARE SCHEMATIC IN NATURE AND ARE NOT INTENDED TO SHOW ALL POSSIBLE CONDITIONS. IT IS INTENDED THAT A COMPLETE HVAC SYSTEM BE PROVIDED WITH ALL NECESSARY EQUIPMENT, APPURTENANCES, AND CONTROLS COMPLETELY COORDINATED WITH ALL DISCIPLINES. ALL ITEMS AND LABOR REQUIRED FOR A COMPLETE HVAC SYSTEM IN ACCORDANCE WITH ALL APPLICABLE CODES, STANDARDS, AND THESE CONTRACT DOCUMENTS SHALL BE FURNISHED WITHOUT INCURRING ADDITIONS TO THE CONTRACT.
2. FLEXIBLE DUCT RUNOUTS TO DIFFUSERS SHALL BE INSTALLED FREE OF KINKS AND SAGS. MAXIMUM LENGTH OF FLEXIBLE DUCT TO BE INSTALLED AT ANY DIFFUSER SHALL BE 4'-0".
3. ALL DUCT TRANSITIONS FROM SQUARE TO ROUND SHALL BE SMOOTH SQUARE TO ROUND TRANSITIONS. SPIT-IN FITTINGS AT THE END OF APPED DUCTS ARE NOT ACCEPTABLE.
4. GENERAL EXHAUST DUCTWORK THAT TERMINATES TO OUTDOORS SHALL NOT BE INSULATED. EXHAUST/TRANSFER FAN DUCTWORK THAT TERMINATES ABOVE CEILING SHALL BE LINED. REFER TO SPECIFICATIONS FOR ADDITIONAL REQUIREMENTS.
5. PORTIONS OF DUCTWORK VISIBLE THROUGH GRILLES AND REGISTERS IN FINISHED AREAS SHALL BE PAINTED FLAT BLACK.
6. ALL FAN MOTORS SHALL HAVE A DISCONNECT SWITCH MOUNTED AT THE FAN.
7. ALL OPEN ENDED DUCTS SHALL BE REINFORCED WITH 1-1/2" X 1-1/2" X 1/8" GALVANIZED STEEL ANGLES BOLTED OR RIVETED 6" ON CENTER (MAX) ALL AROUND THE EXTERIOR PERIMETER OF THE DUCT.
8. ALL DUCT RUNOUTS TO SUPPLY DIFFUSERS SHALL HAVE MANUAL VOLUME DAMPERS AS CLOSE TO TRUNK DUCT AS POSSIBLE.
9. ALL DIFFUSERS IN CORRIDORS OR WITHIN 3 FEET OF A WALL SHALL HAVE 2-WAY OR 3-WAY THROW AWAY FROM OR PRARALLEL TO WALLS. DO NOT LOCATE THERMOSTATS WHERE DIFFUSER AIR THROWS BLOW ON THERMOSTAT.
10. BACK OF ALL SUPPLY DIFFUSERS SHALL BE INSULATED WITH FOIL BACKED FIBERGLASS INSULATION.
11. PROVIDE FIRE, SMOKE OR COMBINATION FIRE/SMOKE DAMPERS AT PENETRATION OF ALL SMOKE OR FIRE RATED WALLS OR FLOORS, RATING OF DAMPERS SHALL BE SUITABLE FOR WALL OR FLOOR IN WHICH THEY ARE INSTALLED.
12. ALL PIPING EXPOSED TO FREEZING SHALL BE HEAT TRACED AND INSULATED TO PROTECT PIPING DOWN TO 0° F. HEAT TRACING CABLE SHALL BE SELF-REGULATING TYPE AS MANUFACTURED BY RAYCHEM OR APPROVED EQUAL. PIPE INSULATION SHALL BE SAME TYPE AND THICKNESS AS SPECIFIED UNDER INSULATION SPECIFICATION FOR PIPING SYSTEM BEING HEAT TRACED.
13. PROVIDE CONDENSATE DRAIN PUMPS WHERE INADEQUATE SPACE FOR GRAVITY DRAIN. FOR RETURN AIR CEILING PLENUM INSTALLATIONS PROVIDE GALVANIZED STEEL ENCLOSURE WITH REMOVABLE ACCESS PANEL, SIZED TO HOUSE PUMP AND ELEC J BOX WITH PLUG IN OUTLET, TO ISOLATE ALL NON-PLENUM RATED COMPONENTS FROM AIR STREAM. SEAL ALL PIPING AND ELEC PENETRATIONS. CONTRACTOR SHALL BE RESPONSIBLE FOR COORDINATING ALL REQUIREMENTS SUCH AS ELEC CONNECTIONS AND DRAIN TERMINATIONS.
14. MOUNT THERMOSTATS/SENSORS AT LOCATIONS INDICATED ON DRAWINGS. T'STAT MOUNTING HEIGHTS SHALL BE PER ADA REQUIREMENTS UNLESS NOTED OTHERWISE ON DRAWINGS FOR DIFFERENT WALL MOUNTING HEIGHTS OR CEILING MOUNTING. MOUNT ADJUSTABLE T'STATS AT 48" AFF PER ADA WHEELCHAIR ACCESS. LOCATE CEILING MOUNTED THERMOSTATS OUT OF THROW OF NEARBY AIR DISTRIBUTION DEVICES. T'STATS MOUNTED ON RAG'S SHALL BE MOUNTED ON THE BOTTOM OF THE GRILLE (WITHIN THE ROOM SERVED) UNLESS OTHERWISE NOTED. LOCATE THERMOSTATS ABOVE LIGHT SWITCHES WHERE SHOWN IN THE IMMEDIATE VICINITY OF SWITCHES. DO NOT LOCATE THERMOSTATS IN THE SAME WALL STUD SPACE AS DIMMERS AND RHEOSTATS. VERIFY EXACT LOCATION OF THERMOSTATS WITH ARCHITECT (REFER TO ARCHITECTURAL FLOOR PLANS AND FURNITURE PLANS AND ELECTRICAL LIGHTING PLANS FOR COORDINATION).
15. PROVIDE MINIMUM OF 36" CLEARANCE DEPTH IN FRONT OF CONTROL PANELS. VFD'S AND OTHER ELECTRICAL COMPONENTS OF HVAC SYSTEM WITH ELECTRICAL CONNECTIONS UP TO 150V TO GROUND; INCREASE CLEARANCE TO 42" FOR EQUIPMENT WITH 151V-600V. PROVIDE 30" WIDTH AND 6.5 FT HEIGHT CLEARANCE. COMPLY WITH 2023 NEC 110.26 REQUIREMENTS.
16. PROVIDE ACCESS PANELS FOR ALL EQUIPMENT, DAMPERS (FD'S, FSD'S, MOD'S, BALANCING DAMPERS ETC.) AND OTHER MATERIALS REQUIRING ACCESS ABOVE CEILINGS.
17. ALL REFRIGERANT SUCTION PIPING SHALL BE INSULATED WITH PREFORMED FLEXIBLE CLOSED CELL ELASTOMERIC FOAM PIPING INSULATION SYSTEM PERMEATED WITH AN ANTI-MICROBIAL AGENT, WITH A MAXIMUM THERMAL CONDUCTIVITY (K) OF 0.25, SELF ADHESIVE LONGITUDINAL SEAMS WITH SELF ADHESIVE LAP STRIP, AP ARMAFLEX BLACK LAP SEAL WITH MICROBAN. SEAL ALL SEAMS WITH SELF-SEALING ADHESIVE LAP STRIPS. SEAL ALL JOINTS BETWEEN SECTIONS WITH ARMAFLEX 520 SOLVENT ADHESIVE AND TAPE. FITTINGS SHALL BE FABRICATED FROM MITRED SECTIONS OF PREFORMED PIPE, TAPE AND/OR SOLVENT SEAL ALL SEAMS AND JOINTS. ALL EXTERIOR REFRIGERANT PIPING INSULATION SHALL BE COATED WITH A UV RESISTANT, WEATHER PROOF PAINT BY THE INSULATION MANUFACTURER. INSULATION SHALL BE 1" THICK FOR ALL PIPE DIAMETERS LESS THAN 1-1/2", AND 1-1/2" THICK FOR ALL PIPE DIAMETERS 1-1/2" AND ABOVE, PER 2021 IECC C403.12.3.
18. ALL REFRIGERANT (RS&L OR RL&HG) PIPING SHALL BE TYPE "K" OR TYPE "ACR" HARD DRAWN COPPER WITH WROUGHT FITTINGS AND BRAZED JOINTS, "SILFOS" OR EQUIVALENT . PROVIDE CHARGING VALVE FOR EACH SYSTEM OR INDEPENDENT CIRCUIT AND SHUT-OFF VALVES AT ALL UNIT CONNECTIONS FOR SERVICING OF EQUIPMENT WITHOUT LOSS OF REFRIGERANT. REFRIGERANT PIPING SHALL BE SIZED PER THE EQUIPMENT MANUFACTURERS' RECOMMENDATIONS FOR THE SPECIFIC APPLICATIONS AND INSTALLATION. PROVIDE LINE TRAPS AND DOUBLE RISERS AS REQUIRED PER THE MANUFACTURER'S RECOMMENDATIONS.
19. ALL CONDENSATE DRAINAGE PIPING AND ALL WASTE DRAINAGE PIPING WHICH RECEIVES COLD WASTE WATER (ICEMAKER WASTE, ETC.) FROM EQUIPMENT CONNECTION TO SANITARY DRAINAGE SYSTEM SHALL BE INSULATED WITH PREFORMED FLEXIBLE CLOSED CELL ELASTOMERIC FOAM PIPING INSULATION SYSTEM PERMEATED WITH AN ANTI-MICROBIAL AGENT, WITH A MAXIMUM THERMAL CONDUCTIVITY (K) OF 0.25, SELF ADHESIVE LONGITUDINAL SEAMS WITH SELF ADHESIVE LAP STRIP, AP ARMAFLEX BLACK LAP SEAL WITH MICROBAN. SEAL ALL SEAMS WITH SELF-SEALING ADHESIVE LAP STRIPS; SEAL ALL JOINTS BETWEEN SECTIONS WITH ARMAFLEX 520 SOLVENT ADHESIVE AND TAPE. FITTINGS SHALL BE FABRICATED FROM MITRED SECTIONS OF PREFORMED PIPE, TAPE AND/OR SOLVENT SEAL ALL SEAMS AND JOINTS. PROVIDE ARMAFIX IPH INSERTS OR FOAM-GLAS INSERTS AT HANGERS. INSULATION THICKNESS SHALL BE 1/2" FOR ALL PIPE DIAMETERS.
20. ALL CONDENSATE DRAINAGE (CD) PIPING SHALL BE INSULATED TYPE "M" HARD DRAWN COPPER WITH WROUGHT FITTINGS AND TIN ALLOY SOLDERED JOINTS (LEAD-FREE TIN ALLOYS ONLY, CONSISTING OF ANTIMONY, NICKEL, OR SILVER). CONDENSATE DRAINAGE PIPING NOT IN RETURN AIR PLENUMS MAY BE INSULATED PVC WITH SOLVENT WELD FITTINGS AND JOINTS.
21. ALL PIPING IS TO BE LABELED WITH PLASTIC LABELS, PERMANENTLY STRAPPED TO PIPING, OUTSIDE OF APPLICABLE INSULATION AND COVERS/ENCLOSURES. WHERE EXISTING PIPING SYSTEMS ARE LABELED, LABELING SHALL MATCH EXISTING BASE BUILDING STANDARDS. WHERE NO CURRENT STANDARDS EXIST, LABELS SHALL BE COLOR CODED, UNIQUE FOR EACH PIPING SYSTEM, WITH FLOW DIRECTION ARROWS, AND IDENTIFICATION LETTERING. PIPING SHALL BE IDENTIFIED WITH BLACK LETTERS, SIZED TO BE EASILY READABLE FROM FLOOR LEVEL. LOCATE AND MOUNT LABELS SO AS TO BE READABLE FROM FLOOR LEVEL OR AREA OF EASIEST ACCESS. PROVIDE LABELS AT EACH PIPING BRANCH CONNECTION, AT EACH EQUIPMENT CONNECTION, ON EACH SIDE OF WALL AND FLOOR PENETRATIONS, AND AT 20 LINEAR FEET ON CENTER MAXIMUM. PIPING SYSTEMS SHALL BE IDENTIFIED AS FOLLOWS: CONDENSER WATER SUPPLY AND RETURN = CWS&R; CHILLER WATER SUPPLY AND RETURN = CHWS&R; HEATING WATER SUPPLY AND RETURN = HWS&R; HEAT PUMP WATER (HPS&R); GLYCOL/WATER (GWS&R); REFRIGERANT SUCTION, LIQUID, AND HOT GAS = RS, RL, RHG; CONDENSATE DRAINAGE = D.

NELSON
Nelco Architecture, Inc.

12400 Coit Road, Suite 510
Dallas, TX. 75251
Phone: (972) 644-8830
Fax: (972) 644-8496

Client Representative:
CUSHMAN & WAKEFIELD
Attn: Paul Hurchanik
Tel: 720.582.6073
Email: paul.hurchanik@cushwake.com

Architect:
Nelco Architecture, Inc.
Attn: Harry Koutsis
Tel: 310.693.5271
Email: hkoutsis@nelsonww.com

Civil:
LANGAN
Attn: Ben Henry
Tel: (817) 328-3217
Email: bhenry@langan.com

Structural:
Salas O'Brien
Attn: Julie Bolding
Tel: (469) 782-9753
Email: julie.bolding@salasobrien.com

MEP:
Salas O'Brien
Attn: Robert Zendejas
Tel: (404) 434-7373
Email: robert.zendejas@salasobrien.com

Salas O'Brien
salasobrien.com 404-881-5300
Atlanta
3200 Windy Hill Road, SE, Suite 200E
Atlanta, GA 30339

Project Number: 2450-70132

Description:	No:	Date:
Issue for Permit		08/26/2025

BANK OF AMERICA
Broomfield

CO1-111
NWC Hwy 7 and Palisade Pkwy
Broomfield CO, 80023

PROPERTY ID:	CO1-111
NSRP VERSION:	2.0
BULLETIN:	2-2025

MECHANICAL GENERAL

COLORADO LICENSED
T. S. T. NAGUWA
635271
PROFESSIONAL ENGINEER
STATE

Project No: 23.0002261.000 Reviewed By: DBS

M00.01

COMcheck Software Version COMcheckWeb

Mechanical Compliance Certificate

Project Information

Energy Code:	2021 IECC
Project Title:	Bank of America - Broomfield
Location:	Broomfield, Colorado
Climate Zone:	5b
Project Type:	New Construction

Construction Site:
NWC Hwy 7 and Palisade Pkwy
Broomfield, Colorado 80023

Owner/Agent:

Designer/Contractor:
Cameron Barker
Salas O'Brien
3200 Windy Hill Rd SE
Atlanta, Georgia 30339

Additional Efficiency Package(s)

Credits: 10.0 Required 0.0 Proposed

Mechanical Systems List

Quantity	System Type & Description
1	RTU-1 (Single Zone): Heating: 1 each - Central Furnace, Electric, Capacity = 26 kBtu/h No minimum efficiency requirement applies Cooling: 1 each - Single Package DX Unit, Capacity = 23 kBtu/h, Air-Cooled Condenser, Unknown Economizer Proposed Efficiency = 14.00 SEER2, Required Efficiency = 13.40 SEER2 Proposed Part Load Efficiency = 0.00 , Required Part Load Efficiency = 0.00
1	RTU-2 (Single Zone): Heating: 1 each - Central Furnace, Electric, Capacity = 41 kBtu/h No minimum efficiency requirement applies Cooling: 1 each - Single Package DX Unit, Capacity = 33 kBtu/h, Air-Cooled Condenser, Unknown Economizer Proposed Efficiency = 14.00 SEER2, Required Efficiency = 13.40 SEER2 Proposed Part Load Efficiency = 0.00 , Required Part Load Efficiency = 0.00
1	RTU-3 (Single Zone): Heating: 1 each - Central Furnace, Electric, Capacity = 41 kBtu/h No minimum efficiency requirement applies Cooling: 1 each - Single Package DX Unit, Capacity = 33 kBtu/h, Air-Cooled Condenser, Unknown Economizer Proposed Efficiency = 14.00 SEER2, Required Efficiency = 13.40 SEER2 Proposed Part Load Efficiency = 0.00 , Required Part Load Efficiency = 0.00
1	FCU-1 (Single Zone): Split System Heat Pump Heating Mode: Capacity = 12 kBtu/h, Proposed Efficiency = 10.30 HSPF2, Required Efficiency = 7.50 HSPF2 Cooling Mode: Capacity = 12 kBtu/h, Proposed Efficiency = 21.40 SEER2, Required Efficiency = 14.30 SEER2 Proposed Part Load Efficiency = 0.00 , Required Part Load Efficiency = 0.00
1	FCU-2 (Single Zone): Split System Heat Pump Heating Mode: Capacity = 12 kBtu/h, Proposed Efficiency = 10.30 HSPF2, Required Efficiency = 7.50 HSPF2 Cooling Mode: Capacity = 12 kBtu/h, Proposed Efficiency = 21.40 SEER2, Required Efficiency = 14.30 SEER2 Proposed Part Load Efficiency = 0.00 , Required Part Load Efficiency = 0.00
1	FCU-3 (Single Zone): Split System Heat Pump Heating Mode: Capacity = 18 kBtu/h,

Quantity	System Type & Description
	Proposed Efficiency = 9.30 HSPF2, Required Efficiency = 7.50 HSPF2 Cooling Mode: Capacity = 24 kBtu/h, Proposed Efficiency = 20.50 SEER2, Required Efficiency = 14.30 SEER2 Proposed Part Load Efficiency = 0.00 , Required Part Load Efficiency = 0.00
1	EDH-1&3 (Single Zone): Heating: 1 each - Duct Furnace, Electric, Capacity = 8 kBtu/h No minimum efficiency requirement applies
1	EDH-2 (Single Zone): Heating: 1 each - Duct Furnace, Electric, Capacity = 13 kBtu/h No minimum efficiency requirement applies
1	EUH-1 (Unknown w/ PerimeterSystem): Heating: 1 each - Unit Heater, Electric, Capacity = 10 kBtu/h No minimum efficiency requirement applies

Mechanical Compliance Statement

Compliance Statement: The proposed mechanical design represented in this document is consistent with the building plans, specifications, and other calculations submitted with this permit application. The proposed mechanical systems have been designed to meet the 2021 IECC requirements in COMcheck Version COMcheckWeb and to comply with any applicable mandatory requirements listed in the Inspection Checklist.

Cameron Barker - Mechanical Designer — Cameron Barker — 8-26-2025
Name - Title — Signature — Date

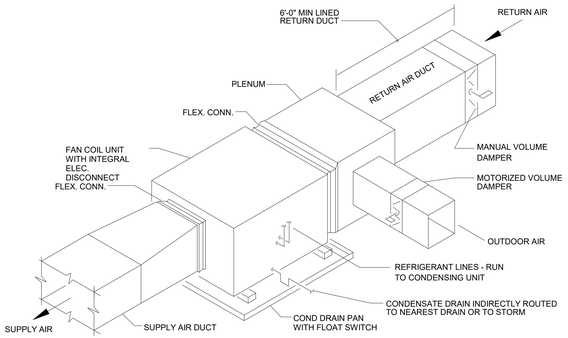

1 M00.02 HORIZONTAL FAN COIL UNIT DETAIL
NOT TO SCALE

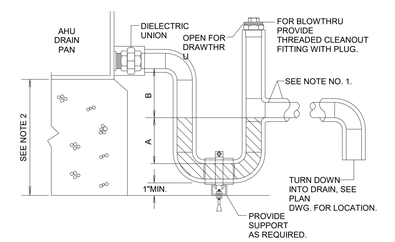

BLOWTHRU:
A = GREATER OF 4" OR 1/2" PLUS AHU TOTAL PRESSURE IN INCHES-WC.

DRAWTHRU:
B = GREATER OF 2" OR 1/2" PLUS AHU TOTAL PRESSURE IN INCHES-WC

NOTES:
1. REF. PLAN DWG'S FOR CONDENSATE DRAIN PIPE SIZE, (1"Ø MIN. AT EACH AHU DRAIN CONNECTION POINT). REF. SPECIFICATIONS FOR PIPE AND INSULATION MATERIAL REQUIREMENTS.
2. PAD OR STANCHION HEIGHT DETERMINED BY SPACE REQD TO INSTALL TRAP, REF. PLAN DWG'S HEIGHT.

2 M00.02 CONDENSATE DRAIN DETAIL
NOT TO SCALE

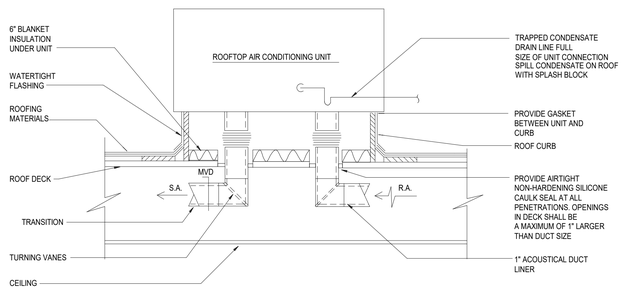

3 M00.02 ROOFTOP UNIT DETAIL
NOT TO SCALE

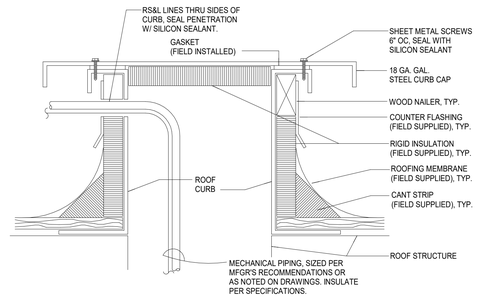

4 M00.02 MECHANICAL PIPING ROOF PENETRATION CURB DETAIL
NOT TO SCALE

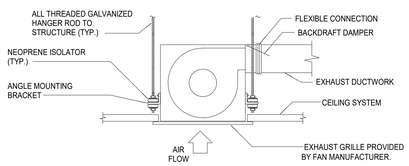

NOTES:
1. CEILING TYPE FANS INSTALLED WITHOUT A CEILING SHALL BE INSTALLED IN ACCORDANCE WITH MANUFACTURERS INSTALLATION REQUIREMENTS UTILIZING ALL THREADED HANGING ROD AND ISOLATORS.

5 M00.02 EXHAUST FAN DETAIL
NOT TO SCALE

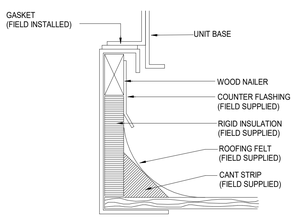

6 M00.02 RTU ROOF CURB DETAIL
NOT TO SCALE

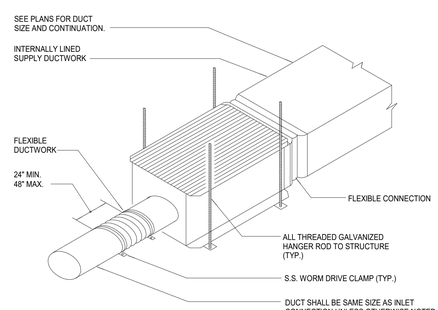

7 M00.02 VVT DETAIL
NOT TO SCALE

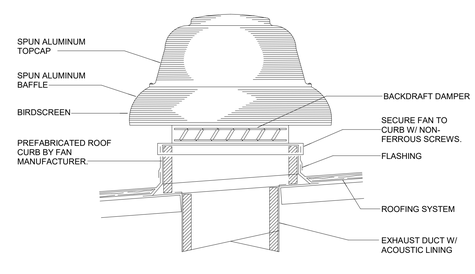

8 M00.02 ROOF EXHAUST FAN DETAIL
NOT TO SCALE

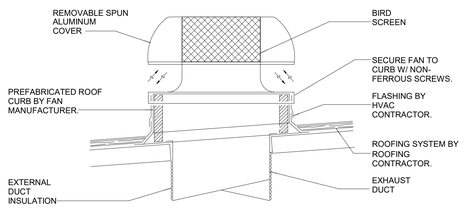

9 M00.02 ROOF INTAKE/RELIEF HOOD DETAIL
NOT TO SCALE

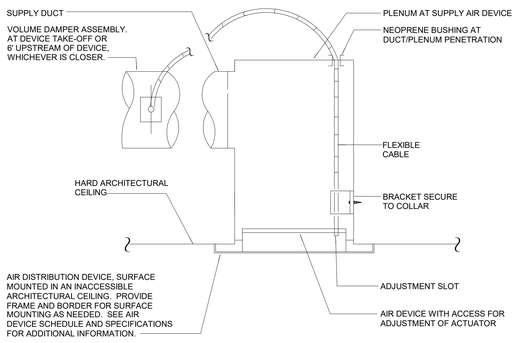

10 M00.02 REMOTE CABLE-OPERATED DAMPER DETAIL
NOT TO SCALE

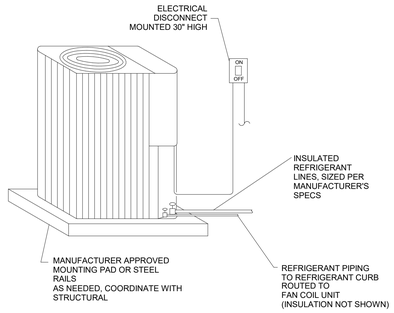

11 M00.02 CONDENSING UNIT DETAIL
NOT TO SCALE

NELSON
Nelco Architecture, Inc.

12400 Coit Road, Suite 510
Dallas, TX. 75251
Phone: (972) 644-8830
Fax: (972) 644-8496

Client Representative:
CUSHMAN & WAKEFIELD
Attn: Paul Hurchanik
Tel: 720.582.6073
Email: paul.hurchanik@cushwake.com

Architect:
Nelco Architecture, Inc.
Attn: Harry Koutsis
Tel: 310.693.5271
Email: hkoutsis@nelsonww.com

Civil:
LANGAN
Attn: Ben Henry
Tel: (817) 328-3217
Email: bhenry@langan.com

Structural:
Salas O'Brien
Attn: Julie Bolding
Tel: (469) 782-9753
Email: julie.bolding@salasobrien.com

MEP:
Salas O'Brien
Attn: Robert Zendejas
Tel: (404) 434-7373
Email: robert.zendejas@salasobrien.com

Salas O'Brien
salasobrien.com 404-881-5300
Atlanta
3200 Windy Hill Road, SE, Suite 200E
Atlanta, GA 30339

Project Number: 2450-70132

Description:	No:	Date:
Issue for Permit		08/26/2025

BANK OF AMERICA
Broomfield

CO1-111
NWC Hwy 7 and Palisade Pkwy
Broomfield CO, 80023

PROPERTY ID:	CO1-111
NSRP VERSION:	2.0
BULLETIN:	2-2025

MECHANICAL DETAILS

COLORADO LICENSED
JESSE T. NAUGLE
63522
PROFESSIONAL ENGINEER
5/26/25

Project No: 23.0002261.000 Reviewed By: DBS

M00.02

PACKAGE ROOFTOP AIR CONDITIONING UNIT SCHEDULE

UNIT NUMBER	SERVICE	OUTDOOR AIR (CFM)	FAN DATA		MOTOR BHP	DIRECT EXPANSION COOLING COIL				COMPRESSOR DATA		ELECTRIC HEAT			SEER2 (EER)	WEIGHT (LBS)	ELECTRICAL CONNECTION (V/PH)	SELECTION BASED ON	REMARKS
			CFM	EXTERNAL S.P (IN. W.G.)		SENSIBLE (MBH)	TOTAL (MBH)	EAT (°F)		NO.	TYPE	NO. STAGES	INPUT (KW)	OUTPUT (MBH)					
								DB	WB										
RTU-1	WEST ZONE	75	800	1.0	0.33	23.0	23.2	80	61	1	CONSTANT VOLUME	1	7.5	25.6	13.4	700	208/1	TRANE 4TCC4024	1,2,3,4,5,7,8,9,11,12,13,15,16,17
RTU-2	CENTRAL ZONE	300	1600	1.0	1.0	44.7	44.7	80	61	1	CONSTANT VOLUME	2	12.0	40.9	13.4	1000	208/3	TRANE TSK048	1,2,3,4,5,6,7,8,9,10,11,12,13,14,15,16,17,18
RTU-3	EAST ZONE	140	1000	1.0	0.75	32.2	32.7	80	61	1	CONSTANT VOLUME	2	12.0	40.9	13.4	1000	208/3	TRANE TSK036	1,2,3,4,5,7,8,9,11,12,13,14,15,16,17

1. PROVIDE ANTI SHORT CYCLE CONTROLS, EC MOTOR, AND FILTER RACK BY MANUFACTURER.
2. PROVIDE OAT SENSOR. TIE INTO AMERICAN AUTO-MATRIX CONTROLLER. COORDINATE WITH ECS.
3. PROVIDE UNIT WITH ELECTROMECHANICAL CONTROLS ONLY. COORDINATE ALL IC3 REQUIREMENTS WITH BANK OF AMERICA IC3 DEPARTMENT:

IC3 CONTACT INFORMATION:
PONCELL BROWN: IC3_OPERATIONS@BANKOFAMERICA.COM
WITH A COPY TO: PONCELL.BROWN@AM.JLL.COM

4. FURNISH DISCONNECT FOR INSTALLATION BY ELECTRICAL CONTRACTOR.
5. CONTROLS BY BANK OF AMERICA IC3 DEPARTMENT.
6. PROVIDE CO2/HUMIDITY SENSOR AS NECESSARY TO MEET BANK OF AMERICA REQUIREMENTS. PROVIDE RTU-2 WITH CARBON DIOXIDE SPACE SENSOR TO BE FIELD INSTALLED PER THE IC3 WIRING DIAGRAM FOR CONTROL ON THE DRAWING M03.01.
7. VARIABLE CHANGEOVER BYPASS SYSTEM.
8. R-454B REFRIGERANT.
9. UNIT SHALL ACCEPT 2" THICK PLEATED THROWAWAY FILTER RATED AT MERV 13.
10. CO2 BASED DEMAND CONTROL VENTILATION, PROVIDE WITH WALL MOUNTED CO2 SENSOR. MINIMUM DCV AIRFLOW SETPOINT OF 105 CFM.
11. DISCHARGE AIR TEMPERATURE TO BE CONTROLLED VIA IC3.
12. PROVIDE ROOF CURB BURGLAR BARS FOR FIELD INSTALLATION.
13. PROVIDE 18" HIGH FACTORY INSULATED WIND AND SEISMIC RESTRAINT ROOF CURB.
14. PROVIDE ENTHALPY ECONOMIZER AND ENTHALPY SENSOR WITH BAROMETRIC RELIEF.
15. PROVIDE MODULATING MOTORIZED OUTSIDE AIR DAMPER AND LOW AMBIENT CONTROL.
16. PROVIDE FACTORY INSTALLED POWERED CONVENIENCE OUTLET.
17. INTERFACE WITH IC3 PER CONTROL DIAGRAM.
18. PROVIDE POWER PHASE LOSS PROTECTION INTEGRAL TO THE UNIT.

GENERAL NOTES:

1. PROVIDE MECHANICAL INSTALLATION IN ACCORDANCE WITH LOCAL CODES (2021 IMC) ORDINANCES, AND BROOMFIELD CITY AMENDMENTS.
2. SUPPORT SUSPENDED MECHANICAL EQUIPMENT WITH FANS WITH ALL-THREAD RODS AND VIBRATION ISOLATORS.
3. PROVIDE GENERAL CONTRACTOR WITH FINAL SIZES AND LOCATIONS OF ALL WALL, FLOOR, AND ROOF PENETRATIONS TO COORDINATE ANY REQUIRED STRUCTURAL FRAMING MEMBERS.
4. ALL PENETRATIONS OF DUCTWORK, PIPING CONDUITS, AND VENTS THROUGH FIRE-RATED AND SMOKE-RATED BARRIERS SHALL HAVE FIRESTOP AND/OR SMOKE STOP PROTECTION IN ACCORDANCE WITH THE MINIMUM BUILDING CODE.
5. IF RTU'S MUST BE USED DURING CONSTRUCTION, THEY SHALL HAVE FILTRATION MEDIA WITH A MERV 8 AT EACH RETURN AIR GRILLE. THESE MUST BE REPLACED PRIOR TO OCCUPANCY.
6. HOLD ALL PIPING AND DUCTWORK TIGHT TO STRUCTURE IN ALL AREAS. NOTE THERE ARE HIGH CEILINGS IN MANY AREAS WHICH WILL REQUIRE CLOSE COORDINATION WITH OTHER TRADES DURING SHOP DRAWING PREPARATION AND DURING CONSTRUCTION.
7. SMOKE DETECTORS AND REMOTE ANNUNCIATOR ARE SUPPLIED BY MECHANICAL CONTRACTOR. SMOKE DETECTORS SHALL BE INSTALLED AND INTERLOCKED FOR SHUTDOWN IN ACCORDANCE WITH SPECIFICATIONS AND CONTROLS REQUIREMENTS.
8. THREE SETS OF FILTERS ARE TO BE PROVIDED BY CONTRACTOR FOR EACH FCU UNIT. ONE SET IS FOR USE DURING CONSTRUCTION, ONE SET TO BE INSTALLED PRIOR TO TEST AND BALANCE, AND A FINAL SET TO BE INSTALLED JUST PRIOR TO OCCUPANCY.

SPLIT SYSTEM HEAT PUMP UNIT SCHEDULE

FAN COIL UNIT													AIR COOLED CONDENSING UNIT										
UNIT NUMBER	SERVICE	TYPE	OUTDOOR AIR (CFM)	FAN DATA			D.X. COOLING COIL				VOLTS	PHASE	HEATING CAPACITY (MBH)	SELECTION BASED ON	UNIT NUMBER	LOCATION	COND. EAT (°F)	COMPRESSOR DATA		SOUND DATA (db)	SINGLE POINT POWER CONNECTION		SELECTION BASED ON	SEER	HSPF	REMARKS
				CFM	EXTERNAL S.P (IN. W.G.)	HP	SENSIBLE CAPACITY (MBH)	TOTAL CAPACITY (MBH)	EAT (°F)									NO.	NO. OF STAGES		VOLTS	PHASE				
									DB	WB																
FCU-1	ATM	DUCTED	0	400	0.5	N/A	9	12	80	61	208	1	12.0	MITSUBISHI TPVA-A12	HP-1	ROOF	105	1	INVERTER SCROLL	47	208	1	MITSUBISHI TRUZ-A12	21.4	10.3	1,2,3,4,5,6,7,8,9,10,11,12,13
FCU-2	VESTIBULE	DUCTED	50	400	0.5	N/A	9	12	80	61	208	1	12.0	MITSUBISHI TPVA-A12	HP-2	ROOF	105	1	INVERTER SCROLL	47	208	1	MITSUBISHI TRUZ-A12	21.4	10.3	1,2,3,4,5,6,7,8,9,10,11,12,13
FCU-3	NER/ELEC	DUCTED	0	800	0.5	N/A	18	24	80	61	208	1	17.5	MITSUBISHI TPVA-A24	HP-3	ROOF	105	1	INVERTER SCROLL	47	208	1	MITSUBISHI TRUZ-A24	20.5	9.3	1,2,3,4,5,6,7,8,9,10,11,12,13

1. REVERSE CYCLE HEATING AT 17 DEG. THEN DUCT HEATER HEATER TO RUN. SEE DUCT HEATER SCHEDULE FOR ADDITIONAL INFORMATION.
2. PROVIDE WITH WIND BAFFLE, LOW AMBIENT CONTROLS, MANUFACTURER'S 24/7 WALL MOUNTED THERMOSTAT AND CONDENSATE PUMP BY MANUFACTURER.
3. COORDINATE ALL IC3 REQUIREMENTS WITH BANK OF AMERICA IC3 DEPARTMENT:

IC3 CONTACT INFORMATION:
PONCELL BROWN: IC3_OPERATIONS@BANKOFAMERICA.COM
WITH A COPY TO: PONCELL.BROWN@AM.JLL.COM

4. CONDENSING UNIT NON-FUSED DISCONNECT BY ELECTRICAL CONTRACTOR.
5. REFRIGERANT LINES TO BE SIZED AND INSTALLED PER MANUFACTURER'S RECOMMENDATIONS.
6. PROVIDE FIELD INSTALLED CONTROLLER WITH 75VA 208 VOLT TO 24 VOLT PRIMARY TO SECONDARY TRANSFORMER IF ONE IS NOT PRESENT OR DOES NOT MATCH CURRENT BANK OF AMERICA STANDARDS. REFER TO CONTROL DRAWING S/M03.01 FOR ADDITIONAL INFORMATION.
7. CONTROLS BY BANK OF AMERICA IC3 DEPARTMENT.
8. PROVIDE AUXILIARY DRAIN PAN WITH UL #508 APPROVED WATER DETECTION SENSOR FOR UNIT SHUTDOWN. WIRE CONTROL CIRCUIT THROUGH NC CONTACT.
9. MAXIMUM REFRIGERANT LINE LENGTH: 100 FT. MAXIMUM HEIGHT DIFFERENCE: 100 FT.
10. MERV-13 PLEATED FILTERS.
11. R-454B REFRIGERANT.
12. MOUNT OUTDOOR UNIT ON MINIMUM 18" HIGH NONISOLATED WIND AND SEISMIC RESTRAINT RAILS. BASIS OF DESIGN: THE VMC GROUP MODEL #R-7000.
13. HANG INDOOR UNIT VIA (4) POINTS FROM STRUCTURE TO SUIT.

MANUFACTURER

SUBJECT TO COMPLIANCE WITH REQUIREMENTS, MANUFACTURERS OFFERING PRODUCTS THAT MAY BE INCORPORATED INTO THE WORK INCLUDE THE FOLLOWING:

1. TRANE: MATT BASKERVILLE (704) 650-2653; MJBASKERVILLE@TRANE.COM
2. CARRIER: STEVE OWENS (704) 991-5205; STEPHEN.OWENS@CARRIER.UTC.COM
3. YORK: WALT JACOBE (405) 312-6666; WALT.JACOBE@JCI.COM
4. LENNOX: RON JOHNSTON (704) 621-2606; RONALD.JOHNSTON@LENNOXIND.COM
5. MITSUBISHI: TOM VARGA (866) 433-3347; NATIONALACCOUNTS@HVAC.MEA.COM

GRILLES, REGISTERS, AND DIFFUSERS SCHEDULE

MARK	MAKE	MODEL	CFM RANGE	NECK	SIZE	DESCRIPTION	REMARKS
S-1A	TITUS	OMNI	0 - 110	6" DIA.	24"x24"	ARCHITECTURAL SQUARE PANEL CEILING SUPPLY AIR DIFFUSER - STEEL CONSTRUCTION, CURVED BACK-PAN DESIGN; FLAT T-BAR CEILING FRAME.	SEE NOTES 1-6
S-1B	TITUS	OMNI	115 - 210	8" DIA.	24"x24"	ARCHITECTURAL SQUARE PANEL CEILING SUPPLY AIR DIFFUSER - STEEL CONSTRUCTION, CURVED BACK-PAN DESIGN; FLAT T-BAR CEILING FRAME.	SEE NOTES 1-6
S-1C	TITUS	OMNI	215 - 330	10" DIA.	24"x24"	ARCHITECTURAL SQUARE PANEL CEILING SUPPLY AIR DIFFUSER - STEEL CONSTRUCTION, CURVED BACK-PAN DESIGN; FLAT T-BAR CEILING FRAME.	SEE NOTES 1-6
S-1D	TITUS	OMNI	335 - 480	12" DIA.	24"x24"	ARCHITECTURAL SQUARE PANEL CEILING SUPPLY AIR DIFFUSER - STEEL CONSTRUCTION, CURVED BACK-PAN DESIGN; FLAT T-BAR CEILING FRAME.	SEE NOTES 1-6
S-1E	TITUS	OMNI	485 - 650	14" DIA.	24"x24"	ARCHITECTURAL SQUARE PANEL CEILING SUPPLY AIR DIFFUSER - STEEL CONSTRUCTION, CURVED BACK-PAN DESIGN; FLAT T-BAR CEILING FRAME.	SEE NOTES 1-6
S-1F	TITUS	OMNI	0 - 110	6" DIA.	12"x12"	ARCHITECTURAL SQUARE PANEL CEILING SUPPLY AIR DIFFUSER - STEEL CONSTRUCTION, CURVED BACK-PAN DESIGN; FLAT T-BAR CEILING FRAME.	SEE NOTES 1-6
S-2	TITUS	300RS	SEE DRAWING	N/A	SEE DRAWING	DOUBLE DEFLECTION HEAVY DUTY SIDEWALL SUPPLY AIR REGISTER - 1/2" FRONT, 3/4" REAR BLADE SPACING, FRONT BLADES PARALLEL TO SHORT DIMENSION, ALL STEEL CONSTRUCTION; WITH OBD.	SEE NOTES 1-6
S-3	TITUS	T3SQ-M	200 - 400	12" DIA.	24"x24"	ARCHITECTURAL SQUARE VAV PANEL CEILING SUPPLY AIR DIFFUSER - STEEL CONSTRUCTION, CURVED BACK-PAN DESIGN; FLAT T-BAR CEILING FRAME.	SEE NOTES 1-7
R-1A	TITUS	50F	0 - 800	10"x22"	12"x24"	EGGCRATE RETURN AIR GRILLE - CORE PF 1/2"X1/2"X1" ALUMINUM GRID. PROVIDE SQUARE TO ROUND TRANSITION AS NEEDED.	SEE NOTES 1-6
R-1B	TITUS	50F	805 - 2000	22"x22"	24"x24"	EGGCRATE RETURN AIR GRILLE - CORE PF 1/2"X1/2"X1" ALUMINUM GRID. PROVIDE SQUARE TO ROUND TRANSITION AS NEEDED.	SEE NOTES 1-6
R-1C	TITUS	50F	2005 - 4000	22"x44"	24"x48"	EGGCRATE RETURN AIR GRILLE - CORE PF 1/2"X1/2"X1" ALUMINUM GRID. PROVIDE SQUARE TO ROUND TRANSITION AS NEEDED.	SEE NOTES 1-6
R-2/E-2	TITUS	355ZRL	SEE DRAWING	N/A	SEE DRAWING	SINGLE DEFLECTION HEAVY DUTY RETURN AIR REGISTER - BLADES AT 1/2" O.C., 0° DEFLECTION, BLADES PARALLEL TO LONG DIMENSION, STEEL CONSTRUCTION; WITH OBD.	SEE NOTES 1-6
E-1	TITUS	50F	0 - 210	10"x10"	10"x10"	EGGCRATE RETURN AIR GRILLE - CORE PF 1/2"X1/2"X1" ALUMINUM GRID. PROVIDE SQUARE TO ROUND TRANSITION AS NEEDED.	SEE NOTES 1-6
SD/SDR	TITUS	TBDI-10	SEE DRAWING	SEE DRAWING	SEE DRAWING	(2) 1" SLOTS, INSULATED PLENUM.	SEE NOTES 1-6

NOTES:
1. MAXIMUM NOISE CRITERION < 30.
2. FINISH WITH STANDARD WHITE BAKED ENAMEL FINISH (#26 WHITE), UNO.
3. FURNISH "RAPID-MOUNT" FRAMES FOR S-1 & R-1 DEVICES LOCATED IN DRYWALL CEILINGS.
4. COORDINATE MOUNTING FRAME WITH CEILING/WALL CONSTRUCTION TYPE.
5. PROVIDE BI-DIRECTIONAL BLOW CLIPS WHERE AS INDICATED AS REQUIRED.
6. PROVIDE REMOTE CABLE OPERATED VOLUME DAMPERS LOCATED IN INACCESSIBLE CONSTRUCTION. SEE DETAIL.
7. PROVIDE 120/240 VAC TRANSFORMER POWER MODULE, CONTROLLER/THERMOSTAT AND PRESSURE RELIEF RING FOR ALL VAV DIFFUSERS.

ELECTRIC HEATER SCHEDULE

UNIT NUMBER	LOCATION	TYPE	CFM	NO. OF STAGES	ELECTRIC HEATING COIL			SELECTION BASED ON	REMARKS
					KW	VOLTS	PHASE		
EDH-1	FCU-1	DUCT	400	1	2.3	208	1	MITSUBISHI EH03-MPA-S(B)	(1) (2)
EDH-2	FCU-2	DUCT	400	1	3.8	208	1	MITSUBISHI EH05-MPA-S(B)	(1) (2)
EDH-3	FCU-3	DUCT	800	1	2.3	208	1	MITSUBISHI EH03-MPA-M(B)	(1) (2)
EUH-1	JANITOR	UNIT	-	1	3.0	208	1	QMARK MUH-0381	(3)

(1) PROVIDE THE FOLLOWING MANUFACTURERS OPTIONS: SINGLE STAGE HEATING, DOOR INTERLOCK DISCONNECT SWITCH, ALLOY ELEMENT WIRE (80/20), MERCURY CONTACTORS, FLANGED CONNECTIONS.

(2) TIE INTO FCU THERMOSTAT AND COORDINATE WITH IC3.

(3) INTEGRAL THERMOSTAT, DISCONNECT, AND OVERHEAT PROTECTION.

EXHAUST FAN SCHEDULE

MARK	AREA SERVED	PRODUCT		TYPE	CFM	ESP	SONES	MOTOR DATA			NOTES
		MFR.	MODEL					DRIVE	VOLT/PH/HZ	WATTS (HP)	
EF-1	RESTROOMS	GREENHECK	G-070-D	ROOF EXHAUST	150	0.4	4.2	DIRECT	115/1/60	(1/30)	1,2,3,4,5,7
EF-2	JANITOR'S CLOSET	GREENHECK	CSP-A200	CABINET	50	0.4	0.3	DIRECT	115/1/60	80.0	3,5,6

1. PROVIDE 18" HIGH FACTORY INSULATED ROOF CURB, INTEGRAL GRAVITY BACKDRAFT DAMPER, ALUMINUM CEILING GRILLE, AND HANGING ISOLATOR KIT.
2. PROVIDE ANTI-BLOWING RAIN INTERNAL WIND BAND AND NEMA 3R EXTERNAL TYPE DISCONNECT SWITCH.
3. PROVIDE FSC SPEED CONTROLLER.
4. PROVIDE ROOF JACK RJ-6X9 WITH BIRD SCREEN.
5. PROVIDE INTEGRAL DISCONNECT SWITCH WITH BACK DRAFT DAMPER, ALUMINUM CEILING GRILLE AND HANGING ISOLATOR KIT.
6. EF-2 SHALL OPERATE BY OCCUPANCY SENSOR. SEE ELECTRICAL FOR ADDITIONAL INFORMATION.
7. OPERATION OF EF-1 VIA LIGHTING CONTROL PANEL. FAN SHALL RUN WHEN OCCUPIED, AND OFF WHEN UNOCCUPIED.

VARIABLE VOLUME AND TEMPERATURE UNIT SCHEDULE

UNIT NUMBER	LOCATION	COOLING		INLET CONNECTION SIZE (DIA.)	MINIMUM INLET PRESSURE (IN. W.G.)	MAXIMUM NOISE CRITERIA	SELECTION BASED ON	REMARKS
		MAXIMUM CFM	MINIMUM CFM					
VVT-1-1	OFFICE 5 CB [109]	145	60	8	0.2	30	TRANE VCEF	1,2,3,4,5,6,7,8,9
VVT-1-2	OFFICE 6 CB [110]	655	105	12	0.2	30	TRANE VCEF	1,2,3,4,5,6,7,8,9
VVT-1-1A	BYPASS	635	0	12	0.2	30	TRANE VCEF	1,3,4,5,6,8,9
VVT-2-1	CALLING CUBES [122]	740	105	14	0.2	30	TRANE VCEF	1,2,3,4,5,6,7,8,9
VVT-2-2	CALLING CUBES [122]	480	105	12	0.2	30	TRANE VCEF	1,2,3,4,5,6,7,8,9
VVT-2-3	BREAK ROOM [118]	380	60	10	0.2	30	TRANE VCEF	1,2,3,4,5,6,7,8,9
VVT-2-1A	BYPASS	1330	0	16	0.2	30	TRANE VCEF	1,3,4,5,6,8,9
VVT-3-1	OFFICE 2 CL [106]	310	60	10	0.2	30	TRANE VCEF	1,2,3,4,5,6,7,8,9
VVT-3-2	OFFICE 4 CB [108]	290	60	10	0.2	30	TRANE VCEF	1,2,3,4,5,6,7,8,9
VVT-3-3	CASH WINDOW [116]	400	60	10	0.2	30	TRANE VCEF	1,2,3,4,5,6,7,8,9
VVT-3-1A	BYPASS	820	0	14	0.2	30	TRANE VCEF	1,3,4,5,6,8,9

1. PROVIDE ALL VVTS WITH SINGLE POINT ELECTRICAL CONNECTION AT 120V / 1PH.
2. PROVIDE REMOTE ROOM SENSORS.
3. PROVIDE INDIVIDUAL CONTROL SYSTEMS FOR EACH.
4. PROVIDE NETWORK CONTROL PANELS WHERE INDICATED ON DRAWINGS.
5. PROVIDE A 120V JUNCTION BOX AND DISCONNECT IN CLOSE PROXIMITY TO THE ASSOCIATED CONTROL PANEL AND EACH VVT TERMINAL.
6. PROVIDE ALL CONTROL WIRING BETWEEN CONTROL PANEL AND DAMPERS, SENSORS, ETC., IN ACCORDANCE WITH MANUFACTURER'S GUIDELINES, PROVIDE 120V/24V CONTROL TRANSFORMER SERVING EACH VVT TERMINAL.
7. PROVIDE AUTOMATIC HEATING/COOLING CHANGE OVER FOR ALL VVT TERMINALS.
8. PROVIDE 1/2" LINER WITH FOIL COVER.
9. VVT'S ARE FOR A CHANGEOVER BYPASS SYSTEM.

ROOF HOOD SCHEDULE

UNIT NUMBER	TYPE	CFM	PD (IN. W.G.)	THROAT SIZE (IN.)	HOOD DATA					SELECTION BASED ON	REMARKS
					DIA (IN.)	L (IN.)	W (IN.)	H (IN.)	THROAT VELOCITY (FPM)		
RH-1	INTAKE	50	0.002	8	8	19	19	19.25	135	GREENHECK GRSI-8	(1) (2)
RH-2	RELIEF	50	0.002	8	8	19	19	19.25	135	GREENHECK GRSR-8	(1) (3)
GRV-1	RELIEF	N/A	0.002	18	35.5	30	30	11.25	495	GREENHECK GRSR-20	(1)
GRV-2	RELIEF	N/A	0.002	18	35.5	30	30	11.25	495	GREENHECK GRSR-20	(1)

(1) PROVIDE MANUFACTURER'S MATCHING 12" HIGH ROOF CURB WITH INSECT SCREEN.

(2) PROVIDE BACKDRAFT DAMPER IN THROAT INTERLOCKED TO ASSOCIATED FCU TO OPEN WHEN UNIT IS OPERATING.

(3) PROVIDE MOTORIZED DAMPER IN THROAT INTERLOCKED TO ASSOCIATED EF TO OPERATE WHEN FAN IS ON.

NELSON
Nelco Architecture, Inc.

12400 Coit Road, Suite 510
Dallas, TX. 75251
Phone: (972) 644-8830
Fax: (972) 644-8496

Client Representative:
CUSHMAN & WAKEFIELD
Attn: Paul Hurchanik
Tel: 720.582.6073
Email: paul.hurchanik@cushwake.com

Architect:
Nelco Architecture, Inc.
Attn: Harry Koutsis
Tel: 310.693.5271
Email: hkoutsis@nelsonww.com

Civil:
LANGAN
Attn: Ben Henry
Tel: (817) 328-3217
Email: bhenry@langan.com

Structural:
Salas O'Brien
Attn: Julie Bolding
Tel: (469) 782-9753
Email: julie.bolding@salasobrien.com

MEP:
Salas O'Brien
Attn: Robert Zendejas
Tel: (404) 434-7373
Email: robert.zendejas@salasobrien.com

Salas O'Brien
salasobrien.com 404-881-5300
Atlanta
3200 Windy Hill Road, SE, Suite 200E
Atlanta, GA 30339

Project Number: 2450-70132

Description:	No:	Date:
Issue for Permit		08/26/2025

BANK OF AMERICA
Broomfield

CO1-111
NWC Hwy 7 and Palisade Pkwy
Broomfield CO, 80023

PROPERTY ID: CO1-111
NSRP VERSION: 2.0
BULLETIN: 2-2025

MECHANICAL SCHEDULES

COLORADO LICENSED
JESSE T. NAGEL
35527
PROFESSIONAL ENGINEER
07/24/25

Project No: 23.0002261.000 Reviewed By: DBS

M00.03

Air System Sizing Summary for FCU-1 - ATM

Project Name: BofA Broomfield
Prepared by: Salas O'Brien
08/05/2025
06:17PM

Air System Information

Air System Name	FCU-1 - ATM	Number of zones	1
Equipment Class	SPLT AHU	Floor Area	164.0 ft²
Air System Type	SZCAV	Location	Denver, Colorado

Sizing Calculation Information

Calculation Months	Jan to Dec	Zone CFM Sizing	Sum of space airflow rates
Sizing Data	Calculated	Space CFM Sizing	Individual peak space loads

Central Cooling Coil Sizing Data

Total coil load	0.6	Tons	Load occurs at	Aug 1300	
Total coil load	7.7	MBH	OA DB / WB	91.8 / 58.5	°F
Sensible coil load	7.7	MBH	Entering DB / WB	74.1 / 52.2	°F
Coil CFM at Aug 1300	400	CFM	Leaving DB / WB	52.4 / 43.2	°F
Max block CFM	400	CFM	Coil ADP	50.0	°F
Sum of peak zone CFM	400	CFM	Bypass Factor	0.100	
Sensible heat ratio	1.000		Resulting RH	34	%
CFM/Ton	621.6		Design supply temp.	51.9	°F
ft²/Ton	254.9		Zone T-stat Check	1 of 1	OK
BTU/(hr·ft²)	47.1		Max zone temperature deviation	0.0	°F
Water flow @ 10.0 °F rise	N/A				

Central Heating Coil Sizing Data

Max coil load	2.6	MBH	Load occurs at	Des Htg	
Coil CFM at Des Htg	400	CFM	BTU/(hr·ft²)	15.7	
Max coil CFM	400	CFM	Ent. DB / Lvg DB	69.1 / 76.4	°F
Water flow @ 20.0 °F drop	N/A				

Supply Fan Sizing Data

Actual max CFM	400	CFM	Fan motor BHP	0.05	BHP
Standard CFM	329	CFM	Fan motor kW	0.04	kW
Actual max CFM/ft²	2.44	CFM/ft²	Fan static	0.50	in wg

Outdoor Ventilation Air Data

Design airflow CFM	0	CFM	CFM/person	0.00	CFM/person
CFM/ft²	0.00	CFM/ft²			

Zone Sizing Summary for FCU-1 - ATM

Project Name: BofA Broomfield
Prepared by: Salas O'Brien
08/05/2025
06:17PM

Air System Information

Air System Name	FCU-1 - ATM	Number of zones	1
Equipment Class	SPLT AHU	Floor Area	164.0 ft²
Air System Type	SZCAV	Location	Denver, Colorado

Sizing Calculation Information

Calculation Months	Jan to Dec	Zone CFM Sizing	Sum of space airflow rates
Sizing Data	Calculated	Space CFM Sizing	Individual peak space loads

Zone Terminal Sizing Data

Zone Name	Design Supply Airflow (CFM)	Minimum Supply Airflow (CFM)	Zone CFM/ft²	Reheat Coil Load (MBH)	Reheat Coil Water gpm @ 20.0 °F	Zone Htg Unit Coil Load (MBH)	Zone Htg Unit Water gpm @ 20.0 °F	Mixing Box Fan Airflow (CFM)
Zone 1	400	400	2.44	0.0	-	0.0	-	0

Zone Peak Sensible Loads

Zone Name	Zone Cooling Sensible (MBH)	Time of Peak Sensible Cooling Load	Zone Heating Load (MBH)	Zone Floor Area (ft²)
Zone 1	7.5	Jul 1500	2.8	164.0

Space Loads and Airflows

Zone Name / Space Name	Mult.	Cooling Sensible (MBH)	Time of Peak Sensible Load	Air Flow (CFM)	Heating Load (MBH)	Floor Area (ft²)	Space CFM/ft²
Zone 1							
102 - ATM Room	1	7.5	Jul 1500	400	2.8	164.0	2.44

Air System Sizing Summary for FCU-2 - Vestibule

Project Name: BofA Broomfield
Prepared by: Salas O'Brien
08/05/2025
06:17PM

Air System Information

Air System Name	FCU-2 - Vestibule	Number of zones	1
Equipment Class	SPLT AHU	Floor Area	281.0 ft²
Air System Type	SZCAV	Location	Denver, Colorado

Sizing Calculation Information

Calculation Months	Jan to Dec	Zone CFM Sizing	Sum of space airflow rates
Sizing Data	Calculated	Space CFM Sizing	Individual peak space loads

Central Cooling Coil Sizing Data

Total coil load	0.6	Tons	Load occurs at	Jul 1500	
Total coil load	7.0	MBH	OA DB / WB	94.8 / 59.4	°F
Sensible coil load	7.0	MBH	Entering DB / WB	75.5 / 53.5	°F
Coil CFM at Jul 1500	400	CFM	Leaving DB / WB	55.7 / 45.6	°F
Max block CFM	400	CFM	Coil ADP	53.5	°F
Sum of peak zone CFM	400	CFM	Bypass Factor	0.100	
Sensible heat ratio	1.000		Resulting RH	26	%
CFM/Ton	683.7		Design supply temp.	53.8	°F
ft²/Ton	480.3		Zone T-stat Check	1 of 1	OK
BTU/(hr·ft²)	25.0		Max zone temperature deviation	0.0	°F
Water flow @ 10.0 °F rise	N/A				

Central Heating Coil Sizing Data

Max coil load	11.8	MBH	Load occurs at	Des Htg	
Coil CFM at Des Htg	400	CFM	BTU/(hr·ft²)	42.2	
Max coil CFM	400	CFM	Ent. DB / Lvg DB	61.2 / 94.6	°F
Water flow @ 20.0 °F drop	N/A				

Supply Fan Sizing Data

Actual max CFM	400	CFM	Fan motor BHP	0.05	BHP
Standard CFM	329	CFM	Fan motor kW	0.04	kW
Actual max CFM/ft²	1.42	CFM/ft²	Fan static	0.50	in wg

Outdoor Ventilation Air Data

Design airflow CFM	23	CFM	CFM/person	23.44	CFM/person
CFM/ft²	0.08	CFM/ft²			

Zone Sizing Summary for FCU-2 - Vestibule

Project Name: BofA Broomfield
Prepared by: Salas O'Brien
08/05/2025
06:17PM

Air System Information

Air System Name	FCU-2 - Vestibule	Number of zones	1
Equipment Class	SPLT AHU	Floor Area	281.0 ft²
Air System Type	SZCAV	Location	Denver, Colorado

Sizing Calculation Information

Calculation Months	Jan to Dec	Zone CFM Sizing	Sum of space airflow rates
Sizing Data	Calculated	Space CFM Sizing	Individual peak space loads

Zone Terminal Sizing Data

Zone Name	Design Supply Airflow (CFM)	Minimum Supply Airflow (CFM)	Zone CFM/ft²	Reheat Coil Load (MBH)	Reheat Coil Water gpm @ 20.0 °F	Zone Htg Unit Coil Load (MBH)	Zone Htg Unit Water gpm @ 20.0 °F	Mixing Box Fan Airflow (CFM)
Zone 1	400	400	1.42	0.0	-	0.0	-	0

Zone Peak Sensible Loads

Zone Name	Zone Cooling Sensible (MBH)	Time of Peak Sensible Cooling Load	Zone Heating Load (MBH)	Zone Floor Area (ft²)
Zone 1	6.8	Jul 1500	11.3	281.0

Space Loads and Airflows

Zone Name / Space Name	Mult.	Cooling Sensible (MBH)	Time of Peak Sensible Load	Air Flow (CFM)	Heating Load (MBH)	Floor Area (ft²)	Space CFM/ft²
Zone 1							
100 - Vestibule	1	4.3	Jul 1500	254	10.2	127.0	2.00
101 - 24 HR Vestibule	1	2.5	Jul 1400	146	1.1	154.0	0.95

Air System Sizing Summary for FCU-3 - Elec/NER

Project Name: BofA Broomfield
Prepared by: Salas O'Brien
08/05/2025
06:17PM

Air System Information

Air System Name	FCU-3 - Elec/NER	Number of zones	1
Equipment Class	SPLT AHU	Floor Area	128.0 ft²
Air System Type	SZCAV	Location	Denver, Colorado

Sizing Calculation Information

Calculation Months	Jan to Dec	Zone CFM Sizing	Sum of space airflow rates
Sizing Data	Calculated	Space CFM Sizing	Individual peak space loads

Central Cooling Coil Sizing Data

Total coil load	1.1	Tons	Load occurs at	Jul 1400	
Total coil load	13.6	MBH	OA DB / WB	94.0 / 59.1	°F
Sensible coil load	13.6	MBH	Entering DB / WB	73.9 / 51.6	°F
Coil CFM at Jul 1400	800	CFM	Leaving DB / WB	54.8 / 43.8	°F
Max block CFM	800	CFM	Coil ADP	52.7	°F
Sum of peak zone CFM	800	CFM	Bypass Factor	0.100	
Sensible heat ratio	1.000		Resulting RH	22	%
CFM/Ton	708.3		Design supply temp.	54.8	°F
ft²/Ton	113.3		Zone T-stat Check	1 of 1	OK
BTU/(hr·ft²)	105.9		Max zone temperature deviation	0.0	°F
Water flow @ 10.0 °F rise	N/A				

Central Heating Coil Sizing Data

Max coil load	1.6	MBH	Load occurs at	Des Htg	
Coil CFM at Des Htg	800	CFM	BTU/(hr·ft²)	12.5	
Max coil CFM	800	CFM	Ent. DB / Lvg DB	69.7 / 72.0	°F
Water flow @ 20.0 °F drop	N/A				

Supply Fan Sizing Data

Actual max CFM	800	CFM	Fan motor BHP	0.11	BHP
Standard CFM	657	CFM	Fan motor kW	0.09	kW
Actual max CFM/ft²	6.25	CFM/ft²	Fan static	0.50	in wg

Outdoor Ventilation Air Data

Design airflow CFM	0	CFM	CFM/person	0.00	CFM/person
CFM/ft²	0.00	CFM/ft²			

Zone Sizing Summary for FCU-3 - Elec/NER

Project Name: BofA Broomfield
Prepared by: Salas O'Brien
08/05/2025
06:17PM

Air System Information

Air System Name	FCU-3 - Elec/NER	Number of zones	1
Equipment Class	SPLT AHU	Floor Area	128.0 ft²
Air System Type	SZCAV	Location	Denver, Colorado

Sizing Calculation Information

Calculation Months	Jan to Dec	Zone CFM Sizing	Sum of space airflow rates
Sizing Data	Calculated	Space CFM Sizing	Individual peak space loads

Zone Terminal Sizing Data

Zone Name	Design Supply Airflow (CFM)	Minimum Supply Airflow (CFM)	Zone CFM/ft²	Reheat Coil Load (MBH)	Reheat Coil Water gpm @ 20.0 °F	Zone Htg Unit Coil Load (MBH)	Zone Htg Unit Water gpm @ 20.0 °F	Mixing Box Fan Airflow (CFM)
Zone 1	800	800	6.25	0.0	-	0.0	-	0

Zone Peak Sensible Loads

Zone Name	Zone Cooling Sensible (MBH)	Time of Peak Sensible Cooling Load	Zone Heating Load (MBH)	Zone Floor Area (ft²)
Zone 1	12.9	Jul 1500	1.9	128.0

Space Loads and Airflows

Zone Name / Space Name	Mult.	Cooling Sensible (MBH)	Time of Peak Sensible Load	Air Flow (CFM)	Heating Load (MBH)	Floor Area (ft²)	Space CFM/ft²
Zone 1							
120 - Electrical	1	3.3	Jul 1400	204	0.2	56.0	3.64
121 - NER	1	9.6	Aug 1500	596	1.7	72.0	8.28

NELSON
Nelco Architecture, Inc.

12400 Coit Road, Suite 510
Dallas, TX. 75251
Phone: (972) 644-8830
Fax: (972) 644-8496

Client Representative:
CUSHMAN & WAKEFIELD
Attn: Paul Hurchanik
Tel: 720.582.6073
Email: paul.hurchanik@cushwake.com

Architect:
Nelco Architecture, Inc.
Attn: Harry Koutsis
Tel: 310.693.5271
Email: hkoutsis@nelsonww.com

Civil:
LANGAN
Attn: Ben Henry
Tel: (817) 328-3217
Email: bhenry@langan.com

Structural:
Salas O'Brien
Attn: Julie Bolding
Tel: (469) 782-9753
Email: julie.bolding@salasobrien.com

MEP:
Salas O'Brien
Attn: Robert Zendejas
Tel: (404) 434-7373
Email: robert.zendejas@salasobrien.com

Salas O'Brien
salasobrien.com 404-881-5300
Atlanta
3200 Windy Hill Road, SE, Suite 200E
Atlanta, GA 30339

Project Number: 2450-70132

Description:	No:	Date:
Issue for Permit		08/26/2025

BANK OF AMERICA
Broomfield

CO1-111
NWC Hwy 7 and Palisade Pkwy
Broomfield CO, 80023

PROPERTY ID: CO1-111
NSRP VERSION: 2.0
BULLETIN: 2-2025

MECHANICAL LOAD CALCULATIONS

COLORADO LICENSED
JESSE T. NAVE
63522
PROFESSIONAL ENGINEER
5/30/25

Project No: 23.0002261.000 Reviewed By: DBS

M00.04

Air System Sizing Summary for RTU-1 - Plan West

Project Name: BofA Broomfield
Prepared by: Salas O'Brien
08/05/2025
06:17PM

Air System Information

Air System Name	RTU-1 - Plan West	Number of zones	2
Equipment Class	PKG ROOF	Floor Area	650.0 ft²
Air System Type	VVT	Location	Denver, Colorado

Sizing Calculation Information

Calculation Months	Jan to Dec	Zone CFM Sizing	Peak zone sensible load
Sizing Data	User-Modified	Space CFM Sizing	Individual peak space loads

Central Cooling Coil Sizing Data

Total coil load	0.9	Tons	Load occurs at	Jul 1500	
Total coil load	10.4	MBH	OA DB / WB	94.8 / 59.4	°F
Sensible coil load	10.4	MBH	Entering DB / WB	74.1 / 53.6	°F
Coil CFM at Jul 1500	577	CFM	Leaving DB / WB	53.8 / 45.5	°F
Max block CFM	800	CFM	Coil ADP	51.5	°F
Sum of peak zone CFM	862	CFM	Bypass Factor	0.100	
Sensible heat ratio	1.000		Resulting RH	28	%
CFM/Ton	666.2		Design supply temp.	55.0	°F
ft²/Ton	750.9		Zone T-stat Check	2 of 2	OK
BTU/(hr·ft²)	16.0		Max zone temperature deviation	0.0	°F
Water flow @ 10.0 °F rise	N/A				

Central Heating Coil Sizing Data

Max coil load	20.8	MBH	Load occurs at	Des Htg	
Coil CFM at Des Htg	756	CFM	BTU/(hr·ft²)	32.1	
Max coil CFM	800	CFM	Ent. DB / Lvg DB	63.6 / 94.7	°F
Water flow @ 20.0 °F drop	N/A				

Supply Fan Sizing Data

Actual max CFM	800	CFM	Fan motor BHP	0.22	BHP
Standard CFM	657	CFM	Fan motor kW	0.17	kW
Actual max CFM/ft²	1.23	CFM/ft²	Fan static	1.00	in wg

Outdoor Ventilation Air Data

Design airflow CFM	54	CFM	CFM/person	18.05	CFM/person
CFM/ft²	0.08	CFM/ft²			

Zone Sizing Summary for RTU-1 - Plan West

Project Name: BofA Broomfield
Prepared by: Salas O'Brien
08/05/2025
06:17PM

Air System Information

Air System Name	RTU-1 - Plan West	Number of zones	2
Equipment Class	PKG ROOF	Floor Area	650.0 ft²
Air System Type	VVT	Location	Denver, Colorado

Sizing Calculation Information

Calculation Months	Jan to Dec	Zone CFM Sizing	Peak zone sensible load
Sizing Data	User-Modified	Space CFM Sizing	Individual peak space loads

Zone Terminal Sizing Data

Zone Name	Design Supply Airflow (CFM)	Minimum Supply Airflow (CFM)	Zone CFM/ft²	Reheat Coil Load (MBH)	Reheat Coil Water gpm @ 20.0 °F	Zone Htg Unit Coil Load (MBH)	Zone Htg Unit Water gpm @ 20.0 °F	Mixing Box Fan Airflow (CFM)
VVT-1-2 Corr & RR	597	23	1.47	0.0	-	0.0	-	0
VVT-1-1 Office 5 & 6	265	31	1.09	0.0	-	0.0	-	0

Zone Peak Sensible Loads

Zone Name	Zone Cooling Sensible (MBH)	Time of Peak Sensible Cooling Load	Zone Heating Load (MBH)	Zone Floor Area (ft²)
VVT-1-2 Corr & RR	5.0	Jul 1500	13.3	406.0
VVT-1-1 Office 5 & 6	4.2	Jul 1500	4.6	244.0

Space Loads and Airflows

Zone Name / Space Name	Mult.	Cooling Sensible (MBH)	Time of Peak Sensible Load	Air Flow (CFM)	Heating Load (MBH)	Floor Area (ft²)	Space CFM/ft²
VVT-1-2 Corr & RR							
111 - Corridor	1	2.5	Jul 1500	324	7.2	148.0	2.19
112 - Janitor Closet	1	0.3	Jul 1500	30	0.7	30.0	0.99
113 - Men's Restroom	1	0.6	Jul 1500	58	1.3	74.0	0.79
114 - Women's Restroom	1	0.6	Jul 1500	58	1.3	74.0	0.79
117 - Storage	1	0.1	Jul 1400	3	0.0	10.0	0.33
115 - Wellness	1	1.1	Aug 1500	126	2.8	70.0	1.80
VVT-1-1 Office 5 & 6							
109 - Office 5 CB	1	2.1	Jul 1500	132	2.3	122.0	1.09
110 - Office 6 CB	1	2.1	Jul 1500	132	2.3	122.0	1.09

Air System Sizing Summary for RTU-2 - Central

Project Name: BofA Broomfield
Prepared by: Salas O'Brien
08/05/2025
06:17PM

Air System Information

Air System Name	RTU-2 - Central	Number of zones	3
Equipment Class	PKG ROOF	Floor Area	1653.0 ft²
Air System Type	VVT	Location	Denver, Colorado

Sizing Calculation Information

Calculation Months	Jan to Dec	Zone CFM Sizing	Peak zone sensible load
Sizing Data	User-Modified	Space CFM Sizing	Individual peak space loads

Central Cooling Coil Sizing Data

Total coil load	2.5	Tons	Load occurs at	Jul 1500	
Total coil load	30.6	MBH	OA DB / WB	94.8 / 59.4	°F
Sensible coil load	30.6	MBH	Entering DB / WB	77.4 / 57.8	°F
Coil CFM at Jul 1500	1433	CFM	Leaving DB / WB	53.3 / 48.9	°F
Max block CFM	1600	CFM	Coil ADP	50.7	°F
Sum of peak zone CFM	1699	CFM	Bypass Factor	0.100	
Sensible heat ratio	1.000		Resulting RH	38	%
CFM/Ton	562.8		Design supply temp.	55.0	°F
ft²/Ton	649.3		Zone T-stat Check	3 of 3	OK
BTU/(hr·ft²)	18.5		Max zone temperature deviation	0.0	°F
Water flow @ 10.0 °F rise	N/A				

Central Heating Coil Sizing Data

Max coil load	20.9	MBH	Load occurs at	Des Htg	
Coil CFM at Des Htg	578	CFM	BTU/(hr·ft²)	12.6	
Max coil CFM	1600	CFM	Ent. DB / Lvg DB	53.4 / 94.2	°F
Water flow @ 20.0 °F drop	N/A				

Supply Fan Sizing Data

Actual max CFM	1600	CFM	Fan motor BHP	0.66	BHP
Standard CFM	1315	CFM	Fan motor kW	0.52	kW
Actual max CFM/ft²	0.97	CFM/ft²	Fan static	1.50	in wg

Outdoor Ventilation Air Data

Design airflow CFM	227	CFM	CFM/person	17.48	CFM/person
CFM/ft²	0.14	CFM/ft²			

Zone Sizing Summary for RTU-2 - Central

Project Name: BofA Broomfield
Prepared by: Salas O'Brien
08/05/2025
06:17PM

Air System Information

Air System Name	RTU-2 - Central	Number of zones	3
Equipment Class	PKG ROOF	Floor Area	1653.0 ft²
Air System Type	VVT	Location	Denver, Colorado

Sizing Calculation Information

Calculation Months	Jan to Dec	Zone CFM Sizing	Peak zone sensible load
Sizing Data	User-Modified	Space CFM Sizing	Individual peak space loads

Zone Terminal Sizing Data

Zone Name	Design Supply Airflow (CFM)	Minimum Supply Airflow (CFM)	Zone CFM/ft²	Reheat Coil Load (MBH)	Reheat Coil Water gpm @ 20.0 °F	Zone Htg Unit Coil Load (MBH)	Zone Htg Unit Water gpm @ 20.0 °F	Mixing Box Fan Airflow (CFM)
VVT-2-1 Central/Waiting	852	118	0.80	0.0	-	0.0	-	0
VVT-2-2 Calling Cubes	476	41	1.64	0.0	-	0.0	-	0
VVT-2-3 Break/Wellness	371	69	1.26	0.0	-	0.0	-	0

Zone Peak Sensible Loads

Zone Name	Zone Cooling Sensible (MBH)	Time of Peak Sensible Cooling Load	Zone Heating Load (MBH)	Zone Floor Area (ft²)
VVT-2-1 Central/Waiting	11.4	Jul 1400	7.8	1070.0
VVT-2-2 Calling Cubes	7.6	Jul 1400	0.8	290.0
VVT-2-3 Break/Wellness	5.9	Jul 1400	2.9	293.0

Space Loads and Airflows

Zone Name / Space Name	Mult.	Cooling Sensible (MBH)	Time of Peak Sensible Load	Air Flow (CFM)	Heating Load (MBH)	Floor Area (ft²)	Space CFM/ft²
VVT-2-1 Central/Waiting							
104 - Waiting	1	3.9	Jul 1400	287	1.0	344.0	0.84
103 - Central Zone	1	7.6	Jul 1500	565	6.8	726.0	0.78
VVT-2-2 Calling Cubes							
122 - Calling Cubes	1	7.6	Jul 1400	476	0.8	290.0	1.64
VVT-2-3 Break/Wellness							
118 - Break Room	1	5.9	Jul 1400	371	2.9	293.0	1.27

Air System Sizing Summary for RTU-3 - Plan East

Project Name: BofA Broomfield
Prepared by: Salas O'Brien
08/05/2025
06:17PM

Air System Information

Air System Name	RTU-3 - Plan East	Number of zones	3
Equipment Class	PKG ROOF	Floor Area	893.0 ft²
Air System Type	VVT	Location	Denver, Colorado

Sizing Calculation Information

Calculation Months	Jan to Dec	Zone CFM Sizing	Peak zone sensible load
Sizing Data	User-Modified	Space CFM Sizing	Individual peak space loads

Central Cooling Coil Sizing Data

Total coil load	1.5	Tons	Load occurs at	Jul 1500	
Total coil load	17.5	MBH	OA DB / WB	94.8 / 59.4	°F
Sensible coil load	17.5	MBH	Entering DB / WB	76.7 / 55.9	°F
Coil CFM at Jul 1500	863	CFM	Leaving DB / WB	53.8 / 47.1	°F
Max block CFM	1000	CFM	Coil ADP	51.2	°F
Sum of peak zone CFM	956	CFM	Bypass Factor	0.100	
Sensible heat ratio	1.000		Resulting RH	32	%
CFM/Ton	590.1		Design supply temp.	55.0	°F
ft²/Ton	610.7		Zone T-stat Check	3 of 3	OK
BTU/(hr·ft²)	19.6		Max zone temperature deviation	0.0	°F
Water flow @ 10.0 °F rise	N/A				

Central Heating Coil Sizing Data

Max coil load	22.3	MBH	Load occurs at	Des Htg	
Coil CFM at Des Htg	741	CFM	BTU/(hr·ft²)	24.9	
Max coil CFM	1000	CFM	Ent. DB / Lvg DB	60.0 / 94.7	°F
Water flow @ 20.0 °F drop	N/A				

Supply Fan Sizing Data

Actual max CFM	1000	CFM	Fan motor BHP	0.27	BHP
Standard CFM	822	CFM	Fan motor kW	0.22	kW
Actual max CFM/ft²	1.12	CFM/ft²	Fan static	1.00	in wg

Outdoor Ventilation Air Data

Design airflow CFM	104	CFM	CFM/person	17.41	CFM/person
CFM/ft²	0.12	CFM/ft²			

Zone Sizing Summary for RTU-3 - Plan East

Project Name: BofA Broomfield
Prepared by: Salas O'Brien
08/05/2025
06:17PM

Air System Information

Air System Name	RTU-3 - Plan East	Number of zones	3
Equipment Class	PKG ROOF	Floor Area	893.0 ft²
Air System Type	VVT	Location	Denver, Colorado

Sizing Calculation Information

Calculation Months	Jan to Dec	Zone CFM Sizing	Peak zone sensible load
Sizing Data	User-Modified	Space CFM Sizing	Individual peak space loads

Zone Terminal Sizing Data

Zone Name	Design Supply Airflow (CFM)	Minimum Supply Airflow (CFM)	Zone CFM/ft²	Reheat Coil Load (MBH)	Reheat Coil Water gpm @ 20.0 °F	Zone Htg Unit Coil Load (MBH)	Zone Htg Unit Water gpm @ 20.0 °F	Mixing Box Fan Airflow (CFM)
VVT-3-1 Office 1 & 2	297	31	1.20	0.0	-	0.0	-	0
VVT-3-2 Office 3 & 4	277	31	1.12	0.0	-	0.0	-	0
VVT-3-3 Cash & Work	382	42	0.96	0.0	-	0.0	-	0

Zone Peak Sensible Loads

Zone Name	Zone Cooling Sensible (MBH)	Time of Peak Sensible Cooling Load	Zone Heating Load (MBH)	Zone Floor Area (ft²)
VVT-3-1 Office 1 & 2	4.7	Jul 1500	6.3	248.0
VVT-3-2 Office 3 & 4	4.4	Jul 1500	4.7	248.0
VVT-3-3 Cash & Work	6.1	Jul 1500	6.4	397.0

Space Loads and Airflows

Zone Name / Space Name	Mult.	Cooling Sensible (MBH)	Time of Peak Sensible Load	Air Flow (CFM)	Heating Load (MBH)	Floor Area (ft²)	Space CFM/ft²
VVT-3-1 Office 1 & 2							
105 - Office 1 ME	1	2.5	Jul 1500	180	4.0	124.0	1.46
106 - Office 2 CL	1	2.2	Jul 1500	138	2.3	124.0	1.12
VVT-3-2 Office 3 & 4							
107 - Office 3 SB	1	2.2	Jul 1500	138	2.3	124.0	1.12
108 - Office 4 CB	1	2.2	Jul 1500	138	2.3	124.0	1.12
VVT-3-3 Cash & Work							
116 - Cash Window	1	3.4	Jul 1400	212	2.5	268.0	0.79
119 - Work Room	1	2.7	Jul 1500	172	3.8	129.0	1.33

NELSON
Nelco Architecture, Inc.

12400 Coit Road, Suite 510
Dallas, TX. 75251
Phone: (972) 644-8830
Fax: (972) 644-8496

Client Representative:
CUSHMAN & WAKEFIELD
Attn: Paul Hurchanik
Tel: 720.582.6073
Email: paul.hurchanik@cushwake.com

Architect:
Nelco Architecture, Inc.
Attn: Harry Koutsis
Tel: 310.693.5271
Email: hkoutsis@nelsonww.com

Civil:
LANGAN
Attn: Ben Henry
Tel: (817) 328-3217
Email: bhenry@langan.com

Structural:
Salas O'Brien
Attn: Julie Bolding
Tel: (469) 782-9753
Email: julie.bolding@salasobrien.com

MEP:
Salas O'Brien
Attn: Robert Zendejas
Tel: (404) 434-7373
Email: robert.zendejas@salasobrien.com

Salas O'Brien
salasobrien.com 404-881-5300
Atlanta
3200 Windy Hill Road, SE, Suite 200E
Atlanta, GA 30339

Project Number: 2450-70132

No:	Description:	Date:
	Issue for Permit	08/26/2025

BANK OF AMERICA
Broomfield

CO1-111
NWC Hwy 7 and Palisade Pkwy
Broomfield CO, 80023

PROPERTY ID: CO1-111
NSRP VERSION: 2.0
BULLETIN: 2-2025

MECHANICAL LOAD CALCULATIONS

COLORADO LICENSED
JESSE T. NAUGLE
63522
PROFESSIONAL ENGINEER
5/26/25

Project No: 23.0002261.000 Reviewed By: DBS

M00.05

SEQUENCE OF OPERATIONS

START/STOP:
THE HVAC EQUIPMENT MAY BE STARTED OR STOPPED BASED ON TIME OF DAY SCHEDULE, OPTIMIZED START/STOP, SPACE TEMPERATURE REQUIREMENTS, OR AN OVERRIDE COMMAND FROM IC3. THE SUPPLY FAN SHALL CYCLE WITH LOADS.

OPTIMIZED START/STOP:
THE IC3 SYSTEM UTILIZES A SELF-ADJUSTING OPTIMAL START/STOP ROUTINE THAT WILL GIVE THE HVAC EQUIPMENT A START COMMAND AT AN AUTOMATICALLY CALCULATED TIME BEFORE THE SCHEDULE START TIME IN ORDER TO BRING THE AREA INTO A COMFORTABLE RANGE OR A STOP COMMAND IF THE SPACE IS SATISFIED PRIOR TO THE SCHEDULED UNOCCUPIED TIME.

SPACE TEMPERATURE OVERRIDE (NIGHT SETBACK AND UNOCCUPIED MODE):
THE HVAC WILL ENTER UNOCCUPIED AFTER-HOURS MODE ONLY IF CURRENTLY IN ASSOCIATE NIGHT SETBACK MODE, THE BUILDING IS ARMED, AND NO ALARM CONDITION EXISTS. IF THE ALARM SYSTEM IS UNARMED WITHIN 15 MINUTES OF THE BUILDING ENTERING UNOCCUPIED AFTER-HOURS MODE, THE HVAC WILL RESUME THE NORMALLY SCHEDULED ASSOCIATE NIGHT SETBACK MODE. IF THE ALARM SYSTEM REMAINS ARMED FOR LONGER THAN 15 MINUTES, WITH NO ALARM EVENT, THE HVAC WILL REMAIN IN UNOCCUPIED AFTER-HOURS MODE UNTIL THE NEXT SCHEDULED OCCUPIED PERIOD.

SPACE TEMPERATURE CONTROL (COOLING):
THE SPACE TEMPERATURE WILL BE CONTROLLED IN THE COOLING MODE BY CYCLING ONE OR MORE COMPRESSORS ON AND OFF TO MAINTAIN SPACE TEMPERATURE.

SPACE TEMPERATURE CONTROL (HEATING):
THE SPACE TEMPERATURE WILL BE CONTROLLED IN THE HEATING MODE BY CYCLING ONE OR MORE STAGES OF THE GAS VALVE, ELECTRIC HEAT, OR HEAT PUMP COMPRESSORS ON AND OFF TO MAINTAIN SPACE TEMPERATURE. REFER TO EQUIPMENT SCHEDULES.

SPACE TEMPERATURE SET POINTS:
OCCUPIED SET POINT OF 78 DEGREES F FOR COOLING AND 70 DEGREES FOR HEATING. THIS COOLING SET POINT FALLS WITHIN THE COMFORT FOR 80% OF PEOPLE WITH AN ACTIVITY LEVEL OF 1.2 MET AND THERMAL INSULATION OF .5 CLO (ASSUMED TO BE REPRESENTATIVE OF ACTIVITY LEVEL AND CLOTHING FOR BANK EMPLOYEES DURING SUMMER MONTHS). THE HEATING SET POINT FALLS WITHIN THE ACCEPTABLE COMFORT RANGE FOR A CLOTHING LEVEL OF ABOUT 1.0 (BETWEEN .96 AND 1.0 FOR TYPICAL WINTER ATTIRE). NER AND ATM ROOMS TO BE MAINTAINED AT 78 DEGREES F FOR COOLING AND 68 DEGREES FOR HEATING. OCCUPIED RELATIVE HUMIDITY SET POINT OF 50%.

RTU DEMAND CONTROL VENTILATION:
THE OA DAMPER SHALL MODULATE BETWEEN DEMAND CONTROL VENTILATION SETPOINT AND FULLY OCCUPIED VENTILATION AIR SETPOINT BASED UPON SPACE CO2 READINGS.

A. **CHANGEOVER BYPASS SYSTEM**
   1. OCCUPIED HEAT/COOL: Each VVT terminal shall use pressure-independent control, with airflow measurement, to vary primary airflow to maintain zone temperature at its occupied setpoint. The RTU shall modulate the bypass damper to maintain duct static pressure at setpoint and modulate (or cycle) compressors, modulate (or stage) heat, and/or enable airside economizing based on current zone cooling/heating demands. The OA damper shall open to bring in the required amount of ventilation.
   2. MORNING WARM-UP/PRE-COOL: Each VVT terminal unit shall vary primary airflow to raise/lower zone temperature to its occupied setpoint. The RTU shall modulate the bypass damper to maintain duct static pressure at setpoint and modulate (or cycle) compressors or modulate (or stage) heat based on current zone cooling/heating demands. The OA damper shall remain closed, unless economizing.
   3. COOLING/HEATING CHANGEOVER LOGIC: The System Controller shall determine the overall system cooling/heating mode based on "voting" from each zone. When the majority of zones require cooling, the RTU shall operate in cooling mode and any zone that requires heating shall reduce primary airflow to minimum. When the majority of zones require heating, the RTU shall operate in heating mode and any zone that requires cooling shall reduce primary airflow to minimum.

FCU/CU/EDH:
THE DX COOLING, DX HEATING AND ELECTRIC HEATING COIL SHALL OPERATE TO MAINTAIN THE ACTIVE SPACE TEMPERATURE SETPOINT. SUPPLY FAN SHALL CYCLE WITH LOADS. WHERE EQUIPMENT INCLUDES AN OUTDOOR AIR MOTORIZED DAMPER, THE DAMPER SHALL BE OPEN WHEN THE UNIT IS IN HEATING OR COOLING MODE. REFER TO CONTROLS DRAWINGS AND COORDINATE WITH IC3 CONTROLS.

EUH:
THE ELECTRIC HEATING COIL SHALL OPERATE TO MAINTAIN THE ACTIVE SPACE TEMPERATURE SETPOINT. THE SUPPLY FAN SHALL BE ON WHEN THE ELECTRIC HEATING COIL IS ON.

KEYED NOTES:

1. THIS CO2 SENSOR IS FOR IC3 MONITORING PURPOSES ONLY AND SHALL BE PROVIDED BY ECS. THERMOSTAT TO BE CONNECTED TO ECS.
2. PROVIDE TAMPER COVER.
3. ROUTE 1" CONDENSATE TO MOP SINK IN JANITOR'S. TERMINATE WITH INDIRECT CONNECTION.
4. IC3 THERMOSTAT TO SERVE RTU AS BACK-UP.
5. ROUTE DUCTWORK UP/DOWN AS SHOWN TO STAY ABOVE CEILINGS WITH HIGHER ELEVATIONS.

GENERAL NOTES:

1. PROVIDE REMOTE CABLE-OPERATED DAMPER IN FACE OF DIFFUSER IN INACCESSIBLE CEILINGS. BASIS OF DESIGN, YOUNG REGULATOR.

2. PROVIDE MINIMUM OF 36" CLEARANCE DEPTH IN FRONT OF CONTROL PANELS, VFD'S AND OTHER ELECTRICAL COMPONENTS OF HVAC SYSTEM WITH ELECTRICAL CONNECTIONS UP TO 150V; INCREASE CLEARANCE TO 42" FOR EQUIPMENT WITH 151V-600V. PROVIDE 30" WIDTH AND 6.5 FT HEIGHT CLEARANCE. COMPLY WITH 2023 NEC 110.26 REQUIREMENTS OR NEC CODE VERSION BEING ENFORCED AT THE TIME OF PERMIT. EQUIPMENT MOUNTED ABOVE CEILING SHALL BE PROVIDED WITH A MINIMUM 22" X 22" ACCESS PANEL OR REMOVEABLE CEILING TILE. NO PERMANENT CONSTRUCTION OTHER THAN EQUIPMENT TO ACCESSED SHALL REQUIRE REMOVAL.

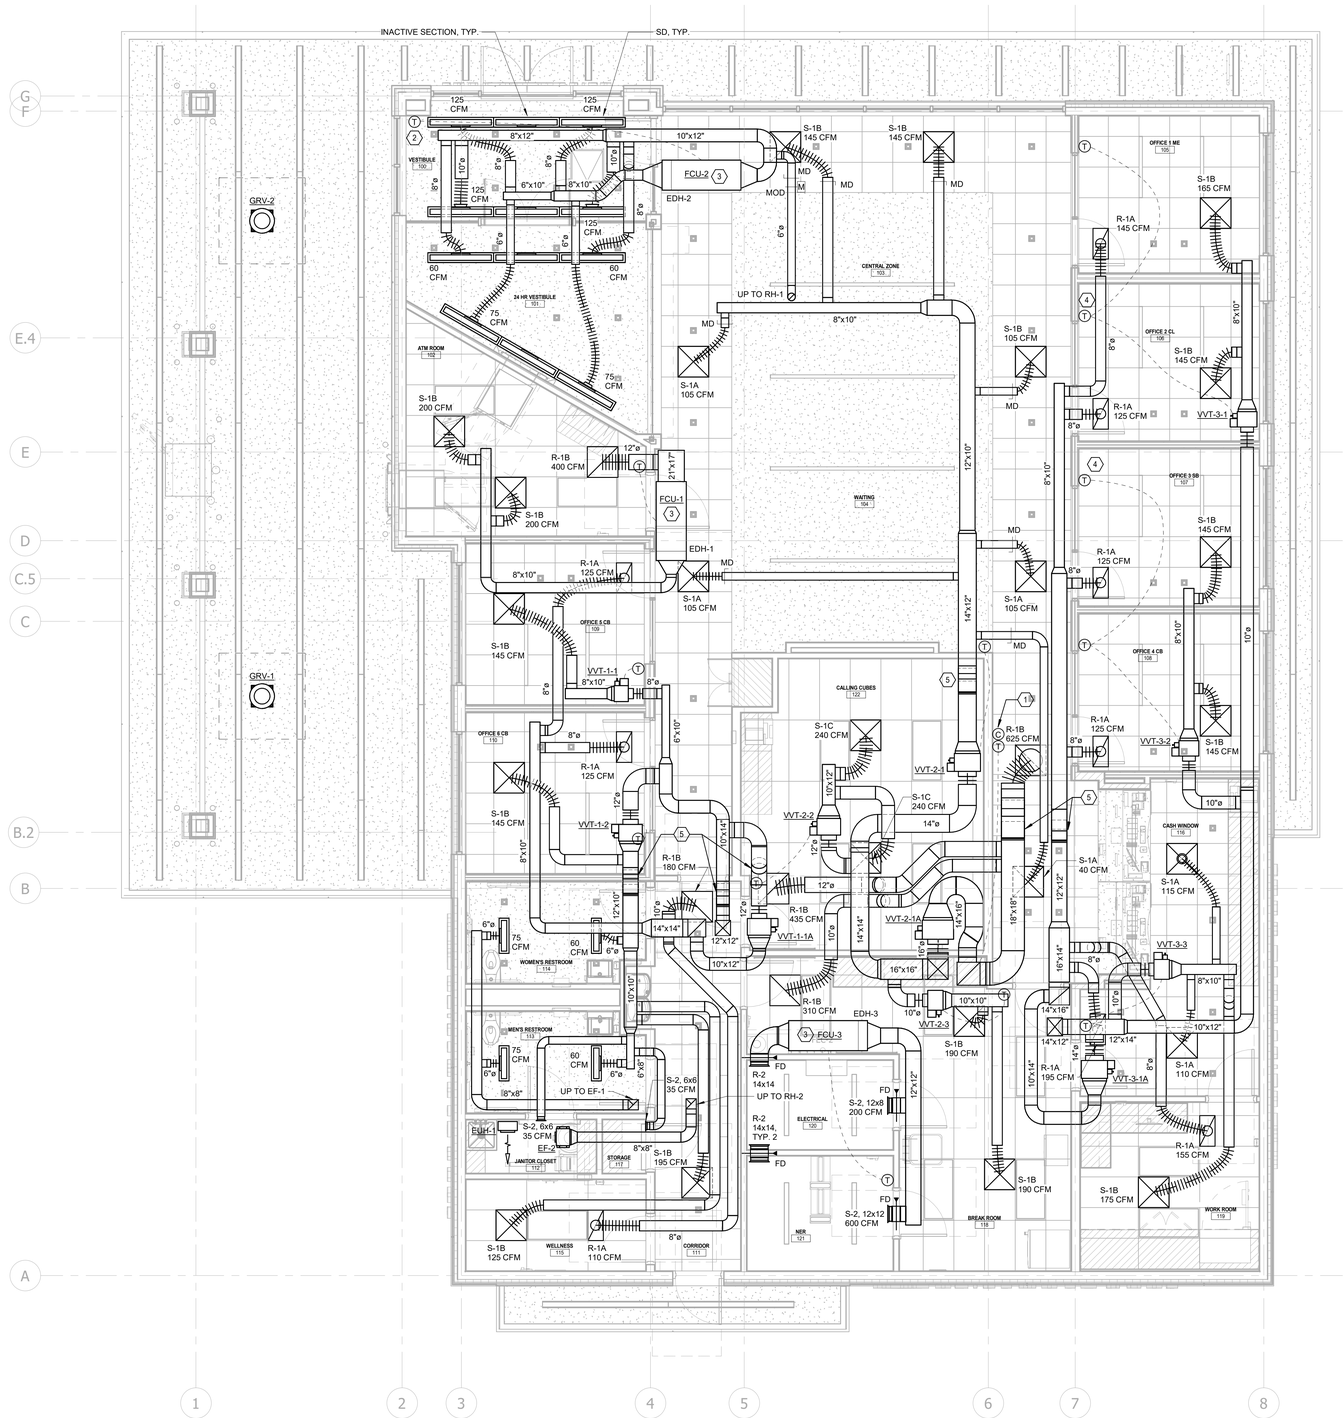

2 MECHANICAL FLOOR PLAN
M01.01 1/4" = 1'-0"

NELSON
Nelco Architecture, Inc.

12400 Coit Road, Suite 510
Dallas, TX. 75251
Phone: (972) 644-8830
Fax: (972) 644-8496

Client Representative:
CUSHMAN & WAKEFIELD
Attn: Paul Hurchanik
Tel: 720.582.6073
Email: paul.hurchanik@cushwake.com

Architect:
Nelco Architecture, Inc.
Attn: Harry Koutsis
Tel: 310.693.5271
Email: hkoutsis@nelsonww.com

Civil:
LANGAN
Attn: Ben Henry
Tel: (817) 328-3217
Email: bhenry@langan.com

Structural:
Salas O'Brien
Attn: Julie Bolding
Tel: (469) 782-9753
Email: julie.bolding@salasobrien.com

MEP:
Salas O'Brien
Attn: Robert Zendejas
Tel: (404) 434-7373
Email: robert.zendejas@salasobrien.com

Salas O'Brien
salasobrien.com 404-881-5300
Atlanta
3200 Windy Hill Road, SE, Suite 200E
Atlanta, GA 30339

Project Number: 2450-70132

Description:	No:	Date:
Issue for Permit		08/26/2025

BANK OF AMERICA
Broomfield

CO1-111
NWC Hwy 7 and Palisade Pkwy
Broomfield CO, 80023

PROPERTY ID:	CO1-111
NSRP VERSION:	2.0
BULLETIN:	2-2025

MECHANICAL NEW WORK PLAN

COLORADO LICENSED
JESSE L. NAU
63522
PROFESSIONAL ENGINEER
5/26/25

NORTH

Project No: 23.0002261.000 Reviewed By: DBS

M01.01

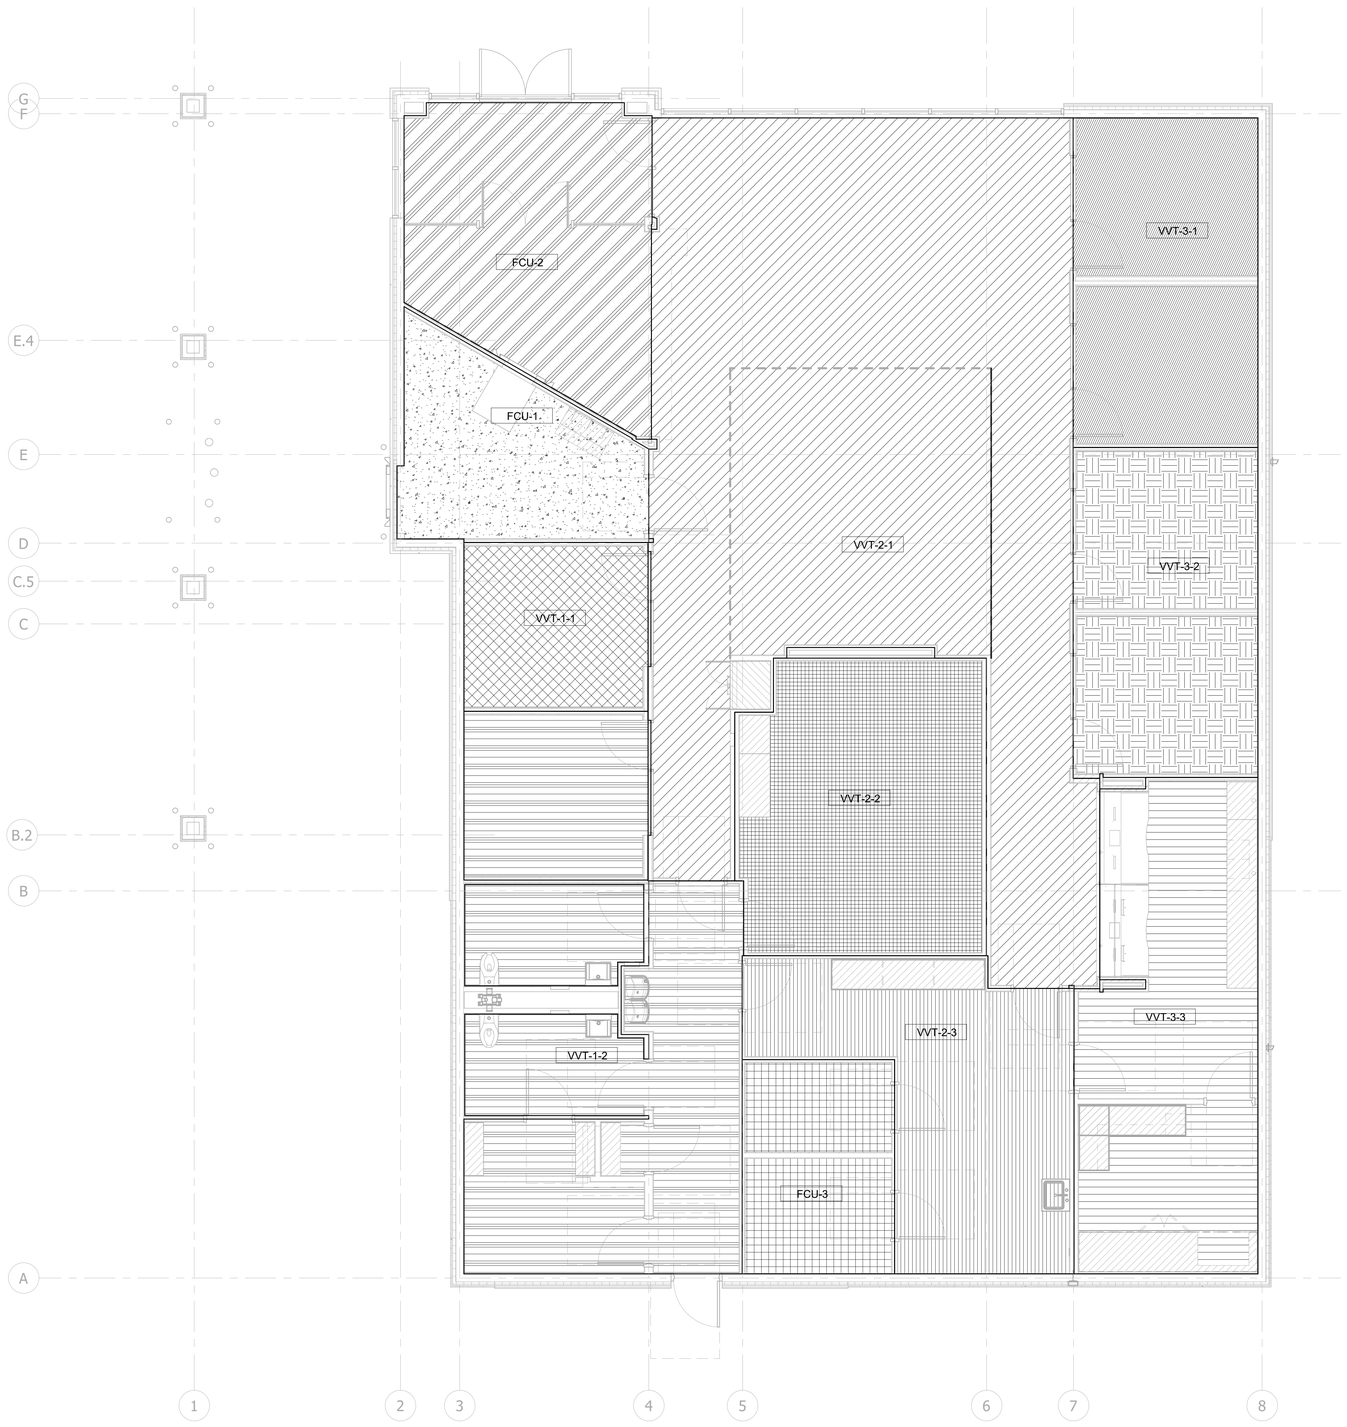

FCU-1
FCU-2
FCU-3
VVT-1-1
VVT-1-2
VVT-2-1
VVT-2-2
VVT-2-3
VVT-3-1
VVT-3-2
VVT-3-3

1 M01.02 MECHANICAL ZONING PLAN
1/4" = 1'-0"

NELSON
Nelco Architecture, Inc.

12400 Coit Road, Suite 510
Dallas, TX. 75251
Phone: (972) 644-8830
Fax: (972) 644-8496

Client Representative:
CUSHMAN & WAKEFIELD
Attn: Paul Hurchanik
Tel: 720.582.6073
Email:
paul.hurchanik@cushwake.com

Architect:
Nelco Architecture, Inc.
Attn: Harry Koutsis
Tel: 310.693.5271
Email: hkoutsis@nelsonww.com

Civil:
LANGAN
Attn: Ben Henry
Tel: (817) 328-3217
Email: bhenry@langan.com

Structural:
Salas O'Brien
Attn: Julie Bolding
Tel: (469) 782-9753
Email: julie.bolding@salasobrien.com

MEP:
Salas O'Brien
Attn: Robert Zendejas
Tel: (404) 434-7373
Email:
robert.zendejas@salasobrien.com

Salas O'Brien
salasobrien.com 404-881-5300
Atlanta
3200 Windy Hill Road, SE, Suite 200E
Atlanta, GA 30339

Project Number: 2450-70132

Description:	No:	Date:
Issue for Permit		08/26/2025

BANK OF AMERICA
Broomfield

CO1-111
NWC Hwy 7 and Palisade Pkwy
Broomfield CO, 80023

PROPERTY ID:	CO1-111
NSRP VERSION:	2.0
BULLETIN:	2-2025

MECHANICAL ZONING PLAN

COLORADO LICENSED
JESSE T. NAUGLE
63522
PROFESSIONAL ENGINEER
8/26/25

NORTH

Project No: 23.0002261.000 Reviewed By: DBS

M01.02

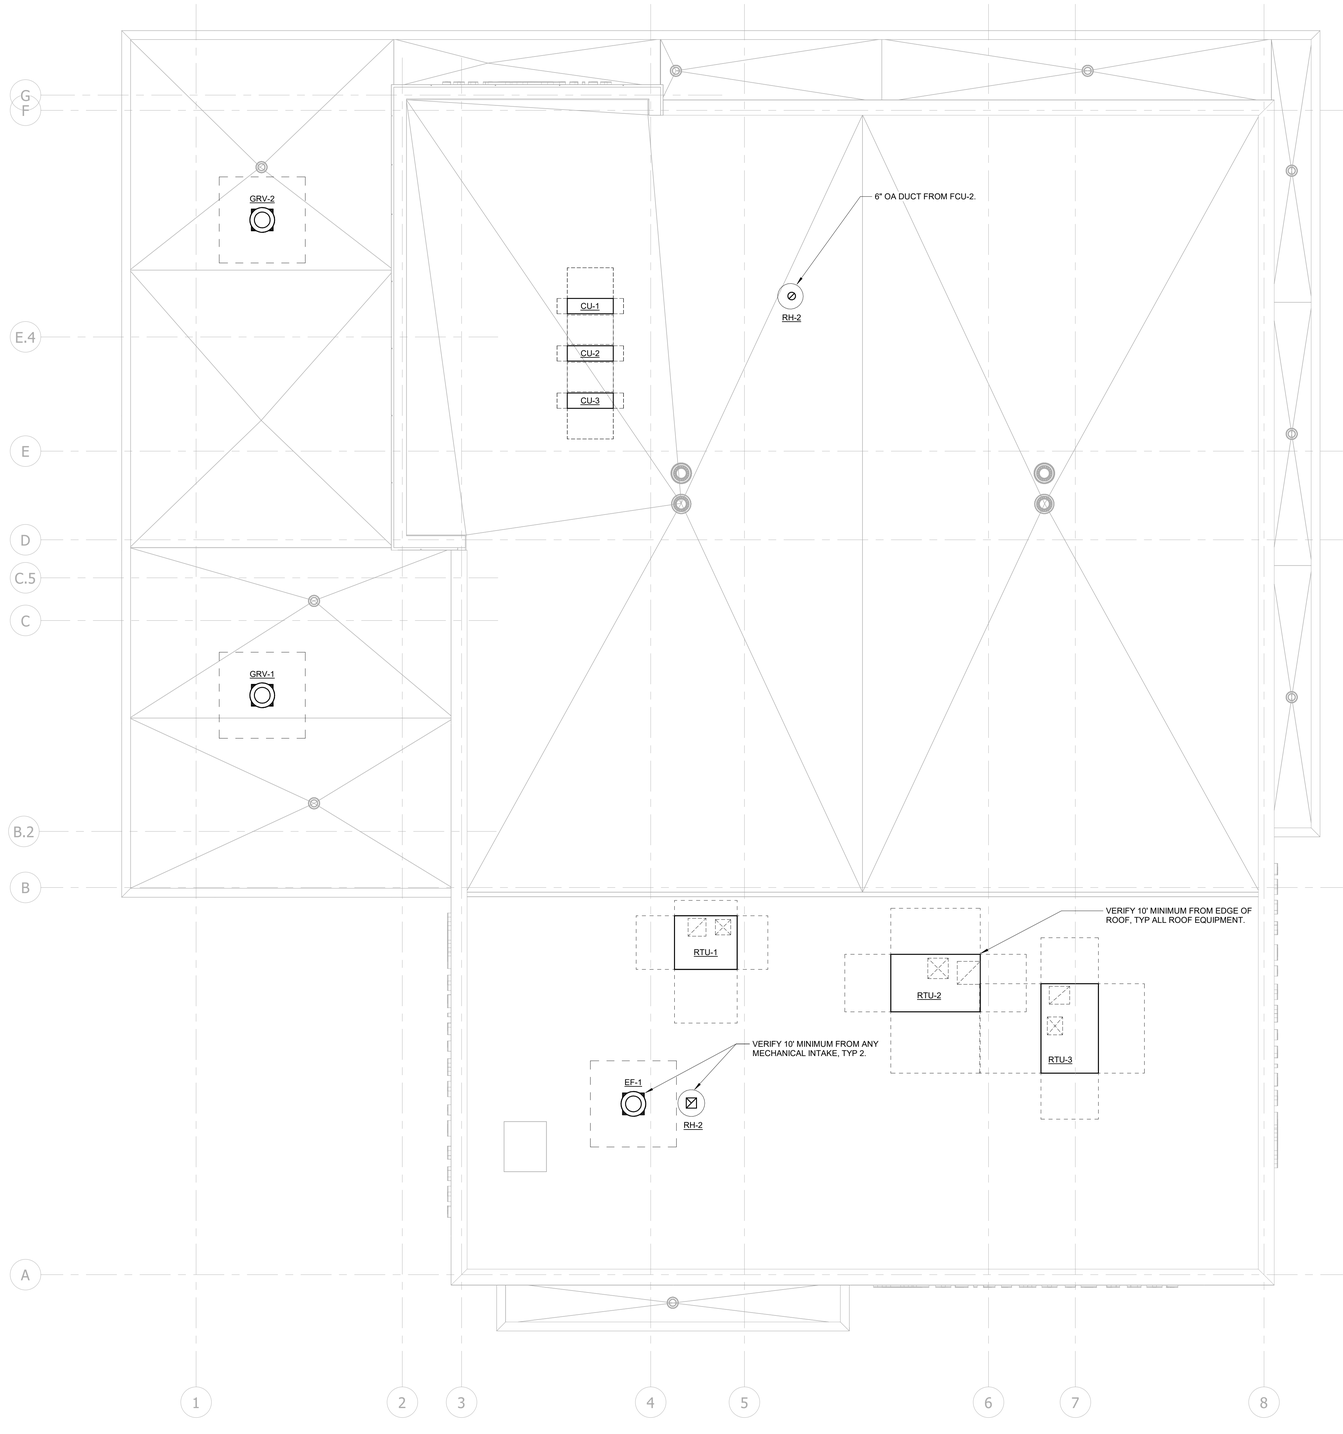

1 M02.01 MECHANICAL ROOF PLAN
1/4" = 1'-0"

NORTH

NELSON
Nelco Architecture, Inc.

12400 Coit Road, Suite 510
Dallas, TX. 75251
Phone: (972) 644-8830
Fax: (972) 644-8496

Client Representative:
CUSHMAN & WAKEFIELD
Attn: Paul Hurchanik
Tel: 720.582.6073
Email:
paul.hurchanik@cushwake.com

Architect:
Nelco Architecture, Inc.
Attn: Harry Koutsis
Tel: 310.693.5271
Email: hkoutsis@nelsonww.com

Civil:
LANGAN
Attn: Ben Henry
Tel: (817) 328-3217
Email: bhenry@langan.com

Structural:
Salas O'Brien
Attn: Julie Bolding
Tel: (469) 782-9753
Email: julie.bolding@salasobrien.com

MEP:
Salas O'Brien
Attn: Robert Zendejas
Tel: (404) 434-7373
Email:
robert.zendejas@salasobrien.com

Salas O'Brien
salasobrien.com 404-881-5300
Atlanta
3200 Windy Hill Road, SE, Suite 200E
Atlanta, GA 30339

Project Number: 2450-70132

Description:	No:	Date:
Issue for Permit		08/26/2025

BANK OF AMERICA
Broomfield

CO1-111
NWC Hwy 7 and Palisade Pkwy
Broomfield CO, 80023

PROPERTY ID:	CO1-111
NSRP VERSION:	2.0
BULLETIN:	2-2025

MECHANICAL ROOF PLAN

COLORADO LICENSED
JESSE T. NAUGLE
63522
PROFESSIONAL ENGINEER

Project No: 23.0002261.000 Reviewed By: DBS

M02.01

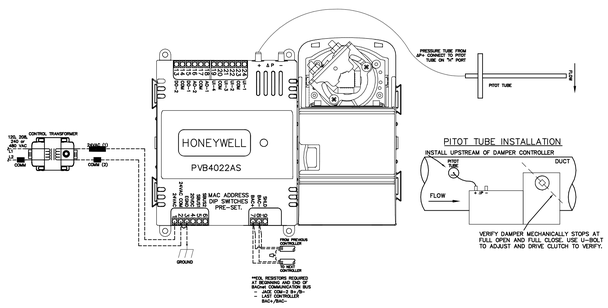

GENERAL NOTES:

1. CLASS 2 CONTROL CIRCUIT.
2. — — — — FIELD WIRING.
3. ALL WIRING IS POLARITY SENSITIVE EXCEPT FOR THERMISTORS.
4. UNLESS OTHERWISE SPECIFIED, CLASS 2 FIELD WIRING
5. CLASS 1 POWER CIRCUIT WIRING FROM BREAKER PANEL TO BE FIELD INSTALLED.

1 M03.01 BYPASS CONTROLLER
NOT TO SCALE

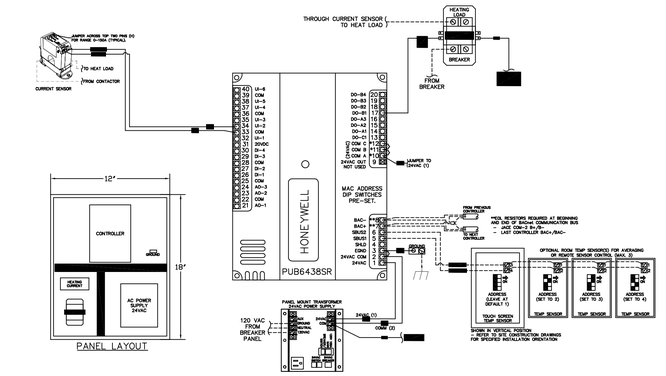

GENERAL NOTES:

1. CLASS 2 CONTROL CIRCUIT.
2. — — — — FIELD WIRING.
3. ALL WIRING IS POLARITY SENSITIVE EXCEPT FOR THERMISTORS.
4. UNLESS OTHERWISE SPECIFIED, CLASS 2 FIELD WIRING
5. CLASS 1 POWER CIRCUIT WIRING FROM BREAKER PANEL TO BE FIELD INSTALLED.

2 M03.01 ELECTRIC HEATER CONTROLLER
NOT TO SCALE

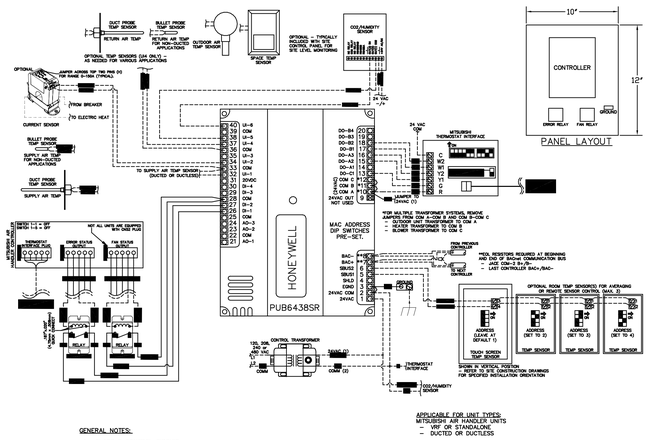

GENERAL NOTES:

1. CLASS 2 CONTROL CIRCUIT.
2. — — — — FIELD WIRING.
3. ALL WIRING IS POLARITY SENSITIVE EXCEPT FOR THERMISTORS.
4. UNLESS OTHERWISE SPECIFIED, CLASS 2 FIELD WIRING
5. CLASS 1 POWER CIRCUIT WIRING FROM BREAKER PANEL TO BE FIELD INSTALLED.

APPLICABLE FOR UNIT TYPES:
MITSUBISHI AIR HANDLER UNITS
– VRF OR STANDALONE
– DUCTED OR DUCTLESS

3 M03.01 FCU-1,2,3 CONTROLLER
NOT TO SCALE

NOTE: PASS THE LOAD SIDE OF EACH EXTERIOR LIGHTING CIRCUIT THROUGH A CURRENT TRANSDUCER. DO NOT COMBINE CIRCUITS, 1 CIRCUIT PER TRANSDUCER.

GENERAL NOTES:

1. CLASS 2 CONTROL CIRCUIT.
2. — — — — FIELD WIRING.
3. ALL WIRING IS POLARITY SENSITIVE EXCEPT FOR THERMISTORS.
4. UNLESS OTHERWISE SPECIFIED, CLASS 2 FIELD WIRING
5. CLASS 1 POWER CIRCUIT WIRING FROM BREAKER PANEL TO BE FIELD INSTALLED.

4 M03.01 LIGHTING CONTROL PANEL
NOT TO SCALE

GENERAL NOTES:

1. CLASS 2 CONTROL CIRCUIT.
2. — — — — FIELD WIRING.
3. ALL WIRING IS POLARITY SENSITIVE EXCEPT FOR THERMISTORS.
4. UNLESS OTHERWISE SPECIFIED, CLASS 2 FIELD WIRING
5. CLASS 1 POWER CIRCUIT WIRING FROM BREAKER PANEL TO BE FIELD INSTALLED.

APPLICABLE FOR UNIT TYPES:
STANDARD CONSTANT VOLUME UNITS
– CONVENTIONAL OR HEAT PUMP
– CHILLED WATER OR HOT WATER
– PACKAGE UNIT OR SPLIT SYSTEM

5 M03.01 RTU-1,2,3 CONTROLLER
NOT TO SCALE

GENERAL NOTES:

1. CLASS 2 CONTROL CIRCUIT.
2. — — — — FIELD WIRING.
3. ALL WIRING IS POLARITY SENSITIVE EXCEPT FOR THERMISTORS.
4. UNLESS OTHERWISE SPECIFIED, CLASS 2 FIELD WIRING
5. CLASS 1 POWER CIRCUIT WIRING FROM BREAKER PANEL TO BE FIELD INSTALLED.

6 M03.01 SITE CONTROL PANEL
NOT TO SCALE

GENERAL NOTES:

1. CLASS 2 CONTROL CIRCUIT.
2. — — — — FIELD WIRING.
3. ALL WIRING IS POLARITY SENSITIVE EXCEPT FOR THERMISTORS.
4. UNLESS OTHERWISE SPECIFIED, CLASS 2 FIELD WIRING
5. CLASS 1 POWER CIRCUIT WIRING FROM BREAKER PANEL TO BE FIELD INSTALLED.

APPLICABLE FOR UNIT TYPES:
SERIES ZONE DAMPERS WITH NO HEAT OR FAN

7 M03.01 VVT-X CONTROLLER
NOT TO SCALE

NOTES TO CONTRACTOR:

1. ALL CONTROL SYSTEM COMPONENTS SHALL BE FURNISHED BY THE BANK OF AMERICA SUPPLIER AND INSTALLED BY THE CONTRACTOR.
2. CONTRACTOR SHALL NOT SOLICIT BIDS FOR THE CONTROL SYSTEM COMPONENTS.
3. CONTRACTOR SHALL BE RESPONSIBLE FOR THE INSTALLATION OF THE IC3 KIT OF PARTS AS SHOWN ON THIS DRAWING.
4. CONTRACTOR SHALL BE RESPONSIBLE FOR COORDINATING THE WORK OF THE BANK OF AMERICA IC3 TEAM INTO THE PROJECT SCHEDULE AND ON THE PROJECT SITE INCLUDING LIGHTING, HVAC, TELECOMMUNICATIONS, DATA, AND SECURITY.
5. REFER TO BAC RETAIL MEP DESIGN MEMO FOR WIRING, TERMINATION, AND SEQUENCE OF OPERATION.
6. REFER TO THE BANK OF AMERICA WORKPLACE & FACILITY GUIDELINES - CONSUMER BANKING WEBSITE FOR ADDITIONAL IC3 INFORMATION.
7. ALL CONTROL WIRING TO BE 18/2 OR 18/4 SHIELDED.
8. ALL 120V AC WIRING SHALL BE IN CONDUIT.
9. COMMISSIONING OF THE CONTROLS SYSTEMS WILL BE BY THE BANK OF AMERICA IC3 TEAM COMMISSIONING AGENT UNDER THE CONTRACTOR'S SCOPE OF WORK.

CONTROLS DIAGRAMS ARE FOR REFERENCE ONLY PER BOA STANDARDS. ECS WILL PROVIDE SITE SPECIFIC WIRING DIAGRAMS WITH THE IC3 KITS/COMPONENTS.

IC3 CONTACT INFORMATION:

EMAIL: IC3_OPERATIONS@BOFA.COM
WITH A COPY TO: PONCELL.BROWN@AM.JLL.COM

NELSON
Nelco Architecture, Inc.

12400 Coit Road, Suite 510
Dallas, TX. 75251
Phone: (972) 644-8830
Fax: (972) 644-8496

Client Representative:
CUSHMAN & WAKEFIELD
Attn: Paul Hurchanik
Tel: 720.582.6073
Email: paul.hurchanik@cushwake.com

Architect:
Nelco Architecture, Inc.
Attn: Harry Koutsis
Tel: 310.693.5271
Email: hkoutsis@nelsonww.com

Civil:
LANGAN
Attn: Ben Henry
Tel: (817) 328-3217
Email: bhenry@langan.com

Structural:
Salas O'Brien
Attn: Julie Bolding
Tel: (469) 782-9753
Email: julie.bolding@salasobrien.com

MEP:
Salas O'Brien
Attn: Robert Zendejas
Tel: (404) 434-7373
Email: robert.zendejas@salasobrien.com

Salas O'Brien
salasobrien.com 404-881-5300
Atlanta
3200 Windy Hill Road, SE, Suite 200E
Atlanta, GA 30339

Project Number: 2450-70132

Description:	No:	Date:
Issue for Permit		08/26/2025

BANK OF AMERICA
Broomfield

CO1-111
NWC Hwy 7 and Palisade Pkwy
Broomfield CO, 80023

PROPERTY ID:	CO1-111
NSRP VERSION:	2.0
BULLETIN:	2-2025

MECHANICAL CONTROLS

COLORADO LICENSED
TYLER J. NAUGLE
63527
PROFESSIONAL ENGINEER

Project No: 23.0002261.000 Reviewed By: DBS

M03.01

FIRE ALARM SEQUENCE OF EVENTS MATRIX

X	INDICATES ACTION WILL CAUSE SPECIFIC RESULTS
	INDICATES ACTION WILL NOT CAUSE SPECIFIC RESULTS

ACTIONS	DEVICE ACTIVATION													
	ACTIVATION OF ANY MANUAL PULL STATION (IN ZONE OF ALARM)	ACTIVATION OF ANY AREA SMOKE SENSOR (IN ZONE OF ALARM)	ACTIVATION OF FIRE SPRINKLER WATER FLOW SWITCH (IN ZONE OF ALARM)	ACTIVATION OF FIRE SPRINKLER TAMPER SWITCH	POWER SUPPLY PROBLEMS (PRIMARY, TROUBLE AND SECONDARY)	OPEN WIRE OR GROUND ON ANY SUPERVISED CIRCUIT	ACTIVATION OF AUDIO/VISUAL BYPASS SWITCH	ACTIVATION OF AHU SHUTDOWN BYPASS SWITCH	ACTIVATION OF SMOKE DAMPER BYPASS SWITCH	LOSS OF PRIMARY POWER	ACTIVATION OF ALARM SILENCE SWITCH	ACTIVATION OF GATE VALVE TAMPER SWITCH	
SYSTEM RESPONSE	A	B	C	D	E	F	G	H	I	J	K	L	
1	X	X	X										1
2	X	X	X										2
3	X	X	X										3
4						X				X			4
5							X	X	X				5
6	X	X	X	X	X	X	X	X	X	X		X	6
7	X	X	X										7
8				X	X	X				X		X	8
9				X			X	X	X		X	X	9
10							X				X		10
11	X	X	X					X					11
12	X	X	X										12
SYSTEM RESPONSE	A	B	C	D	E	F	G	H	I	J	K	L	

ELECTRICAL ABBREVIATIONS

ABBREVIATION	DEFINITION
A	AMPERES
AC	ALTERNATING CURRENT
AFF	ABOVE FINISHED FLOOR
ARCH	ARCHITECTURAL
ATS	AUTOMATIC TRANSFER SWITCH
AWG	AMERICAN WIRE GAGE
BFC	BELOW FINISHED CEILING
CB	CIRCUIT BREAKER
CLG	CEILING
CONTR	CONTRACTOR
CT	CURRENT TRANSFORMER
DWG	DRAWING
EC	ELECTRICAL CONTRACTOR
ELEC	ELECTRICAL
EM	EMERGENCY
ETR	EXISTING TO REMAIN
FACP	FIRE ALARM CONTROL PANEL
FLA	FULL LOAD AMPS
GB	GROUND BUS
GC	GENERAL CONTRACTOR
GFI, GFCI	GROUND FAULT (CIRCUIT) INTERRUPTER
GND	GROUND
HP	HORSEPOWER
HZ	HERTZ
JB	JUNCTION BOX
KV	KILOVOLT
KVA	KILOVOLT AMPERE
KW	KILOWATT
KWH	KILOWATT HOUR
LED	LIGHTING EMMITING DIODE
LS	LIFE SAFETY
LTG	LIGHTING
MCB	MAIN CIRCUIT BREAKER
MECH	MECHANICAL
MIN	MINIMUM
NEC	NATIONAL ELECTRICAL CODE
NEMA	NATIONAL ELECTRICAL MANUFACTURERS ASSOCIATION
NTS	NOT TO SCALE
OC	ON CENTER
OL	OVERLOAD
P	POLE
PC	PHOTOCELL
PH	PHASE
PLBG	PLUMBING
PNL	PANEL
RD	ROUND
RLA	RATED LOAD AMPS
SPEC	SPECIFICATIONS
TBB	TELEPHONE BACK BOARD
TEMP	TEMPERATURE
UNO	UNLESS NOTED OTEHRWISE
V	VOLTAGE; VOLT
VAC	VOLTS ALTERNATING CURRENT
VDC	VOLTS DIRECT CURRENT
W	WIRE
Ø	ROUND; DIAMETER; PHASE

NOTE: THESE ARE STANDARD ABBREVIATIONS. ALL ITEMS MAY NOT APPEAR ON DRAWINGS.

GENERAL NOTES

1. ALL WORK SHALL BE COORDINATED WITH THE WORK OF OTHER TRADES TO AVOID INTERFERENCES AND CONFLICTS. REFER TO THE DRAWINGS OF THE RESPECTIVE SYSTEMS PRIOR TO SUBMISSION OF BIDS FOR ADDITIONAL WORK WHICH MAY BE REQUIRED AS PART OF THIS WORK. NO ALLOWANCES WILL BE MADE FOR THE LACK OF COORDINATION BETWEEN DISCIPLINES OR SYSTEMS AND EQUIPMENT.
2. THE WORK SHALL BE COORDINATED WITH THE ARCHITECTURAL DOCUMENTS FOR THE EXACT LOCATION OF LIGHT FIXTURES, EQUIPMENT, DEVICES, ETC. TO ASSURE PROPER PLACEMENT OF SAID DEVICES AND EQUIPMENT. SWITCHES SHALL BE PLACED ON LATCH SIDE OF ALL DOOR OPENINGS. WHERE A CONFLICT EXISTS BETWEEN ANY TWO DOCUMENTS, NOTIFY THE ARCHITECT PRIOR TO ANY INSTALLATION FOR RESOLUTION.
3. THE CONTRACTOR SHALL VERIFY ALL EQUIPMENT BEING INSTALLED PRIOR TO INSTALLATION TO ASSURE THAT THE FEEDER, DISCONNECT, STARTER, OVERCURRENT PROTECTION, ETC. MATCHES THE ACTUAL NAMEPLATE DATA AS SUPPLIED BY THE MANUFACTURER. FULLY COORDINATE EQUIPMENT TO BE PROVIDED TO ASSURE NO ADDITIONAL COSTS TO THE CONTRACT.
4. CONDUIT HOMERUNS MAY BE COMBINED TO INCLUDE UP TO FOUR (4) CIRCUITS. PROVIDE QUANTITY OF NEUTRALS INDICATED FOR EACH CIRCUIT.
5. SPECIFIC REQUIREMENTS REGARDING MATERIALS, WORKMANSHIP AND THE WORK TO BE DONE ARE COVERED BY THE SPECIFICATIONS WHICH COMPLEMENT THE PLANS. WORK CALLED FOR BY THE SPECIFICATIONS OR THE PLANS IS REQUIRED THE SAME AS IF REQUIRED BY BOTH. WHERE A CONFLICT EXISTS BETWEEN THE PLANS AND THE SPECIFICATIONS, THE MORE STRINGENT REQUIREMENTS OF THE TWO SHALL APPLY UNLESS SPECIFICALLY APPROVED IN WRITING BY THE ARCHITECT/ENGINEER.
6. COORDINATE ALL CUSTOM RECEPTACLES AND CIRCUITS WITH EQUIPMENT FURNISHED BY TENANT. PROVIDE OUTLETS COMPATIBLE WITH EQUIPMENT REQUIREMENTS.
7. SUPPORT ALL ELECTRICAL CONDUIT, RACEWAY, OUTLET AND JUNCTION BOXES VIA THREADED ROD OR DEDICATED INDEPENDENT #12 GA GALVANIZED TIE WIRE. DO NOT SECURE ANY ITEM EXCEPT LIGHT FIXTURES TO CEILING CONSTRUCTION OR SUPPORT WIRES. SUPPORT MULTIPLE CONDUITS FROM ADDITIONAL WIRES COMPLYING WITH NEC ART. 300.11.
8. ALL CONDUIT PENETRATIONS OF FIRE RATED WALLS, FLOORS, AND PARTITIONS SHALL BE FIRESTOPPED WITH A U.L. RECOGNIZED PRODUCT RESTORING THE INTEGRITY OF THE BARRIER PENETRATED. UTILIZE NELSON "FSP" FIRESTOP PUTTY, "PCS" PIPE CHOKE SYSTEM, OR "CLK" FIRESTOP CAULK TO PROVIDE A U.L. LISTED ASSEMBLY, OR APPROVED ALTERNATE.
9. **CONTRACTOR SHALL TEST EACH AND EVERY WIRING DEVICE AND LIGHT FIXTURE FOR CORRECT OPERATION AND DOCUMENT PROJECT VOLTAGE READINGS. PROVIDE COPY OF LIGHTING AND POWER FLOOR PLANS WITH DEVICES AND FIXTURES HIGHLIGHTED TO INDICATE SUCCESSFUL TESTING AND OPERATION. SUBMIT TO THE ARCHITECT PRIOR TO REQUEST FOR FINAL CONSTRUCTION REVIEW.**
10. REFER TO EQUIPMENT CUT SHEETS AND MANUFACTURER'S DATA FOR ROUGH IN LOCATIONS OF ELECTRICAL CONNECTIONS AND INTERCONNECTIONS OF ALL EQUIPMENT.
11. CONTRACTOR SHALL COORDINATE ELEVATIONS AND PIPING SYSTEM SLOPES SUCH THAT DUCTWORK, PIPING, RACEWAY, CABLE TRAY, AND ASSOCIATED EQUIPMENT IS INSTALLED AT UNIFORM ELEVATIONS WITH MINIMAL OFFSET. PROVIDE COORDINATION DRAWING TO ENGINEER FOR REVIEW PRIOR TO EQUIPMENT ORDERS AND ROUGH-IN.
12. COORDINATE WITH SPECIALTY SYSTEMS VENDORS TO PROVIDE RACEWAY AND CABLING, POWER AND CONTROL INTERFACES AS REQUIRED FOR COMPLETE, OPERABLE SYSTEMS.
13. ALL ELECTRICAL EQUIPMENT SHALL BE MARKED WITH ARC FLASH HAZARD WARNING LABELS IN ACCORDANCE WITH THE REQUIREMENTS OF NEC 110.16.
14. AFTER INSTALLATION OF ALL NEW DISTRIBUTION EQUIPMENT, THE CONTRACTOR SHALL CONDUCT A FULL SHORT CIRCUIT COORDINATION STUDY TO CONFIRM REQUIRED CIRCUIT BREAKER ADJUSTABLE SETTINGS AND FUSE RATINGS FOR ALL EQUIPMENT TO BE PROVIDED. PROVIDE REPORT INDICATING RECOMMENDED SETTINGS AND TRIP CURVES.

ELECTRICAL SYMBOL LEGEND

SYMBOL	DESCRIPTION	MTG HT UNO
	ARROWHEAD INDICATES HOMERUN. X-1,3, AND 5 ADJACENT TO HOMERUN ARROWHEADS INDICATES HOMERUN TO PANEL X, CIRCUIT NUMBERS 1, 3, AND 5.	
	INDICATES CIRCUIT CONTINUATION OF CIRCUITS 3 AND 5 OF PANEL X.	
	MARKS ACROSS RACEWAY SYMBOLS INDICATE THE NUMBER OF #12 CONDUCTORS, UNLESS OTHERWISE NOTED. NO MARKS INDICATE TWO #12 CONDUCTORS. EQUIPMENT GROUNDING CONDUCTORS ARE NOT INDICATED BY MARKS, BUT ARE REQUIRED.	
	RACEWAY INSTALLED CONCEALED IN WALL OR ABOVE CEILING / CONCEALED BELOW FLOOR	
	DUPLEX RECEPTACLE OUTLET	18"
WP	WEATHERPROOF GFCI DUPLEX RECEPTACLE OUTLET	18"
	QUADRUPLEX RECEPTACLE OUTLET	18"
D / D	DUPLEX OR QUAD ON DEDICATED CIRCUIT - NOTE 3	18"
/ 42"	GFCI DUPLEX / GFCI DUPLEX RECEPTACLE OUTLET - ABOVE COUNTER	18"/42"
/	ISOLATED GROUND DUPLEX / QUADRUPLEX RECEPTACLE OUTLET	18"
	AUTOMATIC DUPLEX RECEPTACLE OUTLET - NOTE 8	18"
	COMBINATION TELEPHONE/DATA OUTLET WITH NUMBER OF DROPS	18"
	CONCRETE FLOOR BOX DEVICE WITH POWER AND DATA - NOTE 6	
	PANEL AS NOTED	
/	FUSIBLE / NON-FUSED DISCONNECT SWITCH	
CR	BADGE READER BY TENANT'S VENDOR	
$	SINGLE-POLE, SINGLE-THROW TOGGLE SWITCH / ABOVE-COUNTER	44"/42"
$3	THREE-WAY TOGGLE SWITCH - NOTE 5	44"
$D	WALL-MOUNTED DIMMER SWITCH	44"
$O	WALL-MOUNTED OVERRIDE SWITCH	44"
J / J / J	JUNCTION BOX - CEILING MOUNTED / WALL MOUNTED / FLOOR MOUNTED	
	SURFACE-MOUNTED RACEWAY AS SPECIFIED	
	CEILING MOUNTED EXIT SIGN - NOTE 4	
F	FIRE ALARM AUDIO/VISUAL SIGNALING DEVICE - NOTE 7	80" TO BOTTOM
F	FIRE ALARM VISUAL SIGNALING DEVICE - NOTE 7	80" TO BOTTOM
F	FIRE ALARM PULL STATION DEVICE - NOTE 7	46"
S	CEILING MOUNTED SMOKE DETECTOR	
TS	FIRE ALARM TAMPER SWITCH - NOTE 7	
FS	FIRE ALARM FLOW SWITCH - NOTE 7	

LEGEND NOTES:

1. UNLESS NOTED OTHERWISE, MOUNTING HEIGHT DIMENSIONS ARE TO THE CENTERLINE OF THE DEVICE OR OUTLET ABOVE GRADE OR FINISHED FLOOR.
2. ALL SYMBOLS INDICATED IN THE LEGEND MAY NOT NECESSARILY BE USED ON THE PLANS.
3. LABEL COVERPLATES OF ALL DEVICES ON DEDICATED CIRCUITS "DEDICATED."
4. FACE QUANTITY AND DIRECTIONAL ARROWS AS INDICATED.
5. PROVIDE INTERCONNECT CONDUCTORS AS REQUIRED TO PROVIDE MULTIPLE SWITCH POINTS IN EACH AREA SHOWN.
6. PROVIDE WIREMOLD #RFB4 SERIES FLOOR BOX AS SPECIFIED.
7. EXTEND AND CONNECT TO BUILDING FIRE ALARM PANEL. DEVICE MOUNTING HEIGHT SHALL COMPLY WITH NFPA 72.
8. AUTOMATIC RECEPTACLE SHALL BE CONTROLLED THROUGH OCCUPANCY SENSOR SERVING SPACE. PROVIDE LABEL INDICATING RECEPTACLE IS CONTROLLED.

SHEET LIST

SHEET NUMBER	SHEET NAME
E00.01	ELECTRICAL GENERAL
E01.01	SITE PLAN - ELECTRICAL
E02.01	FLOOR PLAN - LIGHTING
E02.02	FLOOR PLAN - ELECTRICAL
E02.03	FLOOR PLAN - FIRE ALARM
E02.04	FLOOR PLAN - MECH. EQUIPMENT
E02.05	FLOOR PLAN - PHOTOMETRIC
E03.01	ROOF PLAN - MECH. EQUIPMENT
E04.01	ELECTRICAL RISER DIAGRAM AND SCHEDULES
E04.02	ELECTRICAL DETAILS

GENERAL SYMBOLS

N — NORTH ARROW

1 — DRAWING REVISION TAG

1 — KEYED NOTE

1 / E-1 — PLAN OR DETAIL NUMBER / SHEET NUMBER

SENSOR SCHEDULE

SYMBOL	DESCRIPTION	MANUFACTURER	MODEL #	MOUNTING	NOTES
OS A	OCCUPANCY SENSOR - CORNER MOUNT	WATTSTOPPER	LMPX-100	CORNER CEILING	DIGITAL PASSIVE IR
OS B	OCCUPANCY SENSOR - 360 DEGREE	WATTSTOPPER	LMPC-100	CEILING	DIGITAL PASSIVE IR
$S	PASSIVE INFRARED WALL SWITCH OCCUPANCY SWITCH	WATTSTOPPER	PW-100	WALL	LINE VOLTAGE
DS	DIMMING PHOTO SENSOR	WATTSTOPPER	LMLS-400	CEILING	1,2
$D	DIGITAL WALLBOX DIMMING SWITCH	WATTSTOPPER	LMDM-101	WALL	1,2
RC	DIGITAL ON/OFF/0-10V DIMMING ROOM CONTROLLER	WATTSTOPPER	LMRC-211	ABOVE CEILING	0-10V, NOTES 1,2

NOTES:
1. CONTRACTOR SHALL PROVIDE THE APPROPRIATE NUMBER OF ROOM CONTROLLERS FOR THE PROJECT. COORDINATE WITH THE MANUFACTURER FOR THE CORRECT QUANTITY.
2. CONTRACTOR SHALL PROVIDE 4"x4" JUNCTION BOX AS REQUIRED. SEE DETAILS ON DRAWING E04.02.
3. CONTRACTOR TO VERIFY EXACT LOCATION OF SENSOR WITH ARCHITECT.

LIGHT FIXTURE SCHEDULE

ITEM	DESCRIPTION	MANUFACTURER	MODEL	VOLTAGE	WATTAGE	LAMP TYPE	LAMP TEMPERATURE	LUMEN OUTPUT
D1	24" UNDER CABINET LED FIXTURE	AIREY-THOMPSON	13L-N-35-24-2-3-D11	120V	9	LED	3500K	1,090 LUMENS
HA	48" LED STRIPLIGHT	LITHONIA LIGHTING	ZL1N-L48-3000LM-FST-MVOLT-35K-80CRI-WH-HC36-WGZ48	120V	25	LED	3500K	3,000 LUMENS
HAE	48" LED STRIPLIGHT	LITHONIA LIGHTING	SAME AS ABOVE EXCEPT WITH EMERGENCY BATTERY PACK	120V	25	LED	3500K	3,000 LUMENS
HB	24" LED STRIPLIGHT	LITHONIA LIGHTING	ZL1N-L24-2500LM-FST-MVOLT-35K-80CRI-WH-HC36-WG24	120V	19	LED	3500K	2,500 LUMENS
MH1	POLE LIGHT MOUNTED AT 25FT	CREE LIGHTING	OSQM-C-6L-40K7-5L-UL-NM / OSQ-ML-C-DA-BZ	208V	37	LED	4000K	6,000 LUMENS
MK1	POLE LIGHT MOUNTED AT 25FT	CREE LIGHTING	OSQL-C-22L-40K7-5L-UL-NM / OSQ-ML-C-DA-BZ	208V	131	LED	4000K	22,000 LUMENS
OZ1	POLE LIGHT MOUNTED AT 25FT	CREE LIGHTING	OSQL-C-40L-40K7-3B-UL-NM / OSQ-ML-C-DA-BZ	208V	236	LED	4000K	40,000 LUMENS
R-11A	4' LINEAR GYP RECESSED SLOT LED FIXTURE	FOCAL POINT	FSM2L-FL-625LF-35K-1C-UNV-LD1-TF-XF2-WH-4'-0"	120V	24	LED	3500K	625 LUMENS/FOOT
R-11B	4' LINEAR GRID RECESSED SLOT LED FIXTURE	FOCAL POINT	FSM2L-FL-375LF-35K-1C-UNV-LD1-G2-WH-4'-0"	120V	14	LED	3500K	375 LUMENS/FOOT
R-11C	12' LINEAR GYP RECESSED SLOT LED FIXTURE	FOCAL POINT	FSM2L-FL-250LF-35K-1C-UNV-LD1-TF-XF2-WH-20'-0"	120V	48	LED	3500K	250 LUMENS/FOOT
R-11CE	12' LINEAR GYP RECESSED SLOT LED FIXTURE	FOCAL POINT	SAME AS ABOVE EXCEPT WITH EMERGENCY BATTERY PACK	120V	48	LED	3500K	250 LUMENS/FOOT
R-14A	3.5" SQUARE LED DOWNLIGHT	FOCAL POINT	FLC33D-SDO-SW-900L-120-L11-1C / LC33-SDO-SW-900L-35K-DNS-WFL-CD-WP	120V	10	LED	3500K	900 LUMENS
R-14AE	3.5" SQUARE LED DOWNLIGHT	FOCAL POINT	SAME AS ABOVE EXCEPT WITH EMERGENCY BATTERY PACK	120V	10	LED	3500K	900 LUMENS
R-14B	3.5" SQUARE LED DOWNLIGHT	FOCAL POINT	FLC33D-SDO-SW-700L-120-L11-1C / LC33-SDO-SW-700L-35K-DNS-WFL-CD-WP	120V	8	LED	3500K	700 LUMENS
R-14BE	3.5" SQUARE LED DOWNLIGHT	FOCAL POINT	SAME AS ABOVE EXCEPT WITH EMERGENCY BATTERY PACK	120V	8	LED	3500K	700 LUMENS
R-15	3.5" SQUARE LED DOWNLIGHT	FOCAL POINT	FLC33W-SDO-SW-700L-120-LZ1-1C / LC33-SDO-SW-700L-35K-WWS-CD-WP	120V	11	LED	3500K	700 LUMENS
R-19	2'X4' ARCHITECTURAL RECESSED LED LUMINAIRE	FOCAL POINT	FLUL-24-PS-3000L-35K-1C-UNV-LD1	120V	30	LED	3500K	3,000 LUMENS
R-19E	2'X4' ARCHITECTURAL RECESSED LED LUMINAIRE	FOCAL POINT	SAME AS ABOVE EXCEPT WITH EMERGENCY BATTERY PACK	120V	30	LED	3500K	3,000 LUMENS
SH1	LED WALL PACK	CREE LIGHTING	SEC-EDG-4M-WM-02-E-UL-BZ-350-40K	208V	25	LED	4000K	2,500 LUMENS
UU1	20' LINEAR RECESSED LED FIXTURE	CORONET	LSR-WET-2.5-20'-40-MED-UNV-DB-W-F-SD-NA-NA-NA	120V	140	LED	4000K	446 LUMENS/FOOT
UU2	2' LINEAR RECESSED LED FIXTURE	CORONET	LSR-WET-2.5-2'-40-MED-UNV-DB-W-F-SD-NA-NA-NA	120V	14	LED	4000K	446 LUMENS/FOOT
UU3	3' LINEAR RECESSED LED FIXTURE	CORONET	LSR-WET-2.5-3'-40-MED-UNV-DB-W-F-SD-NA-NA-NA	120V	21	LED	4000K	446 LUMENS/FOOT
UU4	55' LINEAR RECESSED LED FIXTURE	CORONET	LSR-WET-2.5-55'-40-MED-UNV-DB-W-F-SD-NA-NA-NA	120V	385	LED	4000K	446 LUMENS/FOOT
UU5	50' LINEAR RECESSED LED FIXTURE	CORONET	LSR-WET-2.5-50'-40-MED-UNV-DB-W-F-SD-NA-NA-NA	120V	350	LED	4000K	446 LUMENS/FOOT
UU6	16' LINEAR RECESSED LED FIXTURE	CORONET	LSR-WET-2.5-16'-40-MED-UNV-DB-W-F-SD-NA-NA-NA	120V	112	LED	4000K	446 LUMENS/FOOT
W1	WALL MOUNTED OUTDOOR LUMINAIRE	LITHONIA LIGHTING	DSXW2-LED-20C-530-40K-T3M-MVOLT-DBLXD	120V	36	LED	4000K	2,501 LUMENS
X1	EXIT SIGN	ACUITY BRANDS	EDGR-1-R-L	120V	5	LED	N/A	N/A

LIGHTING FIXTURE SCHEDULE GENERAL NOTES:

1. PROVIDE CREE SSS SERIES POLE FOR ALL POLE LIGHTS. REFER TO GMR FOR FULL POLE SPECIFICATIONS.

CONTRACTOR APPROVED LIGHTING SUPPLIERS:

BORDER STATES ELECTRIC
SCOTT CRAWFORD (864-556-6402)
BOA@BORDERSTATES.COM

WALTERS WHOLESALE ELECTRIC CO.
JAY MELFI (714-545-2022 OR 714-412-1964)
JAY.MELFI@WALTERSWHOLESALE.COM

WEIDENBACH BROWN
ROBERT NELSON (914-846-1445 OR 214-679-2400)
ROBERT.NELSON@WBLIGHT.COM

LIGHTING CONTROL SEQUENCE OF OPERATION:

1. INTERIOR LIGHTING: TIMER CONTROL WITH OVERRIDE FOR AFTER-HOURS OPERATION. OVERRIDE SHALL BE ACCOMPLISHED VIA JACE CONTROL PANEL.
2. EXTERIOR LIGHTING: ROUTE VIA JACE PANEL.
3. SIGNAGE: ROUTE VIA JACE PANEL.

COMcheck Software Version COMcheckWeb

Exterior Lighting Compliance Certificate

Project Information

Energy Code:	2021 IECC
Project Title:	Bank of America Broomfield
Project Type:	New Construction
Exterior Lighting Zone	2 (Light industrial area with limited nighttime use (LZ2))

Construction Site: 16802 Galapago Ct Broomfield, Colorado 80023
Owner/Agent:
Designer/Contractor:

Allowed Exterior Lighting Power

A Area/Surface Category	B Quantity	C Allowed Watts /	D Tradable Wattage	E Allowed Watts (B X C)
ATM/Night depository location (c)	2	45	No	225
Driveway	18202 ft2	0.04	Yes	728
Entry canopy	254 ft2	0.25	Yes	64
Illuminated area of facade wall or surface	2972 ft2	0.07	No	223
Landscaping	18869 ft2	0.04	Yes	755
Parking area	2280 ft2	0.04	Yes	91
Parking near 24-hour retail entrance	1 main	400	No	400
Walkway < 10 feet wide	230 ft of	0.5	Yes	115
			Total Tradable Watts (a) =	1753
			Total Allowed Watts =	2600
			Total Allowed Supplemental Watts (b) =	400

(a) Wattage tradeoffs are only allowed between tradable areas/surfaces.
(b) A supplemental allowance equal to 400 watts may be applied toward compliance of both non-tradable and tradable areas/surfaces.
(c) ATM/Night depository sites have a base allowance of 180 W per site.

Proposed Exterior Lighting Power

A Fixture ID : Description / Lamp / Wattage Per Lamp / Ballast	B Lamps/ Fixture	C # of Fixture	D Fixture Watt.	E (C X D)
ATM/Night depository location (2 machines): Non-tradable Wattage				
LED: UU4: 55' Linear: Other: Exemption:Temporary lighting	4	5	385	Exempt
Driveway (18202 ft2): Tradable Wattage				
LED: MK1: Pole Mounted Site Light: Other:	1	1	131	131
LED: OZ1: Pole Mounted Site Light: Other:	1	4	236	944
Entry canopy (254 ft2): Tradable Wattage				
LED: UU2: 2' Linear: LED Linear 15W:	1	5	14	70
Illuminated area of facade wall or surface (2972 ft2): Non-tradable Wattage				
LED: UU1: 20' Linear: Other:	1	1	140	140
Landscaping (18869 ft2): Tradable Wattage				
LED: MH1: Pole Mounted Site Light: Other:	1	4	37	148
LED: MK1: Pole Mounted Site Light: Other:	1	5	131	655

Project Title: Bank of America Broomfield
Data filename:
Report date: 10/21/24
Page 2 of 7

A Fixture ID : Description / Lamp / Wattage Per Lamp / Ballast	B Lamps/ Fixture	C # of Fixture	D Fixture Watt.	E (C X D)
Parking area (2280 ft2): Tradable Wattage				
LED: SH1: Wall Pack: LED A Lamp 25W:	1	2	25	50
Parking near 24-hour retail entrance (1 main entrys): Non-tradable Wattage				
LED: UU3: 3' Linear: LED Linear 22W:	1	9	21	189
Walkway < 10 feet wide (230 ft of walkway length): Tradable Wattage				
LED: UU5: 50' Linear: Other: Exemption:Temporary lighting	1	1	350	Exempt
			Total Tradable Proposed Watts =	1998

Exterior Lighting PASSES: Design 7% better than code

Exterior Lighting Compliance Statement

Compliance Statement: The proposed exterior lighting design represented in this document is consistent with the building plans, specifications, and other calculations submitted with this permit application. The proposed exterior lighting systems have been designed to meet the 2021 IECC requirements in COMcheck Version COMcheckWeb and to comply with any applicable mandatory requirements listed in the Inspection Checklist.

Kevin Mairena - Salas O'Brien
Name - Title
Signature
10-21-2024
Date

Project Title: Bank of America Broomfield
Data filename:
Report date: 10/21/24
Page 3 of 7

NELSON
Nelco Architecture, Inc.

12400 Coit Road, Suite 510
Dallas, TX. 75251
Phone: (972) 644-8830
Fax: (972) 644-8496

Client Representative:
CUSHMAN & WAKEFIELD
Attn: Paul Hurchanik
Tel: 720.582.6073
Email: paul.hurchanik@cushwake.com

Architect:
Nelco Architecture, Inc.
Attn: Harry Koutsis
Tel: 310.693.5271
Email: hkoutsis@nelsonww.com

Civil:
LANGAN
Attn: Ben Henry
Tel: (817) 328-3217
Email: bhenry@langan.com

Structural:
Salas O'Brien
Attn: Julie Bolding
Tel: (469) 782-9753
Email: julie.bolding@salasobrien.com

MEP:
Salas O'Brien
Attn: Robert Zendejas
Tel: (404) 434-7373
Email: robert.zendejas@salasobrien.com

Salas O'Brien
salasobrien.com 404-881-5300
Atlanta
3200 Windy Hill Road, SE, Suite 200E
Atlanta, GA 30339

Project Number: 2450-70132

Description:	No:	Date:
Issue for Permit		08/26/2025

BANK OF AMERICA
Broomfield

CO1-111
NWC Hwy 7 and Palisade Pkwy
Broomfield CO, 80023

PROPERTY ID:	CO1-111
NSRP VERSION:	2.0
BULLETIN:	2-2025

ELECTRICAL GENERAL

COLORADO LICENSED
THOMAS L. KATZ
56259
PROFESSIONAL ENGINEER
8-26-25

Project No: 23.0002261.000 Reviewed By: RJK

E00.01

GENERAL NOTES:

1. SPECIFIC REQUIREMENTS REGARDING MATERIALS, WORKMANSHIP AND THE WORK TO BE DONE ARE COVERED BY THE SPECIFICATIONS WHICH COMPLEMENT THE PLANS. WORK CALLED FOR BY THE SPECIFICATIONS OR THE PLAN IS REQUIRED THE SAME AS IF REQUIRED BY BOTH. WHERE A CONFLICT EXISTS BETWEEN THE PLANS AND SPECIFICATIONS, THE MORE STRINGENT REQUIREMENTS OF THE TWO SHALL APPLY UNLESS SPECIFICALLY APPROVED IN WRITING BY THE ARCHITECT/ENGINEER.

2. REFER TO LIGHT FIXTURE SCHEDULE ON E00.01.

3. PROVIDE 2#10, #10G AND 1/2"C FOR ALL POLE LIGHTS.THE LIGHTING CIRCUIT SHALL BE RAN THROUGH THE EXTERIOR LIGHTING CONTACTOR.

4. ALL EXTERIOR ELECTRICAL DEVICES SHALL BE WEATHERPROOF.

KEY NOTES: (#)

1. PROVIDE 2#8, #10G - 1"C FROM BUILDING MAIN ELECTRICAL ROOM TO JUNCTION BOX FOR NEW FLAG POLE LIGHTING. ROUTE CIRCUIT THROUGH EXTERIOR LIGHTING CONTACTOR. CONTACTOR SHALL BE CONTROLLED BY JACE BUILDING MANAGEMENT SYSTEM.

2. PROPOSED LOCATION OF NEW UTILITY METER. COORDINATE ALL REQUIREMENTS WITH LOCAL UTILITY PROVIDER AND CIVIL ENGINEER PRIOR TO INSTALLATION.

3. PROVIDE (2) TWO 4" CONDUITS ROUTED FROM BUILDING DATA AND TELEPHONE ROOM TO PROPERTY LINE AND INTERCEPT AT UTILITY MANHOLE. COORDINATE ALL REQUIREMENTS WITH LOCAL SERVICE PROVIDER PRIOR TO INSTALLATION.

4. LOCATION OF DATA/TELEPHONE ROOM (NER). REFER TO ELECTRICAL FLOOR PLAN 1/E02.02.

5. LOCATION OF MAIN ELECTRICAL ROOM. REFER TO ELECTRICAL FLOOR PLAN 1/E02.02.

6. PROVIDE 2 208V 2P 70A CONNECTIONS FOR DUAL PORT EV CHARGING PEDESTAL USING 5-#3 AL, #8G, 1-1/4"C STANDARD WIRE.

7. PROVIDE 2#10, #10G - 1"C FROM BUILDING MAIN ELECTRICAL ROOM TO JUNCTION BOX FOR NEW MONUMENT SIGN LIGHTING. ROUTE CIRCUIT THROUGH SIGNAGE LIGHTING CONTACTOR. CONTACTOR SHALL BE CONTROLLED BY JACE BUILDING MANAGEMENT SYSTEM. COORDINATE EXACT LOCATION WITH VENDOR.

8. PROVIDE 120V 20A CONNECTION FOR EV BIKE CHARGING RACKS. COORDINATE FINAL ELECTRICAL REQUIREMENTS WITH EV BIKE CHARGING RACK INSTALLER.

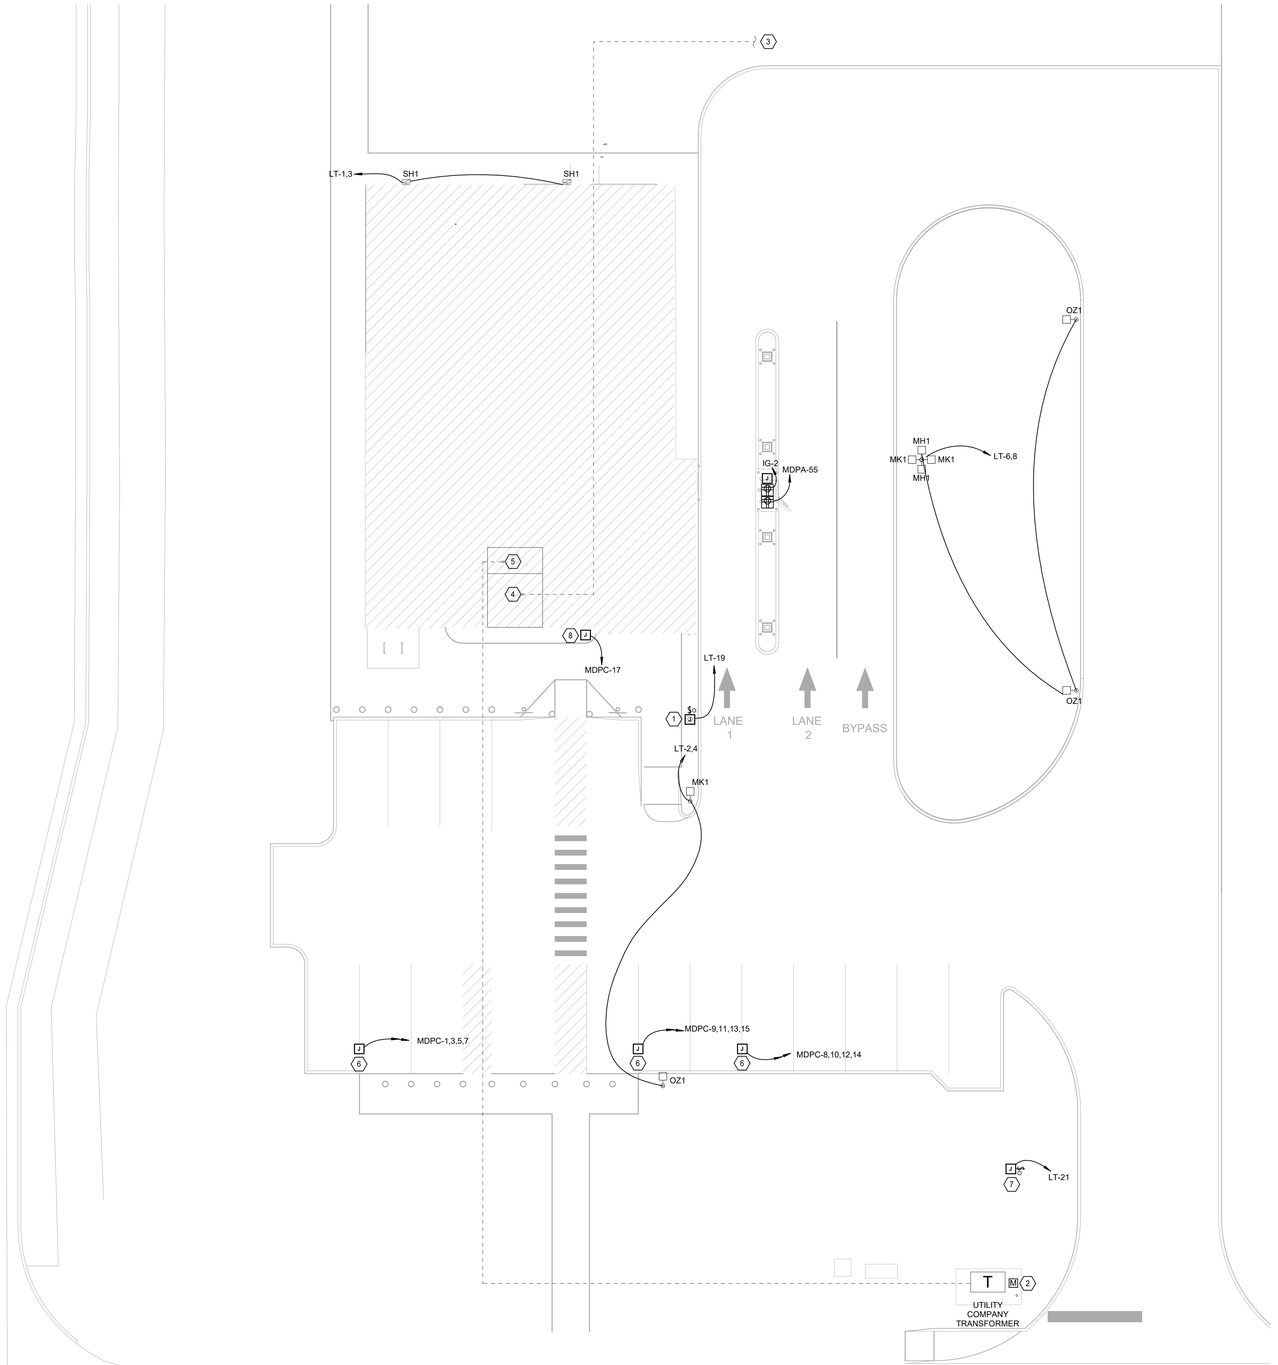

1 E01.01 SITE PLAN - ELECTRICAL
3/32" = 1'-0"

0 4' 8' 16'

NORTH

NELSON
Nelco Architecture, Inc.

12400 Coit Road, Suite 510
Dallas, TX. 75251
Phone: (972) 644-8830
Fax: (972) 644-8496

Client Representative:
CUSHMAN & WAKEFIELD
Attn: Paul Hurchanik
Tel: 720.582.6073
Email:
paul.hurchanik@cushwake.com

Architect:
Nelco Architecture, Inc.
Attn: Harry Koutsis
Tel: 310.693.5271
Email: hkoutsis@nelsonww.com

Civil:
LANGAN
Attn: Ben Henry
Tel: (817) 328-3217
Email: bhenry@langan.com

Structural:
Salas O'Brien
Attn: Julie Bolding
Tel: (469) 782-9753
Email: julie.bolding@salasobrien.com

MEP:
Salas O'Brien
Attn: Robert Zendejas
Tel: (404) 434-7373
Email:
robert.zendejas@salasobrien.com

Salas O'Brien
salasobrien.com 404-881-5300
Atlanta
3200 Windy Hill Road, SE, Suite 200E
Atlanta, GA 30339

Project Number: 2450-70132

Description:	No:	Date:
Issue for Permit		08/26/2025

BANK OF AMERICA
Broomfield

CO1-111
NWC Hwy 7 and Palisade Pkwy
Broomfield CO, 80023

PROPERTY ID:	CO1-111
NSRP VERSION:	2.0
BULLETIN:	2-2025

SITE PLAN - ELECTRICAL

COLORADO LICENSED
THOMAS L. KAYE
56259
PROFESSIONAL ENGINEER
8.26.25

Project No: 23.0002261.000 Reviewed By: RJK

E01.01

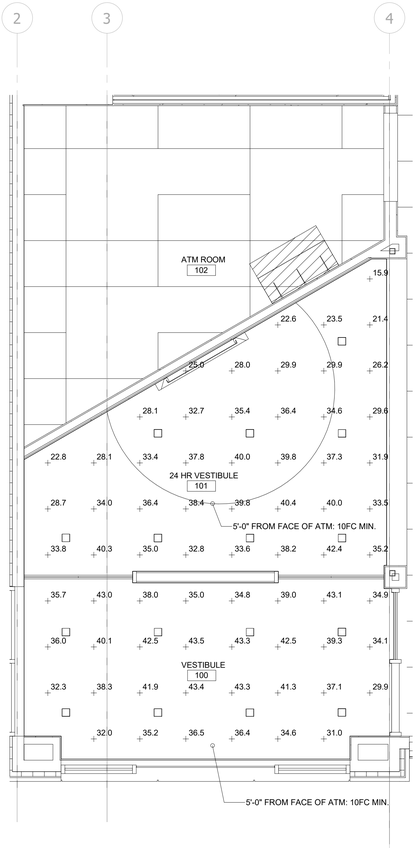

2 E02.01 VESTIBULE PHOTOMETRIC PLAN
3/8" = 1'-0"

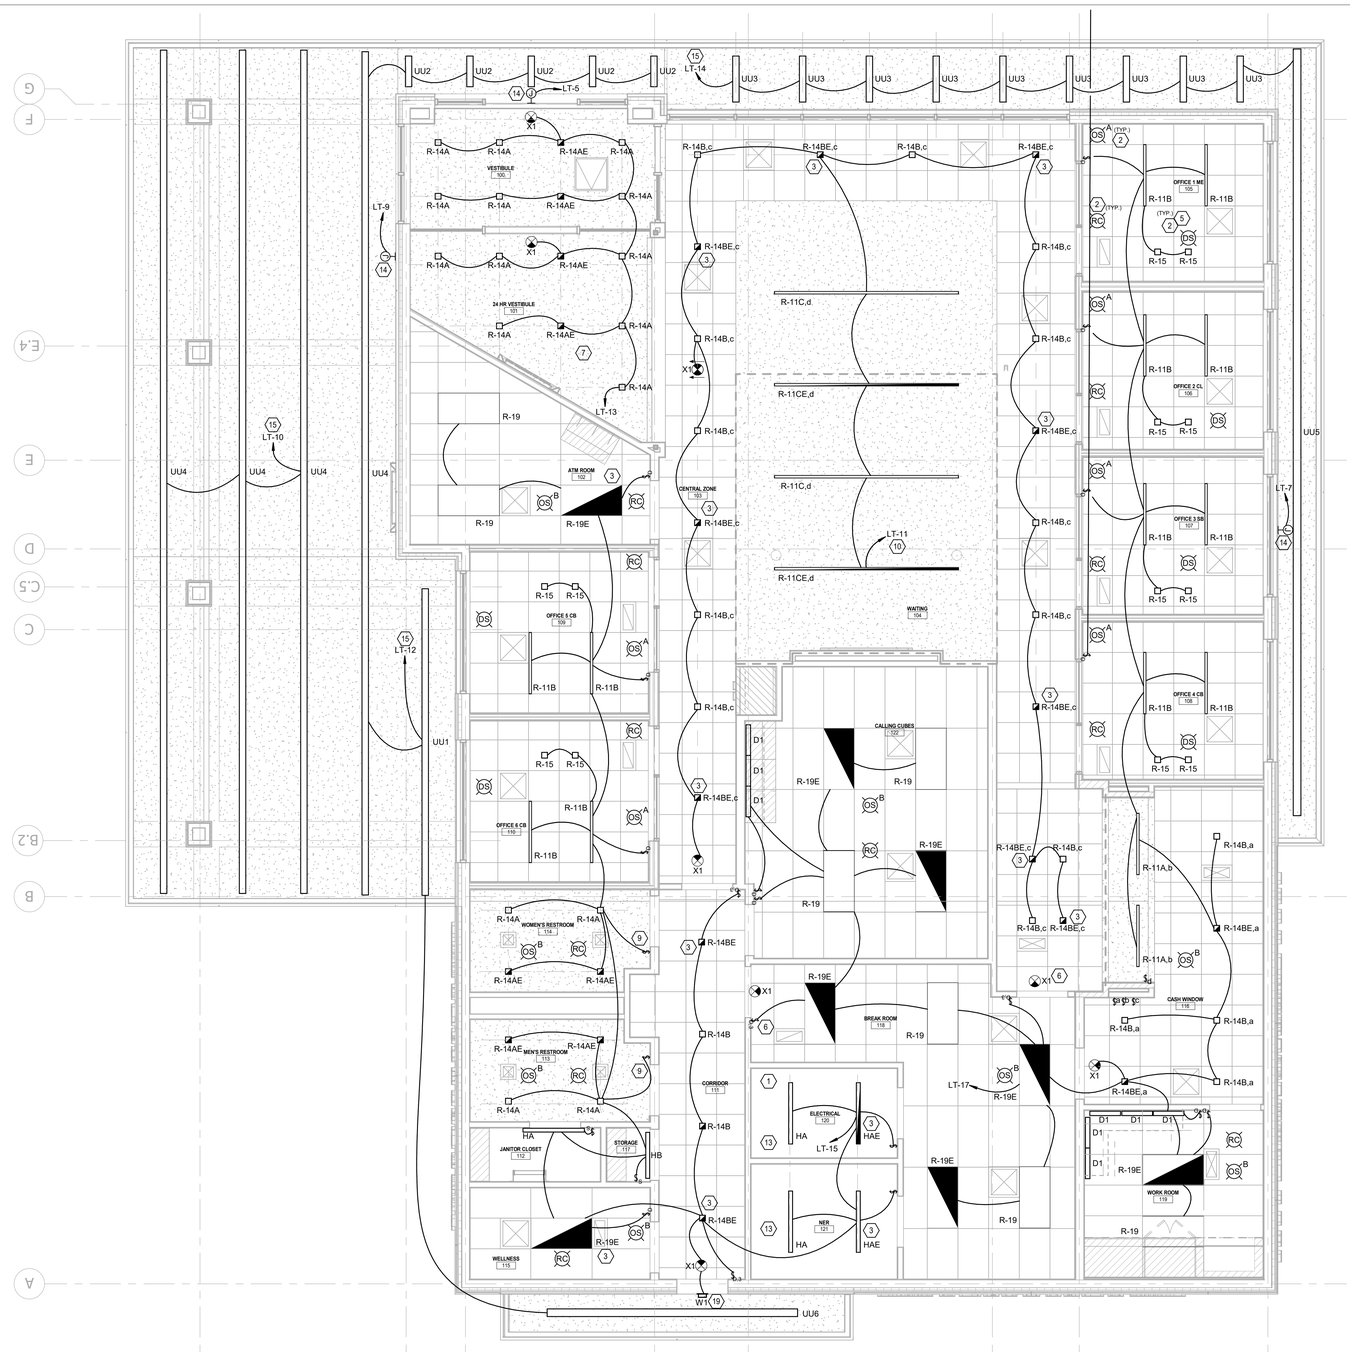

1 E02.01 FLOOR PLAN - LIGHTING
1/4" = 1'-0"

GENERAL NOTES:

1. REFER TO ARCHITECTURAL REFLECTED CEILING PLAN FOR EXACT LOCATIONS OF ALL LIGHTING FIXTURES SHOWN.
2. ALL EMERGENCY LIGHTING FIXTURES SHOWN SHALL OPERATE AS UNSWITCHED NIGHT LIGHT FIXTURES, UNLESS NOTED OTHERWISE. WHERE REQUIRED BY LOCAL AUTHORITY, PROVIDE 24-HOUR POWER FROM LOCAL LIGHTING BRANCH CIRCUIT.
3. COORDINATE COLOR OF ALL SWITCHES AND COVERPLATES WITH ARCHITECT.
4. REFER TO LIGHTING FIXTURE SCHEDULE ON E00.01.

KEY NOTES: (#)

1. BANK ELECTRICAL ROOM. REFER TO 1/E02.01 FOR PANEL LOCATIONS.
2. PROVIDE DIMMING DAYLIGHT SENSOR AND PASSIVE INFRARED OCCUPANCY SENSOR (AS REQUIRED). OCCUPANCY SENSOR WILL FUNCTION FOR ON/OFF CONTROL. IF THE SPACE IS OCCUPIED, THE DAYLIGHT SENSOR WILL ADJUST LIGHT LEVEL BASED ON AMBIENT LIGHT. REFER TO DETAIL 7/E04.01 FOR WIRING SCHEMATIC. LOCATE DAYLIGHT SENSOR WITHIN 3'-0" OF WINDOW.
3. EMERGENCY FIXTURE SHALL BE CONTROLLED LOCALLY. FIXTURE TO COME ON IN THE EVENT OF A POWER LOSS.
4. MOUNT ROOM CONTROLLER ABOVE ACCESSIBLE CEILING.
5. PROVIDE 120V CONSTANT "HOT" CONNECTION TO DIMMING DAYLIGHT SENSOR.
6. PROVIDE 3#12 - 1/2"C BETWEEN CORRESPONDING 3-WAY SWITCHES SHOWN IN THIS ROOM.
7. LIGHTS IN 24-HOUR VESTIBULE AND VESTIBULE ARE UNSWITCHED NIGHT LIGHT FIXTURES. LIGHT FIXTURES IN VESTIBULE AND 24-HOUR VESTIBULE ARE FOR SECURITY PURPOSES.
8. MOUNT LIGHT FIXTURE UNDERNEATH CABINET. COORDINATE ALL CIRCUITRY AND ACCESSORIES WITH MILLWORK TO DETERMINE LENGTH OF FIXTURE. REFER TO ARCHITECTURAL DRAWINGS FOR MORE INFORMATION.
9. LIGHT SWITCH SHALL ALSO CONTROL EXHAUST FAN WITHIN THIS ROOM. REFER TO 1/E02.04 FOR ADDITIONAL DETAILS.
10. ROUTE CIRCUIT THROUGH INTERIOR LIGHTING CONTACTOR. CONTACTOR SHALL BE CONTROLLED BY JACE BUILDING MANAGEMENT SYSTEM. REFER TO KEY NOTE #18 FOR ADDITIONAL CONTROLS.
11. REFER TO PRINTER CABINET DETAIL ON A12.03 FOR ADDITIONAL INFORMATION AND REQUIREMENTS.
12. PROVIDE DOOR JAMB SWITCH FOR CONTROL OF CLOSET FIXTURE. FIXTURE SHALL TURN ON WHEN DOOR OPENS.
13. LIGHT FIXTURES IN THIS ROOM SHALL BE CHAIN HUNG AT 8'-6" AFF TO BOTTOM OF FIXTURE. COORDINATE SUPPORT WITH STRUCTURAL DRAWINGS.
14. PROVIDE JUNCTION BOX WITH 3/4" C AND PULLSTRING FOR EXTERIOR SIGNAGE. JUNCTION BOX SHALL BE LOCATED BEHIND SIGN. COORDINTE EXACT REQUIREMENTS WITH SIGN VENDOR. ROUTE CIRCUIT THROUGH SIGNAGE LIGHTING CONTACTOR. CONTACTOR SHALL BE CONTROLLED BY JACE BUILDING MANAGEMENT SYSTEM
15. ROUTE CIRCUIT THROUGH EXTERIOR LIGHTING CONTACTOR. CONTACTOR SHALL BE CONTROLLED BY JACE BUILDING MANAGEMENT SYSTEM.
16. LIGHT FIXTURE TO BE MOUNTED ABOVE DOOR.
17. PROVIDE JUNCTION BOX ABOVE CEILING FOR LANE SIGNAGE. COORDINATE EXACT POWER REQUIREMENTS AND LOCATIONS WITH SIGNAGE VENDOR. ROUTE CIRCUIT THROUGH SIGNAGE LIGHTING CONTACTOR. CONTACTOR SHALL BE CONTROLLED BY JACE BUILDING MANAGEMENT SYSTEM.
18. DIMMER SWITCHES TO CONTROL LIGHTS IN CENTRAL ZONE AND WAITING AREA PER SWITCH DESIGNATION INDICATED. ROOM CONTROLLER AND DIMMER SWITCHES SHALL BE PROGRAMMED TO DIM LIGHTS DOWN TO A MINIMUM OF 10% LIGHT LEVEL AT DIMMER SWITCH'S LOWEST POSITION. DIMMER SWITCHES SHALL NOT TURN OFF LIGHT FIXTURES.
19. PROVIDE JUNCTION BOX FOR ALL EXTERIOR CANOPY SECURITY CAMERAS. COORDINATE EXACT LOCATIONS AND REQUIREMENTS WITH SECURITY VENDOR.

0 4' 8' 16'

NORTH

NELSON
Nelco Architecture, Inc.

12400 Coit Road, Suite 510
Dallas, TX. 75251
Phone: (972) 644-8830
Fax: (972) 644-8496

Client Representative:
CUSHMAN & WAKEFIELD
Attn: Paul Hurchanik
Tel: 720.582.6073
Email: paul.hurchanik@cushwake.com

Architect:
Nelco Architecture, Inc.
Attn: Harry Koutsis
Tel: 310.693.5271
Email: hkoutsis@nelsonww.com

Civil:
LANGAN
Attn: Ben Henry
Tel: (817) 328-3217
Email: bhenry@langan.com

Structural:
Salas O'Brien
Attn: Julie Bolding
Tel: (469) 782-9753
Email: julie.bolding@salasobrien.com

MEP:
Salas O'Brien
Attn: Robert Zendejas
Tel: (404) 434-7373
Email: robert.zendejas@salasobrien.com

Salas O'Brien
salasobrien.com 404-881-5300
Atlanta
3200 Windy Hill Road, SE, Suite 200E
Atlanta, GA 30339

Project Number: 2450-70132

Description:	No:	Date:
Issue for Permit		08/26/2025

BANK OF AMERICA
Broomfield

CO1-111
NWC Hwy 7 and Palisade Pkwy
Broomfield CO, 80023

PROPERTY ID:	CO1-111
NSRP VERSION:	2.0
BULLETIN:	2-2025

FLOOR PLAN - LIGHTING

COLORADO LICENSED
JOHN'S LAST NAME
56259
PROFESSIONAL ENGINEER
8.26.25

Project No: 23.0002261.000 Reviewed By: RJK

E02.01

GENERAL NOTES:

1. SPECIFIC REQUIREMENTS REGARDING MATERIALS, WORKMANSHIP AND THE WORK TO BE DONE ARE COVERED BY THE SPECIFICATIONS WHICH COMPLEMENT THE PLANS. WORK CALLED FOR BY THE SPECIFICATIONS OR THE PLAN IS REQUIRED THE SAME AS IF REQUIRED BY BOTH. WHERE A CONFLICT EXISTS BETWEEN THE PLANS AND SPECIFICATIONS, THE MORE STRINGENT REQUIREMENTS OF THE TWO SHALL APPLY UNLESS SPECIFICALLY APPROVED IN WRITING BY THE ARCHITECT/ENGINEER.

2. CONTRACTOR SHALL PROVIDE LABELS FOR EACH ELECTRICAL OUTLET AND DATA JACK INDICATING CIRCUIT NUMBER OR DATA PORT USED.

KEY NOTES: (#)

1. BANK ELECTRICAL ROOM. ALL EQUIPMENT SHOWN IS NEW.

2. REFER TO RESTROOM ELEVATIONS FOR EXACT LOCATIONS OF EQUIPMENT AND DEVICES.

3. PROVIDE SINGLE GANG JUNCTION BOX WITH 3/4"C STUBBED UP WITH PULLSTRING TO ACCESSIBLE CEILING FOR SECURITY DEVICE. PROVIDE BLANK COVER PLATE PAINTED TO MATCH WALL COVER.

4. REFER TO MILLWORK DRAWINGS FOR EXACT DEVICE LOCATIONS.

5. PROVIDE (2) 4" SLEEVES THROUGH WALL ABOVE CEILING FOR TELE/DATA CABLING. COORDINATE EXACT LOCATION WITH TELE/DATA CABLE INSTALLER.

6. REFER TO UCR ELEVATIONS FOR EXACT DEVICE LOCATIONS.

7. PROVIDE 1"C WITH PULLSTRING TO 6" ABOVE ACCESSIBLE CEILING FROM BELOW TELLER LINE. COORDINATE EXACT LOCATION WITH SECURITY VENDOR.

8. PROVIDE JUNCTION BOX FOR CASH SAFE POWER. COORDINATE WITH VENDOR FOR POWER/DATA NEEDED FOR SECURITY. CONDUIT FOR POWER AND DATA TO BE CONCEALED BEHIND MILLWORK.

9. PROVIDE POWER FOR GRILLE GATE MOTOR. REFER TO MANUFACTURER CUTSHEETS FOR ADDITIONAL INFORMATION. COORDINATE EXACT LOCATION WITH VENDOR.

10. PROVIDE JUNCTION BOX ABOVE CEILING FOR SPEAKERS. REFER TO MEDIA DRAWINGS FOR MORE INFORMATION.

11. REFER TO MEDIA VENDOR CUT SHEETS AND ELEVATIONS FOR EXACT GANG BOX, FIXTURE LOCATION AND COUNT FOR ALL MEDIA DEVICES.

12. PROVIDE JUNCTION BOX ABOVE CEILING FOR WAP. REFER TO MEDIA DRAWINGS FOR MORE INFORMATION.

13. PROVIDE CHEIF PAC BOX PAC527L RECESSED IN MEDIA WALL.

14. CONTRACTOR SHALL COORDINATE EXACT LOCATION OF NEW ON-GRADE DEVICE WITH TENANT'S REPRESENTATIVE PRIOR TO TRENCHING. COORDINATE ALL CONDUIT REQUIREMENTS WITH AV VENDOR AND FURNITURE PROVIDER PRIOR TO PURCHASE.

15. PROVIDE RECESSED WALKER FLOOR BOX #RFB4AR30OG, (2) #CIHT-D, (2) #CILT-2-RT AND FPBTCAL COVER WITH 1/2" IMC FOR POWER. COORDINATE EXACT LOCATION WITH ARCHITECT. INSTALL TWO DUPLEX RECEPTACLES, EACH BEING ON SEPARATE CIRCUIT.

16. PROVIDE JUNCTION BOX ABOVE CEILING FOR ENTRANCE DOOR AUTOMATIC OPERATOR. COORDINATE WITH DOOR MANUFACTURER FOR ADDITIONAL CONNECTION REQUIREMENTS.

17. PROVIDE JUNCTION BOX ABOVE CEILING FOR CONNECTION TO CARD READER. STUB 3/4"C WITH PULL STRING TO 6" ABOVE ACCESSIBLE CEILING. CONDUIT SHALL BE CONCEALED WITHIN WALL OR STOREFRONT FRAME. COORDINATE INSTALLATION AND LOCATION WITH ARCHITECT.

18. PROVIDE JUNCTION BOX FOR DOOR HARDWARE. COORDINATE WITH DOOR MANUFACTURER FOR ADDITIONAL CONNECTION REQUIREMENTS.

19. PROVIDE AND INSTALL KEY SWITCH FOR PARABIT CARD READER AS SHOWN ON A12.11.

20. PROVIDE AND INSTALL MINIPROX CARD READER. REFER TO ARCHITECTURAL DRAWINGS FOR MORE INFORMATION.

21. PROVIDE POWER TO CONVERTER FOR SECURITY VENDORS WIRING TO DOOR LOCK DEVICE AS REQUIRED.

22. PRINTER RECEPTACLE/DATA OUTLET. REFER TO DRAWINGS A12.03 FOR EXACT OUTLET LOCATIONS.

23. ROUTE CONDUIT SERVING TELLER LINE POWER AND DATA THROUGH MILLWORK IN A MANNER THAT DOES NOT INTERFERE WITH THE MILLWORK OPERATIONS. COORDINATE INSTALLATION WITH MILLWORK INSTALLER

24. PROVIDE JUNCTION BOX WITH 3/4"C WITH PULLSTRING TO 6" ABOVE ACCESSIBLE CEILING FOR ALARM FEED TO ATM. COORDINATE INSTALLATION AND LOCATION WITH ATM INSTALLER.

25. REFER TO ATM VENDOR CUTSHEETS ON BANK OF AMERICA RETAIL DESIGN STANDARDS WEB SITE FOR ADDITIONAL CONSTRUCTION DETAILS. PROVIDE POWER AND DATA AS REQUIRED. COORDINATE WITH SCHEDULED EQUIPMENT.

26. PROVIDE POWER VIA DUPLEX RECEPTACLE FOR ELECTRIC LAVATORY FAUCET. COORDINATE LOCATION WITH PLUMBING CONTRACTOR.

27. PROVIDE JUNCTION BOX FOR ATM SURROUND POWER. COORDINATE EXACT LOCATION AND REQUIREMENTS WITH SYSTEM INSTALLER.

28. PROVIDE POWER FOR HAND DRYER. CONTRACTOR TO PROVIDE POWER WHIP FOR CONNECTION TO HAND DRYER. JUNCTION BOX IS NOT REQUIRED. CIRCUIT BREAKER SHALL BE LOCKABLE IN THE "OFF" POSITION.

29. PROVIDE 8'x7'-6"x3/4" FIRE-RATED PLYWOOD BACKBOARDS MOUNTED VERTICALLY ALONG NER ROOM WALL SHOWN. EXPOSED CONDUIT IN NER ROOM SHALL BE EMT. MC CABLE SHALL NOT BE EXPOSED.

30. PROVIDED 12"x2"x1/4" GROUND BAR WITH STANDOFF INSULATORS ON TELEPHONE BACKBOARD. PROVIDE #4 COPPER GROUND CONNECTION TO TELEPHONE BACKBOARD GROUNDING BAR FROM ELECTRICAL SERVICE GROUNDING BUS. COORDINATE EXACT LOCATION ON BACKBOARD WITH TELEPHONE SERVICE PROVIDER.

31. TELEPHONE SERVICE (2) 4" CONDUIT STUB-UP LOCATIONS.

32. PROVIDE GFCI DUPLEX RECEPTACLE FOR FLOOD STOP. COORDINATE EXACT LOCATION WITH WATER HEATER.

33. APPROXIMATE LOCATION 1/2" CONDUIT FLOOR OUTLET CONDUITS AND ATM CONDUIT STUB-UPS. COORDINATE EXACT LOCATION AND QUANTITY WITH THE TELE/DATA EQUIPMENT INSTALLER.

34. PROVIDE UNISTRUT OR EQUIVALENT TO MOUNT RECEPTACLES SERVING IT EQUIPMENT. INSTALL 6" ABOVE LADDER RACK. COORDINATE EXACT LOCATION WITH TELE/DATA EQUIPMENT INSTALLER.

35. PROVIDE ISOLATED GROUND NEMA L5-20R RECEPTACLE. MOUNT RECEPTACLE ON UNISTRUT. COORDINATE EXACT LOCATION WITH TELE/DATA EQUIPMENT INSTALLER.

36. PROVIDE DUPLEX OUTLET AND JUNCTION BOX IN CABINETS ABOVE VAULTS FOR SECURITY MONITORS. COORDINATE EXACT LOCATION WITH ARCHITECT.

37. PROVIDE JUNCTION BOX FOR ALL SECURITY CAMERAS. COORDINATE EXACT LOCATIONS AND REQUIREMENTS WITH SECURITY VENDOR.

38. PROVIDE (2) 1"C WITH PULLSTRING BACK TO ELECTRICAL ROOM FOR FUTURE DRIVE-UP ATM POWER. PROVIDE (2) 2" CONDUITS WITH PULLSTRING BACK TO TELEPHONE BACKBOARD LOCATED IN NER ROOM FOR FUTURE DRIVE-UP ATM SECURITY AND COMMUNICATIONS.

39. PROVIDE AND INSTALL PUSH PADDLE LOCATED BELOW KEY SWITCH FOR DOOR OPERATOR AS SHOWN ON ARCHITECTURAL DRAWINGS.

40. PROVIDE DUPLEX RECEPTACLE AND DATA OUTLET INSTALLED AT TOP OF CHEIF PAC BOX FOR ONECONNECT BOX. ONECONNECT BOX SHALL BE LOCATED INSIDE CHEIF PAC BOX. CONTRACTOR SHALL PULL SHIELDED CAT-6 CABLE FROM MEDIA RACK IN NER TO DESIGNATED LOCATION FOR ONECONNECT BOX.

41. ALL POWER/DATA DEVICES WITHIN ELECTRICAL AND NER ARE TO BE RECESSED MOUNTED FLUSH WITH PLYWOOD. SURFACE MOUNTED BOXES WILL NOT BE ACCEPTED.

42. PROVIDE JUNCTION BOX WITH 3/4"C WITH PULLSTRING STUBBED UP TO 6" ABOVE ACCESSIBLE CEILING FOR ALARM FEED TO CASH VAULT. COORDINATE MOUNTING HEIGHT AND LOCATION WITH CASH VAULT INSTALLER. EXTEND WIRING AND CONDUIT PROVIDED WITH VAULT TO JUNCTION BOX.

43. PROVIDE JUNCTION BOX WITH 3/4"C WITH PULLSTRING STUBBED UP TO 6" ABOVE ACCESSIBLE CEILING FOR CCTV. COORDINATE EXACT LOCATION OF DUPLEX RECEPTACLE AND CABLE OUTLET (PROVIDED BY OTHERS) WITH ARCHITECT.

44. PROVIDE 2#10, #10G - 1"C TO 30A/1P CB IN PANEL IG FOR DRIVE-UP ATM. PROVIDE 2#12, #12G - 1"C TO 20A/1P CB IN PANEL MDPA FOR DRIVE-UP ATM TOPPER. PROVIDE (2) 2" CONDUITS WITH PULLSTRING FROM ATM TO TELEPHONE BACKBOARD LOCATED IN NER ROOM. REFER TO ATM VENDOR CUTSHEETS ON BANK OF AMERICA RETAIL DESIGN STANDARDS WEBSITE FOR ADDITIONAL CONSTRUCTION DETAILS AND SPECIFIC ATM DEVICE RELATED ELECTRICAL EQUIPMENT. COORDINATE FINAL STUB-UP LOCATIONS WITH EQUIPMENT.

45. PROVIDE 1"C WITH PULLSTRING TO 6" ABOVE ACCESSIBLE CEILING FROM BELOW TELLER LINE FOR TELEPHONE AND DATA CABLING. COORDINATE EXACT LOCATION WITH TELE/DATA EQUIPMENT INSTALLER.

46. PROVIDE POWER AS SHOWN FOR IRRIGATION CONTROLLER. PROVIDE 2" CONDUIT WITH PULLSTRING TO CONTROL VALVES FOR CONTROL WIRING. PROVIDE ADDITIONAL 2" CONDUIT WITH #6G TO CONTROL VALVES. COORDINATE EXACT LOCATIONS AND ADDITIONAL REQUIREMENTS WITH CIVIL DRAWINGS AND LANDSCAPE IRRIGATION INSTALLER.

47. PROVIDE POWER VIA AUTOMATIC DUPLEX RECEPTACLE FOR BACKLIT MIRROR. RECEPTACLE TO BE TIED TO OCCUPANCY SENSOR AND LIGHT SWITCH SERVING RESTROOM. COORDINATE LOCATION WITH ARCHITECT AND FIXTURE CUTSHEET.

2 E02.02 ELECTRICAL 120 AND NER 121 - ELECTRICAL
1/2" = 1'-0"

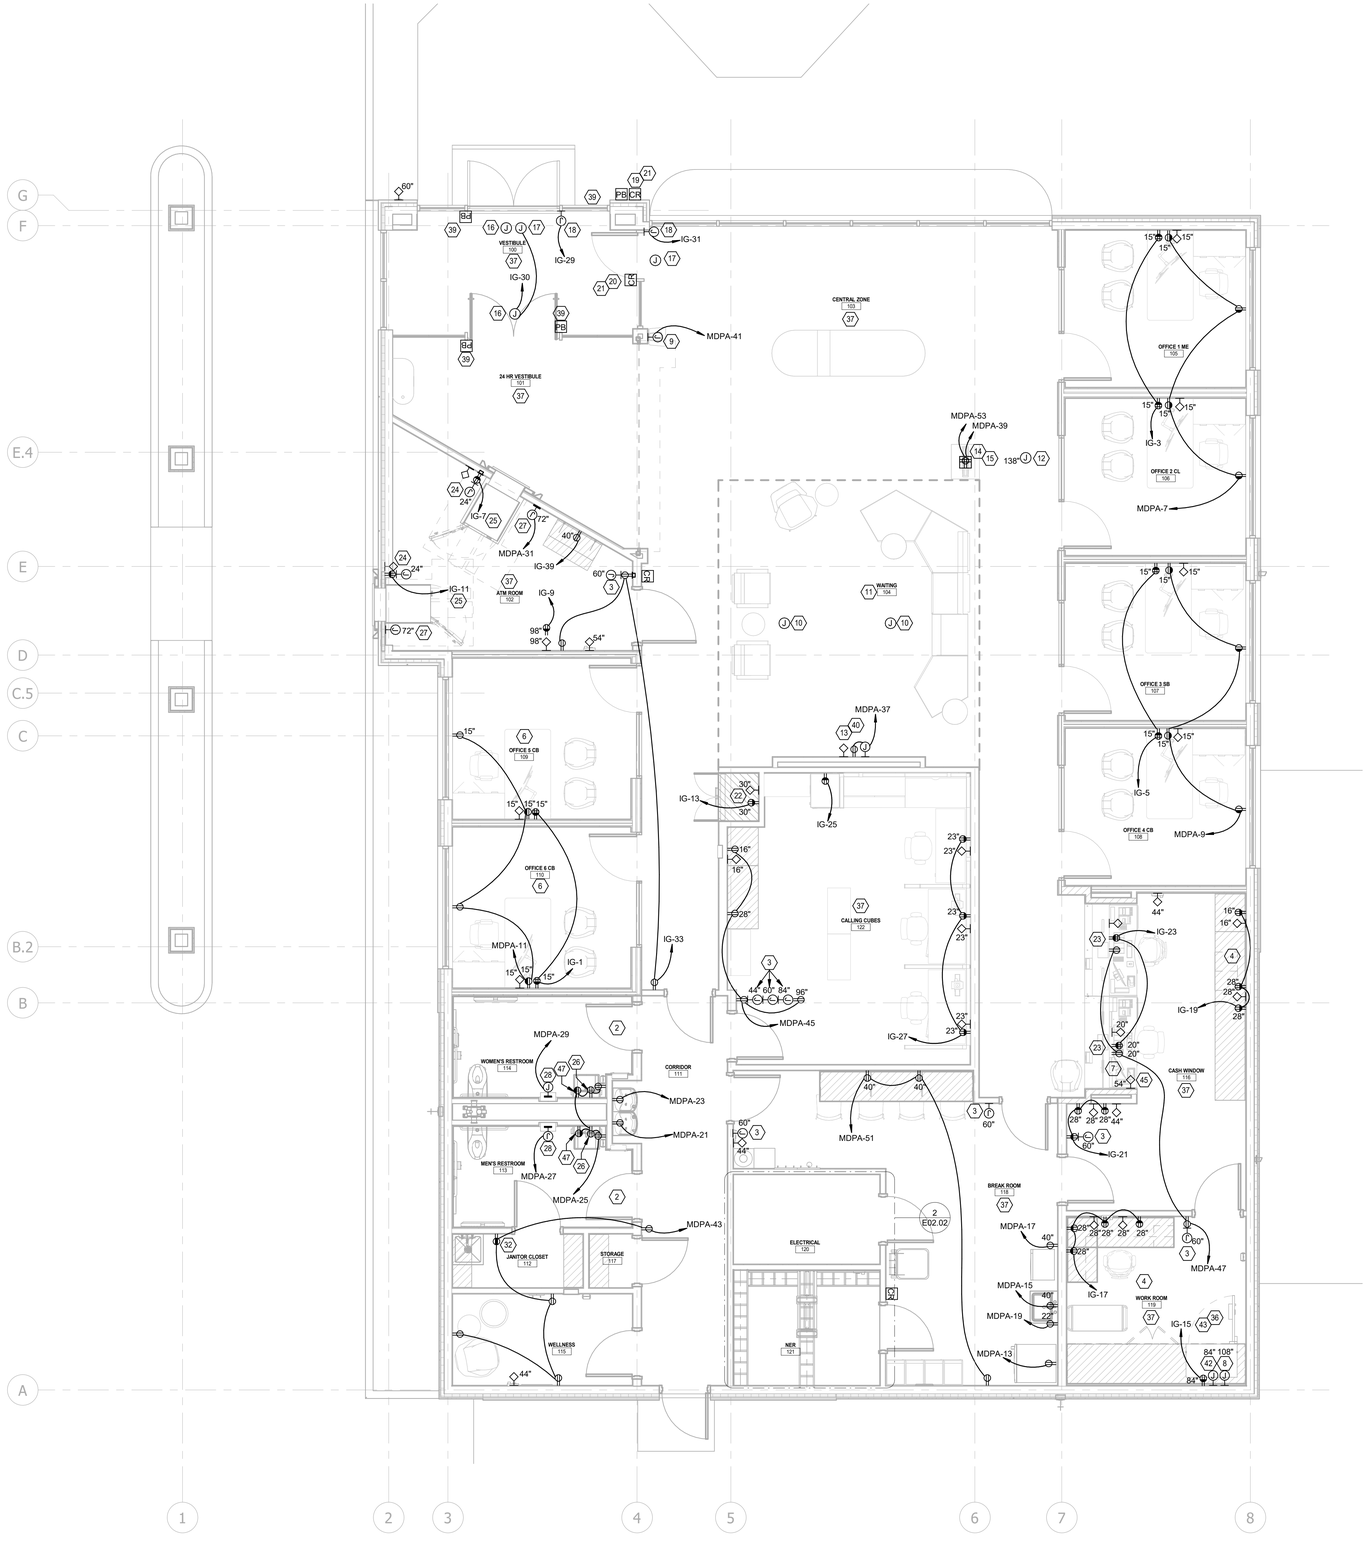

1 E02.02 FLOOR PLAN - ELECTRICAL
1/4" = 1'-0"

NORTH
0 4' 8' 16'

NELSON
Nelco Architecture, Inc.

12400 Coit Road, Suite 510
Dallas, TX. 75251
Phone: (972) 644-8830
Fax: (972) 644-8496

Client Representative:
CUSHMAN & WAKEFIELD
Attn: Paul Hurchanik
Tel: 720.582.6073
Email: paul.hurchanik@cushwake.com

Architect:
Nelco Architecture, Inc.
Attn: Harry Koutsis
Tel: 310.693.5271
Email: hkoutsis@nelsonww.com

Civil:
LANGAN
Attn: Ben Henry
Tel: (817) 328-3217
Email: bhenry@langan.com

Structural:
Salas O'Brien
Attn: Julie Bolding
Tel: (469) 782-9753
Email: julie.bolding@salasobrien.com

MEP:
Salas O'Brien
Attn: Robert Zendejas
Tel: (404) 434-7373
Email: robert.zendejas@salasobrien.com

Salas O'Brien
salasobrien.com 404-881-5300
Atlanta
3200 Windy Hill Road, SE, Suite 200E
Atlanta, GA 30339

Project Number: 2450-70132

Description:	No:	Date:
Issue for Permit		08/26/2025

BANK OF AMERICA
Broomfield

CO1-111
NWC Hwy 7 and Palisade Pkwy
Broomfield CO, 80023

PROPERTY ID:	CO1-111
NSRP VERSION:	2.0
BULLETIN:	2-2025

FLOOR PLAN - ELECTRICAL

COLORADO LICENSED
JAMES L. ALLEN
52259
PROFESSIONAL ENGINEER
8.26.25

Project No: 23.0002261.000 Reviewed By: RJK

E02.02

GENERAL NOTES:

1. SPECIFIC REQUIREMENTS REGARDING MATERIALS, WORKMANSHIP AND THE WORK TO BE DONE ARE COVERED BY THE SPECIFICATIONS WHICH COMPLEMENT THE PLANS. WORK CALLED FOR BY THE SPECIFICATIONS OR THE PLAN IS REQUIRED THE SAME AS IF REQUIRED BY BOTH. WHERE A CONFLICT EXISTS BETWEEN THE PLANS AND SPECIFICATIONS, THE MORE STRINGENT REQUIREMENTS OF THE TWO SHALL APPLY UNLESS SPECIFICALLY APPROVED IN WRITING BY THE ARCHITECT/ENGINEER.

KEY NOTES: (#)

1. PROVIDE 1" EMT CONDUIT FROM TELEPHONE BACKBOARD TO FIRE ALARM CONTROL PANEL FOR CONNECTION OF FIRE ALARM AUTO DIALER.

2. PROVIDE DATA AS REQUIRED FOR KNOX BOX. GC TO FURNISH AND INSTALL KNOX BOX WITH WIRING TO DMP PANEL IN THE NER. COORDINATE WITH LOCAL FIRE AUTHORITY FOR KNOX BOX SPECIFICATIONS.

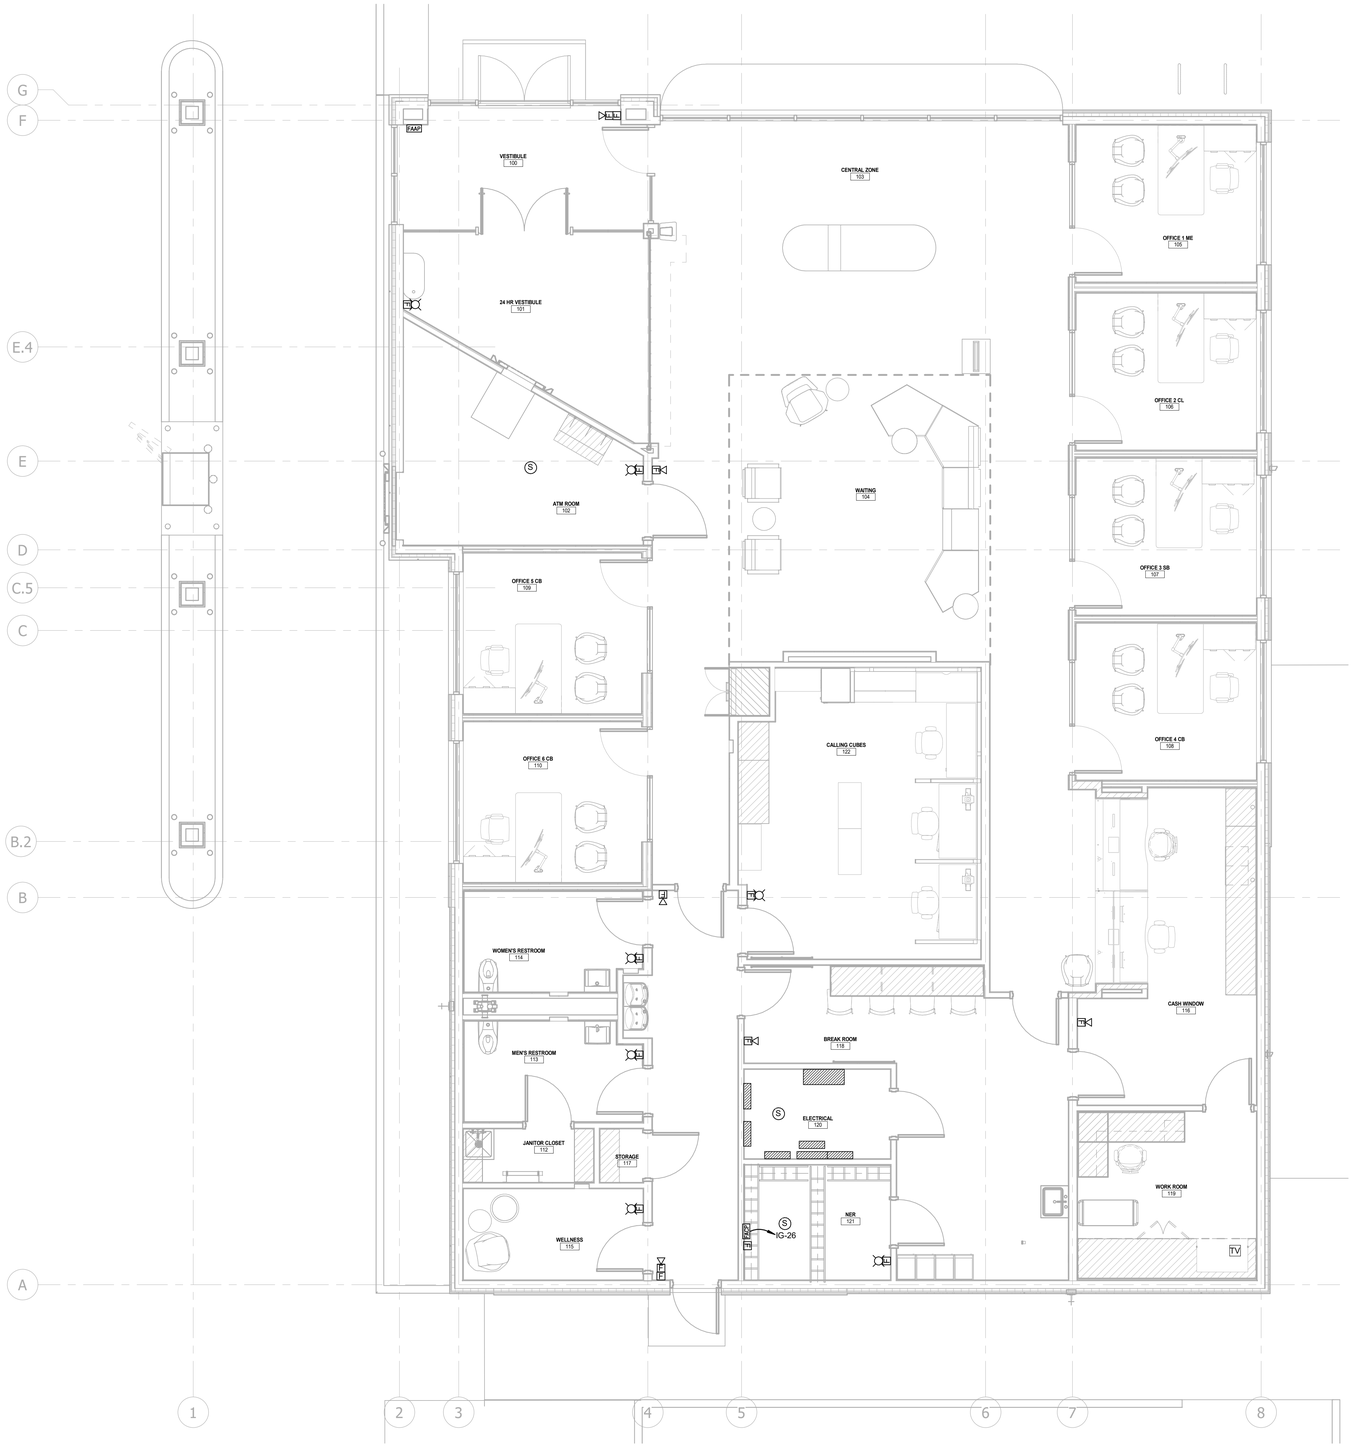

1 E02.03 FLOOR PLAN - FIRE ALARM
1/4" = 1'-0"

NORTH
0 4' 8' 16'

NELSON
Nelco Architecture, Inc.

12400 Coit Road, Suite 510
Dallas, TX. 75251
Phone: (972) 644-8830
Fax: (972) 644-8496

Client Representative:
CUSHMAN & WAKEFIELD
Attn: Paul Hurchanik
Tel: 720.582.6073
Email:
paul.hurchanik@cushwake.com

Architect:
Nelco Architecture, Inc.
Attn: Harry Koutsis
Tel: 310.693.5271
Email: hkoutsis@nelsonww.com

Civil:
LANGAN
Attn: Ben Henry
Tel: (817) 328-3217
Email: bhenry@langan.com

Structural:
Salas O'Brien
Attn: Julie Bolding
Tel: (469) 782-9753
Email: julie.bolding@salasobrien.com

MEP:
Salas O'Brien
Attn: Robert Zendejas
Tel: (404) 434-7373
Email:
robert.zendejas@salasobrien.com

Salas O'Brien
salasobrien.com 404-881-5300
Atlanta
3200 Windy Hill Road, SE, Suite 200E
Atlanta, GA 30339

Project Number: 2450-70132

Description:	No:	Date:
Issue for Permit		08/26/2025

BANK OF AMERICA
Broomfield

CO1-111
NWC Hwy 7 and Palisade Pkwy
Broomfield CO, 80023

PROPERTY ID:	CO1-111
NSRP VERSION:	2.0
BULLETIN:	2-2025

FLOOR PLAN - FIRE ALARM

COLORADO LICENSED
THOMAS L. FAY
56759
PROFESSIONAL ENGINEER
8-26-25

Project No: 23.0002261.000 Reviewed By: RJK

E02.03

GENERAL NOTES:

1. REFER TO MECHANICAL DRAWINGS FOR EXACT LOCATIONS OF ALL MECHANICAL EQUIPMENT. CONTRACTOR SHALL COORDINATE REQUIREMENTS WITH NAMEPLATE DATA OF ACTUAL EQUIPMENT PROVIDED.

KEY NOTES: (#)

1. PROVIDE POWER AS SHOWN FOR MOTORIZED DAMPERS SERVING FCU DUCT. COORDINATE EXACT LOCATION WITH MECHANICAL DRAWINGS.

ELECTRICAL-MECHANICAL EQUIPMENT CONNECTION SCHEDULE

ITEM#	DESCRIPTION	WIRING	VOLTAGE/PHASE	HP/FLA/KW	PANEL	CIRCUIT #	DISCONNECT/FUSES	LOCATION	NOTES
EDH-1	ELECTRIC HEATER	2#12, #12G, 1/2"C	208/1	2.3 KW	MDPB	24,26	30A/2P/NEMA-1	ATM/FCU-1	1
EDH-2	ELECTRIC HEATER	2#10, #10G, 1/2"C	208/1	3.8 KW	MDPB	28,30	30A/2P/NEMA-1	VESTIBULE/FCU-2	1
EDH-3	ELECTRIC HEATER	2#12, #12G, 1/2"C	208/1	2.3 KW	MDPB	32,34	MOTOR RATED SWITCH	NER/FCU-3	1
EF-1	ROOFTOP EXHAUST FAN	2#12, #12G, 1/2"C	120/1	1/30 HP	MDPB	23	MOTOR RATED SWITCH	ROOF	1
EF-2	CEILING EXHAUST FAN	2#12, #12G, 1/2"C	120/1	80 W	MDPB	25	MOTOR RATED SWITCH	JANITOR	1
EUH-1	ELECTRIC UNIT HEATER	2#12, #12G, 1/2"C	208/1	3.0 KW	MDPB	13,15	30A/2P/NEMA-1	JANITOR	1
FCU-1/CU-1	SPLIT SYSTEM	2#12, #12G, 1/2"C	208/1	11 MCA	MDPB	1,3	NOTE 4	ATM WORK ROOM	1,2,4
FCU-2/CU-2	SPLIT SYSTEM	2#12, #12G, 1/2"C	208/1	11 MCA	MDPB	5,7	NOTE 4	VESTIBULE	1,2,4
FCU-3/CU-3	SPLIT SYSTEM	2#8, #10G, 1/2"C	208/1	24 MCA	MDPB	9,11	NOTE 4	NER/ELEC	1,2,4
HWR-1	HOT WATER CIRCULATION PUMP	2#12, #12G, 1/2"C	120/1	70 W	MDPB	21	MOTOR RATED SWITCH	JANITOR	1
RTU-1	ROOFTOP UNIT	2#10, #10G, 1/2"C	208/1	17 MCA	MDPB	8,10	30A/2P/NEMA-3R	ROOF PLAN WEST	1,2
RTU-2	ROOFTOP UNIT	3#8, #10G, 3/4"C	208/3	27 MCA	MDPB	12,14,16	60A/3P/NEMA-3R	ROOF PLAN CENTRAL	1,2
RTU-3	ROOFTOP UNIT	3#10, #10G, 1/2"C	208/3	23 MCA	MDPB	18,20,22	30A/3P/NEMA-3R	ROOF PLAN EAST	1,2
VVT-1-1	VARIABLE AIR VOLUME	2#12, #12G, 1/2"C	120/1	0.1 KW	MDPB	27	MOTOR RATED SWITCH	PLAN WEST	1
VVT-1-1A	VARIABLE AIR VOLUME	2#12, #12G, 1/2"C	120/1	0.1 KW	MDPB	27	MOTOR RATED SWITCH	PLAN WEST	1
VVT-1-2	VARIABLE AIR VOLUME	2#12, #12G, 1/2"C	120/1	0.1 KW	MDPB	27	MOTOR RATED SWITCH	PLAN WEST	1
VVT-2-1	VARIABLE AIR VOLUME	2#12, #12G, 1/2"C	120/1	0.1 KW	MDPB	29	MOTOR RATED SWITCH	CENTRAL	1
VVT-2-1A	VARIABLE AIR VOLUME	2#12, #12G, 1/2"C	120/1	0.1 KW	MDPB	29	MOTOR RATED SWITCH	CENTRAL	1
VVT-2-2	VARIABLE AIR VOLUME	2#12, #12G, 1/2"C	120/1	0.1 KW	MDPB	29	MOTOR RATED SWITCH	CENTRAL	1
VVT-2-3	VARIABLE AIR VOLUME	2#12, #12G, 1/2"C	120/1	0.1 KW	MDPB	29	MOTOR RATED SWITCH	CENTRAL	1
VVT-3-1	VARIABLE AIR VOLUME	2#12, #12G, 1/2"C	120/1	0.1 KW	MDPB	31	MOTOR RATED SWITCH	PLAN EAST	1
VVT-3-1A	VARIABLE AIR VOLUME	2#12, #12G, 1/2"C	120/1	0.1 KW	MDPB	31	MOTOR RATED SWITCH	PLAN EAST	1
VVT-3-2	VARIABLE AIR VOLUME	2#12, #12G, 1/2"C	120/1	0.1 KW	MDPB	31	MOTOR RATED SWITCH	PLAN EAST	1
VVT-3-3	VARIABLE AIR VOLUME	2#12, #12G, 1/2"C	120/1	0.1 KW	MDPB	31	MOTOR RATED SWITCH	PLAN EAST	1
WH	TANK TYPE WATER HEATER	2#12, #12G, 1/2"C	208/1	3.0 KW	MDPB	17,19	30A/2P/NEMA-1	JANITOR	1

MECHANICAL EQUIPMENT ELECTRICAL CONNECTION SCHEDULE NOTES:

1. INSTALL OVERCURRENT PROTECTION AND BRANCH CIRCUITS PER UL LISTED REQUIREMENTS FOR EQUIPMENT SERVED. REFER TO EQUIPMENT CUT SHEETS AND MANUFACTURER'S DATA FOR ROUGHIN LOCATIONS OF ELECTRICAL CONNECTIONS AND INTERCONNECTIONS FOR ALL EQUIPMENT. PROVIDE DISCONNECT SWITCH (NON-FUSED, UNLESS NOTED OTHERWISE). COORDINATE EXACT NAMEPLATE DATA OF EQUIPMENT TO BE USED WITH MECHANICAL CONTRACTOR. PROVIDE HACR CIRCUIT BREAKER OR FUSIBLE SWITCH FOR ALL MECHANICAL EQUIPMENT.
2. PROVIDE WP DEVICES (NEMA 3R RATING) IN ALL EXTERIOR OR DAMP LOCATIONS.
3. PROVIDE COMBINATION STARTER/DISCONNECT ABOVE CEILING. PROVIDE DOUBLE-POLE, SINGLE-THROW SWITCHES AT EACH BATHROOM FOR COMMON CONTROL OF THIS FAN. EXTEND BRANCH CIRCUIT SWITCHLEG SUCH THAT EITHER SWITCH TURNS FAN "ON" WHEN LIGHT IS TURNED "ON".
4. INDOOR UNIT IS POWERED FROM OUTDOOR UNIT. PROVIDE ALL NECESSARY CONNECTIONS FROM OUTDOOR UNIT TO INDOOR UNIT. PROVIDE 30A/2P/NEMA-3R DISCONNECT FOR OUTDOOR UNIT AND 30A/2P/NEMA-1 DISCONNECT FOR INDOOR UNIT

1 E02.04 FLOOR PLAN - MECHANICAL EQUIPMENT
1/4" = 1'-0"

0 4' 8' 16'

NORTH

NELSON
Nelco Architecture, Inc.

12400 Coit Road, Suite 510
Dallas, TX. 75251
Phone: (972) 644-8830
Fax: (972) 644-8496

Client Representative:
CUSHMAN & WAKEFIELD
Attn: Paul Hurchanik
Tel: 720.582.6073
Email: paul.hurchanik@cushwake.com

Architect:
Nelco Architecture, Inc.
Attn: Harry Koutsis
Tel: 310.693.5271
Email: hkoutsis@nelsonww.com

Civil:
LANGAN
Attn: Ben Henry
Tel: (817) 328-3217
Email: bhenry@langan.com

Structural:
Salas O'Brien
Attn: Julie Bolding
Tel: (469) 782-9753
Email: julie.bolding@salasobrien.com

MEP:
Salas O'Brien
Attn: Robert Zendejas
Tel: (404) 434-7373
Email: robert.zendejas@salasobrien.com

Salas O'Brien
salasobrien.com 404-881-5300
Atlanta
3200 Windy Hill Road, SE, Suite 200E
Atlanta, GA 30339

Project Number: 2450-70132

Description:	No:	Date:
Issue for Permit		08/26/2025

BANK OF AMERICA
Broomfield

CO1-111
NWC Hwy 7 and Palisade Pkwy
Broomfield CO, 80023

PROPERTY ID:	CO1-111
NSRP VERSION:	2.0
BULLETIN:	2-2025

FLOOR PLAN - MECH. EQUIPMENT

COLORADO LICENSED
RYAN S. KYLE
56259
PROFESSIONAL ENGINEER
8/26/25

Project No: 23.0002261.000 Reviewed By: RJK

E02.04

Statistics						
Description	Symbol	Avg	Max	Min	Max/Min	Avg/Min
ATM ROOM #2	+	29.1 fc	33.1 fc	22.8 fc	1.5:1	1.3:1
BREAK ROOM 118	+	30.7 fc	35.5 fc	26.2 fc	1.4:1	1.2:1
CALLING CUBES 122	+	28.5 fc	37.8 fc	17.3 fc	2.2:1	1.6:1
CASH WINDOW 116	+	22.6 fc	27.0 fc	19.9 fc	1.4:1	1.1:1
CASH WINDOW COUNTER 116	+	25.6 fc	25.6 fc	25.6 fc	1.0:1	1.0:1
CENTRAL CORRIDOR	+	12.6 fc	14.4 fc	5.5 fc	2.6:1	2.3:1
ELECTRICAL 120	+	33.9 fc	34.1 fc	33.7 fc	1.0:1	1.0:1
JANITOR'S CLOSET 112	+	18.5 fc	20.9 fc	16.1 fc	1.3:1	1.1:1
MENS RESTROOM 113	+	30.6 fc	31.1 fc	30.0 fc	1.0:1	1.0:1
NER 121	+	31.9 fc	32.1 fc	31.8 fc	1.0:1	1.0:1
NORTHEAST CORRIDOR	+	35.6 fc	35.7 fc	35.5 fc	1.0:1	1.0:1
NORTHWEST CORRIDOR	+	13.6 fc	14.5 fc	11.9 fc	1.2:1	1.1:1
OFFICE 1 ME 105	+	22.4 fc	25.0 fc	19.8 fc	1.3:1	1.1:1
OFFICE 2 CL 106	+	22.6 fc	25.0 fc	20.1 fc	1.2:1	1.1:1
OFFICE 3 SB 107	+	22.5 fc	24.9 fc	20.0 fc	1.2:1	1.1:1
OFFICE 4 CB	+	22.5 fc	24.9 fc	20.0 fc	1.2:1	1.1:1
OFFICE 5 CB 109	+	22.6 fc	25.1 fc	20.1 fc	1.2:1	1.1:1
OFFICE 6 CB 110	+	22.6 fc	25.1 fc	20.1 fc	1.2:1	1.1:1
STORAGE 117	+	18.4 fc	18.4 fc	18.4 fc	1.0:1	1.0:1
WAITING 104	+	10.9 fc	12.2 fc	7.5 fc	1.6:1	1.5:1
WELLNESS 115	+	18.1 fc	18.3 fc	18.0 fc	1.0:1	1.0:1
WOMAN'S RESTROOM 114	+	30.6 fc	31.1 fc	30.0 fc	1.0:1	1.0:1
WORK ROOM 119	+	29.3 fc	29.9 fc	28.9 fc	1.0:1	1.0:1

Schedule									
Symbol	Label	Quantity	Manufacturer	Catalog Number	Description	Number Lamps	Lumens per Lamp	LLF per Lamp	Wattage
	HA	10	Generic Lighting	6.5" DIA. LED DOWNLIGHT, Finish Driver: 90 CRI, 7 CRI 90 CRI	6.5" DIA. LED DOWNLIGHT, Finish Driver: 90 CRI, 7 CRI 90 CRI	1	3000	1	30.72
	HB	1	Generic Lighting	6.5" DIA. LED DOWNLIGHT, Finish Driver: 90 CRI, 7 CRI 90 CRI	6.5" DIA. LED DOWNLIGHT, Finish Driver: 90 CRI, 7 CRI 90 CRI	1	3000	1	19.52
	R-11A	4	Visual Field, LLC	10BAS, 4" ROUND WALL WASH APERTURE	Specs: LED Grid/Gasket/Heat Sink/Housing	1	3000	1	20.16
	R-11B	10	Visual Field, LLC	10BAS, 4" ROUND WALL WASH APERTURE	Specs: LED Grid/Gasket/Heat Sink/Housing	1	1500	1	10.08
	R-11C	1	Visual Field, LLC	10BAS, 4" ROUND WALL WASH APERTURE	Specs: LED Grid/Gasket/Heat Sink/Housing	1	1500	1	10.08
	R-14A	15	Visual Field	4" LED RECESSED 90CRI 35K 4.5 W 45 DEG. WALL WASH APERTURE	RECESSED SQUARE LUMINAIRE 3MC HOUSING SYSTEM, CONSTRUCTION, TRIM, TRIM TO COORDINATE WITH ARCHITECTURAL CEILING TYP. USE APPLICATIONS	1	807	1	7.8
	R-14B	27	Visual Field	4" LED RECESSED 90CRI 35K 4.5 W 45 DEG. WALL WASH APERTURE	RECESSED SQUARE LUMINAIRE 3MC HOUSING SYSTEM, CONSTRUCTION, TRIM, TRIM TO COORDINATE WITH ARCHITECTURAL CEILING TYP. USE APPLICATIONS	1	807	1	7.8
	R-15	16	Visual Field	4" LED RECESSED 90CRI 35K 4.5 W 45 DEG. WALL WASH APERTURE	RECESSED SQUARE LUMINAIRE 3MC HOUSING SYSTEM, CONSTRUCTION, TRIM, TRIM TO COORDINATE WITH ARCHITECTURAL CEILING TYP. USE APPLICATIONS	1	807	1	7.8
	R-19	15	Visual Field LLC	10" DIA. SQUARE 3MC RECESSED DOWNLIGHT, 4000K, 90CRI, 2000 LUMENS, 20 WATTS, 0-10V DIMMING, 120V, WHITE FINISH	10" DIA. SQUARE 3MC RECESSED DOWNLIGHT, 4000K, 90CRI, 2000 LUMENS, 20 WATTS, 0-10V DIMMING, 120V, WHITE FINISH	1	2000	1	20.16

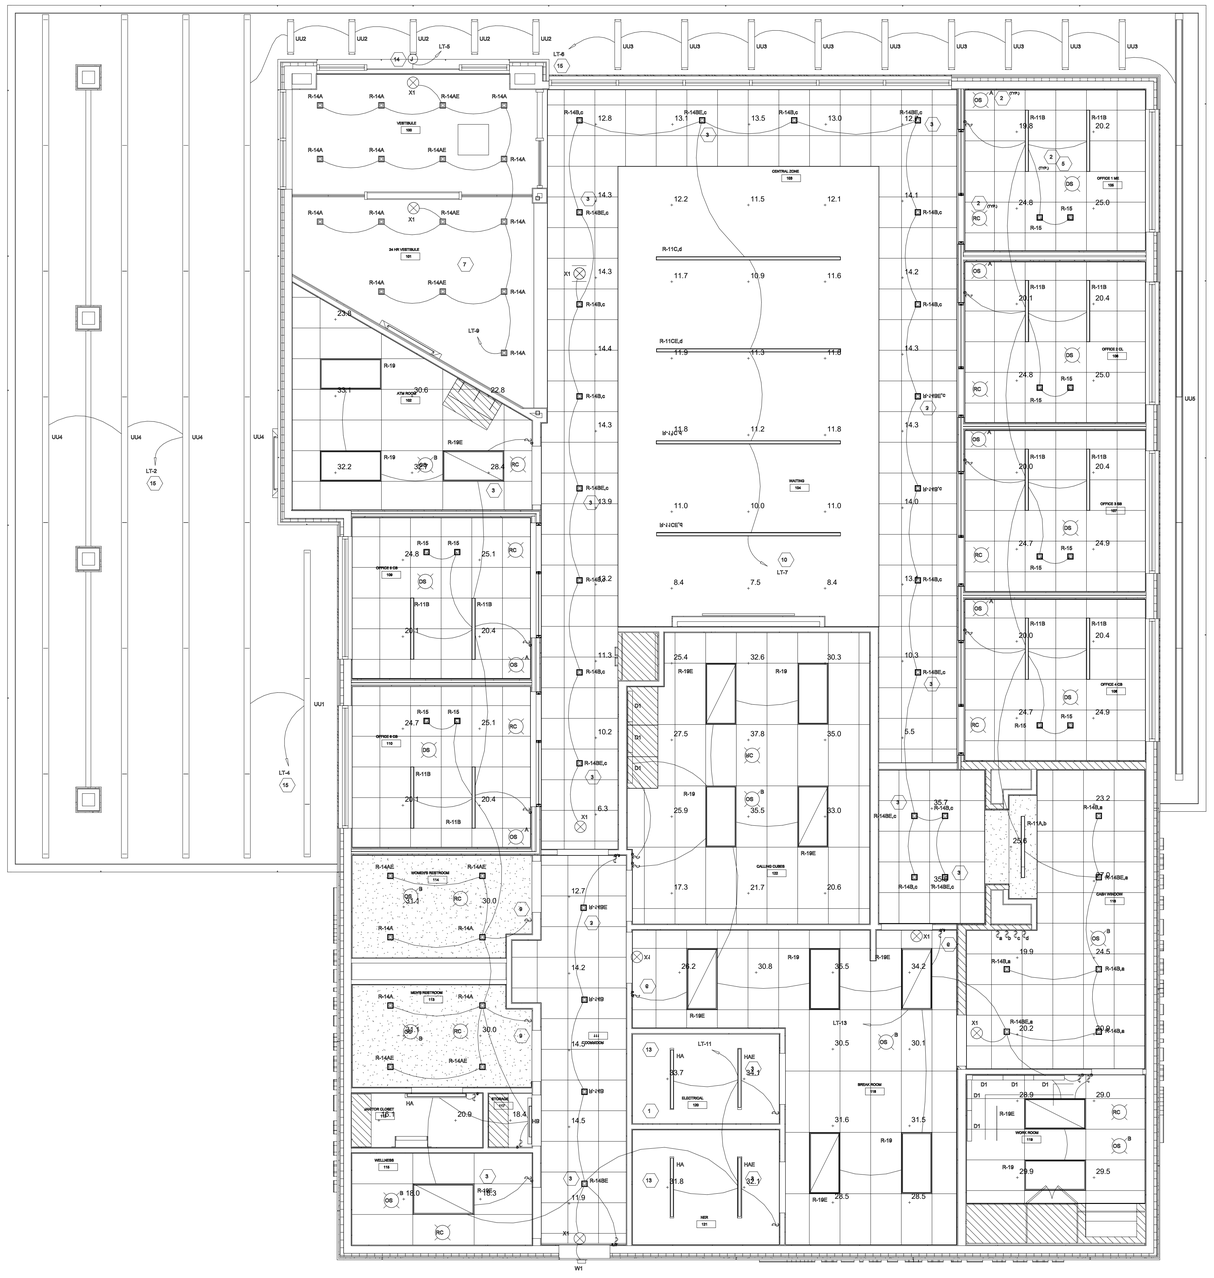

1 Reflected Ceiling Plan - Photometrics
E02.05 1/4" = 1'-0"

NELSON
Nelco Architecture, Inc.

12400 Coit Road, Suite 510
Dallas, TX. 75251
Phone: (972) 644-8830
Fax: (972) 644-8496

Client Representative:
CUSHMAN & WAKEFIELD
Attn: Paul Hurchanik
Tel: 720.582.6073
Email: paul.hurchanik@cushwake.com

Architect:
Nelco Architecture, Inc.
Attn: Harry Koutsis
Tel: 310.693.5271
Email: hkoutsis@nelsonww.com

Civil:
LANGAN
Attn: Ben Henry
Tel: (817) 328-3217
Email: bhenry@langan.com

Structural:
Salas O'Brien
Attn: Julie Bolding
Tel: (469) 782-9753
Email: julie.bolding@salasobrien.com

MEP:
Salas O'Brien
Attn: Robert Zendejas
Tel: (404) 434-7373
Email: robert.zendejas@salasobrien.com

Salas O'Brien
salasobrien.com 404-881-5300
Atlanta
3200 Windy Hill Road, SE, Suite 200E
Atlanta, GA 30339

Project Number: 2450-70132

Description:	No:	Date:
Issue for Permit		08/26/2025

BANK OF AMERICA
Broomfield

CO1-111
NWC Hwy 7 and Palisade Pkwy
Broomfield CO, 80023

PROPERTY ID:	CO1-111
NSRP VERSION:	2.0
BULLETIN:	2-2025

FLOOR PLAN - PHOTOMETRIC

0 4' 8' 16'

NORTH

Project No: 23.0002261.000 Reviewed By: RJK

E02.05

GENERAL NOTES

1. REFER TO MECHANICAL DRAWINGS FOR EXACT LOCATIONS OF ALL MECHANICAL EQUIPMENT. CONTRACTOR SHALL COORDINATE REQUIREMENTS WITH NAMEPLATE DATA OF ACTUAL EQUIPMENT PROVIDED.

2. ALL EXTERIOR ELECTRICAL DEVICES SHALL BE WEATHER PROOF.

KEY NOTES: (#)

1. PROVIDE POWER AS SHOWN FOR MOTORIZED DAMPERS SERVING ROOF HOODS.

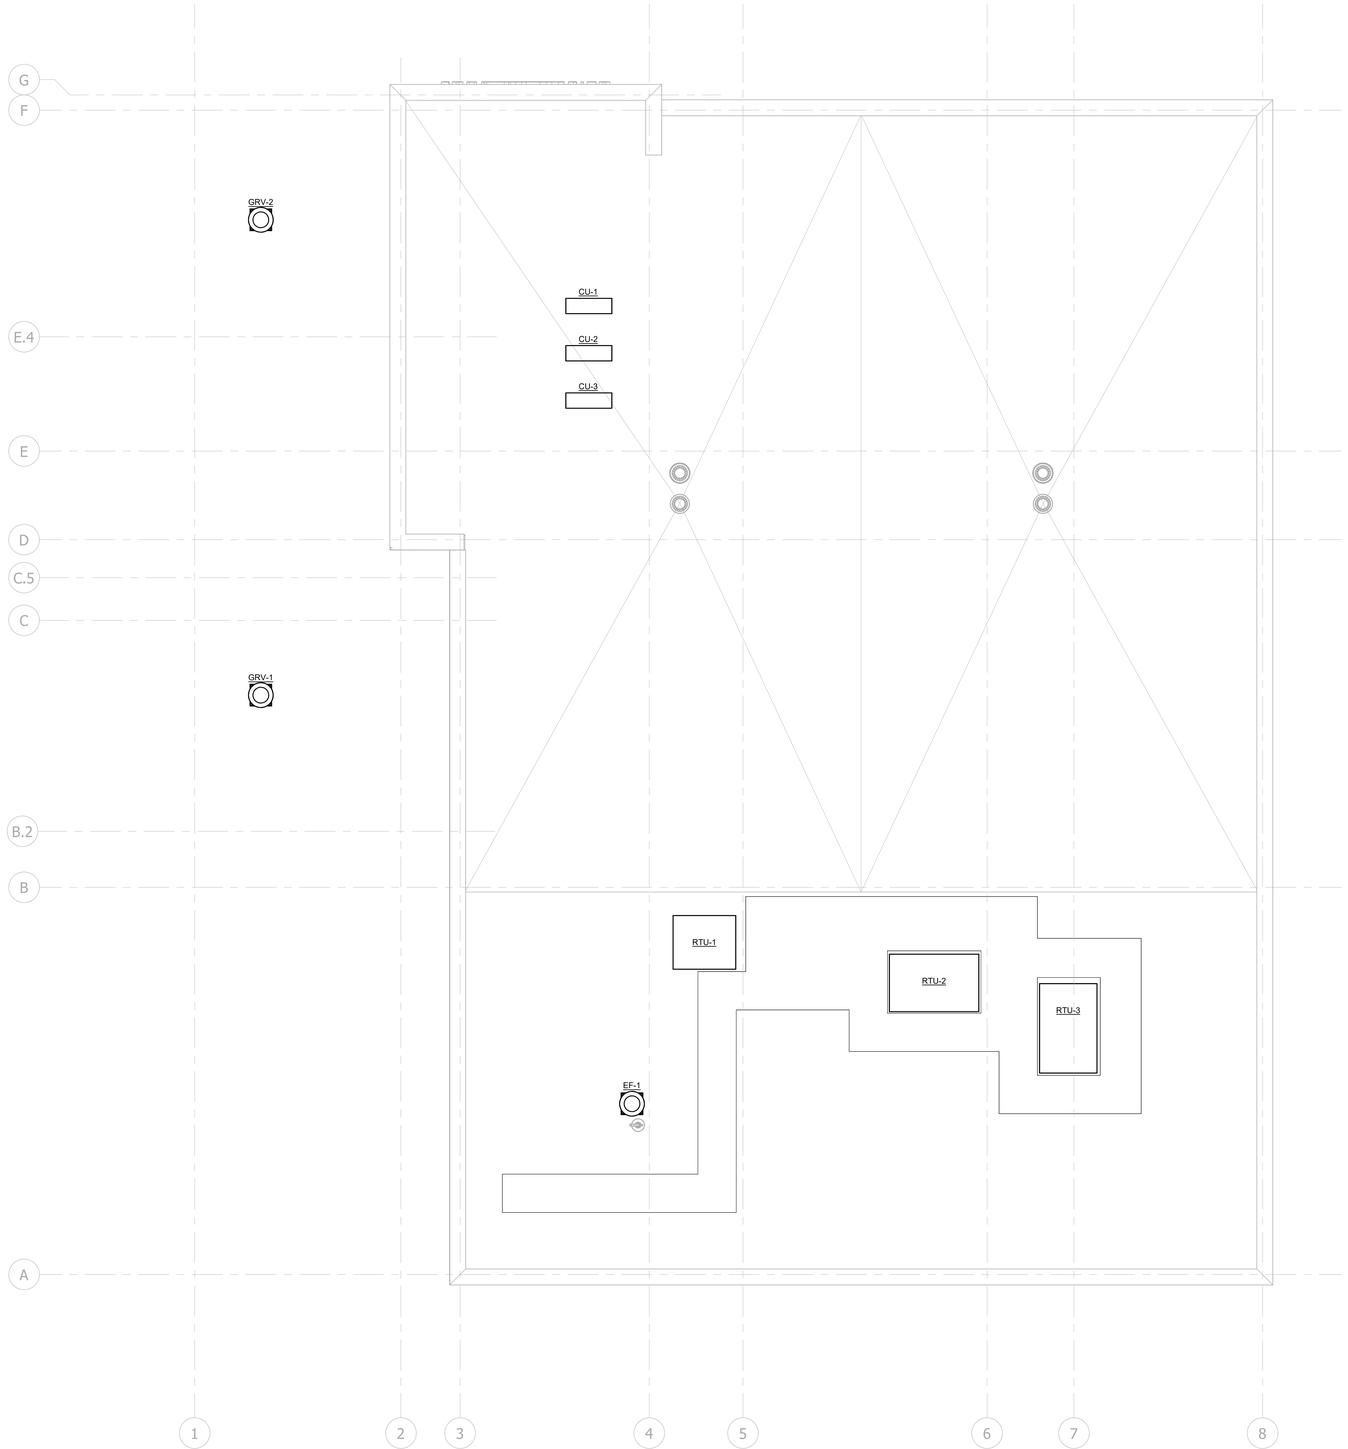

1 E03.01 ROOF PLAN - MECHANICAL EQUIPMENT
1/4" = 1'-0"

0 4' 8' 16'

NORTH

NELSON
Nelco Architecture, Inc.

12400 Coit Road, Suite 510
Dallas, TX. 75251
Phone: (972) 644-8830
Fax: (972) 644-8496

Client Representative:
CUSHMAN & WAKEFIELD
Attn: Paul Hurchanik
Tel: 720.582.6073
Email:
paul.hurchanik@cushwake.com

Architect:
Nelco Architecture, Inc.
Attn: Harry Koutsis
Tel: 310.693.5271
Email: hkoutsis@nelsonww.com

Civil:
LANGAN
Attn: Ben Henry
Tel: (817) 328-3217
Email: bhenry@langan.com

Structural:
Salas O'Brien
Attn: Julie Bolding
Tel: (469) 782-9753
Email: julie.bolding@salasobrien.com

MEP:
Salas O'Brien
Attn: Robert Zendejas
Tel: (404) 434-7373
Email:
robert.zendejas@salasobrien.com

Salas O'Brien
salasobrien.com 404-881-5300
Atlanta
3200 Windy Hill Road, SE, Suite 200E
Atlanta, GA 30339

Project Number: 2450-70132

Description:	No:	Date:
Issue for Permit		08/26/2025

BANK OF AMERICA
Broomfield

CO1-111
NWC Hwy 7 and Palisade Pkwy
Broomfield CO, 80023

PROPERTY ID:	CO1-111
NSRP VERSION:	2.0
BULLETIN:	2-2025

ROOF PLAN - MECH. EQUIPMENT

COLORADO LICENSED
JOHN K. KIRK
56259
PROFESSIONAL ENGINEER
8-26-25

Project No: 23.0002261.000 Reviewed By: RJK

E03.01

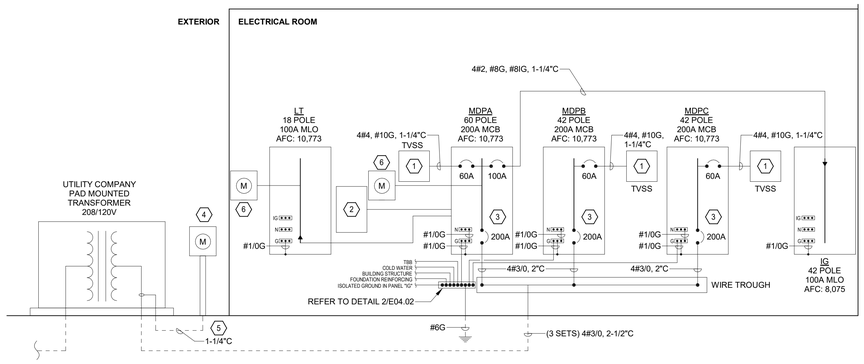

KEY NOTES: (#)

1. PROVIDE LIGHTNING SURGE PROTECTION WITH AUDIBLE ALARM. MOUNT AS CLOSE TO PANEL AS POSSIBLE. MAXIMUM LEAD LENGTH IS 8". VERIFY BREAKER AND FEEDER SIZE WITH MANUFACTURER INSTALLATION INSTRUCTIONS.
2. LIGHTING CONTACTORS IN NEMA 1 ENCLOSURE.
3. PROVIDE LABEL INDICATING BUILDING REQUIRES BOTH MAIN CIRCUIT BREAKERS IN PANELS MDPA AND MDPB TO BE OFF TO SHUT DOWN ALL POWER.
4. UTILITY METER SOCKET.
5. CONDUIT AND CONDUCTORS ARE PROVIDED BY UTILITY COMPANY.
6. METER

1 E04.01 ELECTRICAL RISER COMPONENTS
NOT TO SCALE

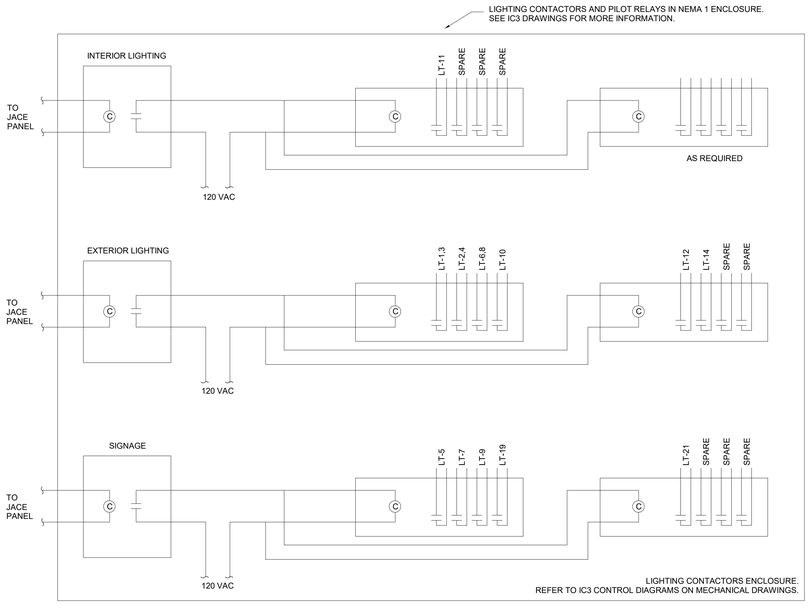

2 E04.01 LIGHTING CONTACTOR DETAIL
NOT TO SCALE

BRANCH PANEL: LT

SUPPLY FROM:
MOUNTING: Surface
ENCLOSURE: Type 1
VOLTS: 120/208 Wye
PHASES: 3
WIRES: 4
A.I.C. RATING:
MAINS TYPE: MLO
MAINS RATING: 100 A
FEED THRU LUGS: NO

CKT	CIRCUIT DESCRIPTION	TRIP	POL...	A		B		C		POL...	TRIP	CIRCUIT DESCRIPTION	CKT
1	EXTERIOR LIGHTING	20	2	193	193					2	20	EXTERIOR LIGHTING	2
3						193	193						4
5	EXTERIOR WALL SIGN	20	1					500	289	2	20	EXTERIOR LIGHTING	6
7	EXTERIOR WALL SIGN	20	1	500	289								8
9	EXTERIOR WALL SIGN	20	1			500	1155			1	20	CANOPY LIGHTING	10
11	CENTRAL LIGHTING	20	1					369	707	1	20	CANOPY LIGHTING	12
13	VESTIBULE LIGHTING	20	1	169	539					1	20	CANOPY LIGHTING	14
15	OFFICE LIGHTING	20	1			517	--			1	--	SPACE	16
17	OFFICE LIGHTING	20	1					710	--	1	--	SPACE	18
19	FLAG POLE	20	1	180	--					1	--	SPACE	20
21	MONUMENT SIGN	20	1			180	--			1	--	SPACE	22
23	SPACE	--	1					--	--	1	--	SPACE	24
	TOTAL LOAD (VA):			2063		2737		2575					

LOAD CLASSIFICATION	CONNECTED LOAD	DEMAND FACTOR	ESTIMATED...	PANEL TOTALS	
Lighting - Exterior	1975 VA	125.00%	2469 VA	TOTAL CONNECTED LOAD...	7
Lighting	3727 VA	125.00%	4658 VA	TOTAL DEMAND LOAD (KVA):	9
Lighting - Interior	1673 VA	125.00%	2092 VA	TOTAL CONNECTED LOAD (A):	20
				TOTAL DEMAND LOAD (A):	26

NOTES:
1. PANEL SHALL BE SERVICE ENTRANCE RATED.

COMcheck Software Version COMcheckWeb
Interior Lighting Compliance Certificate

Project Information

Energy Code: 2021 IECC
Project Title: Bank of America Broomfield
Project Type: New Construction

Construction Site: 16802 Galapago Ct Broomfield, Colorado 80023
Owner/Agent:
Designer/Contractor:

Additional Efficiency Package(s)
Credits: 10.0 Required 0.0 Proposed

Allowed Interior Lighting Power

A Area Category	B Floor Area (ft2)	C Allowed Watts / ft2	D Allowed Watts
1-Bank (Retail)	4040	0.84	3394
		Total Allowed Watts =	3394

Proposed Interior Lighting Power

A Fixture ID : Description / Lamp / Wattage Per Lamp / Ballast	B Lamps/ Fixture	C # of Fixture	D Fixture Watt.	E (C X D)
1-Bank (Retail)				
LED: D1: Undercabinet LED: LED Linear 10W:	1	8	9	72
LED: HA: 48" Striplight: LED Linear 33W:	1	5	25	125
LED: HB: 24" Striplight: LED Linear 20W:	1	1	19	19
LED: R-11A: 4' recessed slot: LED Linear 33W:	1	1	24	24
LED: R-11B: 4' recessed slot: LED Linear 15W:	1	12	14	168
LED: R-11C: 12' recessed slot: LED Other Fixture Unit 50W:	1	4	48	192
LED: R-14A: 3.5" downlight: LED MR 10W:	1	20	10	200
LED: R-14B: 3.5" downlight: LED MR 8W:	1	31	8	248
LED: R-15: 3.5" downlight: LED PAR 11W:	1	12	11	132
LED: R-19: 2x4 Panel: LED Panel 33W:	1	15	30	450
		Total Proposed Watts =		1630

Interior Lighting PASSES: Design 52% better than code

Interior Lighting Compliance Statement
Compliance Statement: The proposed interior lighting design represented in this document is consistent with the building plans, specifications, and other calculations submitted with this permit application. The proposed interior lighting systems have been designed to meet the 2021 IECC requirements in COMcheck Version COMcheckWeb and to comply with any applicable mandatory requirements listed in the Inspection Checklist.

Kevin Mairena - Salas O'Brien — Name - Title
Signature
10-21-2024 — Date

Project Title: Bank of America Broomfield
Data filename:
Report date: 10/21/24
Page 1 of 7

BRANCH PANEL: MDPA

SUPPLY FROM:
MOUNTING: Surface
ENCLOSURE: Type 1
VOLTS: 120/208 Wye
PHASES: 3
WIRES: 4
A.I.C. RATING: 22000
MAINS TYPE: MCB
MAINS RATING: 225 A
MCB RATING: 200 A
FEED THRU LUGS: NO

CKT	CIRCUIT DESCRIPTION	TRIP	POL...	A		B		C		POL...	TRIP	CIRCUIT DESCRIPTION	CKT
1				3400	0								2
3	IG	100	3			3420	0			3	60	TVSS	4
5								3800	0				6
7	OFFICE RECEPTS	20	1	720	180					1	20	LIGHTING CONTACTOR	8
9	OFFICE RECEPTS	20	1			720	0			1	20	SPARE	10
11	OFFICE RECEPTS	20	1					720	0	1	20	SPARE	12
13	REFRIGERATOR (GFCI)	20	1	180	0					1	20	SPARE	14
15	MICROWAVE (GFCI)	20	1			180	0			1	20	SPARE	16
17	WATER DISPENSER (GFCI)	20	1					180	0	1	20	SPARE	18
19	BREAK ROOM RECEPT (GFCI)	20	1	180	0					1	20	SPARE	20
21	WATER FOUNTAIN (GFCI)	20	1			180	0			1	20	SPARE	22
23	WATER FOUNTAIN (GFCI)	20	1					180	0	1	20	SPARE	24
25	RESTROOM RECEPTS (GFCI)	20	1	1080	0					1	20	SPARE	26
27	HAND DRYER (LOFF)	20	1			500	0			1	20	SPARE	28
29	HAND DRYER (LOFF)	20	1					500	0	1	20	SPARE	30
31	WALK-UP ATM SURROUND	20	1	500	0					1	20	SPARE	32
33	SPARE	20	1			0	0			1	20	SPARE	34
35	SPARE	20	1					0	0	1	20	SPARE	36
37	WAITING ROOM MONITOR	20	1	680	0					1	20	SPARE	38
39	CENTRAL AREA FLOOR RECEPT	20	1			360	0			1	20	SPARE	40
41	CENTRAL AREA GATE MOTOR	20	1					500	0	1	20	SPARE	42
43	WELLNESS, CORRIDOR, JANIOR	20	1	900	0					1	20	SPARE	44
45	CALLING CUBES RECEPTS	20	1			720	0			1	20	SPARE	46
47	CASH WINDOW/WORK ROOM RECEPTS	20	1					540	0	1	20	SPARE	48
49	ELECTRICAL ROOM RECEPTS	20	1	360	0					1	20	SPARE	50
51	IRRIGATION CONTROLLER	20	1			540	0			1	20	SPARE	52
53	CENTRAL AREA FLOOR RECEPT	20	1					360	0	1	20	SPARE	54
55	DRIVE UP ATM TOPPER	20	1	360	0					1	20	SPARE	56
57	SPARE	20	1			0	0			1	20	SPARE	58
59	SPARE	20	1					0	0	1	20	SPARE	60
	TOTAL LOAD (VA):			8540		6620		6780					

LOAD CLASSIFICATION	CONNECTED LOAD	DEMAND FACTOR	ESTIMATED...	PANEL TOTALS	
Receptacle	21940 VA	72.79%	15970 VA	TOTAL CONNECTED LOAD (KVA):	22
				TOTAL ESTIMATED DEMAND...	16
				TOTAL CONNECTED LOAD (A):	61
				TOTAL DEMAND LOAD (A):	44

NOTES:
1. PANEL SHALL BE SERVICE ENTRANCE RATED.

BRANCH PANEL: MDPB

SUPPLY FROM:
MOUNTING: Surface
ENCLOSURE: Type 1
VOLTS: 120/208 Wye
PHASES: 3
WIRES: 4
A.I.C. RATING: 22000
MAINS TYPE: MCB
MAINS RATING: 225 A
MCB RATING: 200 A
FEED THRU LUGS: NO

CKT	CIRCUIT DESCRIPTION	TRIP	POL...	A		B		C		POL...	TRIP	CIRCUIT DESCRIPTION	CKT
1	FCU-1/CU-1	15	2	1144	0					3	60	TVSS	2
3						1144	0						4
5	FCU-2/CU-2	15	2					1144	0				6
7				1144	1768					2	30	RTU-1	8
9	FCU-3/CU-3	25	2			2496	1768						10
11								2496	3242	3	40	RTU-2	12
13	EUH-1	20	2	1500	3242								14
15						1500	3242						16
17	WH-1	20	2					1500	2762	3	30	RTU-3	18
19				1500	2762								20
21	HWR-1	15	1			70	2762						22
23	EF-1	15	1					33	1150	2	15	EDH-1	24
25	EF-2	15	1	80	1150								26
27	VVT-1	20	1			300	1900			2	40	EDH-2	28
29	VVT-2	20	1					400	1900				30
31	VVT-3	20	1	400	1150					2	15	EDH-3	32
33	ROOF RECEPTS & HOODS	20	1			1080	1150						34
35	SPARE	20	1					0	0	1	20	SPARE	36
37	SPARE	20	1	0	0					1	20	SPARE	38
39	SPARE	20	1			0	0			1	20	SPARE	40
41	SPARE	20	1					0	0	1	20	SPARE	42
	TOTAL LOAD (VA):			15840		17412		14627					

LOAD CLASSIFICATION	CONNECTED LOAD	DEMAND FACTOR	ESTIMATED...	PANEL TOTALS	
HVAC	46799 VA	100.00%	46799 VA	TOTAL CONNECTED LOAD (KVA):	48
Receptacle	1080 VA	100.00%	1080 VA	TOTAL ESTIMATED DEMAND...	48
				TOTAL CONNECTED LOAD (A):	133
				TOTAL DEMAND LOAD (A):	133

NOTES:
1. PANEL SHALL BE SERVICE ENTRANCE RATED.

BRANCH PANEL: MDPC

SUPPLY FROM:
MOUNTING: Surface
ENCLOSURE: Type 1
VOLTS: 120/208 Wye
PHASES: 3
WIRES: 4
A.I.C. RATING: 22000
MAINS TYPE: MCB
MAINS RATING: 225 A
MCB RATING: 200 A
FEED THRU LUGS: NO

CKT	CIRCUIT DESCRIPTION	TRIP	POL...	A		B		C		POL...	TRIP	CIRCUIT DESCRIPTION	CKT
1				5200	0								2
3	EV CHARGER	70	2			5200	0			3	60	TVSS	4
5								5200	0				6
7	EV CHARGER	70	2	5200	5200					2	70	EV CHARGER	8
9						5200	5200						10
11	EV CHARGER	70	2					5200	5200	2	70	EV CHARGER	12
13				5200	5200								14
15						5200	0			1	20	SPARE	16
17	EV BIKE CHARGING RACK	20	1					180	0	1	20	SPARE	18
19	SPARE	20	1	0	0					1	20	SPARE	20
21	SPARE	20	1			0	0			1	20	SPARE	22
23	SPARE	20	1					0	0	1	20	SPARE	24
25	SPARE	20	1	0	0					1	20	SPARE	26
27	SPACE	--	1			--	--			1	--	SPACE	28
29	SPACE	--	1					--	--	1	--	SPACE	30
31	SPACE	--	1	--	--					1	--	SPACE	32
33	SPACE	--	1			--	--			1	--	SPACE	34
35	SPACE	--	1					--	--	1	--	SPACE	36
37	SPACE	--	1	--	--					1	--	SPACE	38
39	SPACE	--	1			--	--			1	--	SPACE	40
41	SPACE	--	1					--	--	1	--	SPACE	42
	TOTAL LOAD (VA):			26000		20800		15780					

LOAD CLASSIFICATION	CONNECTED LOAD	DEMAND FACTOR	ESTIMATED...	PANEL TOTALS	
Power	62580 VA	100.00%	62580 VA	TOTAL CONNECTED LOAD (KVA):	63
				TOTAL ESTIMATED DEMAND...	63
				TOTAL CONNECTED LOAD (A):	174
				TOTAL DEMAND LOAD (A):	174

NOTES:
1. PANEL SHALL BE SERVICE ENTRANCE RATED.

BRANCH PANEL: IG

SUPPLY FROM: MDPA
MOUNTING: Surface
ENCLOSURE: Type 1
VOLTS: 120/208 Wye
PHASES: 3
WIRES: 4
A.I.C. RATING: 10,000
MAINS TYPE: MLO
MAINS RATING: 225 A
FEED THRU LUGS: NO

CKT	CIRCUIT DESCRIPTION	TRIP	POL...	A		B		C		POL...	TRIP	CIRCUIT DESCRIPTION	CKT
1	OFFICE QUAD RECEPTS	20	1	720	360					1	20	DRIVE UP ATM	2
3	OFFICE QUAD RECEPTS	20	1			720	0			1	20	SPARE	4
5	OFFICE QUAD RECEPTS	20	1					720	180	1	20	NER RACK RECEPT	6
7	WALK-UP ATM	20	1	180	180					1	20	NER RACK RECEPT	8
9	NEVER DOWN WIFI	20	1			180	180			1	20	NER RACK RECEPT	10
11	ATM ROOM RECEPT	20	1					180	180	1	20	NER RACK RECEPT	12
13	CENTRAL AREA PRINTER	20	1	180	180					1	20	NER RACK RECEPT	14
15	WORK ROOM RECEPT	20	1			180	180			1	20	NER RACK RECEPT	16
17	WORK ROOM RECEPTS	20	1					720	180	1	20	NER RACK RECEPT	18
19	CASH WINDOW RECEPT	20	1	540	180					1	20	NER ROOM RECEPT	20
21	CASH WINDOW RECEPTS	20	1			540	180			1	20	NER ROOM RECEPT	22
23	CASH WINDOW QUAD RECEPT	20	1					720	180	1	20	NER ROOM RECEPT	24
25	TABLET CABINET	20	1	180	200					1	20	FIRE ALARM PANEL (LON)	26
27	CALLING CUBES RECEPT	20	1			540	0			1	20	SPARE	28
29	DOOR HARDWARE	20	1					500	240	1	20	AUTOMATIC DOOR OPENERS	30
31	DOOR HARDWARE	20	1	500	0					1	20	SPARE	32
33	CASH WINDOW QUAD RECEPT	20	1			540	0			1	20	SPARE	34
35	SPARE	20	1					0	0	1	20	SPARE	36
37	SPARE	20	1	0	0					1	20	SPARE	38
39	ATM CAB RECEPT	20	1			180	0			1	20	SPARE	40
41	SPARE	20	1					0	0	1	20	SPARE	42
	TOTAL LOAD (VA):			3400		3420		3800					

LOAD CLASSIFICATION	CONNECTED LOAD	DEMAND FACTOR	ESTIMATED...	PANEL TOTALS	
Receptacle	10620 VA	97.08%	10310 VA	TOTAL CONNECTED LOAD...	11
				TOTAL DEMAND LOAD (KVA):	10
				TOTAL CONNECTED LOAD (A):	29
				TOTAL DEMAND LOAD (A):	29

NOTES:
1. PANEL SHALL BE PROVIDED WITH ISOLATED GROUND BUS.

NELSON
Nelco Architecture, Inc.
12400 Coit Road, Suite 510
Dallas, TX. 75251
Phone: (972) 644-8830
Fax: (972) 644-8496

Client Representative:
CUSHMAN & WAKEFIELD
Attn: Paul Hurchanik
Tel: 720.582.6073
Email: paul.hurchanik@cushwake.com

Architect:
Nelco Architecture, Inc.
Attn: Harry Koutsis
Tel: 310.693.5271
Email: hkoutsis@nelsonww.com

Civil:
LANGAN
Attn: Ben Henry
Tel: (817) 328-3217
Email: bhenry@langan.com

Structural:
Salas O'Brien
Attn: Julie Bolding
Tel: (469) 782-9753
Email: julie.bolding@salasobrien.com

MEP:
Salas O'Brien
Attn: Robert Zendejas
Tel: (404) 434-7373
Email: robert.zendejas@salasobrien.com

Salas O'Brien
salasobrien.com 404-881-5300
Atlanta
3200 Windy Hill Road, SE, Suite 200E
Atlanta, GA 30339

Project Number: 2450-70132

Description:	No:	Date:
Issue for Permit		08/26/2025

BANK OF AMERICA
Broomfield

CO1-111
NWC Hwy 7 and Palisade Pkwy
Broomfield CO, 80023

PROPERTY ID: CO1-111
NSRP VERSION: 2.0
BULLETIN: 2-2025

ELECTRICAL RISER DIAGRAM AND SCHEDULES

COLORADO LICENSED
THOMAS K. FEY
56759
PROFESSIONAL ENGINEER
8-26-25

Project No: 23.0002261.000 Reviewed By: RJK

E04.01

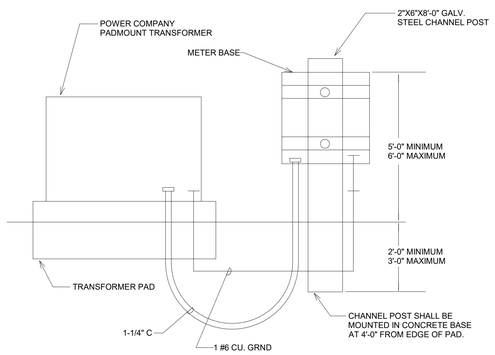

DETAIL NOTES
1. PROVIDE CONDUIT, POST & NECESSARY HARDWARE.
2. INSTALL METER BASE FURNISHED BY POWER COMPANY.
3. CONDUIT SHALL HAVE INSULATING BUSHING AT EACH END.
4. COORDINATE EXACT CONDUIT REQUIREMENTS WITH SERVING ELECTRIC UTILITY.

3 E04.02 PAD MOUNTED TRANSFORMER METER BASE DETAIL
NOT TO SCALE

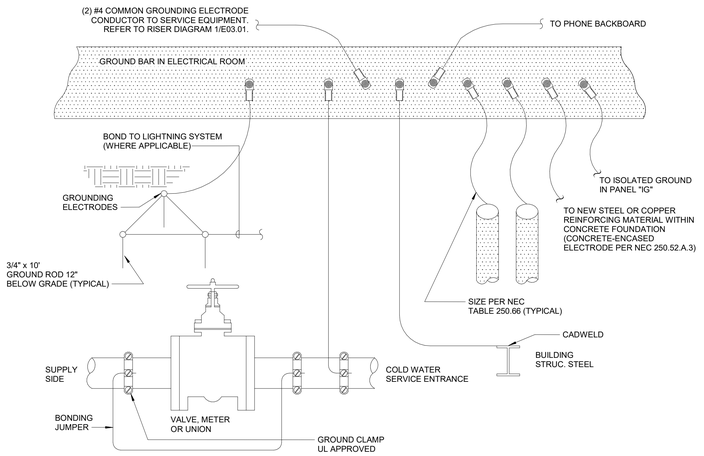

2 E04.02 NEUTRAL GROUNDING SYSTEM
NOT TO SCALE

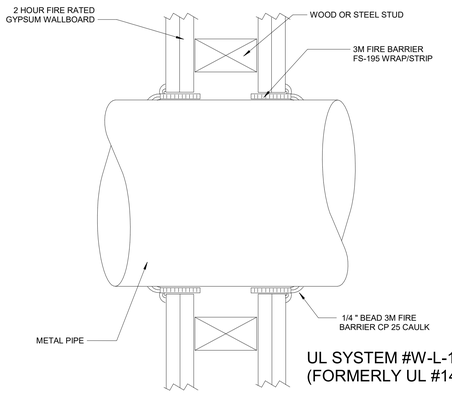

UL SYSTEM #W-L-1002
(FORMERLY UL #147-B)

SYSTEM DETAILS:

1. ASSEMBLY: 2 HOUR FIRE RATED GYPSUM WALLBOARD/STUD WALL ASSEMBLY. NOMINAL 4" DIA OR SMALLER STEEL PIPES OR CONDUITS MAY ONLY BE USED.
2. RATINGS: F-2 HOUR, T-2 HOUR ON 1" DIAMETER (OR SMALLER) FLEXIBLE STEEL CONDUIT. T RATING IS 0 HOUR ON OTHER ITEMS LISTED.
3. PENETRATING ITEMS:
   - NOMINAL 4" DIAMETER (OR SMALLER) SCHEDULE 10 (OR HEAVIER) STEEL PIPE, STEEL CONDUIT, OR TYPE L (OR HEAVIER) COPPER TUBING. A MAXIMUM OF ONE PIPE OR CONDUIT IS PERMITTED IN THE FIRESTOP SYSTEM

APPLICATION DETAILS:

1. INSTALL THE FIRESTOP SYMMETRICALLY ON BOTH SIDES OF THE WALL ASSEMBLY.
2. ANNULAR SPACE REQUIREMENTS : 1/4" TO 3/8".
3. SLIDE ONE FS-195 WRAP/STRIP INTO THE OPENING, LEAVING A MAXIMUM 3/4" EXPOSED WRAP BEYOND THE WALL SURFACE. IF THE ANNULAR SPACE IS GREATER THAN 1/4" ADD ADDITIONAL WRAPS OF FS-195 WRAP/STRIP UNTIL THE ANNULAR SPACE IS LESS THAN 1/4". FS-195 WRAP/STRIP MAY BE FRICTION FIT INTO THE OPENING OR SECURED WITH FOIL TAPE OR 16-GAUGE STEEL TIE WIRE.
4. APPLY A MINIMUM 1/4" DIAMETER CONTINUOUS BEAD OF CP 25 CAULK TO THE WRAP/STRIP/WALL INTERFACE AND TO THE EXPOSED EDGE OF THE WRAP/STRIP LAYER APPROXIMATELY 3/4" FROM THE WALL SURFACE.

1 E04.02 PENETRATION FIRESTOP FOR 4" MAX DIAMETER METAL PIPE/CONDUIT THROUGH A GYPSUM WALLBOARD ASSEMBLY
NOT TO SCALE

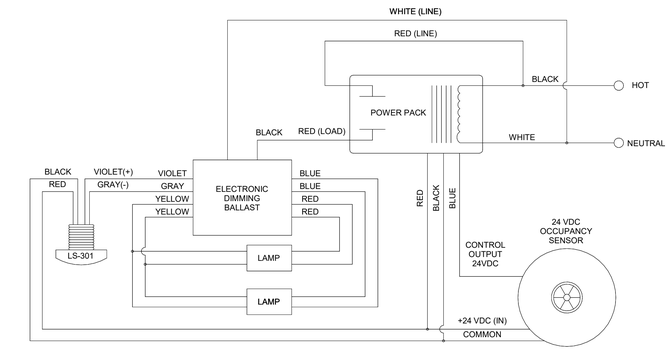

6 E04.02 DAYLIGHT SENSOR WITH OCCUPANCY SENSOR WIRING SCHEMATIC
NOT TO SCALE

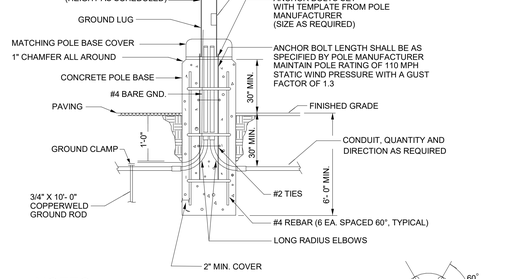

NOTES:

1) 3000 PSI CONCRETE BASE WITH 6 #4 BARS VERTICAL SPACED AT 60 DEGREES AND WITH #2 TIES 12" O.C. 14" MINIMUM DIAMETER.

2) BASE DIAMETER EXCEEDS ANCHOR BOLT DIAMETER BY EIGHT (8) INCHES.

3) TYPICAL DETAIL. STRUCTURAL ENGINEER SHALL DETERMINE EXACT REBAR AND CONCRETE DESIGN.

4) PROVIDE GROUNDING PER LOCAL CODES.



BASE SECTION

5 E04.02 POLE LIGHT BASE DETAIL
NOT TO SCALE

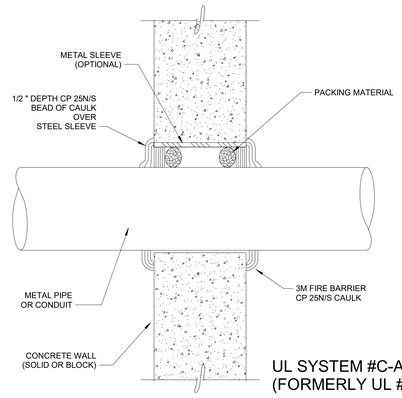

UL SYSTEM #C-AJ-1001
(FORMERLY UL #49)

SYSTEM DETAILS:

1. ASSEMBLY: MINIMUM THICKNESS OF SOLID CONCRETE WALL IS 4 1/2 ", OR MAY BE CONSTRUCTED OF ANY UL CLASSIFIED CONCRETE BLOCKS.
2. RATINGS: F-3 HOUR, T-0 HOUR. WHEN STEEL VENT DUCT IS USED, THE F RATING IS 2 HOUR MAXIMUM.
3. PENETRATING ITEMS:
   - NOMINAL 20" DIA. (OR SMALLER) SCH. 10 (OR HEAVIER) STEEL PIPE.
   - NOMINAL 6" DIA. (OR SMALLER) RIGID STEEL CONDUIT.
   - NOMINAL 6" DIA. (OR SMALLER) TYPE L (OR HEAVIER) COPPER TUBE.
   - NOMINAL 4" DIA. (OR SMALLER) CAST IRON PIPE OR STEEL EMT CONDUIT.
4. STEEL SLEEVE:
   - NOMINAL 12" DIA. (OR SMALLER) SCHEDULE 40 (OR HEAVIER) STEEL PIPE SLEEVE CAST INTO CONCRETE FLOOR OR WALL. SLEEVE TO BE FLUSH WITH OR PROJECT MAX. 2" FROM TOP SURFACE OF FLOOR OR FROM BOTH SURFACES OF WALL.

APPLICATION DETAILS:

1. INSTALL THE FIRESTOP SYMMETRICALLY ON BOTH SIDES OF THE WALL ASSEMBLY.
2. MINIMUM ANNULAR SPACE REQUIREMENT IS ZERO. POINT CONTACT. MAXIMUM ANNULAR SPACE ALLOWABLE IS 1" FOR MAX. 10" DIA. PIPE AND 2-1/2" FOR MAXIMUM 20" DIA. PIPE. THE 28 GAUGE STEEL SLEEVE IS OPTIONAL.
3. RECESS PACKING MATERIAL (BACKEROD, MINERAL WOOL, ETC.) 1/2 " FROM TOP SURFACE OF FLOOR OR BOTH SIDES OF THE WALL.
4. FILL THE ANNULAR SPACE AROUND THE PIPE WITH A MINIMUM 1/2 " DEPTH OF CP 25 N/S CAULK TO BOTH SIDES OF THE WALL.
5. THE FIRE RATING OF THE CP 25 CAULK IS BASED ON THE WET INSTALLED DEPTH. SHRINKAGE MAY BE EXPECTED AFTER INSTALLATION.

4 E04.02 PENETRATION FIRESTOP FOR METAL PIPE/CONDUIT THROUGH A CONCRETE FLOOR OR WALL (3 HOUR RATING)
NOT TO SCALE

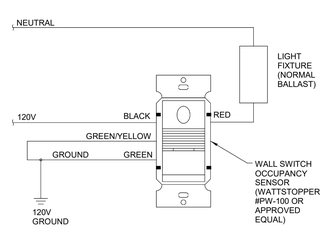

9 E04.02 WALL SWITCH OCCUPANCY SENSOR WIRING SCHEMATIC
NOT TO SCALE

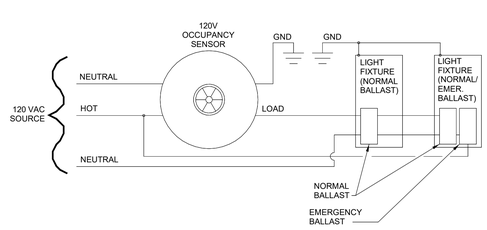

8 E04.02 OCCUPANCY SENSOR WITH NORMAL AND EMERGENCY LIGHT FIXTURE WIRING SCHEMATIC
NOT TO SCALE

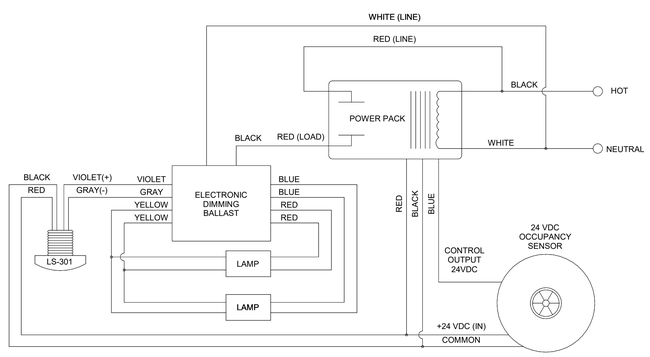

7 E04.02 TYPICAL OFFICE CONTROL WIRING SCHEMATIC
NOT TO SCALE

NELSON
Nelco Architecture, Inc.

12400 Coit Road, Suite 510
Dallas, TX. 75251
Phone: (972) 644-8830
Fax: (972) 644-8496

Client Representative:
CUSHMAN & WAKEFIELD
Attn: Paul Hurchanik
Tel: 720.582.6073
Email: paul.hurchanik@cushwake.com

Architect:
Nelco Architecture, Inc.
Attn: Harry Koutsis
Tel: 310.693.5271
Email: hkoutsis@nelsonww.com

Civil:
LANGAN
Attn: Ben Henry
Tel: (817) 328-3217
Email: bhenry@langan.com

Structural:
Salas O'Brien
Attn: Julie Bolding
Tel: (469) 782-9753
Email: julie.bolding@salasobrien.com

MEP:
Salas O'Brien
Attn: Robert Zendejas
Tel: (404) 434-7373
Email: robert.zendejas@salasobrien.com

Salas O'Brien
salasobrien.com 404-881-5300
Atlanta
3200 Windy Hill Road, SE, Suite 200E
Atlanta, GA 30339

Project Number: 2450-70132

Description:	No:	Date:
Issue for Permit		08/26/2025

BANK OF AMERICA
Broomfield

CO1-111
NWC Hwy 7 and Palisade Pkwy
Broomfield CO, 80023

PROPERTY ID:	CO1-111
NSRP VERSION:	2.0
BULLETIN:	2-2025

ELECTRICAL DETAILS

COLORADO LICENSED
ROBERT K. ZENDEJAS
56259
PROFESSIONAL ENGINEER
8-26-25

Project No: 23.0002261.000 Reviewed By: RJK

E04.02

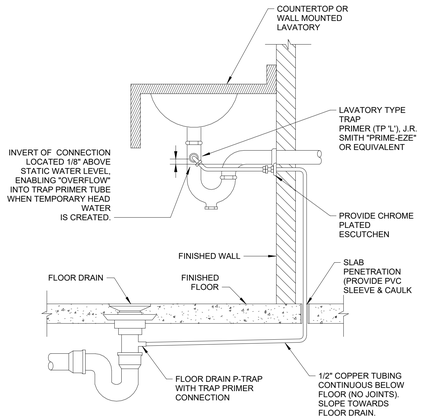

1 P00.01 LAVATORY TRAP PRIMER DETAIL
NOT TO SCALE

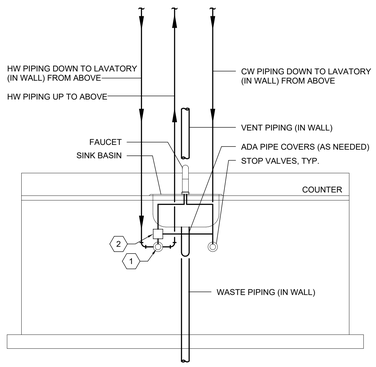

2 P00.01 LAVATORY PIPING DETAIL
NOT TO SCALE

DETAIL KEYED NOTES:

1. LIMIT THE LENGTH OF HOT WATER SUPPLY PIPING FROM THE HOT WATER SOURCE (THE TAP ON THE HW PIPING WITHIN THE WALL) AND THE FAUCET TO 2 FEET MAX TO COMPLY WITH LOCAL ENERGY CODE (IECC SECTION 404.5.1).
2. LEONARD MODEL LF-270, ASSE 1070 LISTED, THERMOSTATIC MIXING VALVE SET TO DELIVER 105°F MAX TO THE FAUCET.

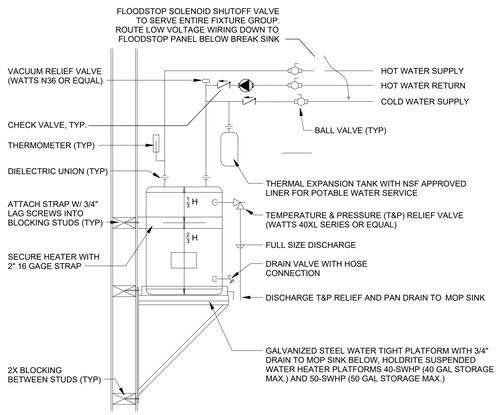

3 P00.01 PLATFORM MOUNTED WATER HEATER DETAIL
NOT TO SCALE

PLUMBING ABBREVIATIONS

ABBREVIATION	DEFINITION
A/C	ABOVE CEILING
AAV	AIR ADMITTANCE VALVE
AD	AREA DRAIN
AFF	ABOVE FINISHED FLOOR
AFG	ABOVE FINISHED GRADE
AP	ACCESS PANEL
B/F	BELOW FLOOR
B/G	BELOW GRADE
BT	BATHTUB
CA	COMPRESSED AIR
CL	CENTER LINE
CLG	CEILING
CO	CLEAN OUT
CW	COLD WATER
DF	DRINKING FOUNTAIN
DN	DOWN
DPV	DRY PIPE VALVE
EWC	ELECTRIC WATER COOLER
FCO	FLOOR CLEANOUT
FD	FLOOR DRAIN
FG	GENERATOR FUEL PIPING
FND	FOUNDATION DRAINAGE PIPING
FS	FLOOR SINK
G	GAS (NATURAL UNO)
GCO	GRADE CLEANOUT
GI	GREASE INTERCEPTOR
GT	GREASE TRAP
GV	GATE VALVE
GW	GREASE WASTE
HB	HOSE BIBB
HD	HUB DRAIN
HW	HOT WATER
HWR	HOT WATER RETURN
INV EL	INVERT ELEVATION
IW	INDIRECT WASTE
LV	LAVATORY
N/A	NOT APPLICABLE
NFRH	NON FREEZE WALL HYDRANT
NFWH	NON FREEZE ROOF HYDRANT
NTS	NOT TO SCALE
O/H	OVERHEAD
OD	OVERFLOW DRAINAGE
ORD	OVERFLOW ROOF DRAIN
PRV	PRESSURE REDUCING VALVE
RD	ROOF DRAIN
SAN	SANITARY
SH	SHOWER
SK	SINK
SS	SANITARY SEWER
ST	STORM
TP	TRAP PRIMER
TYP.	TYPICAL
U/C	UNDER COUNTER
UNO	UNLESS NOTED OTHERWISE
UR	URINAL
V	VENT
VTR	VENT THRU ROOF
W	WASTE
WC	WATER CLOSET
WCO	WALL CLEANOUT

NOTE: THESE ARE STANDARD ABBREVIATIONS. ALL ITEMS MAY NOT APPEAR ON DRAWINGS.

SHEET LIST

SHEET NUMBER	SHEET NAME
P00.01	PLUMBING GENERAL
P01.01	PLUMBING FLOOR PLAN - SANITARY
P01.02	PLUMBING FLOOR PLAN - SUPPLY
P02.01	PLUMBING ROOF PLAN
P03.01	PLUMBING RISER DIAGRAMS

PLUMBING LEGEND

SYMBOL	DESCRIPTION
1" CW	PIPE SIZE AND SYSTEM (SEE ABBREVIATIONS FOR SYSTEM TYPES)
1" CW	PIPE SIZE AND SYSTEM (SEE ABBREVIATIONS FOR SYSTEM TYPES)
	DOMESTIC COLD WATER (CW)
	DOMESTIC HOT WATER (HW)
	DOMESTIC HOT WATER RETURN (HWR)
	VENT (V)
	SANITARY / WASTE (W)
	STORM (ST)
	OVERFLOW (OD)
	NATURAL GAS (G)
	GREASE WASTE (GW)
	RISER UP (ELBOW)
	RISER DOWN (ELBOW)
	FIXTURE TRAP
	RISE OR DROP
	BRANCH - BOTTOM CONNECTION
	BRANCH - TOP CONNECTION
	BRANCH - SIDE CONNECTION
	PIPE CAP
	CLEANOUT
	VALVE
	BALANCING VALVE (CIRCUIT SETTER)
	BALL VALVE
	BUTTERFLY VALVE
	CHECK VALVE
	PRESSURE REDUCING VALVE (PRV)
	STRAINER
	EXISTING PIPING
	PIPING BELOW SLAB/FLOOR
	1/4" SLOPED PIPING
	1/16" SLOPED PIPING
	PIPING TO BE DEMOLISHED
M	REMOTE READ SUBMETER (WATER OR GAS)
EI = 100.00'	APPROXIMATE INVERT ELEVATION

NOTE: THIS IS A STANDARD LEGEND. ALL ITEMS MAY NOT APPEAR ON DRAWINGS.

ADA COMPLIANCE

1. VERIFY FIXTURES THAT ARE INTENDED FOR HANDICAP USE WITH CURRENT ARCHITECTURAL DRAWINGS.
2. PLUMBING FIXTURES DESIGNATED FOR HANDICAP USE SHALL COMPLY WITH ADA AND ALL STATE, CITY, AND LOCAL REQUIREMENTS PERTAINING TO HANDICAP ACCESSIBILITY.
3. FIXTURE INSTALLATION SHALL COMPLY WITH ADA AND ANY STATE, CITY, AND LOCAL REQUIRMENTS PERTAINING TO HANDICAP ACCESSIBILITY.
4. THE CONTRACTOR SHALL BE RESPONSIBLE FOR COMPLYING WITH ADA AND ALL STATE, CITY, AND LOCAL REQUIREMENTS PERTAINING TO PLUMBING FIXTURES AND PLUMBING FIXTURE INSTALLATION FOR USE BY THE HANDICAPPED.

WATER HAMMER ARRESTER SCHEDULE

CHART A - FOR GROUPED FIXTURES		CHART B - FOR LONG PIPE RUNS						
P.D.I SIZE	FIXTURE UNITS	P.D.I WATER HAMMER ARRESTERS						
		LENGTH OF PIPE	NOMINAL PIPE DIAMETER					
			1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
A	1-11	25'	A	A	B	C	D	E
B	12-32	50'	A	B	C	D	E	F
C	33-60	75'	B	C	D	AE	F	EF
D	61-113	100'	C	D	E	F	CF	FF
E	114-154	125'	C	D	F	AF	EF	EFF
F	155-310	150'	D	E	F	DF	FF	FFF

NOTES:
1. WATER HAMMER ARRESTERS SHALL BE INSTALLED IN ACCORDANCE WITH STANDARD PDI-WH201.

ROOF DRAIN PERFORMANCE TABLE

ROOF DRAIN SIZE	MAX ROOF DRAIN FLOOW RATE
2" Ø	95 GPM
3" Ø	195 GPM
4" Ø	305 GPM
6" Ø	380 GPM
8" Ø	405 GPM

NOTE: ROOF DRAIN PERFORMANCE SHOWN IS FOR ZURN FLOFORCE ROOF DRAINS WITH 2" OF HEAD DEPTH WITH MODIFIED DOWNSTREAM PIPING TESTED PER ASPE/IAPMO/ANSI Z1034-2015. ANY SUBSTITUTED ROOF/OVERFLOW DRAINS (RD/ORD) SHALL MEET OR EXCEED THESE CAPACITIES.

PLUMBING GENERAL NOTES

1. COORDINATE ALL WORK WITH ARCHITECTURAL, STRUCTURAL, MECHANICAL, AND ELECTRICAL TRADES. PIPE ROUTING SHOWN IS DIAGRAMMATIC, PROVIDE ALL OFFSETS, ETC., TO AVOID INTERFERENCES WITH EQUIPMENT, PIPING, DUCTWORK, LIGHTS, CONDUIT, ETC.
2. COORDINATE ALL FLOOR PENETRATIONS WITH STRUCTURAL DRAWINGS. SET SLEEVES IN FLOORS AND WALLS AND ATTACHMENTS FOR HANGERS AS CONSTRUCTION PROGRESSES. ALL PENETRATIONS MUST BE SEALED AND HELD AS TIGHT TO COLUMNS OR WALLS AS POSSIBLE.
3. ALL PIPING SHALL BE CONCEALED INSIDE WALLS, BELOW FLOORS OR ABOVE CEILINGS UNLESS INDICATED OTHERWISE. REMOVE ALL EXISTING WATER PIPING NOT IN USE.
4. ALL PIPING SHALL BE SLOPED AS PER AT THE MINIMUM GRADE REQUIRED BY CODE (UNLESS NOTED OTHERWISE) FOR EACH PARTICULAR PIPE SIZE. ALL SANITARY/WASTE PIPING SHALL BE SLOPED AT 1/8" PER FOOT AND ALL GREASE WASTE PIPING SHALL BE SLOPED AT 1/4" PER FOOT UNLESS NOTED OTHERWISE.
5. REFER TO ARCHITECTURAL DRAWINGS FOR EXACT LOCATION OF ALL PLUMBING FIXTURES. EXACT LOCATION OF ALL FIXTURES MUST BE VERIFIED IN THE FIELD PRIOR TO INSTALLATION. FINAL LOCATION SHALL BE AS DIRECTED BY ARCHITECT.
6. DO NOT RUN PLUMBING PIPING THROUGH ELECTRICAL/COMPUTER ROOMS OR DIRECTLY ABOVE ELECTRICAL PANELS.
7. INSTALL WATER HAMMER ARRESTORS (PDI'S) ON DOMESTIC COLD & HOT WATER LINES AS INDICATED ON THE DRAWINGS, IN ACCORDANCE WITH THE LOCAL PLUMBING CODE, AND/OR STANDARD PDI-WH201. ARRESTORS SHALL BE INSTALLED IN AN ACCESSIBLE LOCATION.
8. REFER TO ELECTRICAL DRAWINGS FOR ELECTRICAL COORDINATION AND INFORMATION.
9. ALL FIXTURES SHALL BE FURNISHED WITH QUARTER-TURN STOP VALVES. VALVES MAY BE IN SUPPLY PIPES OR INTEGRAL WITH SUPPLY FITTINGS.
10. PLUMBING CONTRACTOR SHALL OBTAIN ALL NECESSARY PERMITS AND PAY ALL COSTS INVOLVED.
11. PROVIDE NEW PRESSURE REGULATOR (PRV) WITH INTEGRAL STRAINER ON ALL NEW INCOMING WATER SERVICES. PRESSURE REGULATOR SHALL BE FACTORY SET TO SUPPLY 50 PSI TO BUILDING. FOR INCOMING WATER SERVICES 2 INCHES AND LARGER IN SIZE, A PRESSURE REGULATOR STATION SHALL BE PROVIDED WITH TWO PARALLEL PRESSURE REGULATORS WITH INTEGRAL STRAINERS, PRESSURE GAUGES AND SHUT OFF VALVES ON EITHER SIDE OF EACH, AND A FULL SIZE BYPASS WITH NORMALLY CLOSED BALL VALVE. WATER SERVICES LARGER THAN 4" SHALL HAVE A THIRD PARALLEL LINE WITH FULL SIZE REGULATOR WITH SAME APPURTENANCES AS WELL. SEE DETAILS FOR ADDITIONAL INFORMATION/REQUIREMENTS.
12. INSULATE SUPPLY PIPES, STOPS AND DRAIN AT EACH ADA SINK WITH FIRE RESISTANT MOLDED FOAM INSULATING DEVICE TRUEBRO ADA LAV GUARD.
13. MINIMUM FIXTURE CONNECTION SIZES SHALL BE MADE IN ACCORDANCE WITH THE PLUMBING FIXTURE SCHEDULE.
14. ALL EQUIPMENT, PIPING, APPURTENANCES SHALL BE PROTECTED FROM DEBRIS AND DAMAGE. SENSITIVE EQUIPMENT SHALL NOT BE DELIVERED TO THE JOB SITE UNTIL SUCH TIME AS IT IS TO BE INSTALLED. PIPING ENDS SHALL BE CLOSED BY TEMPORARY MEANS WHEN PORTIONS OF THE SYSTEM ARE NOT COMPLETE.
15. LOCATE ALL VALVES WHERE THEY ARE ACCESSIBLE FOR SERVICE AND USE. WHERE ACCESS PANELS ARE REQUIRED COORDINATE SELECTION AND LOCATION WITH ARCHITECT.
16. PROVIDE TRAP PRIMER AND CONNECTION FOR ANY FLOOR DRAIN, FLOOR SINK OR HUB DRAIN NOT SUBJECT TO REGULAR FLOW.
17. ALL PIPES DROPPING AT COLUMNS SHALL BE INSTALLED WITHIN THE ENCLOSURE DETAILED ON THE ARCHITECTURAL DRAWINGS SUCH THAT THE DIMENSIONS OF THE ENCLOSURE ARE NOT ALTERED.
18. INSULATE ALL NEW HOT AND COLD WATER PIPING. SIZE PER SPECIFICATIONS.
19. ALL PENETRATIONS AT FLOORS AND RATED PARTIONS SHALL HAVE A UL CLASSIFIED FIRE STOP SYSTEM TESTED TO ASTM E814 AND UL 1479 BY UNDERWRITERS LABORATORIES. FIRE STOP SYSTEMS SHALL BE PROSET SYSTEMS, PENSIL FIRESTOP SYSTEMS OR 3M COMPANY.
20. ALL MATERIAL SHALL FIT THE SPACE AVAILABLE. VERIFY DIMENSIONS AND CLEARANCES AT BUILDING BEFORE COMMENCING WORK.
21. EXPOSED PIPING IN CONNECTION WITH PLUMBING FIXTURES SHALL BE CHROMIUM PLATED. WHERE PIPES PASS THROUGH WALLS, PROVIDE CHROMIUM PLATES ESCUTCHEONS AND FIRMLY SECURE IN PLACE.
22. PROVIDE APPROVED FLANGES FOR CONNECTIONS BETWEEN DRAINAGE PIPING AND FLOOR OUTLET PLUMBING FIXTURES.
23. DEFECTIVE WORK IF INSPECTION OR TESTS SHOW DEFECTS, SUCH DEFECTIVE WORK OR MATERIAL SHALL BE REPLACED AND INSPECTION AND TESTS SHALL BE REPEATED. ALL REPAIRS TO PIPING SHALL BE MADE WITH NEW MATERIAL. NO CAULKING OF SCREWED JOINTS OR HOLES WILL BE ACCEPTABLE.
24 CONTRACTOR TO SUBMIT ADDITIONAL SET OF GAS DRAWINGS TO HVAC PLANS REVIEWER. NOTE: SEE PLUMBING DRAWINGS FOR ANY ADDITIONAL PLUMBING SPECIFICATIONS.
25 ALL PIPING NOTED BELOW THAT IS EXPOSED TO FREEZING (NOT IN HEATED AREAS) SHALL BE PROTECTED BY A HEAT TRACE SYSTEM WITH INSULATION. HEAT TRACE FOR PIPE SIZES > 2" SHALL HAVE AN ELECTRICAL LOAD OF 5 W PER LINEAR FOOT OF PIPING WITH HEAT TRACE LINE INSTALLED AT BOTTOM OF PIPE. HEAT TRACE FOR PIPE SIZES ≤ 2" SHALL HAVE AN ELECTRICAL LOAD OF 10 W PER LINEAR FOOT (TWO STRIPS OF HEAT TRACE). UTILIZE CHROMALOX CPR COMMERCIAL SELF-REGULATING HEAT TRACE OR APPROVED EQUAL. COORDINATE ALL POWER REQUIREMENTS WITH ELECTRICAL DRAWINGS AND CONTRACTOR.
- ALL P-TRAPS IN EXPOSED AREAS.
- ALL DOMESTIC WATER SUPPLY AND WET FIRE SPRINKLER PIPING IN EXPOSED AREAS.
- ALL GREASE WASTE PIPING IN EXPOSED AREAS.

GENERAL PROJECT INFORMATION

LOCATION:
BROOMFIELD, CO

APPLICABLE CODES:
2021 INTERNATIONAL BUILDING CODE WITH CO AMENDMENTS
2021 INTERNATIONAL PLUMBING CODE WITH CO AMENDMENTS
2021 INTERNATIONAL FUEL GAS CODE WITH CO AMENDMENTS
2021 INTERNATIONAL ENERGY CONSERVATION CODE WITH CO AMENDMENTS
LOCAL CITY OF BROOMFIELD ORDINANCES

RAINFALL RATE:
2.4" PER HOUR

FLOW RATE BASED ON 2021 INTERNATIONAL FIRE CODE, SECTION B105.1(2):

SQUARE FOOTAGE	- 4,260 GSF
CONSTRUCTION TYPE	- TYPE II-B
SPRINKLERED BUILDING	- NO
REQUIRED FLOW RATE AT HYDRANT	- 1,500 GPM
FLOW DURATION AT HYDRANT	- 2 HOURS

ELECTRIC WATER HEATER SCHEDULE

MARK	TYPE	STORAGE CAPACITY (GAL)	KW	RECOVERY @ 80°F TEMP RISE (GPH)	MAKE/MODEL	ELECTRICAL	LOCATION	REMARKS
WH-1	STORAGE TYPE WATER HEATER	10	3.0	12	A.O. SMITH MODEL DEL-10	208V/1PH	JANITOR CLOSET (112) ON PLATFORM ABOVE MOP SINK	SET STORAGE TEMPERATURE TO 125°F. SEE ELECTRICAL PLANS FOR EXACT POWER REQUIREMENTS.

PUMP SCHEDULE

MARK	SERVICE	MAKE/MODEL	CAPACITY (GPM)	DISCHARGE HEAD (FT)	WATTS (W)	ELECTRICAL	REMARKS
HWR-1	HOT WATER CIRCULATION	BELL & GOSSETT MODEL ECOCIRC+ 20-18	2	5	70	115V/1PH	ELECTRICALLY COMMUTATED MOTOR WITH BUILT-IN ELECTRICAL OVERLOAD AND DRY RUN PROTECTION. PUMP TO HAVE INTEGRAL CONTROLS FOR CONSTANT TEMPERATURE OPERATION (SET AT 115°F). STAINLESS STEEL CONSTRUCTION. SEE ELECTRICAL DRAWINGS FOR EXACT POWER REQUIREMENTS

PLUMBING FIXTURE SCHEDULE

MARK	DESCRIPTION	MAKE/MODEL	FIXTURE SUPPORT	MIN. CONNECTION SIZE CW	MIN. CONNECTION SIZE HW	MIN. CONNECTION SIZE WASTE	MINIMUM VENT SIZE	REMARKS
CRD	CANOPY ROOF DRAIN	ZURN Z100F	ROOF	-	-	SEE PLANS	-	FLASHED IN PLACE WITH ROOFING MATERIAL WITH THREADED NIPPLE/PLAIN END AND 1/8 BEND BACK TO WALL (COORDINATE ROOF INSULATION BEFORE ORDERING DRAINS AND ADJUST AS REQUIRED).
DN-1	DOWNSPOUT NOZZLE	MIFAB MODEL R1940	WALL	-	-	SEE PLANS	-	WITH WALL FLANGE AND BIRD SCREEN.
FDM	FLOOR DRAIN (BOH)	J.R. SMITH MODEL 2310-P050	FLOOR	**1/2"	-	3"	SEE PLANS	FLOOR DRAIN WITH 8" DIAMETER GRATE, FLASHING COLLAR, CAST IRON BODY, ADJUSTABLE AND TRAP PRIMER CONNECTION.
FDT	FLOOR DRAIN (FOH)	J.R. SMITH MODEL 2005-9050	FLOOR	**1/2"	-	3"	SEE PLANS	FLOOR DRAIN WITH 5" SQUARE GRATE, FLASHING COLLAR, CAST IRON BODY, ADJUSTABLE AND TRAP PRIMER CONNECTION.
FPRH	ROOF HYDRANT	WOODFORD MODEL SRH-MS	ROOF	1"	-	-	-	FROST-PROOF ROOF HYDRANT WITH FLASHED CURB SEALED WATER/AIR TIGHT.
FPWH	WALL HYDRANT	WOODFORD MODEL B65	WALL	3/4"	-	-	-	RECESSED WALL MOUNTED FROST PROOF HYDRANT WITH BUILT IN VACUUM BREAKER, LOCK AND KEY
IMB-1	ICE MAKER BOX	OATEY #38689	WALL	1/2"	-	-	SEE PLANS	ICE MAKER SUPPLY BOX WITH INTEGRAL WATER HAMMER ARRESTOR AND QUARTER TURN STOP VALVE.
ORD	ROOF DRAIN (OVERFLOW)	ZURN Z100F-89	ROOF	-	-	SEE PLANS	-	PROVIDE WITH EXTENSION(S), SECONDARY CLAMP TO ACCOMMODATE THE ARCHITECT'S 2" OF INSULATION AND CAST IRON OVERFLOW ROOF DRAIN. PROVIDE WITH UNDERDECK CLAMP, SUMP RECEIVER, CAST IRON STANDPIPE, 2" HIGH WATER DAM, AND CAST IRON DOME. (COORDINATE ROOF INSULATION BEFORE ORDERING DRAINS AND ADJUST AS REQUIRED WITH ADDITIONAL EXTENSION AND FLASHING CLAMPS).
PF-01	PUBLIC WATER CLOSET	TOTO CT728CU(G)	WALL	1"	-	4"	SEE PLANS	PROVIDE WITH TET1UA32, SENSOR FLUSH VALVE (1.0 GPF) AND OPEN FRONT SEAT. PROVIDE WITH ZURN MODEL Z1202-ND4 CARRIER FOR BACK-TO-BACK TOILETS INSTUD CHASE. CONFIRM CHASE THICKNESS BEFORE ORDERING CARRIERS. MOUNT FIXTURE TO MEET ADA REQUIRMENTS PER ARCHITECTURAL DETAILS. PROVIDE WITH OPEN FRONT SEAT.
PF-02	PUBLIC LAVATORY	AM. STANDARD MODEL 9024.001EC CHO	WALL	1/2"	1/2"	2"	SEE PLANS	PUBLIC LAVATORY WITH SLOAN MODEL EAF-200-0.35 SENSOR FAUCET (PF-03) WITH PLUG-TYPE DISCONNECT (0.35 GPM). PROVIDE WITH KEENEY 5700PC DRAIN, 301PC P-TRAP, TRUEBRO LAV GAURD, LEONARD MODEL LF-270 ASSE 1070 LISTED MIXING VALVE (SET AT 110°F), AND PASSIVE TRAP PRIMER TO NEARBY FD.
PF-04	BREAK SINK	ELKAY MODEL GECR2521R-2	COUNTER MOUNTED	1/2"	1/2"	2"	SEE PLANS	ADA COMPLIANT SS SINK WITH REAR RIGHT DRAIN. PROVIDE WITH LKAD35 DRAIN, KOHLER MODEL K-30614 FAUCET (PF-05) WITH LEVER HANDLE, SIDE SPRAYER, AND K-18036 0.5 GPM AERATOR, SUPPLIES, STOP VALVES, AND P-TRAP. COORDINATE INSTALLATION WITH ARCHITECTURAL COUNTER DETAIL.
PF-06	ELECTRIC DRINKING FOUNTAIN	ELKAY MODEL EZSTL8WSLK	WALL	1/2"	-	2"	SEE PLANS	SELF CONTAINED, WALL HUNG, BI-LEVEL DRINKING FOUNTAIN WITH BOTTLE FILLER, WATER FILTER, INTEGRAL CHILLER, STAINLESS STEEL FINISH, AND KEENEY MODEL 301PC P-TRAP.
PF-07	MOP SINK	ACORN MODEL TSH-24-TF2	FLOOR	3/4"	3/4"	3"	SEE PLANS	BASIN MOP SINK. PROVIDE WITH DELTA MODEL 28C2383 FAUCET WITH INTEGRAL VACUUM BREAKER, WALL BRACE, PAIL HOOK, AND THREADED HOSE OUTLET. PROVIDE WITH DELTA MODEL 28T911, 48" LONG HOSE WITH WALL GRIP AND PASSIVE TRAP PRIMER TO NEARBY FD.
RD	ROOF DRAIN	ZURN Z100F	ROOF	-	-	SEE PLANS	-	PROVIDE WITH EXTENSION(S), SECONDARY FLASHING CLAMP TO ACCOMMODATE THE ARCHITECT'S 2" OF AND CAST IRON ROOF DRAIN. PROVIDE WITH UNDERDECK CLAMP, SUMP RECEIVER AND CAST IRON DOME. (COORDINATE ROOF INSULATION BEFORE ORDERING DRAINS AND ADJUST AS REQUIRED WITH ADDITIONAL EXTENSION AND FLASHING CLAMPS).

NELSON
Nelco Architecture, Inc.

12400 Coit Road, Suite 510
Dallas, TX. 75251
Phone: (972) 644-8830
Fax: (972) 644-8496

Client Representative:
CUSHMAN & WAKEFIELD
Attn: Paul Hurchanik
Tel: 720.582.6073
Email: paul.hurchanik@cushwake.com

Architect:
Nelco Architecture, Inc.
Attn: Harry Koutsis
Tel: 310.693.5271
Email: hkoutsis@nelsonww.com

Civil:
LANGAN
Attn: Ben Henry
Tel: (817) 328-3217
Email: bhenry@langan.com

Structural:
Salas O'Brien
Attn: Julie Bolding
Tel: (469) 782-9753
Email: julie.bolding@salasobrien.com

MEP:
Salas O'Brien
Attn: Robert Zendejas
Tel: (404) 434-7373
Email: robert.zendejas@salasobrien.com

Salas O'Brien
salasobrien.com 404-881-5300
Atlanta
3200 Windy Hill Road, SE, Suite 200E
Atlanta, GA 30339

Project Number: 2450-70132

Description:	No:	Date:
Issue for Permit		08/26/2025

BANK OF AMERICA
Broomfield

CO1-111
NWC Hwy 7 and Palisade Pkwy
Broomfield CO, 80023

PROPERTY ID:	CO1-111
NSRP VERSION:	2.0
BULLETIN:	2-2025

PLUMBING GENERAL

COLORADO LICENSED TESSA T. NAUGHTON 63523 PROFESSIONAL ENGINEER 07/31/26

Project No: 23.0002261.000 Reviewed By: MBB

P00.01

GENERAL NOTES:

1. ALL VENT, STORM, AND OVERFLOW PIPING SHALL BE ROUTED TIGHT TO STRUCTURE, ABOVE THE CEILING AND ALL WASTE PIPING SHALL BE ROUTED BELOW GRADE UNLESS NOTED OTHERWISE.
2. ALL WALL/ROOF/FLOOR PENETRATIONS TO BE SEALED WATER/AIR TIGHT.
3. PROVIDE CLEANOUT AT THE BASE OF EACH STORM RISER.
4. ALL OVERFLOW DOWNSPOUTS (DN-1) TO SPILL ON SPLASH BLOCK INSTALLED ON GRADE. SEE ARCHITECTURAL ELEVATIONS FOR DS MOUNTING HEIGHTS.
5. ALL WASTE AND STORM PIPING SHALL BE SLOPED AT 1/8" PER FOOT UNLESS NOTED OTHERWISE.

KEYED NOTES:

1. 3" W UP TO FD. PROVIDE 1/2" TRAP PRIMER LINE FROM NEARBY FIXTURE TRAP DOWN TO FLOOR DRAIN. SEE TRAP PRIMER DETAIL FOR ADDITIONAL INFORMATION.
2. 3" W UP TO FD. PROVIDE FLOOR DRAIN IN THIS LOCATION WITH AUTOMATIC TRAP PRIMER SERVED BY NEARBY CW MAIN. SEE PLUMBING SUPPLY PLAN FOR ADDITIONAL INFORMATION.

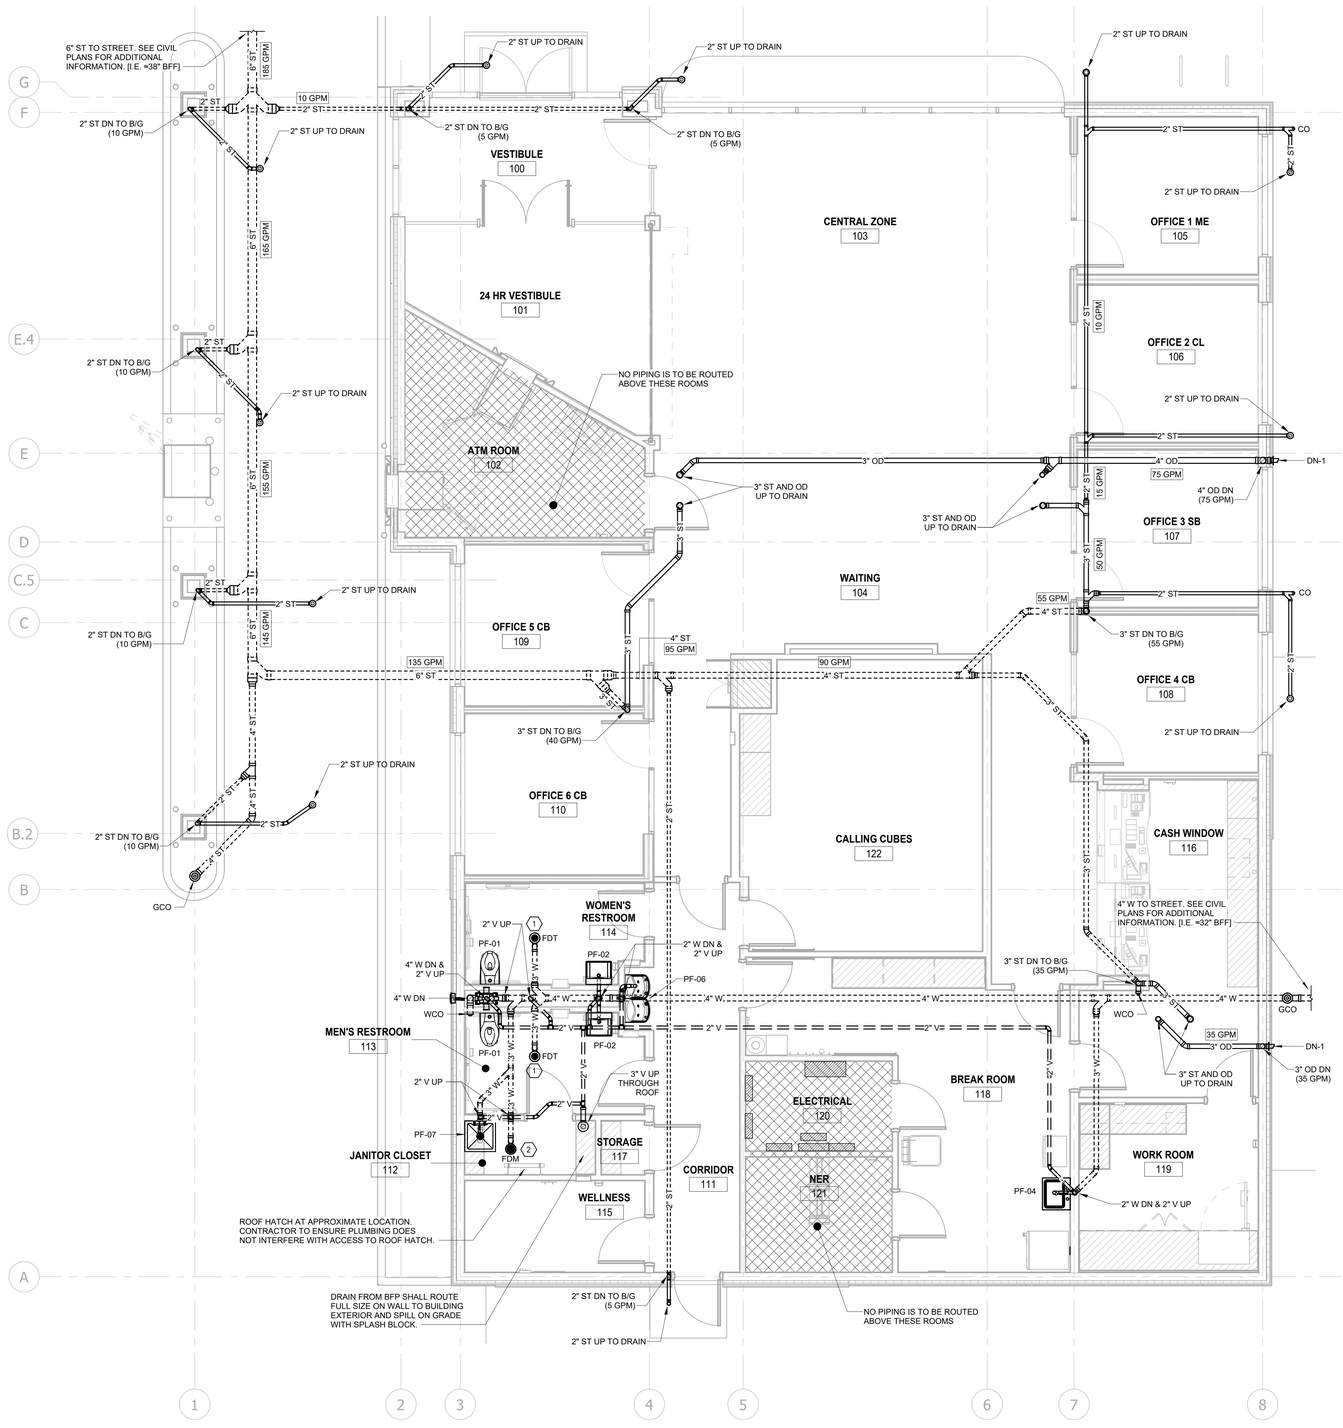

1 P01.01 PLUMBING PLAN SANITARY
1/4" = 1'-0"

NELSON
Nelco Architecture, Inc.

12400 Coit Road, Suite 510
Dallas, TX. 75251
Phone: (972) 644-8830
Fax: (972) 644-8496

Client Representative:
CUSHMAN & WAKEFIELD
Attn: Paul Hurchanik
Tel: 720.582.6073
Email:
paul.hurchanik@cushwake.com

Architect:
Nelco Architecture, Inc.
Attn: Harry Koutsis
Tel: 310.693.5271
Email: hkoutsis@nelsonww.com

Civil:
LANGAN
Attn: Ben Henry
Tel: (817) 328-3217
Email: bhenry@langan.com

Structural:
Salas O'Brien
Attn: Julie Bolding
Tel: (469) 782-9753
Email: julie.bolding@salasobrien.com

MEP:
Salas O'Brien
Attn: Robert Zendejas
Tel: (404) 434-7373
Email:
robert.zendejas@salasobrien.com

Salas O'Brien
salasobrien.com 404-881-5300
Atlanta
3200 Windy Hill Road, SE, Suite 200E
Atlanta, GA 30339

Project Number: 2450-70132

Description:	No:	Date:
Issue for Permit		08/26/2025

BANK OF AMERICA
Broomfield

CO1-111
NWC Hwy 7 and Palisade Pkwy
Broomfield CO, 80023

PROPERTY ID:	CO1-111
NSRP VERSION:	2.0
BULLETIN:	2-2025

PLUMBING FLOOR PLAN - SANITARY

COLORADO LICENSED
JESSE T. NAUGHTON
65527
PROFESSIONAL ENGINEER

NORTH

Project No: 23.0002261.000 Reviewed By: MBB

P01.01

GENERAL NOTES:

1. ALL VENT, AND WATER (CW, HW, AND HWR) PIPING SHALL BE ROUTED ABOVE THE CEILING, TIGHT TO STRUCTURE AND ALL SANITARY/WASTE PIPING SHALL BE ROUTED BELOW SLAB UNLESS NOTED OTHERWISE.
2. ALL ROOF/WALL PENETRATIONS TO BE SEALED WATER/AIR TIGHT.
3. PROVIDE COMPLETE FLOODSTOP SYSTEM AT THE WATER HEATER (WH-1). SEE DETAILS FOR ADDITIONAL INFORMATION.

KEYED NOTES:

1. 3/4" T/FROM UL LISTED WATER HEATER (WH-1). ROUTE FULL SIZE DRAIN LINE AND PRESSURE RELIEF TO MOP SINK. SEE PLATFORM MOUNTED WATER HEATER DETAIL FOR ADDITIONAL INFORMATION.
2. FLOODSTOP SOLENOID SHUT OFF VALVE. SEE DETAILS FOR ADDITIONAL INFORMATION.
3. 3/4" HWR DN TO CP. SEE PLATFORM MOUNTED WATER HEATER DETAIL FOR ADDITIONAL INFORMATION.
4. PROVIDE EVERPURE MODEL IN-12 WATER FILTER BELOW COUNTER WITH QUARTER-TURN STOP VALVE. PROVIDE 1/2" CW LINE TO WATER FILTER AND 1/2" CW LINE FROM WATER FILTER TO ABOVE COUNTER WATER DISPENSER
5. 1-1/2" CW DN. PROVIDE WITH FULL-SIZE SHUT OFF VALVE, WATER UTILITY METER, BFP, AND PRESSURE REDUCING VALVE TO SUPPLY 70 PSI MAX TO BUILDING (IN JANITOR CLOSET). INSTALL SHUT OFF VALVE, WATER UTILITY METER, BFP, AND PRV BELOW FIRST SHELF ABOVE FINISHED FLOOR. PROVIDE A MINIMUM OF 20 FT OF COPPER WATER SERVICE PIPE FROM BUILDING ENTRANCE FOR THE WATER PIPE GROUND ELECTRODE TO COMPLY WITH LOCAL BROOMFIELD ORDINANCE (2021 IPC, 605.3).
6. PROVIDE 1/2" TRAP PRIMER LINE FROM SINK TAILPIECE TO NEARBY FLOOR DRAIN. SEE DETAILS FOR ADDITIONAL INFORMATION.
7. 1/2" CW DN TO AUTOMATIC TRAP PRIMER SERVING FLOOR DRAIN IN THIS LOCATION.

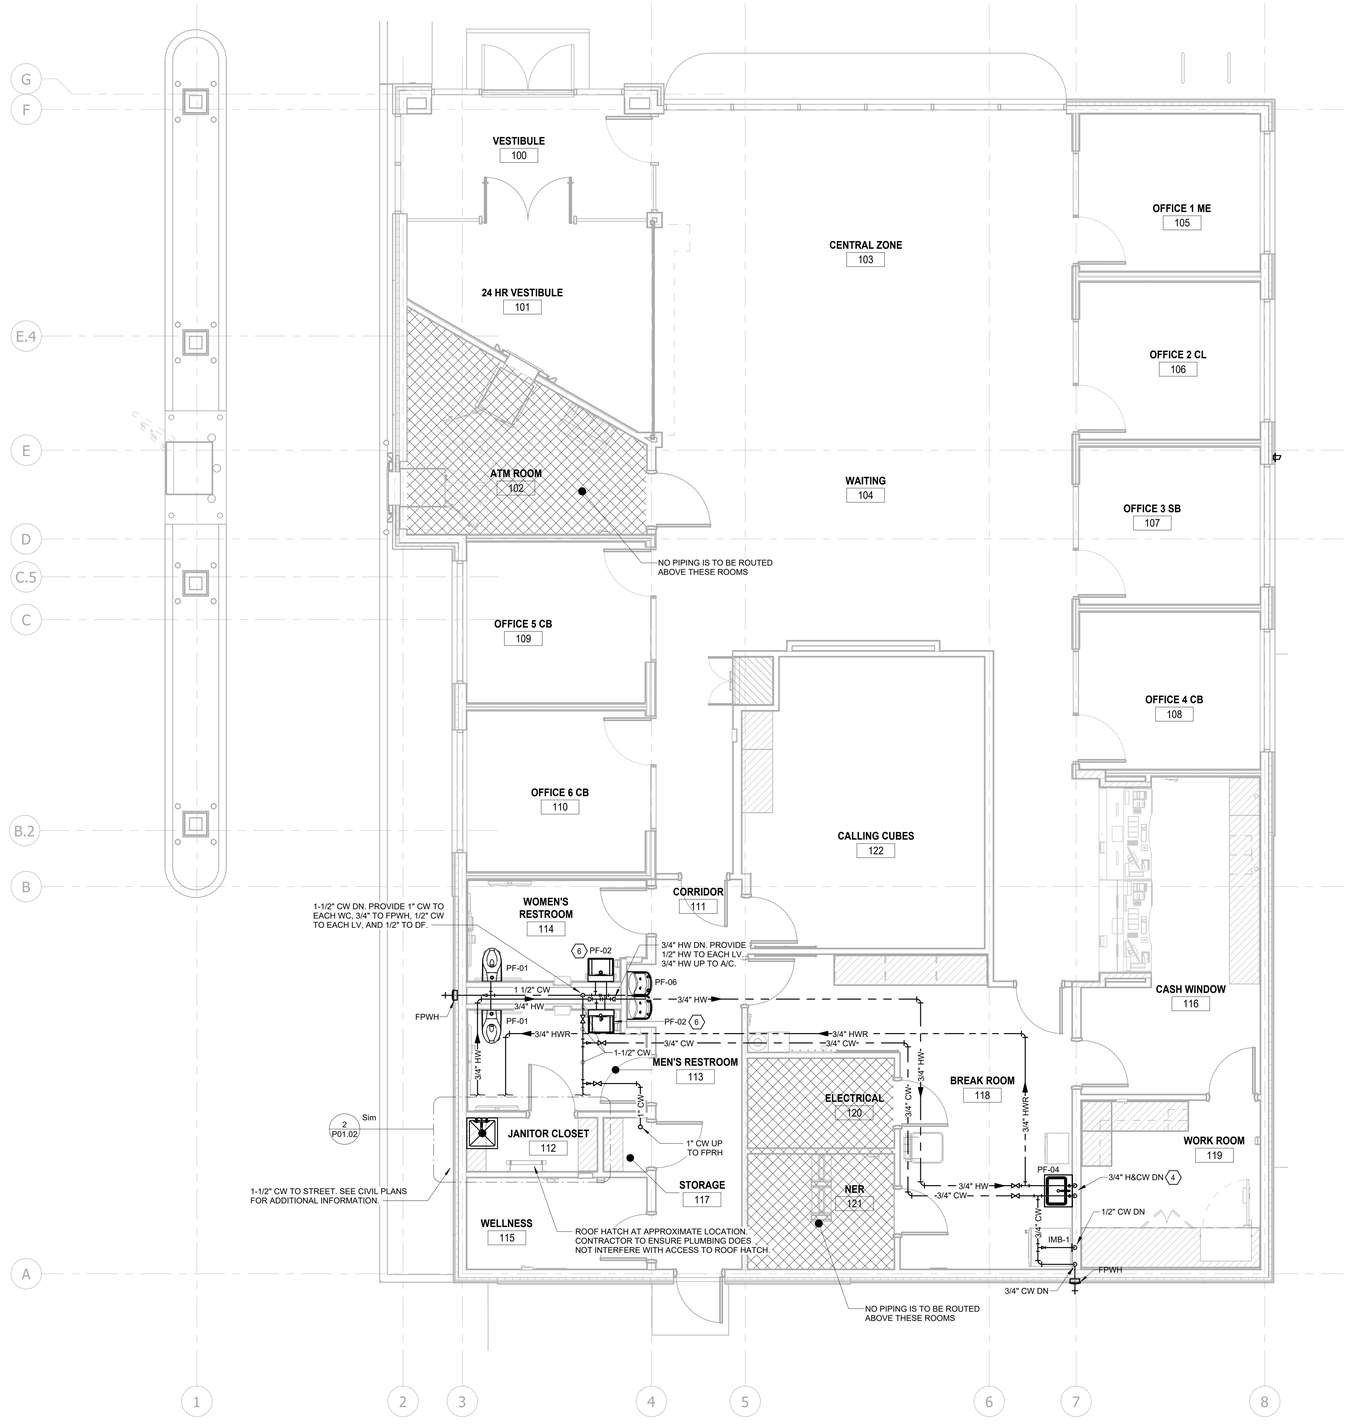

1 P01.02 PLUMBING PLAN SUPPLY
1/4" = 1'-0"

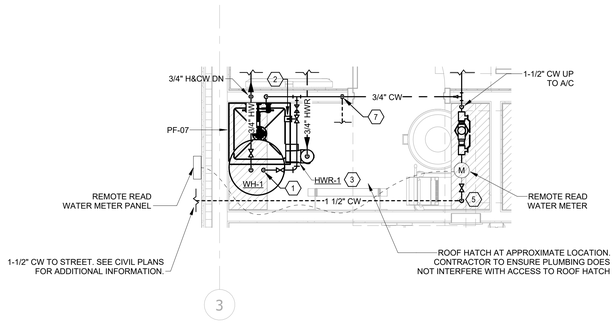

2 P01.02 PLUMBING PLAN SUPPLY - JANITOR CLOSET (112)
1/2" = 1'-0"

NORTH

NELSON
Nelco Architecture, Inc.

12400 Coit Road, Suite 510
Dallas, TX. 75251
Phone: (972) 644-8830
Fax: (972) 644-8496

Client Representative:
CUSHMAN & WAKEFIELD
Attn: Paul Hurchanik
Tel: 720.582.6073
Email:
paul.hurchanik@cushwake.com

Architect:
Nelco Architecture, Inc.
Attn: Harry Koutsis
Tel: 310.693.5271
Email: hkoutsis@nelsonww.com

Civil:
LANGAN
Attn: Ben Henry
Tel: (817) 328-3217
Email: bhenry@langan.com

Structural:
Salas O'Brien
Attn: Julie Bolding
Tel: (469) 782-9753
Email: julie.bolding@salasobrien.com

MEP:
Salas O'Brien
Attn: Robert Zendejas
Tel: (404) 434-7373
Email:
robert.zendejas@salasobrien.com

Salas O'Brien
salasobrien.com 404-881-5300
Atlanta
3200 Windy Hill Road, SE, Suite 200E
Atlanta, GA 30339

Project Number: 2450-70132

Description:	No:	Date:
Issue for Permit		08/26/2025

BANK OF AMERICA
Broomfield

CO1-111
NWC Hwy 7 and Palisade Pkwy
Broomfield CO, 80023

PROPERTY ID:	CO1-111
NSRP VERSION:	2.0
BULLETIN:	2-2025

PLUMBING FLOOR PLAN - SUPPLY

COLORADO LICENSED
JESSE T. NAUGHTON
65523
PROFESSIONAL ENGINEER

Project No: 23.0002261.000 Reviewed By: MBB

P01.02

GENERAL NOTES:

1. ALL ROOF/WALL PENETRATIONS TO BE SEALED WATER/AIR TIGHT.
2. CONDENSATE FROM HVAC RTU'S TO BE PIPED FROM EQUIPMENT TO NEARBY PRIMARY ROOF DRAIN AND TERMINATE WITH AN INDIRECT CONNECTION. SEE MECHANICAL PLANS FOR ADDITIONAL INFORMATION.

KEYED NOTES:

1 SEAL VTR WATER/AIR TIGHT. COORDINATE EXACT LOCATION OF VTR WITH MECHANICAL EQUIPMENT TO ENSURE IT IS NOT LOCATED WITHIN 11' FROM ANY RTU OUTSIDE AIR INTAKE.

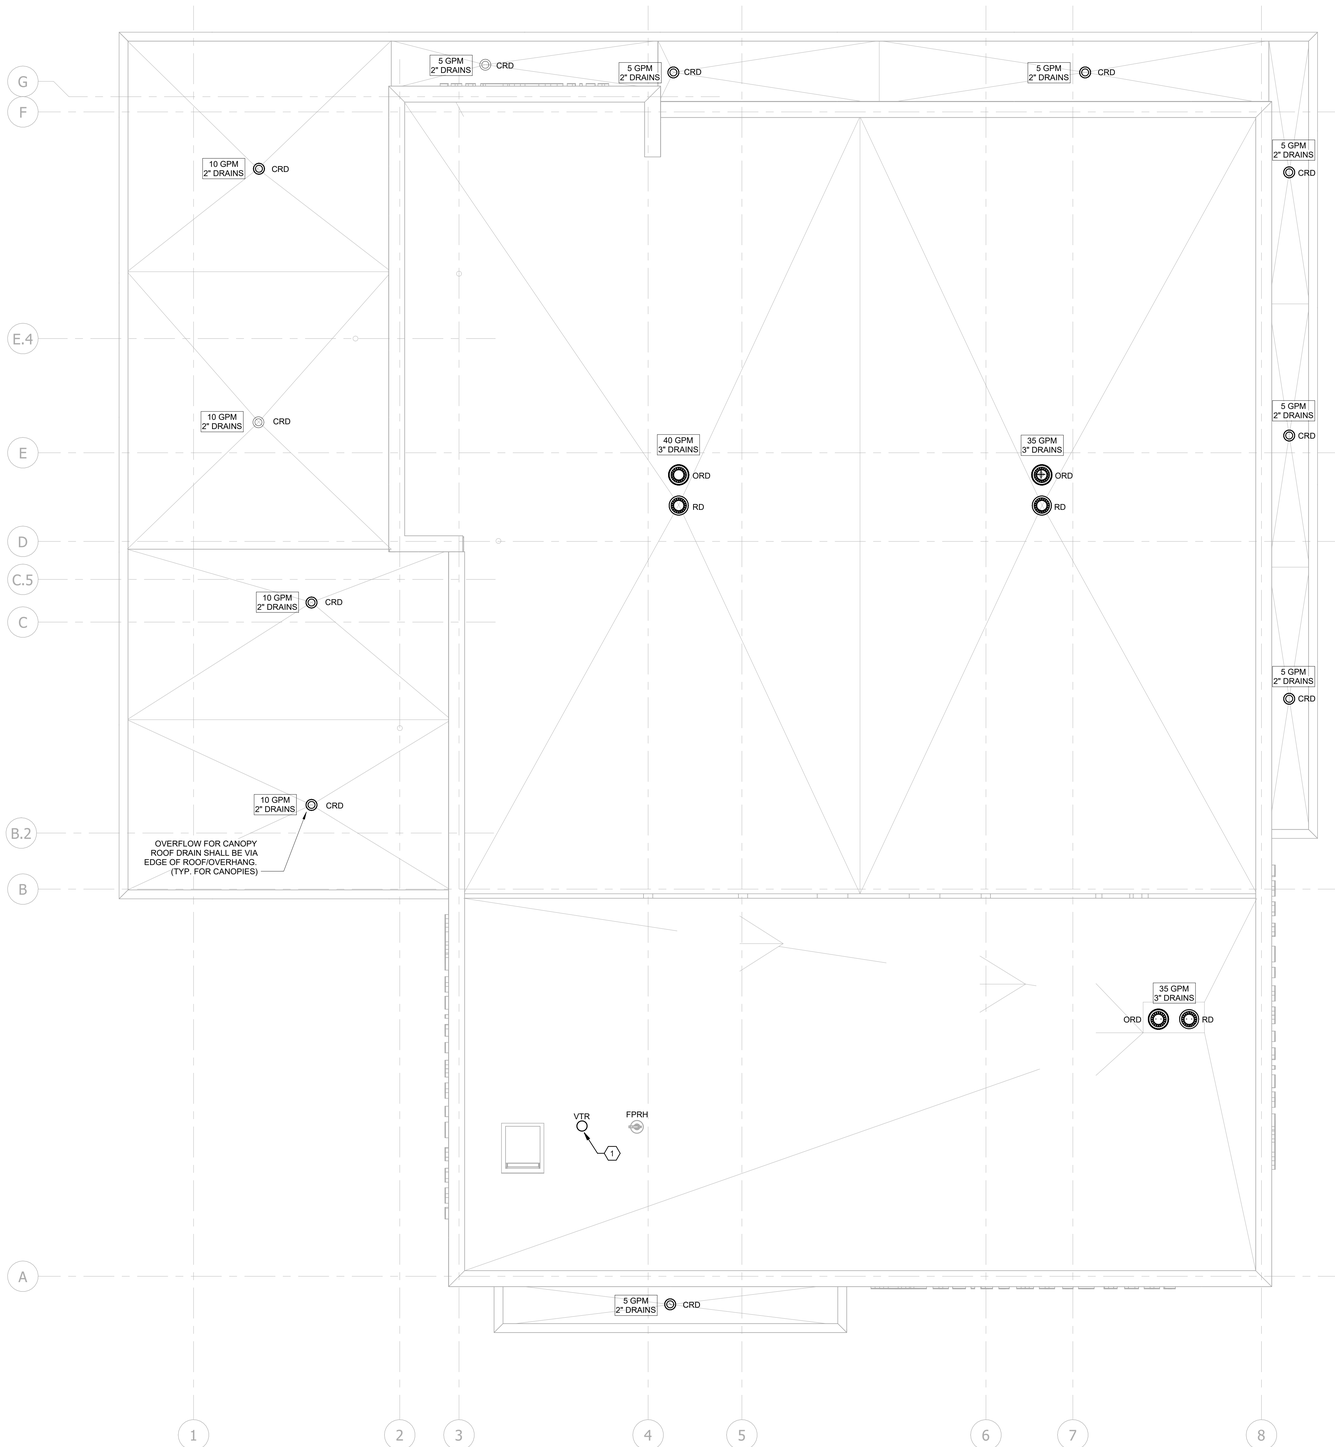

1 P02.01 PLUMBING ROOF PLAN
1/4" = 1'-0"

NORTH

NELSON
Nelco Architecture, Inc.

12400 Coit Road, Suite 510
Dallas, TX. 75251
Phone: (972) 644-8830
Fax: (972) 644-8496

Client Representative:
CUSHMAN & WAKEFIELD
Attn: Paul Hurchanik
Tel: 720.582.6073
Email:
paul.hurchanik@cushwake.com

Architect:
Nelco Architecture, Inc.
Attn: Harry Koutsis
Tel: 310.693.5271
Email: hkoutsis@nelsonww.com

Civil:
LANGAN
Attn: Ben Henry
Tel: (817) 328-3217
Email: bhenry@langan.com

Structural:
Salas O'Brien
Attn: Julie Bolding
Tel: (469) 782-9753
Email: julie.bolding@salasobrien.com

MEP:
Salas O'Brien
Attn: Robert Zendejas
Tel: (404) 434-7373
Email:
robert.zendejas@salasobrien.com

Salas O'Brien
salasobrien.com 404-881-5300
Atlanta
3200 Windy Hill Road, SE, Suite 200E
Atlanta, GA 30339

Project Number: 2450-70132

Description:	No:	Date:
Issue for Permit		08/26/2025

BANK OF AMERICA
Broomfield

CO1-111
NWC Hwy 7 and Palisade Pkwy
Broomfield CO, 80023

PROPERTY ID:	CO1-111
NSRP VERSION:	2.0
BULLETIN:	2-2025

PLUMBING ROOF PLAN

COLORADO LICENSED
ISSUE AT NATIONAL
65522
STAMP
PROFESSIONAL ENGINEER

Project No: 23.0002261.000 Reviewed By: MBB

P02.01

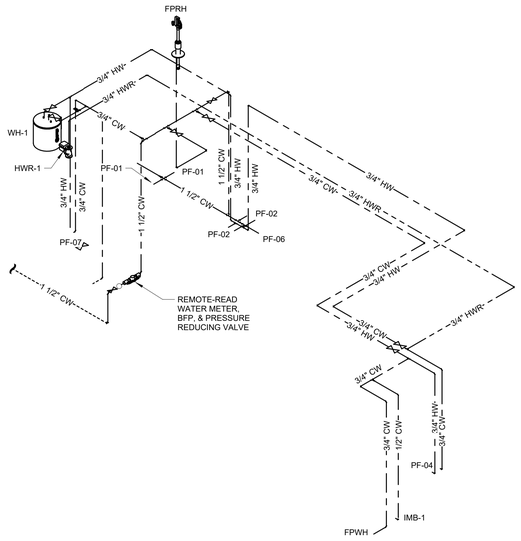

1 P03.01 SUPPLY RISER DIAGRAM
NOT TO SCALE

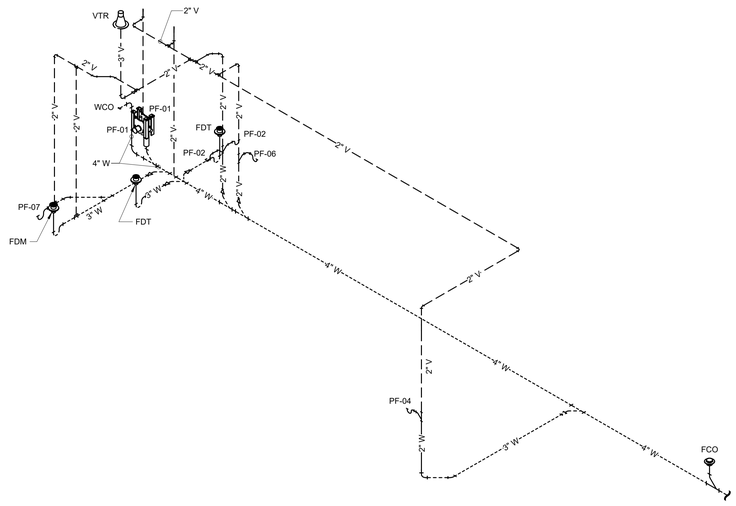

2 P03.01 SANITARY RISER DIAGRAM
NOT TO SCALE

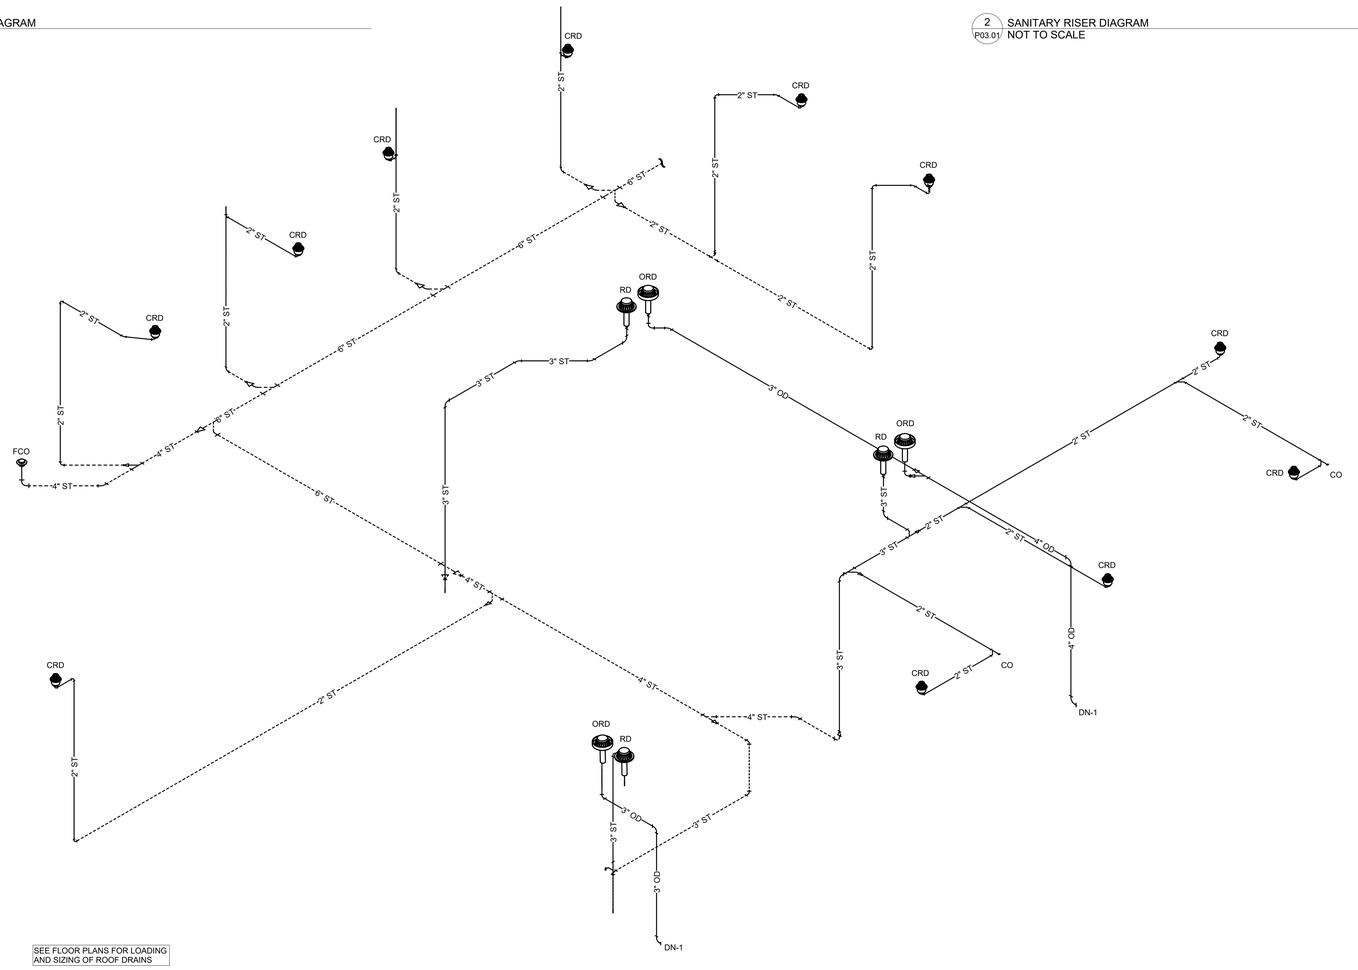

SEE FLOOR PLANS FOR LOADING AND SIZING OF ROOF DRAINS

3 P03.01 STORM RISER DIAGRAM
NOT TO SCALE

NELSON
Nelco Architecture, Inc.

12400 Coit Road, Suite 510
Dallas, TX. 75251
Phone: (972) 644-8830
Fax: (972) 644-8496

Client Representative:
CUSHMAN & WAKEFIELD
Attn: Paul Hurchanik
Tel: 720.582.6073
Email:
paul.hurchanik@cushwake.com

Architect:
Nelco Architecture, Inc.
Attn: Harry Koutsis
Tel: 310.693.5271
Email: hkoutsis@nelsonww.com

Civil:
LANGAN
Attn: Ben Henry
Tel: (817) 328-3217
Email: bhenry@langan.com

Structural:
Salas O'Brien
Attn: Julie Bolding
Tel: (469) 782-9753
Email: julie.bolding@salasobrien.com

MEP:
Salas O'Brien
Attn: Robert Zendejas
Tel: (404) 434-7373
Email:
robert.zendejas@salasobrien.com

Salas O'Brien
salasobrien.com 404-881-5300
Atlanta
3200 Windy Hill Road, SE, Suite 200E
Atlanta, GA 30339

Project Number: 2450-70132

Description:	No:	Date:
Issue for Permit		08/26/2025

BANK OF AMERICA
Broomfield

CO1-111
NWC Hwy 7 and Palisade Pkwy
Broomfield CO, 80023

PROPERTY ID:	CO1-111
NSRP VERSION:	2.0
BULLETIN:	2-2025

PLUMBING RISER DIAGRAMS

COLORADO LICENSED
JOSE V. NAVARRO
63527
PROFESSIONAL ENGINEER
5/26/25

Project No: 23.0002261.000 Reviewed By: MBB

P03.01

TAKE-OFF MARKUPS - LEGEND

Source: takeoff_canon.json · one PDF annotation (Line / PolyLine) per wall on the plan sheet where it was measured · Subject = type · Contents = TYPE · LF · H · SF · DETAIL · id

Sample	Type	Walls	LF	Marked	No geometry	Walls without geometry (not marked): 0
	A1	16	91.50	16	0	
	A1K	3	8.46	3	0	
	A5	6	41.82	6	0	
	B	11	60.28	11	0	
	B2	7	38.41	7	0	
	B2K	1	1.77	1	0	
	BULKHEAD-G	6	45.00	6	0	
	C1	8	44.64	8	0	
	CANOPY-COL	4	22.67	4	0	
	EXT-6CFMF	13	224.26	13	0	
	EXT-PARAPET	10	268.94	10	0	
	F	1	17.76	1	0	
	G	14	81.59	14	0	
	G1	5	18.79	5	0	
	OTHER FRAMING	24	582.40	24	0	
	TOTAL	**129**	**1548.28**	**129**	**0**	

ESTIMATOR DECISIONS 2026-10-23 (applied on the 29A canon)
1) Extra framing ATM recess (6/A08.11): 49.87 LF (29A 23.00)
2) Type B2K A-AS-18: 1'-9 1/4" = 1.771 LF (29A 1.50)
3) 5/8" glass mat sheathing: 346.63 SF, no glass mat at drive-up canopy 15/A09.27 (unchanged)
4) CSR framed soffit 10/A09.33: vertical studs @ 16" O.C. + 2 tracks full length, no joists (-48.08 LF)
5) Gypsum board jamb return: 95.94 SF (29A 127.08)
Acoustical sealant: EXCLUDED (Clarifications only). Insulation: EXCLUDED.