
SHEET SYMBOLS

- # — SEE SHEET A600 FOR WALL CONFIGURATION, CONSTRUCTION AND INSULATION DETAILS
- EXISTING AREA N.I.C.
- DECK HEIGHT / DECK TYPE @ XX'-X" / DECK TYPE
- EXISTING DOOR. PATCH AND REPAIR TO "AS-NEW" CONDITION AS NECESSARY
- NEW DOOR AS SCHEDULED
- # - DOOR NUMBER / DOOR TYPE

NOTE: SEE SHEET A600 FOR DOOR SCHEDULE AND DETAILS.

GENERAL NOTES

1. G.C. TO FIELD VERIFY ALL DIMENSIONS AND NOTIFY ARCHITECTS IMMEDIATELY OF ANY DISCREPANCIES OR UNFORESEEN ITEMS NOT SHOWN ON DRAWINGS.
2. FOR ALL PARTITION CONNECTION DETAILS (TOP AND BOTTOM) SEE SHEET A500.
3. ALL ANGLED WALLS ARE 45°, 90°, OR 135° U.O.N.
4. MAINTAIN FIRE RESISTANCE RATING FOR ALL TENANT DEMISING WALLS.
5. PROVIDE WATER RESISTANT GYPSUM BOARD AT ALL WET LOCATIONS (UTILITY SINK, KITCHENETTE, DRINKING FOUNTAIN, TOILET ROOM, ETC.)
6. G.C. TO COORDINATE LOCATION OF ELECTRICAL FLOOR BOXES WITH ELECTRICAL DRAWINGS AND FIXTURE PLAN.
7. WHERE EXISTING INSULATION IS REMOVED OR MISSING, PATCH AND REPLACE INSULATION TO MATCH EXISTING CONDITIONS AND MAINTAIN REQUIRED R-VALUES.
8. ALL DOORS TO BE LOCATED 4" FROM PERPENDICULAR WALL UNLESS OTHERWISE NOTED. ALL DOORS DIMENSIONED TO ROUGH OPENING OF DOOR.
9. ALL DIMENSIONS ARE FROM FACE OF GYPSUM BOARD TO FACE OF GYPSUM BOARD UNLESS OTHERWISE NOTED.
10. SLAB PENETRATIONS SHALL BE MADE WITH PROPER LOCATION AND X-RAY IDENTIFICATION OF EXISTING REBAR AND/OR POST TENSION CABLES.
11. GYPSUM BOARD INSTALLED IN WET AREAS SUCH AS KITCHENS AND RESTROOMS SHALL BE AT LEAST WATER RESISTANT (GREEN BOARD) OR AN EQUIVALENT WATERPROOF SHEATHING MATERIAL.

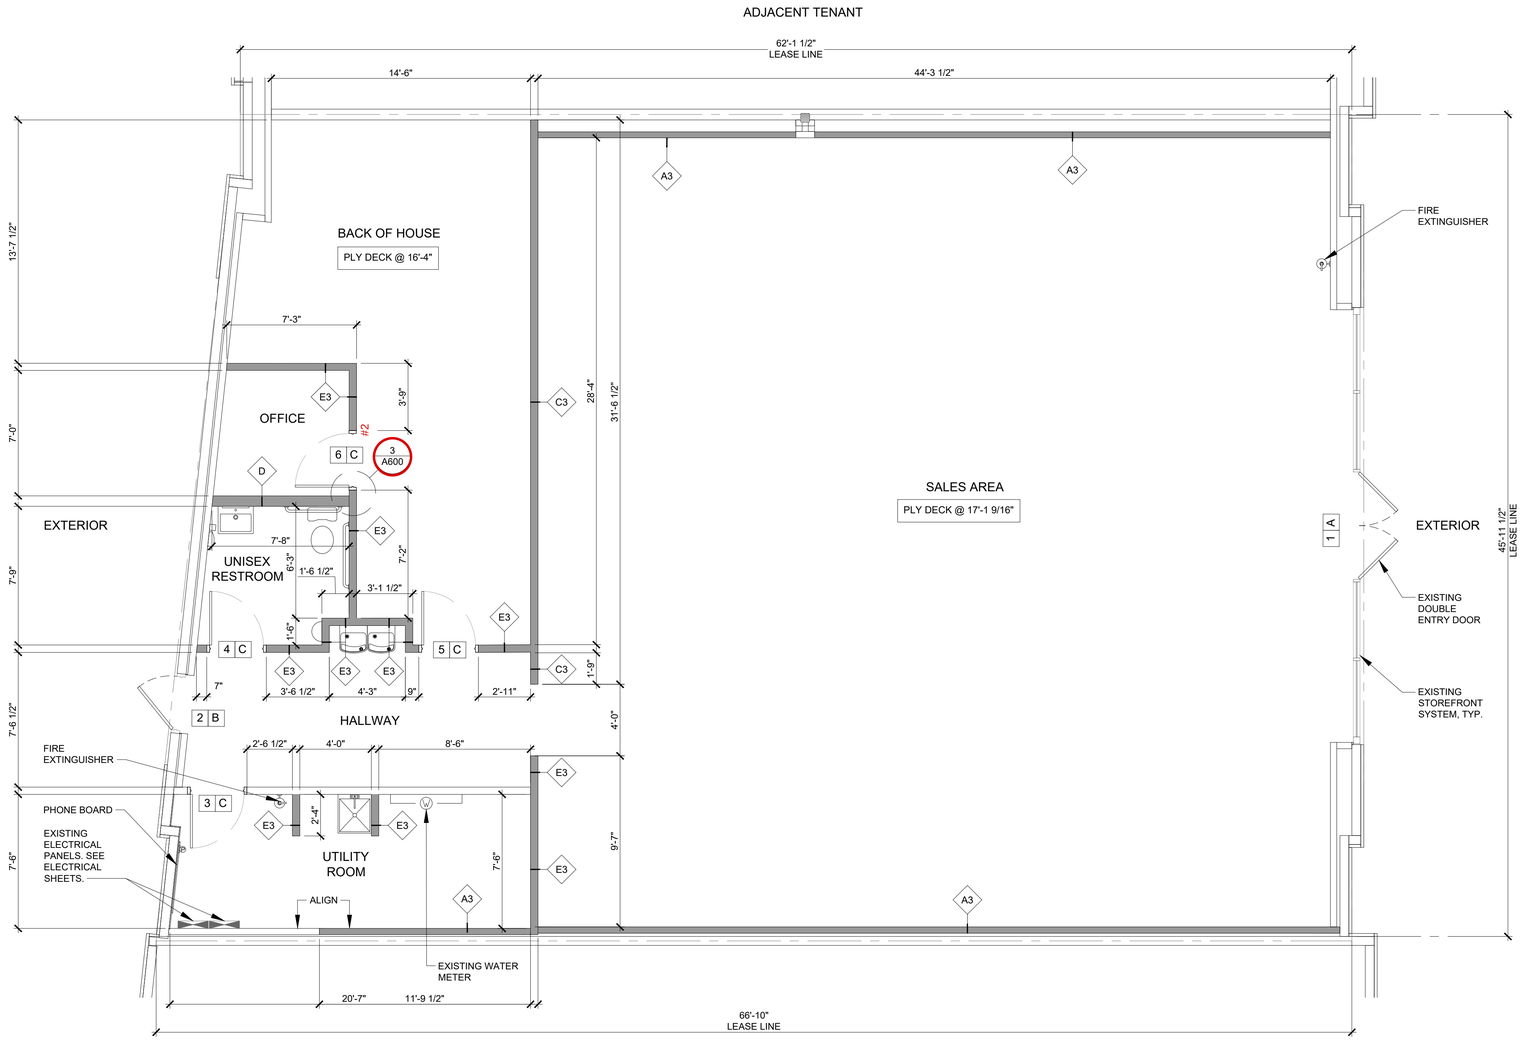

1 CONSTRUCTION FLOOR PLAN
1/4" = 1'-0"

SARGENTI
5840 LEGACY CIR - STE D230, PLANO, TX 75024
T|201.316.5491 ■ WWW.SARGARCH.COM

SEAL:

STATE OF COLORADO ★ ROBERT J. SARGENTI 305929 ★ LICENSED ARCHITECT

DATE SIGNED: 10/15/2026

CONTRACTOR'S NOTES:

WRITTEN DIMENSIONS HOLD PREFERENCE OVER SCALED DIMENSIONS. DO NOT SCALE THE DRAWINGS. THE CONTRACTORS MUST VISIT JOB SITE TO VERIFY ALL EXISTING CONDITIONS AND DIMENSIONS BEFORE SUBMITTING BIDS. REPORT ANY DISCREPANCIES OF ANY CONDITIONS WHICH MAY INTERFERE WITH THE PROPER EXECUTION OF, THE CONTRACT TO THE TENANT'S REPRESENTATIVE. REPORT DISCREPANCIES DURING BIDDING PROCESS AND BEFORE START OF CONSTRUCTION. CHANGE ORDERS NEED TO BE APPROVED BY THE CONSTRUCTION MANAGER FOR ISSUES ARISING FROM THE FIELD CONDITIONS OR CONFLICTS BETWEEN THE PLANS AND THE EXISTING CONDITIONS PRIOR TO THE COMMENCEMENT OF WORK.

	DATE	ISSUE
△	DATE	REVISION

LOCATION:

Consumer Cellular

8283 S. AKRON ST.
SUITE #110
CENTENNIAL, CO 80112

STORE NUMBER:

CO2

PROJECT INFORMATION:


DATE: 10/14/2026
PROJECT NUMBER: 15066 - 26
STORE TYPE: TIER 2
DRAWN BY: GV REVIEWED BY: AN

TITLE:

CONSTRUCTION FLOOR PLAN

SHEET NUMBER:

A100

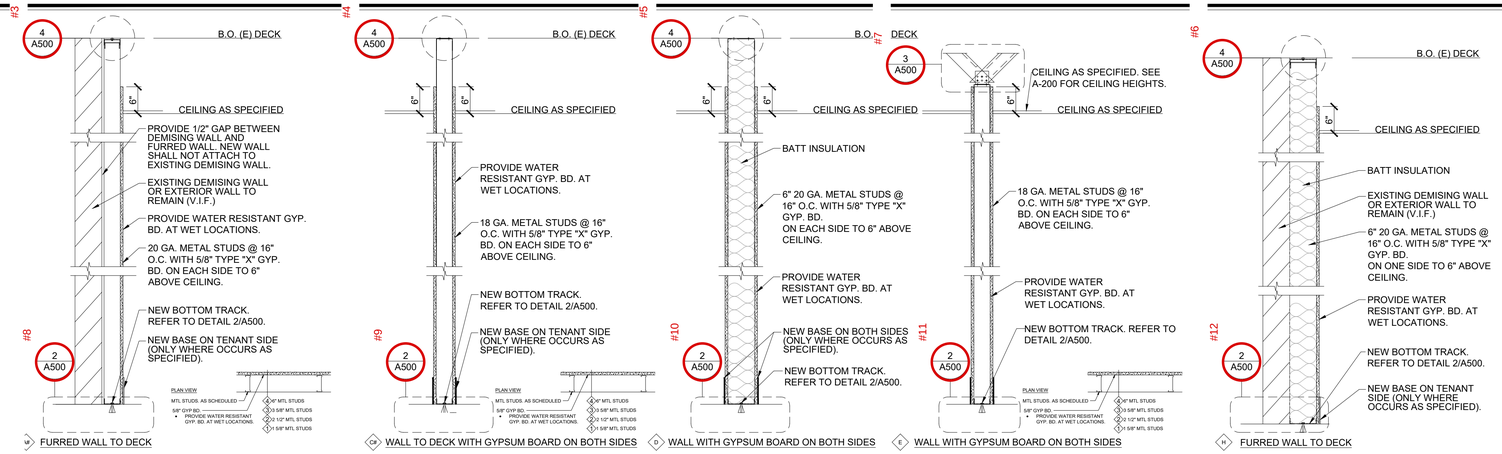

#1
1 PARTITION TYPES
3/4"=1'-0"


FASTENERS:
AT PLYWOOD FLOOR (MIN. 3/4" CDX):
PROVIDE (2) NO. 8 X 3/4" WOOD SCREWS AT 24" O.C. MAX. STAGGERED FOR (1) LAYER GYP. BD. EACH SIDE, 16" O.C. MAX. STAGGERED FOR (2) LAYERS GYP. BD. EACH SIDE.

AT CIP CONCRETE FLOOR:
PROVIDE HILTI X-DNI .145Ø X 1" EMBED (POWDER-ACTUATED FASTENERS PER ES REPORT ESR-1663) AT 24" O.C. MAX. STAGGERED FOR (1) LAYER GYP. BD. EACH SIDE, 16" O.C. MAX. STAGGERED FOR (2) LAYERS GYP. BD. EACH SIDE.


AT POST-TENSIONED CONCRETE FLOOR:
PROVIDE HILTI X-DNI .145Ø X 3/4" EMBED (POWER-ACTUATED FASTENERS PER ES REPORT ESR-1663) AT 24" O.C. MAX. STAGGERED FOR (1) LAYER GYP. BD. EACH SIDE, 16" O.C. MAX. STAGGERED FOR (2) LAYERS GYP. BD. EACH SIDE.


FOR WALLS TO 10'-0" - BRACE WITH 362S137-33 AT 48" O.C. MAX. ALTERNATE DIRECTION OF BRACES ALONG LENGTH OF WALL WHERE POSSIBLE.

FOR WALLS TO 15'-0" - BRACE WITH DOUBLE 362S137-33 AT 48" O.C. MAX. ALTERNATE DIRECTION OF BRACES ALONG LENGTH OF WALL. FASTEN DOUBLED STUDS TOGETHER WITH NO. 8 SCREWS AT 24" O.C. MAX.

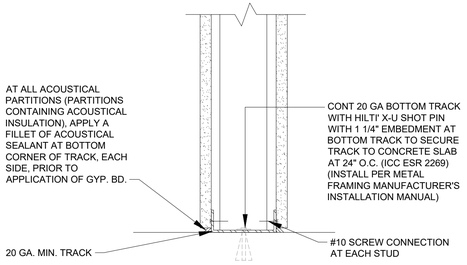


#12
2 PARTITION FLOOR CONNECTION
3" = 1'-0"

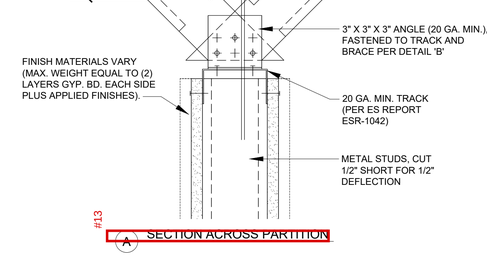


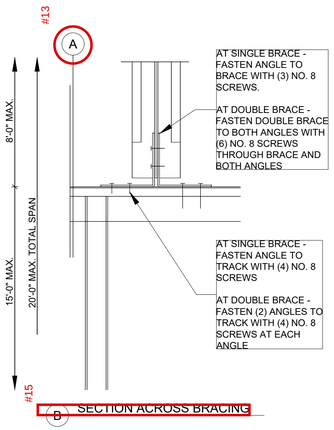

#7
3 TOP OF WALL BRACING DETAIL
3" = 1'-0"

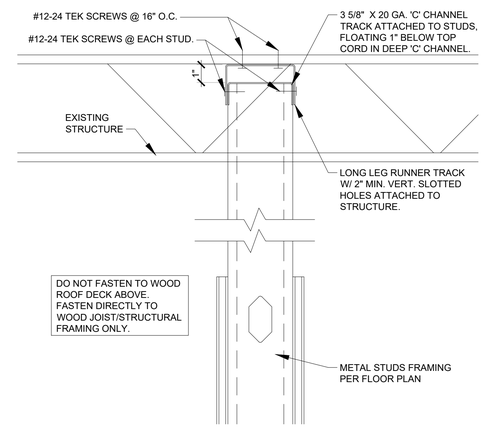


#6
4 ATTACHMENT TO STRUCTURE
3" = 1'-0"

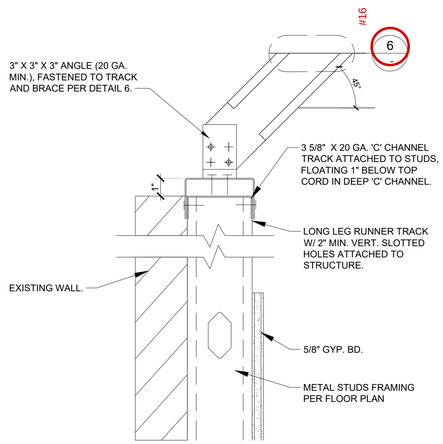

5 ATTACHMENT TO STRUCTURE
3" = 1'-0"

BRACING DETAIL FOR FLOOR SUPPORTED FRAMING ONLY!

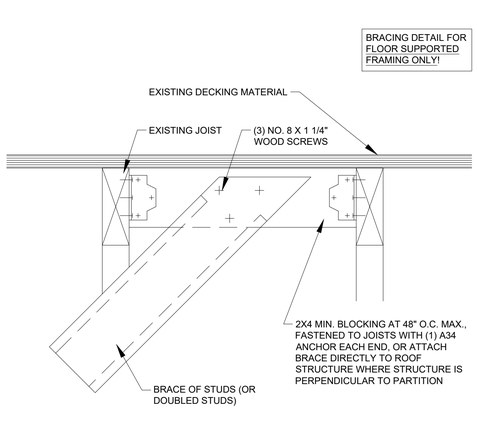

#16
6 ATTACHMENT TO STRUCTURE
3" = 1'-0"

SARGENTI
5840 LEGACY CIR - STE D230, PLANO, TX 75024
T|201.316.5491 ★ WWW.SARGARCH.COM

SEAL:
STATE OF COLORADO
ROBERT J. SARGENTI
305929
LICENSED ARCHITECT
DATE SIGNED: 10/15/2026

CONTRACTOR'S NOTES:
WRITTEN DIMENSIONS HOLD PREFERENCE OVER SCALED DIMENSIONS. DO NOT SCALE THE DRAWINGS. THE CONTRACTORS MUST VISIT JOB SITE TO VERIFY ALL EXISTING CONDITIONS AND DIMENSIONS BEFORE SUBMITTING BIDS. REPORT ANY DISCREPANCIES OF ANY CONDITIONS WHICH MAY INTERFERE WITH THE PROPER EXECUTION OF, THE CONTRACT TO THE TENANT'S REPRESENTATIVE. REPORT DISCREPANCIES DURING BIDDING PROCESS AND BEFORE START OF CONSTRUCTION. CHANGE ORDERS NEED TO BE APPROVED BY THE CONSTRUCTION MANAGER FOR ISSUES ARISING FROM THE FIELD CONDITIONS OR CONFLICTS BETWEEN THE PLANS AND THE EXISTING CONDITIONS PRIOR TO THE COMMENCEMENT OF WORK.

	DATE	ISSUE

△	DATE	REVISION

LOCATION:
Consumer Cellular®
8283 S. AKRON ST.
SUITE #110
CENTENNIAL, CO 80112

STORE NUMBER:
CO2

PROJECT INFORMATION:
DATE: 10/14/2026
PROJECT NUMBER: 15066 - 26
STORE TYPE: TIER 2
DRAWN BY: GV
REVIEWED BY: AN

TITLE:
PARTITION TYPES & DETAILS


SHEET NUMBER:
A500

DOOR SCHEDULE


DOOR #	DESCRIPTION	DOOR				FRAME		DETAILS			FIRE RATING	HARDWARE	FURNISHED BY	INSTALLED BY	NOTES
		SIZE	TYPE	MATERIAL	FINISH	MATERIAL	FINISH	SILL	JAMB	HEAD					
1A	(E) EXTERIOR MAIN ENTRY/EXIT	(2) 3'-0"X7'-0"X1 3/4" V.I.F.	A	EXISTING	EXISTING	EXISTING	EXISTING	EXISTING	EXISTING	EXISTING	-	EXISTING	EXISTING	EXISTING	1, 2, 3, 4, 5, 6, 29, 30, 31,32, 33
2B	(E) EXTERIOR HALLWAY	3'-0"X7'-0"X1 3/4" V.I.F.	B	EXISTING	PAINT PT-2	EXISTING	PAINT PT-2	EXISTING	EXISTING	EXISTING	-	A6, C2, H1, P1	EXISTING	EXISTING	3, 5, 6, 7, 8, 9, 10, 26, 34
3C	UTILITY	3'-0"X7'-0"X1 3/4"	C	WOOD (WHITE BIRCH)	CLEAR SATIN STAIN	HOLLOW METAL	P-2 SEMI GLOSS	A502	3/A600	2/A600	-	A10, C3, G2, H1, L6	G.C	G.C	
4C	UNISEX RESTROOM	3'-0"X7'-0"X1 3/4"	C	WOOD (WHITE BIRCH)	CLEAR SATIN STAIN	HOLLOW METAL	P-2 SEMI GLOSS	A502	3/A600	2/A600	-	A10, C3, G2, H1, L6	G.C	G.C	
5C	BOH	3'-0"X7'-0"X1 3/4"	C	WOOD (WHITE BIRCH)	CLEAR SATIN STAIN	HOLLOW METAL	P-2 SEMI GLOSS	A502	#23 3/A600	#24 2/A600	-	A10, C3, E3, G2, H1	G.C	G.C	
6C	OFFICE	3'-0"X7'-0"X1 3/4"	C	WOOD (WHITE BIRCH)	CLEAR SATIN STAIN	HOLLOW METAL	P-2 SEMI GLOSS	A502	3/A600	2/A600	-	A10, C3, G2, H1, L6	G.C	G.C	

DOOR HARDWARE LEGEND


ACCESSORIES				CLOSERS		ELECTRONIC HARDWARE		GASKETS		HINGES		LOCKSET		PANIC ALARM	
A1	PUSH/PULL BARS - ROCKWOOD BF 15847-1	A9	IVES 10 X 34 8400 KICK PLATE	C1	LCN 6030	E1	SECURITECH TEL-210S*	G1	IVES FS436 DOORSTOP	H1	MCKINNEY TA2714 NRP 4.5X4.5 HINGE	L1	BEST CYLINDER LOCK	P1	YALE 6100ED A-ALR 36 BSP 6000 SERIES
A2	INTERMEDIATE PIVOT - RIXON #M19 - OFFSET	A10	IVES #20 SILENCERS	C2	LCN 5010	E2	SECURITECH 4850-TTBG-37 5-POINT LOCK	G2	IVES WS406 CCV DOORSTOP	H2	HAGER 253** 4 1/2 " WIDE PIVOT HINGE	L2	QMI CYLINDER SILVER SHUTTER CURTAIN - LOCK OUTSIDE		
A3	TOP PIVOT - RIXON #180 - OFFSET	A11	TOP PIVOT - RIXSON 340	C3	LCN 4000 SERIES	E3	TRILOGY DL2700IC-26D	G3	DOOR SWEEP	H3	HAGER BB1191 NRP HINGE	L3	QMI CYLINDER SILVER SHUTTER CURTAIN - LOCK INSIDE-OUTSIDE		
A4	BOTTOM PIVOT - RIXON #147 - OFFSET	A12	CENTER HUNG PIVOT SET - RIXSON 370	C4		E4	SECURITECH DETEX V40-EB-HD-AL-REW-IC7-99	G4		H4	BOTTOM PIVOT - RIXSON #147 - OFFSET	L4	FALCON ND10S RHODES PASSAGE LATCH SET		
A5	NATIONAL GUARD US32D, US28, US15 FINISH THRESHOLD	A13	IVES U696 PEEP HOLE	C5		E5		G5		H5		L5	FALCON T581 AVALON STOREROOM LOCKSET		
A6	NATIONAL GUARD MILL FINISH THRESHOLD	A14	CRL BRUSHED STAINLESS 48" EXTRA LENGTH LADDER STYLE BACK-TO-BACK PULL	C6		E6		G6		H6		L6	FALCON TM301S AVALON PRIVACY LATCH SET		
A7	NATIONAL GUARD CRL8010ADJ THRESHOLD	A15	DOOR CLOSERS USA - STOREFRONT DOOR ADA COMPLIANT OFFSET PULL HANDLE AND SINGLE BEND PUSH BAR SET, CLEAR ANODIZED FINISH	C7		E7		G7		H7		L7	SCHLAGE D70PD RHODES OFFICE LOCKSET		
A8	IVES SR-64 SILENCERS	A16	BEA 10PBS451 STAINLESS STEEL PUSH PLATE, 4.5 IN. SQUARE, BLUE HANDICAP LOGO AND TEXT	C8		E8		G8		H8		L8	FALCON 8242-AL AUTOMATIC DOOR OPENER		

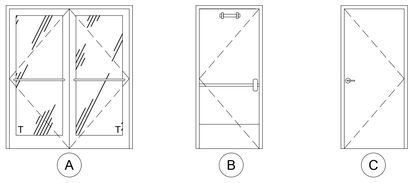

1 DOOR TYPES

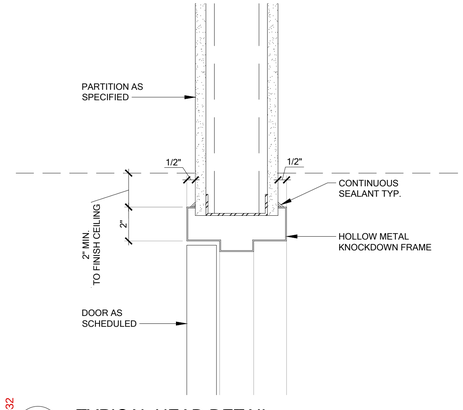

#32 2 TYPICAL HEAD DETAIL
3" = 1'-0"

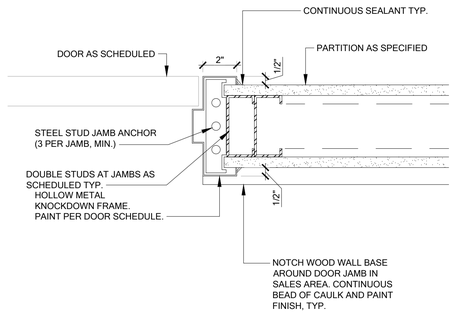

#28 3 TYPICAL JAMB DETAIL
3" = 1'-0"

DOOR NOTES LEGEND

1. SIGNAGE BY G.C.; PROVIDE SIGNAGE ABOVE DOOR(S), SEE SHEET G002.
2. POSTAL ADDRESS NUMBERS PER LANDLORD REQUIREMENTS.
3. ADA PANIC HARDWARE TO BE INSTALLED ON INSIDE WHEN REQUIRED BY LOCAL JURISDICTION.
4. LOCKS SHALL BE KEY-OPERATED WITH INDICATOR TO BE READILY DISTINGUISHABLE AS LOCKED.
5. WEATHER STRIPPING AND SWEEPS TO BE INSTALLED AS REQUIRED.
6. EXISTING DOOR - VERIFY EXISTING HARDWARE MEETS REQUIREMENTS OF, OR IS EQUAL TO SPECIFIED HARDWARE. REPLACE WITH SPECIFIED HARDWARE AS REQUIRED.
7. KICK PLATE TO BE PROVIDED ON PUSH SIDE. IF NOT, PROVIDE AND INSTALL NEW KICK PLATE ON PUSH SIDE OF DOOR: IVES 8400 10"X2" LDW630.
8. VERIFY ALL EXISTING DOOR HARDWARE TO COMPLY WITH CURRENT CODE.
9. HARDWARE PURCHASED AND INSTALLED BY G.C., DOOR PREP BY G.C..
10. PROVIDE NON REMOVABLE PINS (NRP), PIANO TYPE HINGE OR GEARED HINGE (ROTON) AS APPROVED BY CONSUMER CELLULAR ON IN-SWINGING DOOR.
11. ROLL DOWN SHUTTER SHALL BE OPERABLE FROM INSIDE WITHOUT THE USE OF A KEY OR SPECIAL KNOWLEDGE OR EFFORT WHILE THE SPACE IS OCCUPIED.
12. SHUTTER SHALL REMAIN SECURED IN THE FULL OPEN POSITION DURING THE PERIOD OF OCCUPANCY BY THE GENERAL PUBLIC.
13. MAX SHUTTER SIZE: 160 SF OR 150" HIGH.
14. PROVIDE RISER AS REQUIRED FOR CARPET INSTALLATION.
15. PROVIDE LATCH GUARD USE "BG" GUARD PLATE.
16. PROVIDE 5 1/2" THROAT.
17. VERTICALLY STIFFED HOLLOW METAL DOOR RECOMMENDED FOR SECURITY AND EASE OF INSTALLATION.
18. LOCK HARDWARE PURCHASED AND INSTALLED BY G.C. THROUGH APPROVED VENDOR, SECURITY SOURCE.
19. MOUNT AT UPPER CORNER OF DOOR AND JAMB.
20. PROVIDE APPROPRIATE RESTROOM SIGNAGE, SEE SHEET G002 & THE ENLARGED RESTROOMS PLANS.
21. LOCK HARDWARE PURCHASED AND INSTALLED BY SECURITY SOURCE (VENDOR), DOOR PREP BY G.C..
22. ORDER 6" BOTTOM BAR WITH 60° BEVEL (ALTERNATE OPTION: 10" BOTTOM BAR), 7-PIN KEYED CYLINDERS (CONSTRUCTION CORES) WITH THUMBTURNS ON INSIDE, AND PATCH HINGES WITH DOOR.
23. PROV[illegible] LOU[illegible] VEN[illegible] DOC[illegible] O.N. SEE MECHANICAL SHEETS.
24. G.C.: [illegible]AINT[illegible]ICH[illegible]STOF[illegible]" ON DOOR.
25. PROV[illegible]IC-7[illegible]MOR[illegible]HOL[illegible]3 AND INSTAKEY CORE.
26. G.C. [illegible]DD[illegible]ER 1[illegible]"EEP[illegible]E TO REAR EXIT DOOR WHEN NONE IS EXISTING. VIEWER TO BE INST[illegible]D AF[illegible]XIM[illegible]Y 6[illegible]F., CENTERED HORIZONTALLY ON DOOR AND SUITABLE FOR METAL DOOR[illegible]STAL[illegible]ON [illegible]WID[illegible]GLE LENS. SEAL AND SECURE VIEWER TIGHTLY TO MAINTAIN DOOR INTE[illegible]Y. U[illegible]TED[illegible]90 [illegible]TE FIRE DOOR (UL10B). #25 #26 #27 #28
27. SELF-LA[illegible]RING DOOR HARDWARE PURCHASED AND INSTALLED THROUGH SECURITY SOURCE (VENDOR) BY G.C. DOOR PREP BY G.C.
28. SUPPLY COMPLETE EXIT DEVICE PART NUMBER BASED ON DOOR SIZE AS REQUIRED. 36" DOOR = 36, NARROW STILE = NS. DOUBLE DOOR = 2D[illegible] BY FOR NARROW STILE, ADD NARROW STILE KIT #101879-1.
29. PROV[illegible]ADE[illegible]NAL[illegible]RME[illegible]TE PIVOT FOR DOORS 8'-0" AND TALLER.
30. DO N[illegible]PROV[illegible]HOL[illegible]"EN [illegible]CE ON DOOR IF TACTILE SIGNAGE IS MOUNTED TO DOOR.
31. G.C.: [illegible]IELD[illegible]RIFY[illegible]DITH[illegible]F EXISTING DOOR HARDWARE AND COORDINATE WITH OWNER IF REPL[illegible]MEN[illegible]REQ[illegible]ED.
32. G.C.: [illegible]LEA[illegible]ISTIN[illegible]OOF[illegible] LIKE NEW CONDITION. G.C. TO INSTALL BOTTOM RAIL ADAPTER (CRL[illegible]AD, DO[illegible]CL[illegible]RS U[illegible]SF-ADA-36KIT-A OR EQ) TO EXTEND BOTTOM RAIL TO 10" MIN. TO MEET[illegible]DE W[illegible]N REQ[illegible]ED. #29 #30 #31 #32
33. GC TO ADD ADDRESS SUITE NUMBERS TO ENTRY/ EXIT DOORS WHEN NOT EXISTING. NUMBERS HAVE HIGH CONTRAST WITH DOOR SURFACE. NUMBER TO BE 4" IN HEIGHT AND INSTALLED 60" AFF CENTERED ON DOOR.
34. GC TO INSTALL BLANK PLATE TO EXTERIOR SIDE OF DOOR AT HARDWARE LOCATION, IF REQUIRED.

GENERAL NOTES

A. HARDWARE FINISHES SHALL BE SATIN CHROME 626 UNLESS NOTED OTHERWISE.
B. ALL LOCKSETS AND LATCH SETS SHALL BE LEVER HANDLES.
C. VERIFY ALL EXISTING DOOR HARDWARE TO COMPLY WITH CURRENT CODE. SHALL NOT REQUIRE TIGHT GRASPING, TIGHT PINCHING OR TWISTING OF THE WRIST TO OPERATE. VERIFY EXISTING DOOR HANDLES, PULLS, LATCHES, LOCKS AND OTHER OPERATING DEVICES ARE INSTALLED BETWEEN 34" - 48" AFF.
D. G.C. TO PURCHASE AND INSTALL CORES PER HARDWARE SCHEDULE FROM CONSUMER CELLULAR'S VENDOR AT TIME OF STORE TURNOVER.
E. AT EXISTING DOORS TO REMAIN, VERIFY THAT EXISTING DOOR AND HARDWARE MEETS OR EXCEEDS THE REQUIREMENTS OF THESE SPECIFICATIONS. REPLACE AS REQUIRED.
F. DOORS WITH CLOSERS SHALL COMPLY WITH THE FOLLOWING:
   1. 5LBF MAXIMUM FORCE FOR OPENING DOOR
   2. FROM AN OPEN POSITION OF 70°, DOOR SHALL TAKE AT LEAST 3 SECONDS TO MOVE TO A POINT 3 INCHES FROM THE LATCH, MEASURED TO THE LEADING EDGE OF THE DOOR.
G. DOORS/FRAMES SHALL BE "TIMELY" (OR EQUAL) FACTORY FINISH TO MATCH P1.
H. LEVER SETS TO BE FALCON GRADE 1 WITH INTERCHANGEABLE CORES. T-SERIES OR APPROVED EQUAL LEVER TO BE AVALON STYLE.
I. SECURITECH TRIDENT EXIT DEVICES SUPPLIED BY LP NETWORK INC., DBA SECURITY SOURCE (888) 836-2137
J. EXIT DOORS SHALL BE READILY OPENABLE FROM THE EGRESS SIDE, WITHOUT THE USE OF A KEY OR SPECIAL KNOWLEDGE OR EFFORT. THE UNLATCHING OF ANY EXIT DOOR SHALL NOT REQUIRE MORE THAN ONE OPERATION. INSTALL ALL PANIC HARDWARE PER PLANS.
K. ALL DOORS EXCEPT THE MAIN ENTRANCE DOORS SHALL COMPLY WITH ICC / ANSI A-117.1 2009 SECTION 309.4 AND 404.2.6, AND IBC SECTION 1008.1.9. THE OPERABLE PARTS OF THE DOOR HARDWARE SHALL HAVE A SHAPE THAT IS EASY TO GRASP WITH ONE HAND AND DOES NOT REQUIRE TIGHT GRASPING, PINCHING OR THE TWISTING OF THE WRIST. THE FORCE TO ACTIVATE THE DOOR HARDWARE SHALL BE 5.0 POUNDS MAXIMUM.

SARGENTI
5840 LEGACY CIR - STE D230, PLANO, TX 75024
T|201.316.5491 ★ WWW.SARGARCH.COM

SEAL:

STATE OF COLORADO ★ ROBERT J. SARGENTI 305929 ★ LICENSED ARCHITECT

DATE SIGNED: 10/15/2026

CONTRACTOR'S NOTES:

WRITTEN DIMENSIONS HOLD PREFERENCE OVER SCALED DIMENSIONS. DO NOT SCALE THE DRAWINGS. THE CONTRACTORS MUST VISIT JOB SITE TO VERIFY ALL EXISTING CONDITIONS AND DIMENSIONS BEFORE SUBMITTING BIDS. REPORT ANY DISCREPANCIES OF ANY CONDITIONS WHICH MAY INTERFERE WITH THE PROPER EXECUTION OF, THE CONTRACT TO THE TENANT'S REPRESENTATIVE. REPORT DISCREPANCIES DURING BIDDING PROCESS AND BEFORE START OF CONSTRUCTION. CHANGE ORDERS NEED TO BE APPROVED BY THE CONSTRUCTION MANAGER FOR ISSUES ARISING FROM THE FIELD CONDITIONS OR CONFLICTS BETWEEN THE PLANS AND THE EXISTING CONDITIONS PRIOR TO THE COMMENCEMENT OF WORK.

	DATE	ISSUE
△	DATE	REVISION

LOCATION:

Consumer Cellular

8283 S. AKRON ST.
SUITE #110
CENTENNIAL, CO 80112

STORE NUMBER:

CO2

PROJECT INFORMATION:

DATE: 10/14/2026
PROJECT NUMBER: 15066 - 26
STORE TYPE: TIER 2
DRAWN BY: GV REVIEWED BY: AN

TITLE:

DOOR SCHEDULE AND DETAILS

SHEET NUMBER:

A600