# DOOR SCHEDULE

| MARK | ROOM | COUNT | WIDTH | HEIGHT | THICKNESS | DOOR TYPE | DOOR MATERIAL | DOOR FINISH | FRAME TYPE | FRAME MATERIAL | FRAME FINISH | HARDWARE GROUP | FIRE RATING | COMMENTS |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 100 | 100 | 1 | 6' - 0" | 7' - 0" | EXISTING | B EXISTING | ALUMINUM | EXISTING | EXISTING | ALUMINUM | EXISTING | A2 | 0 | VERIFY HARDWARE REQUIREMENTS |
| 101 | 101 | 1 | 3' - 0" | 7' - 0" | 1 3/4" | A | S.C. WOOD | PAINT | 1 | HOLLOW METAL | PAINT | B2 | 0 | PAINT TO MATCH ADJACENT WALL. KEYPAD LOCK. VERIFY WITH OWNER. |
| 102 | 103 | 1 | 3' - 0" | 7' - 0" | EXISTING | A EXISTING | S.C. WOOD | PAINT | EXISTING | HOLLOW METAL | PAINT | B1 | 0 | PAINT TO MATCH ADJACENT WALL |
| 103 | 104 | 1 | 3' - 0" | 7' - 0" | EXISTING | A EXISTING | S.C. WOOD | PAINT | EXISTING | HOLLOW METAL | PAINT | B1 | 0 | PAINT TO MATCH ADJACENT WALL |
| 104 | 101 | 1 | 3' - 0" | 7' - 0" | EXISTING | C EXISTING | HOLLOW METAL | PAINT | EXISTING | HOLLOW METAL | PAINT | B5 | 0 | PAINT TO MATCH ADJACENT WALL |

# HARDWARE GROUPS

**SINGLE OR PAIR OF GLASS DOORS**

A1 SINGLE STOREFRONT GLASS DOOR (S)

| | |
|---|---|
| OPERATING HARDWARE | MS 1850S |
| CYLINDER GUARD | MS 4043 |
| EXIT INDICATOR | 4089 |
| THRESHOLD | 200D |
| PUSH / PULL HANDLE | P-751 A |
| PARALLEL ARM CLOSER | LCN P1460 SERIES |

A2 PAIR OF STOREFRONT GLASS DOORS - ENTRY

| | |
|---|---|
| (3 POINT LOCK) | |
| OPERATING HARDWARE | MS 1850S |
| THRESHOLD BOLT | 4015 |
| HEADER BOLT | 4085 |
| CYLINDER GUARD | MS 4043 |
| EXIT INDICATOR | 4089 |
| THRESHOLD | 200D |
| PUSH / PULL HANDLE | P-751 A |
| PARALLEL ARM CLOSER | LCN P1460 SERIES |

A3 SINGLE STOREFRONT GLASS DOOR - EGRESS

| | |
|---|---|
| HEADERS | DS-4022 |
| CYLINDER GUARD | MS 4043 |
| TAPERED RAIL | DS-00 |
| CLOSER | RTS-85 |
| PARALLEL ARM CLOSER | LCN P1460 SERIES |
| THRESHOLD | 200D |
| PUSH PADDLE OPERATOR | ADAMS RITE 4590 02 |
| LATCH | ADAMS RITE 4510 25 |
| PULL | |

A4 PAIR STOREFRONT GLASS DOORS - VEST INTERIOR

| | |
|---|---|
| PUSH PULL | P-751 A |

**SINGLE WOOD OR HOLLOW METAL DOOR**

B1 TOILET ROOM DOOR

| | |
|---|---|
| BUTT HINGES | 450 T88 |
| STOP | W1276 CCS |
| CLOSER | 8581 BF |
| BATH PRIVACY LATCH | ND 40 S SCHLAGE "ND" SERIES "SPARTA" - #626 SATIN CHROMIUM PLATTED |

B2 INTERIOR DOOR WITH KEYPAD LOCK

| | |
|---|---|
| BUTT HINGES | 450 T88 |
| STOP | W1276 CCS |
| CLOSER | 8581 BF |
| KEYPAD LOCKSET | VERIFY SPEC WITH OWNER |

B3 INTERIOR DOOR WITHOUT KEYPAD LOCK

| | |
|---|---|
| BUTT HINGES | 450 T88 |
| STOP | W1276 CCS |
| CLOSER | 8581 BF |
| PASSAGE LOCK | ND 10 S SCHLAGE "ND" SERIES "SPARTA" LATCH #626 SATIN CHROME |

B4 STORAGE ROOM DOOR WITHOUT KEYPAD LOCK

| | |
|---|---|
| BUTT HINGES | 450 T88 |
| STOP | W1276 CCS |
| CLOSER | 8581 BF |
| STORAGE LOCK | ND 80 PD SCHLAGE "ND" SERIES "SPARTA" LATCH #626 SATIN CHROME |

B5 EXTERIOR DOOR

| | |
|---|---|
| BUTT HINGES | 450 T88 |
| STOP | W1276 CCS |
| CLOSER | 8581 BF |
| SEALS | S88 |
| LATCH GUARD | LP2 |
| THRESHOLD | 200D |
| DOOR SHOE | 216DV |
| VIEWER | U698 BS6D |
| EXIT DEVICE | ADAMS RITE 8300 SERIES |
| LATCH | ADAMS RITE 4510 25 |

B6 REAR EXIT DOOR - INTERIOR


| | |
|---|---|
| BUTT HINGES | 450 T88 |
| STOP | W1276 CCS |
| CLOSER | 8581 BF |
| SEALS | S88 |
| LATCH GUARD | LP2 |
| VIEWER | U698 BS6D |
| EXIT DEVICE | ADAMS RITE 8300 SERIES |
| LATCH | ADAMS RITE 4510 25 |

**DOOR CLEARANCES FOR ACCESSIBILITY:**
THE DASHED RECTANGLES AT DOORS INDICATE CLEAR FLOOR SPACE NEEDED FOR A DISABLED PERSON TO MANEUVER. NO OBJECTS (WALLS, FIXTURES, ETC.) ARE TO BE PLACED WITHIN THE DASHED RECTANGLES. SEE SHEET A0.2 FOR ADDITIONAL INFORMATION.


**CLEAR FLOOR SPACE:**
CLEAR FLOOR SPACE DIMENSIONS ARE FROM FACE OF FINAL FINISH MATERIAL WHICH INCLUDES ANY PROJECTING FINISHES SUCH AS; CASING, FLOOR BASE MATERIAL, CORNER GUARDS, ETC. BEYOND THE FINISH WALL. VERIFY WALL TYPES AND WALL FINISHES TO MAINTAIN PROPER CLEARANCES.

# DOOR & FRAME ELEVATIONS

MAY NEED TO ALTER THIS TO BE ONE DOOR

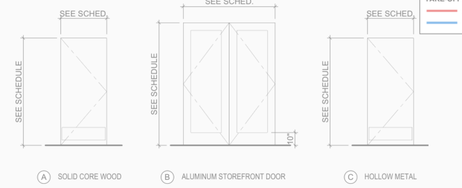


A SOLID CORE WOOD  B ALUMINUM STOREFRONT DOOR  C HOLLOW METAL

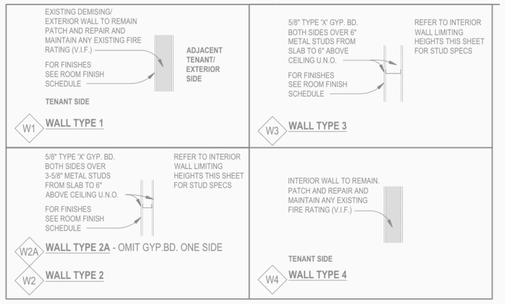


2 A2.0 WALL TYPES 1/2" = 1'-0"

# WALL LEGEND


EXISTING CONSTRUCTION TO REMAIN

FULL HEIGHT PARTITION TO 6" ABOVE CEILING U.N.O.


FULL HEIGHT PARTITION TO 6" ABOVE CEILING WITH SOUND BATT INSULATION U.N.O.

# DOOR NOTES


1. REFER TO THE PARTITION PLAN AND SPECIFICATIONS FOR ADDITIONAL INFORMATION.
2. ALL DOORS AND FRAMES TO BE PAINTED WITH SEMI-GLOSS PAINT TO MATCH ADJACENT WALL COLOR.
3. PROVIDE A SIGN ON OR NEAR THE MAIN EXIT DOOR READING: "THIS DOOR TO REMAIN UNLOCKED WHEN BUILDING IS OCCUPIED."
4. DOOR HANDLES, PULLS OR KNOBS SHALL BE INSTALLED AT 40" ABOVE FINISH FLOOR. ALL OTHER OPERABLE PARTS OF DOOR HARDWARE (SUCH AS DEADBOLTS, KEYHOLES, ETC.) ARE TO BE CENTERED BETWEEN 34" AND 44" ABOVE FINISH FLOOR. IF EXISTING BUILDING STANDARD EXISTS, MATCH BUILDING STANDARD AND CONFIRM COMPLIANCE WITH ACCESSIBILITY REQUIREMENTS.
5. MAXIMUM UNDERCUT OF ALL DOORS NOT IN A RATED CORRIDOR SHALL NOT EXCEED 1/2" ABOVE FINISH FLOOR SURFACE.
6. ALL REQUIRED FIRE DOORS SHALL BEAR A LABEL FROM A RECOGNIZED AGENCY SHOWING THE SPECIFIC RATING.
7. EXIT DOORS SHALL BE OPERABLE FROM THE INSIDE WITHOUT THE USE OF A KEY OR ANY SPECIAL KNOWLEDGE OR EFFORT.

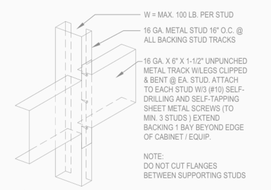



8 A2.0 BACKING DETAIL FOR MISC. EQUIP. 1 1/2" = 1'-0"

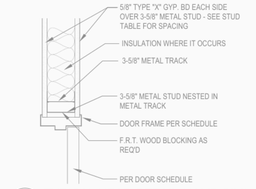



7 A2.0 TYPICAL HEAD DETAIL (JAMB SIM) 1 1/2" = 1'-0"

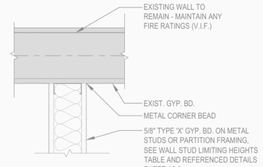



6 A2.0 WALL CONNECTION AT DEMISING 1 1/2" = 1'-0"

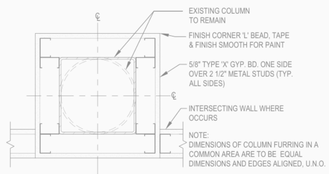


5 A2.0 NON-RATED COLUMN FURRING 1 1/2" = 1'-0"

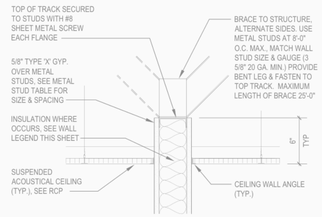


4 A2.0 TYPICAL WALL AND CEILING DETAIL 1 1/2" = 1'-0"




3 A2.0 TYPICAL WALL - BASE DETAIL 1 1/2" = 1'-0"

# INTERIOR WALL LIMITING HEIGHTS

NON-COMPOSITE-FULLY SHEATHED WITH GYPSUM BOARD OR PLYWOOD ON BOTH SIDES OF WALL. OPTION: CONTINUOUS BRIDGING/ BLOCKING AT 60" O.C. FULL HEIGHT OF WALL

| (S) STUD MEMBER | Lu (IN.) | SPACING (IN.) O.C. | 5 PSF L/240 | (S) STUD MEMBER | Lu (IN.) | SPACING (IN.) O.C. | 5 PSF L/240 |
|---|---|---|---|---|---|---|---|
| 162S125-18 | 29" | 12 | 7'-8" | 400S125-27 | 28" | 12 | 17'-10" |
| 162S125-18 | | 16 | 6'-11" | 400S125-27 | | 16 | 16'-2" |
| 162S125-18 | | 24 | 6'-1" | 400S125-27 | | 24 | 14'-1" |
| 162S125-27 | 29" | 12 | 8'-11" | 400S125-30 | 28" | 12 | 18'-5" |
| 162S125-27 | | 16 | 8'-2" | 400S125-30 | | 16 | 16'-8" |
| 162S125-27 | | 24 | 7'-1" | 400S125-30 | | 24 | 14'-7" |
| 162S125-30 | 29" | 12 | 9'-3" | 400S125-33 | 28" | 12 | 19'-0" |
| 162S125-30 | | 16 | 8'-5" | 400S125-33 | | 16 | 17'-3" |
| 162S125-30 | | 24 | 7'-4" | 400S125-33 | | 24 | 15'-1" |
| 162S125-33 | 29" | 12 | 9'-6" | 400S125-43 | 28" | 12 | 20'-9" |
| 162S125-33 | | 16 | 8'-8" | 400S125-43 | | 16 | 18'-10" |
| 162S125-33 | | 24 | 7'-7" | 400S125-43 | | 24 | 16'-5" |
| 250S125-18 | 29" | 12 | 10'-6" | 400S125-54 (50 KSI) | 22" | 12 | 22'-2" |
| 250S125-18 | | 16 | 9'-7" | 400S125-54 (50 KSI) | | 16 | 20'-2" |
| 250S125-18 | | 24 | 8'-3" | 400S125-54 (50 KSI) | | 24 | 17'-7" |
| 250S125-27 | 29" | 12 | 12'-4" | 400S125-68 (50 KSI) | 22" | 12 | 23'-8" |
| 250S125-27 | | 16 | 11'-3" | 400S125-68 (50 KSI) | | 16 | 21'-6" |
| 250S125-27 | | 24 | 9'-10" | 400S125-68 (50 KSI) | | 24 | 18'-10" |
| 250S125-30 | 29" | 12 | 12'-9" | 600S125-30 | 27" | 12 | 25'-2" |
| 250S125-30 | | 16 | 11'-7" | 600S125-30 | | 16 | 22'-11" |
| 250S125-30 | | 24 | 10'-2" | 600S125-30 | | 24 | 18'-11" |
| 250S125-33 | 29" | 12 | 13'-2" | 600S125-33 | 27" | 12 | 26'-2" |
| 250S125-33 | | 16 | 12'-0" | 600S125-33 | | 16 | 23'-9" |
| 250S125-33 | | 24 | 10'-6" | 600S125-33 | | 24 | 20'-6" |
| 250S125-43 | 29" | 12 | 14'-4" | 600S125-43 | 27" | 12 | 28'-9" |
| 250S125-43 | | 16 | 13'-0" | 600S125-43 | | 16 | 26'-1" |
| 250S125-43 | | 24 | 11'-5" | 600S125-43 | | 24 | 22'-10" |
| 362S125-18 | 28" | 12 | 14'-0" | 600S125-54 (50 KSI) | 21" | 12 | 30'-9" |
| 362S125-18 | | 16 | 12'-2" | 600S125-54 (50 KSI) | | 16 | 27'-11" |
| | | | | 600S125-54 (50 KSI) | | 24 | 24'-5" |
| 362S125-27 | 28" | 12 | 16'-6" | 600S125-68 (50 KSI) | 21" | 12 | 33'-0" |
| 362S125-27 | | 16 | 15'-0" | 600S125-68 (50 KSI) | | 16 | 30'-0" |
| 362S125-27 | | 24 | 13'-1" | 600S125-68 (50 KSI) | | 24 | 26'-2" |
| 362S125-30 | 28" | 12 | 17'-0" | 800S125-43 | 26" | 12 | 36'-1" |
| 362S125-30 | | 16 | 15'-6" | 800S125-43 | | 16 | 32'-9" |
| 362S125-30 | | 24 | 13'-6" | 800S125-43 | | 24 | 28'-8" |
| 362S125-33 | 28" | 12 | 17'-7" | 800S125-54 (50 KSI) | 21" | 12 | 38'-9" |
| 362S125-33 | | 16 | 16'-0" | 800S125-54 (50 KSI) | | 16 | 35'-2" |
| 362S125-33 | | 24 | 14'-0" | 800S125-54 (50 KSI) | | 24 | 30'-9" |
| 362S125-43 | 28" | 12 | 19'-2" | 800S125-68 (50 KSI) | 21" | 12 | 41'-11" |
| 362S125-43 | | 16 | 17'-5" | 800S125-68 (50 KSI) | | 16 | 36'-1" |
| 362S125-43 | | 24 | 15'-3" | 800S125-68 (50 KSI) | | 24 | 33'-4" |
| 362S125-54 (50 KSI) | 22" | 12 | 20'-6" | | | | |
| 362S125-54 (50 KSI) | | 16 | 18'-7" | | | | |
| 362S125-54 (50 KSI) | | 24 | 16'-3" | | | | |
| 362S125-68 (50 KSI) | 22" | 12 | 21'-11" | | | | |
| 362S125-68 (50 KSI) | | 16 | 19'-11" | | | | |
| 362S125-68 (50 KSI) | | 24 | 17'-5" | | | | |


NOTES:
1. FIVE POUNDS PER SQUARE FOOT (PSF), LOADS HAVE NOT BEEN REDUCED FOR STRENGTH OR DEFLECTION CHECKS; FULL LATERAL LOAD IS APPLIED
2. LIMITING HEIGHTS ARE BASED ON STEEL PROPERTIES ONLY (NON-COMPOSITE) WITHOUT THE CONTRIBUTION OF SHEATHING TO STRENGTH AND STIFFNESS OF THE ASSEMBLY. PROPERLY FASTENED SHEATHING IS STILL REQUIRED FOR MEMBERS TO BE CONSIDERED FULLY BRACED.
3. WEB CRIPPLING CHECK BASED ON 1" END BEARING
4. STUDS ARE ASSUMED TO BE ADEQUATELY BRACED AT MAXIMUM SPACING OF Lu TO DEVELOP FULL ALLOWABLE MOMENT (i.e. SCREW SPACING)

# PARTITION PLAN GENERAL NOTES

1. VERIFY DIMENSION WITH MILLWORKER PRIOR TO FRAMING.
2. INSTALL KNOX BOX IF NOT ALREADY EXISTING, HEIGHT AND LOCATION AS REQUIRED BY FIRE DEPARTMENT.
3. UNLESS OTHERWISE NOTED, ALL GYPSUM BOARD SURFACES, WALLS, AND CEILINGS SHALL BE TAPED, SANDED SMOOTH TO A "LEVEL 4" FINISH, SO AS TO RECEIVE PAINT OR WALL COVERING MATERIAL
4. THE PROJECT ADDRESS SHALL BE PROVIDED FOR ALL NEW AND EXISTING BUILDINGS IN A POSITION AS TO BE PLAINLY VISIBLE AND LEGIBLE FROM THE STREET OR ROAD FRONTING THE PROPERTY PER LOCAL FIRE DEPARTMENT STANDARDS.

# PARTITION PLAN KEY NOTES

1. IF EXISTING COLUMNS ARE LOCATED IN SALES AREA COLUMNS TO BE FURRED WITH METAL STUDS & (1) LAYER 5/8" GYP. BOARD TO 6" ABOVE CEILING. SIZE OF COLUMN FURRING TO BE CONSISTENT AND ALIGN WITH OTHERS. SEE DETAIL 5/A2.0
2. PROVIDE BACKING SUPPORT BEHIND WALL-MOUNTED EQUIPMENT AND FIXTURES. SEE SHEET A4.0 FOR FIXTURE LOCATIONS AND SHEET A5.0 FOR BLOCKING LEGEND.
3. PROVIDE LEVEL FLOOR FOR LEVEL INSTALLATION OF MILLWORK AND FLOOR FINISHES.
4. USE WATER RESISTANT GYPSUM BOARD/FIBER BOARD AT ALL AREAS SUBJECT TO MOISTURE OR WHERE TILE IS USED. PROVIDE WATERPROOF MEMBRANE AT ALL AREAS WHEN THEY ARE ABOVE OTHER SPACES.
5. PROVIDE FIRE EXTINGUISHER BY POTTER-ROEMER. EXTINGUISHER TO BE #3005, 2A:10B:C. LOCATIONS AND CLASSIFICATIONS OF FIRE EXTINGUISHERS SHALL BE IN ACCORDANCE WITH STATE & LOCAL FIRE CODES AND PLACEMENT IS SUBJECT TO THE APPROVAL OF THE FIRE INSPECTOR. VERIFY QUANTITY & EXACT LOCATION WITH FIRE DEPARTMENT PRIOR TO ORDERING.
6. PROVIDE AND INSTALL ALL NECESSARY WALL BACKING, STIFFENERS,BRACING, BACK-UP PLATES AND/OR SUPPORTING BRACKETS AS REQUIRED FOR THE INSTALLATION OF WALL-MOUNTED OR SUSPENDED EQUIPMENT OR BUILT-IN ITEMS. VERIFY REQUIREMENTS WITH MANUFACTURERS PRIOR TO INSTALLATION. SEE DETAIL 8/A2.0.
7. ELECTRONIC EQUIPMENT TO BE PROVIDED BY TENANT'S VENDORS.
8. ELECTRICAL EQUIPMENT. SEE ELECTRICAL.
9. PREPARE ALL FLOOR SURFACES AS REQUIRED TO RECEIVE FINISHES AS NOTED ON FINISH PLAN, ENLARGED FINISH PLANS & FINISH LEGEND.
10. (2) SERVER RACKS. MOUNT ONE ABOVE THE OTHER ON 3/4" FRT PLYWOOD PAINTED TO MATCH ADJACENT WALL.
11. EXISTING GLAZING AND STOREFRONT FRAME TO REMAIN - CLEAN TO "LIKE NEW" CONDITION.
12. "EXIT ROUTE" TACTILE SIGNAGE REQUIRED AT ALL EXIT ROUTES. SEE SHEET A0.2 FOR REQUIREMENTS.
13. "EXIT" TACTILE SIGNAGE REQUIRED AT ALL EXITS. SEE SHEET A0.2 FOR REQUIREMENTS.
14. EXIT DOORS - T.G.C. SHALL ENSURE STOOP, THRESHOLD AND ALL CODE REQUIRED ELEMENTS COMPLY WITH ADA REQUIREMENTS AND MEET ALL LOCAL, STATE, AND NATIONAL CODES FOR ACCESSIBILITY AND EGRESS.
15. GC TO VERIFY CONDITION OF EXISTING THRESHOLD AND EXTERIOR LANDING AND IF REQUIRED TO BRING EXISTING THRESHOLD AND LANDING AT SIDEWALK AND STORE SIDE INTO COMPLIANCE TO MEET ALL LOCAL AND NATIONAL CODES AND ADA STANDARDS FOR ACCESSIBILITY AND EGRESS

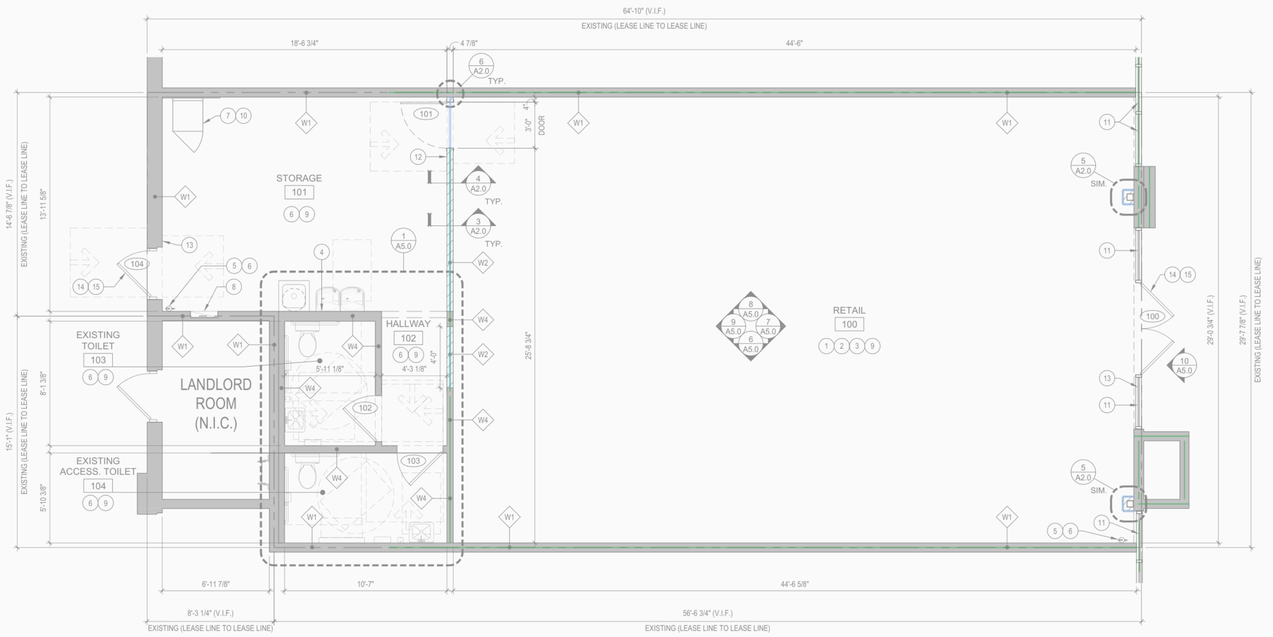


1 A2.0 PARTITION PLAN 1/4" = 1'-0"

ROBERT F. VANNEY ARCHITECT
149 THOMPSON AVE, EAST, STE. 112
WEST SAINT PAUL, MINNESOTA 55118
651. 222. 4642 FAX. 651. 222. 3034

COLORADO LICENSED ROBERT F. VANNEY C-3845 10/08/2026 ARCHITECT

xfinity

BRANDED PARTNER
INTERQUEST COMMONS
1333 INTERQUEST PKWY.
LOT #11
COLORADO SPRINGS, CO 80921

| No. | Description | Date |
|---|---|---|
| - | - | - |

| | |
|---|---|
| Preliminary Issue: | - |
| Bid Issue: | 10/08/2026 |
| Landlord Issue: | 10/08/2026 |
| Permit Issue: | 10/08/2026 |
| Construction Issue: | - |

PARTITION PLAN

| | |
|---|---|
| Comm. Number | 81-2116 |
| Date | 10/08/2026 |
| Drawn By | RFV |
| Checked By | RFV |

A2.0


Copyright 2026 Robert F. Vanney Architect

**TAKE-OFF LEGEND - A3.0 (gypsum board ceilings / soffits)**

SOF-01 - gyp. bd. header 8'-6" AFF: 4.25 LF x 3.407 ft = 14.47 SF board

EXCLUDED - 6 room(s) not quantified: grey hatch = room, red text = reason + sheet


Measure at the printed scale (1/4" = 1'-0"); SF = Excel row

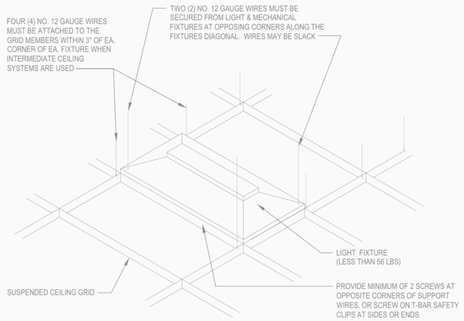


LATERAL FORCE BRACING MEMBERS MUST BE SPACED A MINIMUM OF 6" FROM ALL HORIZONTAL PIPING OR DUCT WORK THAT IS NOT PROVIDED WITH BRACING RESTRAINTS FOR HORIZ. FORCES. BRACING WIRES MUST BE ATTACHED TO THE GRID AND TO THE STRUCTURE IN SUCH A MANNER THAT THEY CAN SUPPORT A DESIGN LOAD OF NOT LESS THAT 200 LBS OR THE ACTUAL LOADS,. SAFETY FACTOR OF 2

## 4 A3.0 LIGHT FIXTURE AT SUSPENDED CEILING


6" = 1'-0"

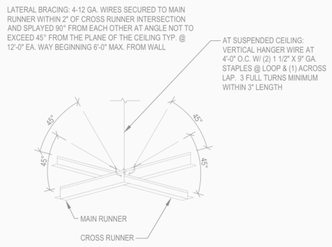


NOTES:
1. ALL WIRES 12 GA.
2. PROVIDE 6" CLEARANCE AT ALL PIPES AND DUCTS, ETC.
3. BRACING WIRES MUST BE ATTACHED TO THE GRID AND TO THE STRUCTURE IN SUCH A MANNER THAT THEY CAN SUPPORT A DESIGN LOAD OF NOT LESS THAN 200 LBS. OR THE ACTUAL LOADS, WHICHEVER IS GREATER, WITH A SAFETY FACTOR OF 2.

## 3 A3.0 SUSPENDED ACOUSTICAL CEILING

3" = 1'-0"

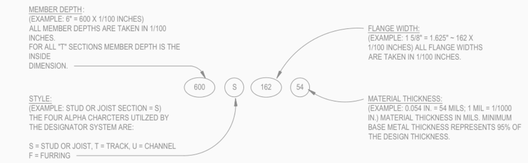


CEILING SPAN TABLE NOTES:
1. VALUES ARE FOR SINGLE SPANS.
2. ALLOWABLE CEILING SPANE CALCULATIONS BASED ON 33KSI YEILD STRENGTH STEEL.
3. FOR FULLY BRACED CEILINGS, USE MID-SPAN BRACED VALUES.
4. END BEARING LENGTH = 1" MINIMUM.


| | | 4 PSF LATERAL SUPPORT OF COMPRESSION FLANGE UNSUPPORTED JOIST SPACING (IN.) O.C. | | | MID-SPAN JOIST SPACING (IN.) O.C. | | |
|---|---|---|---|---|---|---|---|
| SECTION: | (MIL.) | 12" | 16" | 24" | 12" | 16" | 24" |
| 250S137 | 33 | 11'-9" | 10'-10" | 9'-9" | 14'-11" | 13'-6" | 11'-10" |
| 250S137 | 43 | 13'-2" | 12'-1" | 10'-9" | 16'-2" | 14'-8" | 12'-10" |
| 250S162 | 33 | 13'-5" | 12'-5" | 11'-1" | 15'-8" | 14'-2" | 12'-5" |
| 250S162 | 43 | 14'-11" | 13'-9" | 12'-3" | 17'-0" | 15'-5" | 13'-6" |
| 350S137 | 33 | 12'-9" | 11'-9" | 10'-6" | 18'-1" | 16'-9" | 15'-0" |
| 350S137 | 43 | 14'-1" | 13'-0" | 11'-7" | 19'-10" | 18'-4" | 16'-4" |
| 350S162 | 33 | 14'-6" | 13'-5" | 12'-0" | 20'-3" | 18'-5" | 16'-1" |
| 350S162 | 43 | 16'-0" | 14'-9" | 13'-2" | 22'-0" | 20'-0" | 17'-6" |
| 362S137 | 33 | 12'-10" | 11'-11" | 10'-7" | 18'-3" | 16'-11" | 15'-2" |
| 362S137 | 43 | 14'-3" | 13'-1" | 11'-8" | 20'-0" | 18'-6" | 16'-6" |
| 362S162 | 33 | 14'-8" | 13'-6" | 12'-1" | 20'-9" | 18'-11" | 16'-6" |
| 362S162 | 43 | 16'-1" | 14'-10" | 13'-3" | 22'-7" | 20'-7" | 17'-11" |
| 400S137 | 33 | 13'-2" | 12'-2" | 10'-11" | 18'-9" | 17'-4" | 15'-6" |
| 400S137 | 43 | 14'-7" | 13'-5" | 12'-0" | 20'-6" | 18'-11" | 17'-9" |
| 400S162 | 33 | 15'-0" | 13'-10" | 12'-5" | 21'-4" | 19'-10" | 16'-1" |
| 400S162 | 43 | 16'-6" | 15'-3" | 13'-7" | 23'-4" | 21'-7" | 19'-4" |
| 550S137 | 33 | 14'-6" | 13'-5" | 12'-0" | 20'-10" | 19'-4" | 17'-5" |
| 550S137 | 43 | 15'-10" | 14'-7" | 13'-1" | 20'-0" | 18'-6" | 16'-6" |
| 550S162 | 33 | 16'-6" | 15'-3" | 13'-8" | 23'-9" | 22'-0" | 19'-10" |
| 550S162 | 43 | 17'-11" | 16'-7" | 14'-10" | 25'-7" | 23'-9" | 21'-4" |
| 600S137 | 33 | 14'-10" | 13'-9" | 12'-4" | 21'-4" | 19'-10" | 17'-10" |
| 600S137 | 43 | 16'-2" | 14'-11" | 13'-5" | 23'-1" | 21'-4" | 19'-2" |
| 600S162 | 33 | 16'-10" | 15'-8" | 14'-1" | 23'-1" | 22'-7" | 20'-4" |
| 600S162 | 43 | 18'-4" | 17'-0" | 15'-3" | 26'-3" | 24'-4" | 21'-10" |

NOTE: ALL STUD INFORMATION IS BASED ON CEMCO ICC ES ESR-3016

## 2 A3.0 ALLOWABLE CEILING SPANS - L/240

1/2" = 1'-0"

EXISTING CEILING NOTE:
G.C. SHALL INSPECT ALL EXISTING ACOUSTICAL CEILING TILE & CEILING GRID FOR DAMAGE, MARS, ETC. G.C. SHALL REPLACE ALL DAMAGED AC TILE & CEILING GRID TO MATCH EXISTING

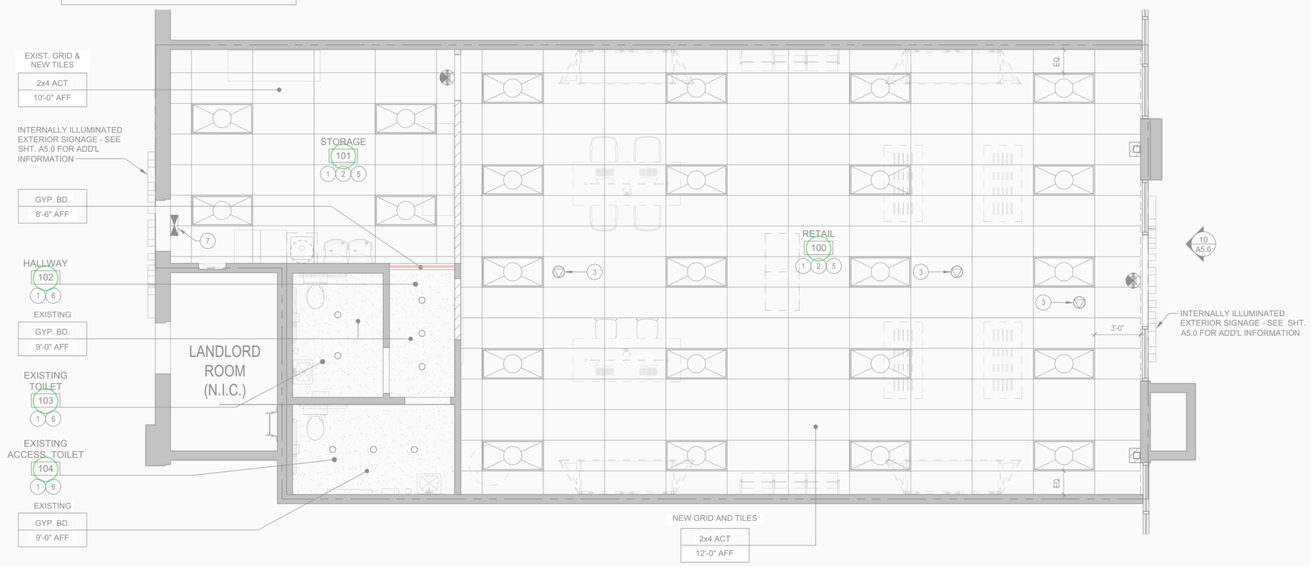


## 1 A3.0 REFLECTED CEILING PLAN

1/4" = 1'-0"

# REFLECTED CEILING PLAN GENERAL NOTES

1. FIELD VERIFY CEILING GRID LOCATION AND NOTIFY ARCHITECT OF ANY DISCREPANCIES ON PLANS.
2. FIELD VERIFY ALL CLEARANCES OF DUCTS, PIPES, SPRINKLERS, ETC. AND NOTIFY ARCHITECT OF ANY CONFLICTS PRIOR TO INSTALLATION OF LIGHTS, ETC.
3. CONDUITS ABOVE CEILING MUST BE A MINIMUM OF 12" ABOVE THE CEILING GRID.
4. ALL JUNCTION BOXES AND MECHANICAL EQUIPMENT REQUIRING ACCESS FOR SERVICE SHALL BE LOCATED OVER ACOUSTICAL CEILINGS. NO ACCESS HATCHES SHALL BE INSTALLED IN GYPSUM BOARD CEILINGS WITHOUT PRIOR APPROVAL BY OWNER.
5. SPRINKLER HEADS ARE TO BE CENTERED BETWEEN LIGHTS IN A UNIFORM ARCHITECTURAL PATTERN.
6. LOCATE RECESSED DOWN LIGHTS, WALL WASHERS, SMOKE DETECTORS, EXIT SIGNS, SPEAKERS, FIRE SPRINKLERS, ETC. IN CENTER OF 24"X24" SECTION OF SECOND LOOK CEILING TILES.
7. PROVIDE BACK-UP POWER FOR EXIT SIGNS PER STATE & LOCAL CODES.
8. THE MEANS OF EGRESS, INCLUDING THE EXIT DISCHARGE, SHALL BE ILLUMINATED TO A LEVEL OF NOT LESS THAN ONE FOOT CANDLE AT THE WALKING SURFACE AT ALL TIMES THE BUILDING SPACE SERVED BY THE MEANS OF EGRESS IS OCCUPIED.
9. EMERGENCY LIGHTING SHALL HAVE (2) SEPARATE SOURCES OF POWER & SHALL COMPLY WITH THE NEC.
10. CONTRACTOR SHALL PROVIDE EMERGENCY LIGHTING, STROBE LIGHTS, AUDIO-VISUAL ALARMS & OCCUPANCY SENSORS TO MEET ALL APPLICABLE CODES.
11. CONTRACTOR SHALL PROVIDE LAMPS WITH TYPE IC RATED HOUSING WHERE FIXTURES COME IN DIRECT CONTACT WITH INSULATION.
12. EXIT SIGNS SHALL BE INTERNALLY OR EXTERNALLY ILLUMINATED AT ALL TIMES & SHALL BE CONNECTED TO AN EMERGENCY POWER SYSTEM (BATTERIES, UNIT EQUIPMENT OR AN ON-SITE GENERATOR) THAT WILL AUTOMATICALLY ILLUMINATE THE EXIT SIGNS FOR A DURATION OF NOT LESS THAN 90 MINS.
13. INSTALL SUSPENDED CEILING GRID PER DETAIL 3/A3.0, TYP.

# REFLECTED CEILING PLAN KEYNOTES

1. ALL FIRE SPRINKLERS TO BE SEMI-RECCESSED. COLOR: WHITE - SPRINKLER HEADS TO BE WHITE. AVOID STROBES IN SOFFITS. CENTER SPRINKLER HEAD IN 24" X 24" SECTION OF SECOND LOOK CEILING TILE.
2. ALL LIGHT FIXTURES ATTACHED TO CEILING GRID MUST ALSO BE INDEPENDENTLY SUPPORTED. SEE DETAIL 4/A3.0
3. CEILING MOUNTED DATA - SEE ELECTRICAL
4. NOT USED
5. NEW LIGHT FIXTURE.
6. EXISTING LIGHT FIXTURE. VERIFY FUNCTIONALITY. REPLACE/REPAIR/RELAMP AS REQ'D.
7. EXISTING EXIT SIGN WITH EMERGENCY BACK UP. REPLACE AS REQ'D.

# LIGHTING LEGEND

CEILING MOUNTED EXIT SIGN WITH RED LETTER IN CLEAR BACKGROUND - BEST LIGHTING PRODUCTS - REF. ELXTEU-1-R-C-A-EM - SEE ELECTRICAL DRAWINGS

2'X4' LAY-IN LED LIGHT FIXTURE MANF. - SEE ELECTRICAL DRAWINGS

2'X4' ARMSTRONG PRODUCT DUNE (ITEM 2712) ACOUSTICAL TILE WITH TEGULAR EDGE IN WHITE -SET WITHIN PRELUDE ML EXPOSED "T"-GRID

5/8" TYPE "X" GYPSUM BOARD CEILING

ROBERT F. VANNEY ARCHITECT
149 THOMPSON AVE. EAST, STE. 112
WEST SAINT PAUL, MINNESOTA 55118
651. 222. 4642 FAX. 651. 222. 3034

COLORADO LICENSED
ROBERT F. VANNEY
C-3845
10/08/2026
ARCHITECT

xfinity

BRANDED PARTNER
INTERQUEST COMMONS
1333 INTERQUEST PKWY.
LOT #11
COLORADO SPRINGS, CO 80921

| No. | Description | Date |
|---|---|---|
| - | - | - |

| | |
|---|---|
| Preliminary Issue: | - |
| Bid Issue: | 10/08/2026 |
| Landlord Issue: | 10/08/2026 |
| Permit Issue: | 10/08/2026 |
| Construction Issue: | - |

REFLECTED CEILING PLAN

| | |
|---|---|
| Comm. Number | 81-2116 |
| Date | 10/08/2026 |
| Drawn By | RFV |
| Checked By | RFV |

A3.0

Copyright 2026 Robert F. Vanney Architect