


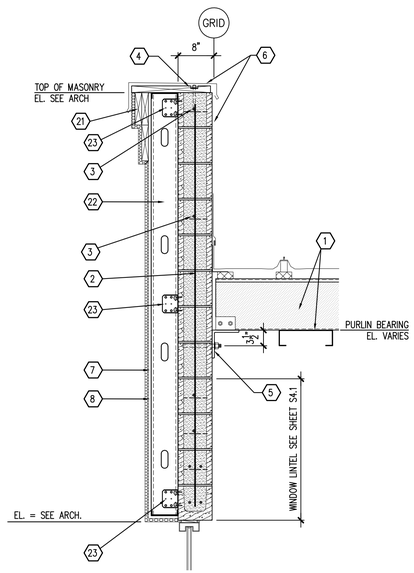




1 SECTION
S5.3 SCALE: 3/4" = 1'-0"

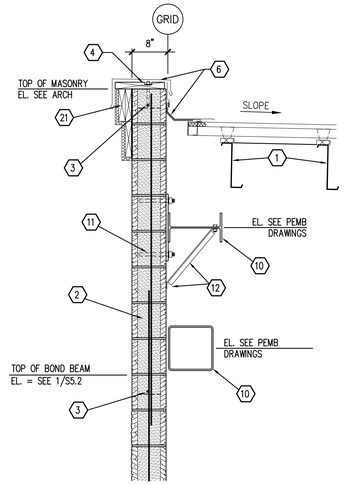

2 SECTION
S5.3 SCALE: 3/4" = 1'-0"

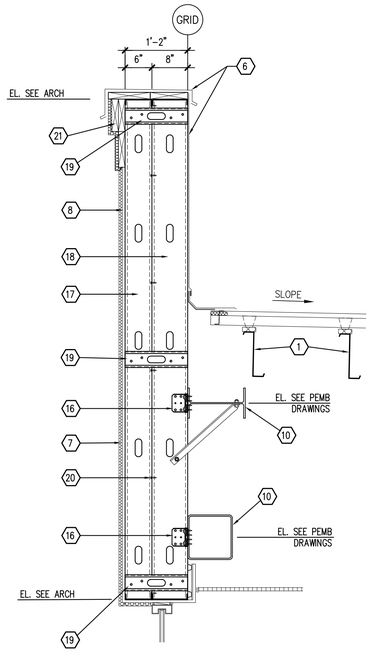

#8

3 SECTION
S5.3 SCALE: 3/4" = 1'-0"

KEYNOTES

1. PRE-ENGINEERED METAL BUILDING (PEMB) STRUCTURAL SYSTEM. REFER TO SHOP DRAWINGS FOR ADDITIONAL INFORMATION.
2. 8" (NOM) CMU. REFER TO STRUCTURAL NOTES, SHEET S1.1, FOR CMU WALL CONSTRUCTION REQUIREMENTS.
3. CONTINUOUS 8" (NOM) BOND BEAM REINFORCED W/ (1) #5
4. CONTINUOUS FIRE RETARDANT TREATED 2x NAILER WITH ½"ø GALVANIZED ANCHOR BOLTS @ 32" O.C.
5. L 6"x4"x½" LEDGER ANGLE BY PEMB. ANCHOR TO CMU W/ (2) ¾"ø x 0'-8½" (6½" EMBED) THREADED ROD ADHESIVE ANCHORS CENTERED UPON PURLIN AND WITHIN 6" OF ANGLE END. REFER TO ADHESIVE ANCHOR NOTE. SEE 5/S5.2 & 6/S5.2 FOR TYPICAL PURLIN ANCHORAGE AND 8/S5.2 FOR ANCHORAGE OF PURLINS SUPPORTING RTU's.
6. REFER TO ARCHITECTURAL FOR ALL ROOF FLASHING REQUIREMENTS
7. EXTERIOR FINISH SYSTEM, REFER TO ARCHITECTURAL
8. REFER TO ARCHITECTURAL DRAWINGS FOR EXTERIOR WALL SHEATHING. FASTEN SHEATHING @ 8" O.C. ALONG FRAMING MEMBERS W/ #6x1¼" LONG CORROSION RESISTANT SCREWS.
9. PEMB WALL CONNECTION PLATE. FIELD WELD GC PROVIDED SHIMS AS REQUIRED
10. PEMB WIND BEAM. SEE PEMB DRAWINGS FOR SIZE, SHAPE AND LOCATION.
11. ANCHOR WIND BEAM TO FULLY GROUTED CMU WITH (2) ¾"ø x 0'-8½" (6½" EMBED) THREADED ROD ADHESIVE ANCHORS AS PER 7/S5.2 AND ADHESIVE ANCHOR NOTE.
12. FLANGE BRACES AS PER PEMB SHOP DRAWINGS. ANCHOR TO CMU WITH ½"ø x 0'-5½" (4½" EMBED) THREADED ROD ADHESIVE ANCHOR. SEE ADHESIVE ANCHOR NOTE.
13. PURLINS SUPPORTING ROOF TOP UNITS REQUIRE (4) ¾"ø x 0'-8½" (6½" EMBED) THREADED ROD ADHESIVE ANCHORS AS PER 8/S5.2. SEE ADHESIVE ANCHOR NOTE.
14. L 6"x4"x½" SUPPORT ANGLE CLIP. ANCHOR TO CMU WALL WITH (5) ¾"ø x 0'-8½" (6½" EMBED) THREADED ROD ADHESIVE ANCHORS AS PER 5/S5.2 AND ADHESIVE ANCHOR NOTE.
15. L 6"x4"x½" SUPPORT ANGLE CLIP. ANCHOR TO CMU WALL WITH (5) ¾"ø x 0'-8½" (6½" EMBED) THREADED ROD ADHESIVE ANCHORS AS PER 6/S5.2 AND ADHESIVE ANCHOR NOTE.
16. SIMPSON FCB43.5 FRAMING CLIP W/ (4) #12-14 SCREWS TO STUDS AND (2) #12-24 TO PEMB WIND BEAM
17. 6"x16ga METAL STUDS (600S162-54) @ 16" O.C.
18. 8"x16ga METAL STUDS (800S162-54) @ 16" O.C.
19. 3⅝"x18 ga. METAL STUD TIES (362S162-43) @ 48" O.C. WITH MIN (2) #8 SCREWS TO EACH STUD
20. FASTEN STUDS TOGETHER WITH #10 SCREWS @ 24" O.C.
21. CORNICE CONSTRUCTION, REFER TO ARCHITECTURAL
22. 6"x 18 ga (MINIMUM) METAL STUDS (600S162-43) @ 16" O.C.
23. SIMPSON FCB43.5 FRAMING CLIP AT 48" O.C. W/ (4) #12-14 SCREWS TO STUDS AND (2) ⅜16"ø TAPCON MASONRY SCREWS TO CMU (1" EMBEDMENT)

ADHESIVE ANCHOR NOTES:

1. ADHESIVE TO BE SIMPSON STRONG-TIE AT-XP. THREADED ROD TO BE A36.
2. REFER TO MANUFACTURER'S REQUIREMENTS FOR HOLE SIZE, CLEANING, AND ALL OTHER INSTALLATION REQUIREMENTS.
3. SHIFT ANCHOR LOCATIONS AS NECESSARY TO PROVIDE 1½" CLEARANCE FROM HEAD JOINTS AND 4" CLEARANCE FROM CONTROL JOINTS.
4. TO ASSURE ANCHORS ARE INSTALLED IN FULLY GROUTED CELLS – CONTRACTOR SHALL FULLY GROUT:
   4.a. ALL COURSES ABOVE INTERMEDIATE BOND BEAM (SEE 1/S5.2 FOR ELEVATION)
   4.b. ALL CELLS WITHIN 4'-8" OF CORNERS
5. ANCHOR INSTALLATION REQUIRES PERIODIC SPECIAL INSPECTIONS

J.S. Smith Consulting Engineers, P.C.
Aaron D. Smith P.E. 59473
1801 W 32nd St. Bldg. B Ste. 104 * Joplin, Missouri 64804
P.O. Box 8102 * Joplin, Missouri 64802
Phone: 417-624-0444 * Fax: 417-624-0430

COLORADO LICENSED
AARON D. SMITH
59473
PROFESSIONAL ENGINEER
7/19/24

TIMOTHY M. GUILLOT
ARCHITECT
1736 East Sunshine, Suite 417
Springfield, Missouri 65804
417.862.0558
Fax: 417.862.3265
e-mail: architect@estertyschneider.com


PROJECT:
NEW O'REILLY AUTO PARTS STORE
23rd AVE.
EVANS, CO #1

FRAMING DETAILS

O'Reilly AUTO PARTS
CORPORATE OFFICES
243 SOUTH PATTERSON
SPRINGFIELD, MISSOURI 65802
(417) 862-2674 TELEPHONE

COMM #	4838
DATE:	7-19-24
REVISION DATE:	

S5.3

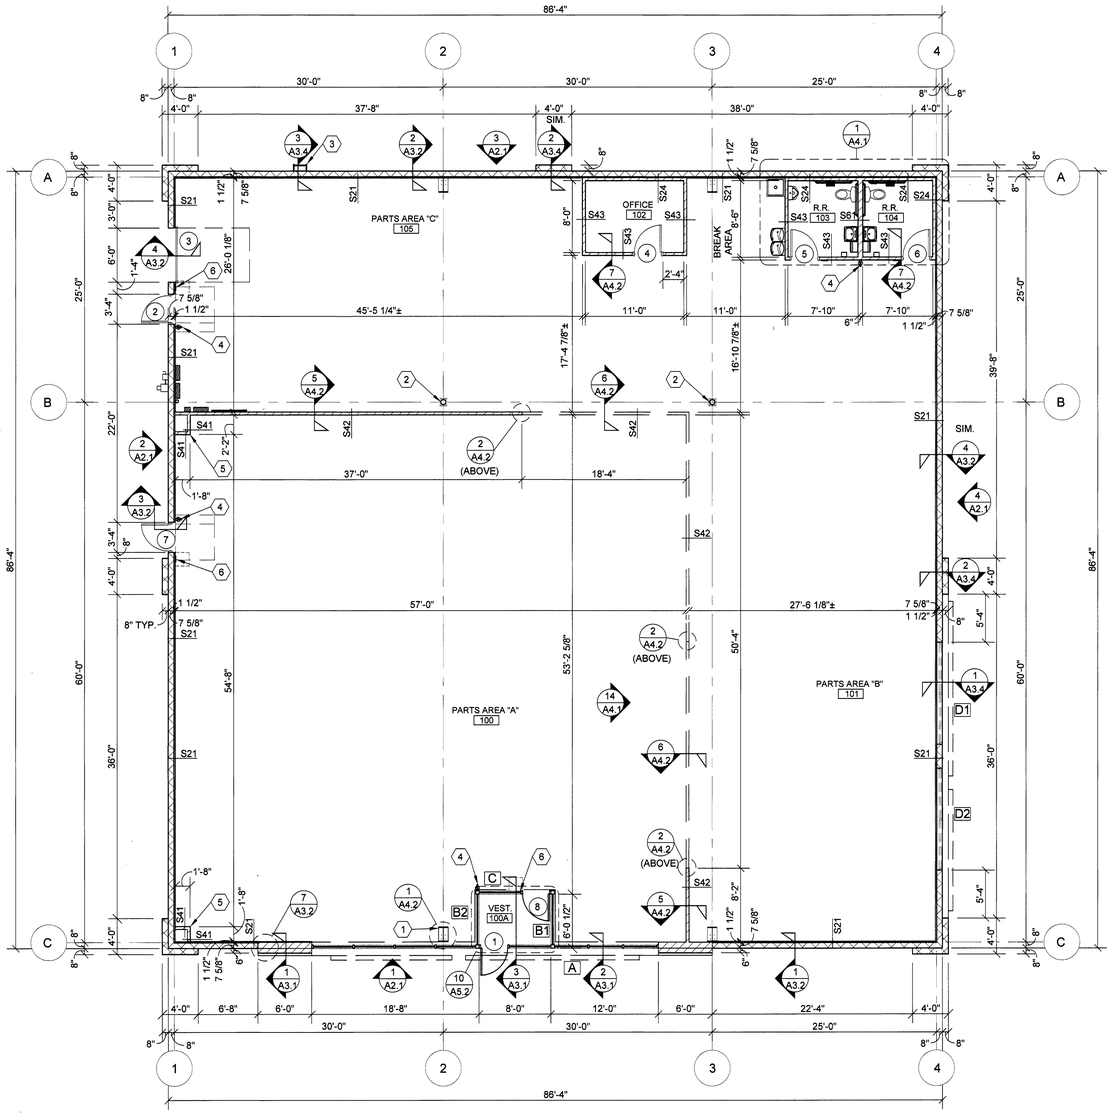

FLOOR PLAN REVISED TO REFLECT SITE PLAN CHANGES.

1 FLOOR PLAN
A1.1 SCALE: 1/8" = 1'-0"

N

GENERAL NOTES

A. REFER TO PROJECT MANUAL FOR ADDITIONAL REQUIREMENTS.

B. ALL DIMENSIONS TO ROUGH FACE OF ROUGH FRAMING, CONCRETE, MASONRY OR CENTERLINE OF STRUCTURE, UNLESS OTHERWISE NOTED. COLD FORM METAL STUD INTERIOR PARTITION DIMENSIONS 3-5/8" UNLESS OTHERWISE INDICATED AND NOT SHOWN FOR CLARITY.

C. REFER TO EXTERIOR AND INTERIOR FINISH SCHEDULES FOR ADDITIONAL REQUIREMENTS.

D. REFER TO PRE-ENGINEERED METAL BUILDING SHOP DRAWINGS FOR ADDITIONAL REQUIREMENTS. NOTIFY ARCHITECT IF FINAL DESIGN CONDITIONS DEVIATE SUBSTANTIALLY FROM THOSE INDICATED HEREIN.

KEY NOTES

1. CONCEALED STEEL COLUMN. REFER TO PRE-ENGINEERED METAL BUILDING SHOP DRAWINGS. PROVIDE SHEET METAL COVER WITH NO EXPOSED HORIZONTAL SEAMS. FINISH TO MATCH WINDOW FRAMING.
2. EXPOSED STEEL COLUMN, REFER TO PRE-ENGINEERED METAL BUILDING SHOP DRAWINGS, (PAINT W-3, REFER INTERIOR FINISH SCHEDULE).
3. ROOF ACCESS LADDER. REFER TO EXTERIOR FINISH SCHEDULE.
4. SURFACE MOUNTED PORTABLE FIRE EXTINGUISHER, REFER TO DETAIL 10/A4.2.
5. SHOWROOM CORNER WALL BOX OUT. INSTALL 5/8" FIRE TREATED PLYWOOD BACKING TO BACK SIDE OF STUD INTERIOR FLANGE ON EACH EXPOSED WALL FACE FROM 8'-0" TO 10'-0" A.F.F. FOR INSTALLATION OF SECURITY MIRRORS. REFER TO 4/A4.2 (TYPICAL).
6. TACTILE EXIT SIGN AT EXIT DISCHARGE DOOR STATING "EXIT" WITH BRAILLE (GRADE 2 CONTRACTED) LETTERING. SIGN CONSTRUCTION AND LOCATION TO COMPLY WITH ANSI A117.1. MOUNT 48" MINIMUM ABOVE FINISH FLOOR TO BOTTOM OF LOWEST TACTILE CHARACTER AND 80" MAXIMUM ABOVE FINISH FLOOR TO BOTTOM OF HIGHEST TACTILE CHARACTER.

INTERIOR WALL & CEILING NOTES

1. GENERAL:
A. REFER TO FINISH SCHEDULES FOR ADDITIONAL WALL FINISH MATERIAL APPLICATIONS.

B. REFER TO WALL SECTIONS AND DETAILS FOR ADDITIONAL CONDITIONS.

2. FRAMING:
A. PROVIDE FIRE TREATED 2X BLOCKING AS REQUIRED FOR INSTALLATION OF ACCESSORIES PER MANUFACTURER'S RECOMMENDATIONS.

B. PROVIDE DIAGONAL WALL BRACING (3" X 16 GA. FLAT STRIP) AT CORNER FACES OF FREE STANDING PARTITION SYSTEMS.

C. WHERE WALL FRAMING EXTENDS TO BOTTOM OF ROOF DECK OR STRUCTURE, PROVIDE DEFLECTION CHANNELS AT TOP TRACK FOR 1 1/2" MINIMUM DEFLECTION.

D. REFER TO STRUCTURAL DRAWINGS FOR STRUCTURAL STUD REQUIREMENTS.

E. REFER TO WINDOW AND DOOR HEAD, JAMB AND SILL DETAILS FOR ADDITIONAL FRAMING REQUIREMENTS.

F. PROVIDE HORIZONTAL STUD BRIDGING AT 4'-0" O.C. VERTICAL.

3. GYPSUM AND BACKING BOARD:
A. EXPANSION/CONTROL JOINTS: INSTALL EXPANSION/CONTROL JOINTS IN CEILINGS EXCEEDING 2500 SQ. FT. IN AREA AND IN PARTITION WALL LENGTHS EXCEEDING 30 FEET. LOCATE JOINTS AT LOCATIONS OF MASONRY CONTROL JOINTS SHOWN ON EXTERIOR ELEVATIONS. DO NOT EXCEED A DISTANCE OF 50 FEET IN ANY DIRECTION BETWEEN CEILING JOINTS. INSTALL CONTROL JOINTS WHERE FRAMING OR FURRING CHANGES DIRECTION.

B. PROVIDE MOISTURE RESISTANT TYPE "X" GYPSUM BOARD AT ALL WET LOCATIONS (RESTROOMS, WET WALLS, AND JANITOR'S SINK AREAS).


C. PROVIDE "J" MOLDING, REGLETS, OR CORNER BEAD AT GYPSUM BOARD PERIMETER CONDITIONS TRANSITIONING TO DISSIMILAR EXPOSED FINISH MATERIALS.

4. INSULATION:
A. INSULATION SHALL HAVE A FLAME SPREAD RATING OF 0-25 AND A SMOKE DEVELOPMENT RATING OF 0- 450.

B. PROVIDE SEALANT ON BOTH SIDES OF STUD BOTTOM TRACKS AT ACOUSTICAL INSULATED WALL LOCATIONS.

INTERIOR WALL TYPES

(SCALE 1 1/2" = 1'-0")

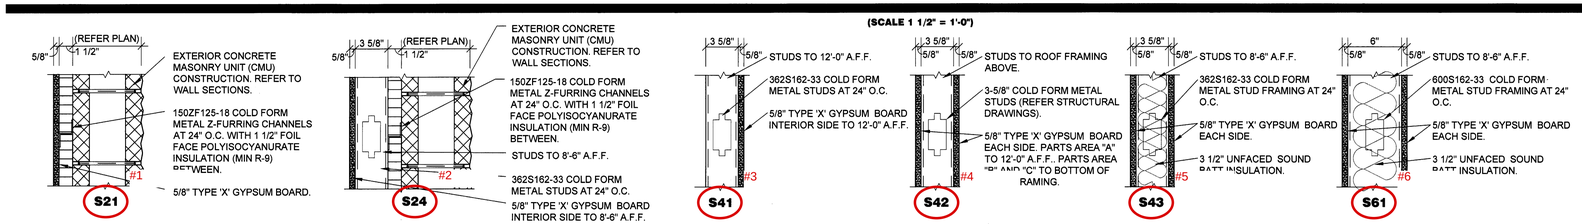

TIMOTHY M. GUILLOT
ARCHITECT
1736 East Sunshine, Suite 417
Springfield, Missouri 65804
417.862.9558
Fax: 417.862.3265
e-mail: architect@estes1ychandler.com

STATE OF COLORADO — REGISTERED ARCHITECT — TIMOTHY MICHAEL GUILLOT — 40872 — LICENSED — 4-18-25

PROJECT:
NEW O'REILLY AUTO PARTS STORE
23RD AVE.
EVANS, CO #1


FLOOR PLAN

O'Reilly AUTO PARTS

CORPORATE OFFICES
233 SOUTH PATTERSON
SPRINGFIELD, MISSOURI 65802
(417) 862-2674 TELEPHONE

COMM #	4838
DATE:	7-19-24
REVISION DATE:	4-18-25

A1.1

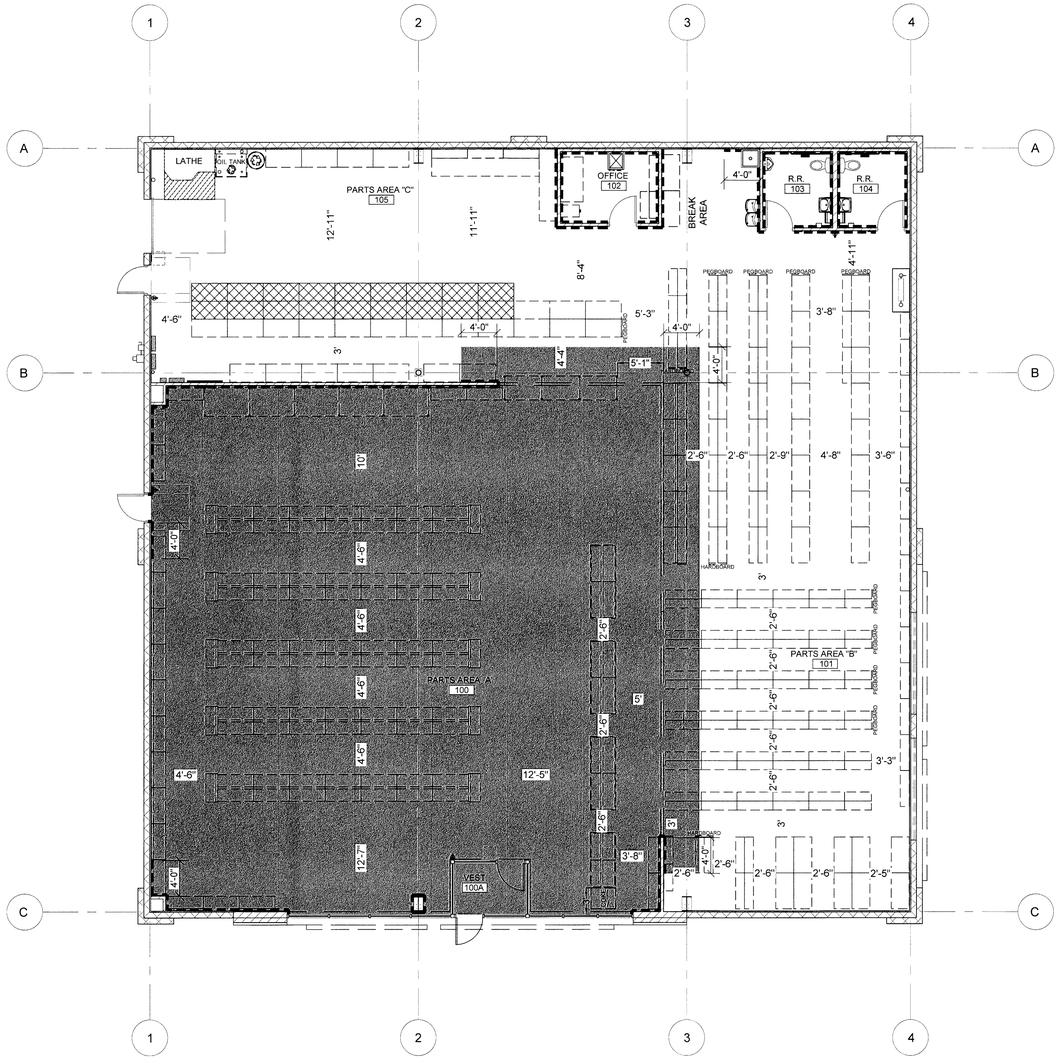

1 FINISH PLAN
A1.2 SCALE: 1/8" = 1'-0"

N

INTERIOR FINISH SCHEDULE

NO.	SPACE	FLOORING		WALLS				CEILING		DOORS		NOTES
		TYPE	BASE	NORTH	EAST	SOUTH	WEST	TYPE	HEIGHT	DOOR	FRAME	
100	#25 #26 A (A)	F-1	B-1	W-2/W-3	W-2/W-3	W-2/W-3	W-2/W-3	C-1	11'-6"	D-3	D-3	2, 4, 6
102	#27 ILE	F-1	-	-	-	-	-	C-3	11'-4"	-	-	
103	#28 A (B)	F-2	N/A	W-2	W-2/W-3	W-2	W-2	C-2	VARIES	-	-	1, 2, 3, 5
104	#29 E	F-2	B-1	W-2	W-2	W-2	W-2	C-3	8'-6"	D-1	D-2	2
103	#30 OM	F-2	B-1	W-4	W-4	W-4	W-4	C-3	8'-6"	D-1	D-2	2
104	#31 OM	F-2	B-1	W-4	W-4	W-4	W-4	C-3	8'-6"	D-1	D-2	2
105	PARTS AREA (C)	F-2	N/A	W-2	W-2/W3	W-2/W-3	W-2	C-2	VARIES	D-3	D-3	1, 2, 5

INTERIOR FINISH SCHEDULE NOTES:
1. PAINT EXTERIOR OF (102) OFFICE, (103) RESTROOM, AND (104) RESTROOM WITH W-3 AND PROVIDE BASE B-1. WHERE MULTIPLE WALL FINISH TYPES INDICATED IN SCHEDULE RELATES TO VARIOUS WALL FINISH TYPES BY ROOM OR SPACE PLAN ORIENTATION ONLY AND IS NOT INTENDED AS WAINSCOT PATTERNING OF FINISHES ON A SINGLE WALL PLANE.

2. LOCATION OF BASE GRAPHICALLY INDICATED ON DRAWING, REFER SYMBOLS LEGEND.

3. PROVIDE PIECES OF 2' LENGTH BASE FOR INSTALLATION AT ENDS OF PARTS AREA "B" FIXTURES FACING PARTS AREA "A".

4. REFER TO ELECTRICAL DRAWINGS FOR GRID LAYOUT.

5. (WHERE OCCURS) PAINT INTERIOR ISOLATED EXPOSED STRUCTURAL STEEL COLUMNS TO MATCH W-3 . (UNLESS OTHERWISE INDICATED) EXPOSED EXTERIOR PERIMETER STRUCTURAL STEEL COLUMNS TO BE FACTORY PRIMED ONLY.

6. REFER TO 14/A4.1 FOR PARTS AREA "A" TYPICAL PAINT SCHEME LAYOUT AND FINISH TYPE LOCATIONS FOR ROOM INTERIOR PERIMETER WALLS.

SYMBOLS LEGEND

F-1: POLISHED CONCRETE:

F-2: LIQUID DENSIFIER TREATED CONCRETE

B-1: BASE:

GENERAL NOTES

A. REFER TO PROJECT MANUAL FOR ADDITIONAL REQUIREMENTS.

B. FIXTURES AND EQUIPMENT SHOWN FOR REFERENCE ONLY AND ARE OWNER FURNISHED AND INSTALLED.

C. DIMENSIONS TO ROUGH FACE OF ROUGH FRAMING OR FACE OF FIXTURE UNLESS OTHERWISE NOTED.

D. PROVIDE SUSPENDED CEILING SEISMIC BRACING WHERE REQUIRED, REFER TO DETAIL 9/A4.2.

E. ALL FINISH SUBSTITUTION REQUEST REQUIRE OWNER PRIOR APPROVAL.

INTERIOR FINISH TYPES

FLOORS
F-1:
TYPE: POLISHED CONCRETE FINISH
MFG: (REFER TO PROJECT MANUAL - SECTION 03 35 43)
COLOR: NATURAL CONCRETE, CLEAR

F-2:
TYPE: LIQUID DENSIFIER TREATED CONCRETE FINISH
MFG: (REFER TO PROJECT MANUAL - SECTION 03 30 00)
COLOR: NATURAL CONCRETE, CLEAR

BASE
B-1:
TYPE: RESILIENT BASE
MFG: EQUAL TO VPI
SIZE: 4" COVE
COLOR: IFT #01
#32

WALLS
W-1: N #33

W-2:
TYPE: PAINT
MFG: SHERWIN WILLIAMS
SERIES: SEMI GLOSS LATEX
COLOR #34 OJI WHITE"

W-3:
TYPE: PAINT
MFG: SHERWIN WILLIAMS
SERIES: SEMI GLOSS LATEX
COLOR #35 NT CLUB"

W-4:
TYPE: SANITARY WALL AND CEILING PANEL SYSTEM
MFG: (REFER PROJECT MANUAL)
COLOR: WHITE
#36

CEILINGS
C-1:
TYPE: ACOUSTICAL TILE CEILING
SIZE: 24" X 48" X 5/8", SQUARE EDGE
MFG: ARMSTRONG SPECIFIED
SERIES: 1729 "FINE FISSURED"
COLOR: WHITE
GRID SERIES: "PRELUDE" 15/16" EXPOSED TEE SYSTEM
GRID C #37

C-2:
TYPE: EXPOSED INSULATION VAPOR BARRIER (WHITE) AND EXPOSED STEEL F STEM (FACTORY PRIMED)
#38

C-3:
TYPE: PAINT
MFG: SHERWIN WILLIAMS
SERIES: SEMI GLOSS LATEX
COLOR: SW7042 "SHOJI WHITE"
#39

DOORS AND FRAMES
D-1 (INTERIOR WOOD DOORS):
TYPE: STAIN
SPECIES: CUSTOM GRADE ROTARY SLICED NATURAL BIRCH
FINISH: FACTORY FINISHED
COLOR #40 'GRAHAM" #300, MEDIUM BROWN

D-2 (INTERIOR HOLLOW METAL FRAMES)
TYPE: PAINT
MFG: SHERWIN WILLIAMS
SERIES: SEMI GLOSS ENAMEL
COLOR #41 NT CLUB"

D-3 (EXTERIOR DOORS & FRAMES):
TYPE: PAINT
FINISH: REFER TO EXTERIOR FINISH SCHEDULE
COLOR: REFER TO EXTERIOR FINISH SCHEDULE

TIMOTHY M. GUILLOT
ARCHITECT
1736 East Sunshine, Suite 417
Springfield, Missouri 65804
417.862.0558
Fax: 417.862.3265
e-mail: architect@osterlyschneider.com

STATE OF COLORADO — TIMOTHY MICHAEL GUILLOT — 9-9-25


PROJECT:
NEW O'REILLY AUTO PARTS STORE
23RD AVE.
EVANS, CO #1

INTERIOR FINISH PLAN

O'Reilly AUTO PARTS
CORPORATE OFFICES
233 SOUTH PATTERSON
SPRINGFIELD, MISSOURI 65802
(417) 862-2674 TELEPHONE


COMM #	4838
DATE:	7-19-24
REVISION DATE:	4-18-25
	9-9-25

A1.2

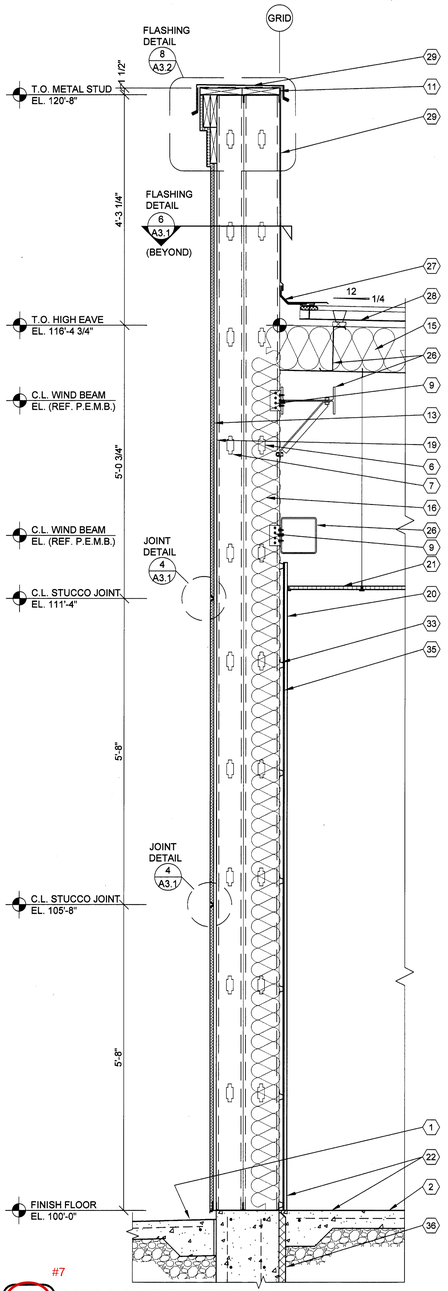


1 WALL SECTION

A3.1 SCALE: 3/4" = 1'-0"

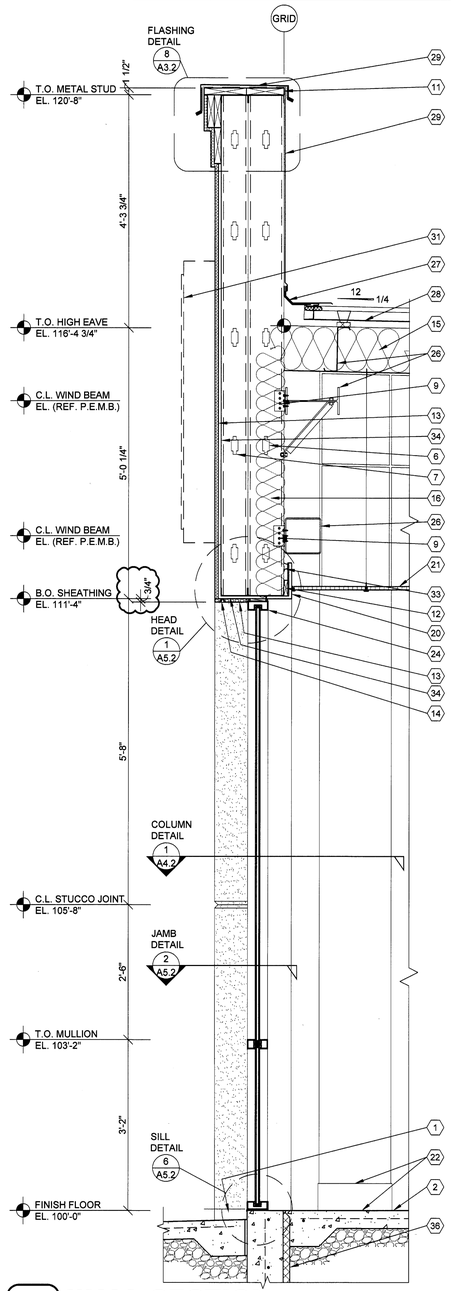

2 WALL SECTION


A3.1 SCALE: 3/4" = 1'-0"

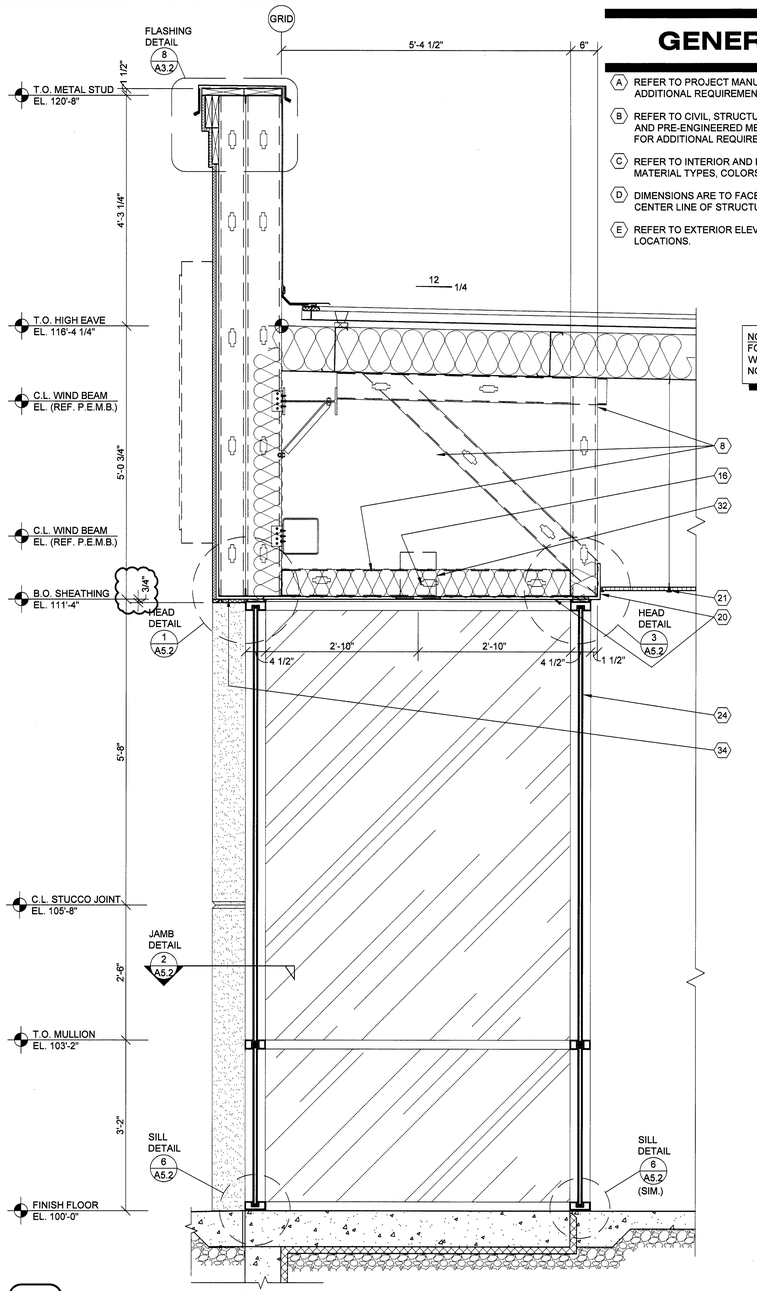

3 WALL SECTION


A3.1 SCALE: 3/4" = 1'-0"

NOTE:
FOR TYPICAL EXTERIOR WALL CONSTRUCTION NOTATION, REFER TO (2 A3.1)




4 SECTION

A3.1 SCALE: 1 1/2" = 1'-0"



5 SECTION

A3.1 SCALE: 1 1/2" = 1'-0"

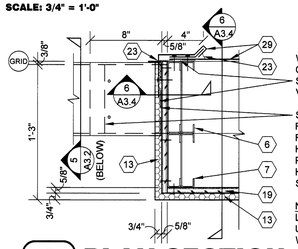

WEATHER BARRIER FLEXIBLE FLASHING TO BE CONTINUOUS AROUND END OF HEAD WALL SUBSTRATE AND BEHIND P.E.M.B. PARAPET VERTICAL SHEET METAL FLASHING.

SHEET METAL HEAD WALL TRANSITION FLASHING BELOW LOW PARAPET COPING FLASHING AND TO EXTEND 8" MINIMUM HORIZONTAL AND 8" MINIMUM VERTICAL. PROVIDE BENT EDGE RETURN ON HORIZONTAL LEG TO FORM DAM. PROVIDE SEALANT AT FASTENERS.

NOTE:
LOW PARAPET FLEXIBLE FLASHING TO EXTEND UP HEAD WALL 8" MINIMUM BEHIND HEAD WALL SHEET METAL TRANSITION FLASHING.

6 PLAN SECTION

A3.1 SCALE: 1 1/2" = 1'-0"

GENERAL NOTES

A. REFER TO PROJECT MANUAL AND SCOPE OF WORK SCHEDULE FOR ADDITIONAL REQUIREMENTS.

B. REFER TO CIVIL, STRUCTURAL, MECHANICAL, ELECTRICAL, PLUMBING, AND PRE-ENGINEERED METAL BUILDING (P.E.M.B.) SHOP DRAWINGS FOR ADDITIONAL REQUIREMENTS.

C. REFER TO INTERIOR AND EXTERIOR FINISH SCHEDULES FOR MATERIAL TYPES, COLORS AND FINISHES.

D. DIMENSIONS ARE TO FACE OF CONCRETE, MASONRY, FRAMING, OR CENTER LINE OF STRUCTURE UNLESS OTHERWISE INDICATED.

E. REFER TO EXTERIOR ELEVATIONS FOR MASONRY CONTROL JOINT LOCATIONS.

KEY NOTES

1. FINISH LAWN, PAVEMENT OR SIDEWALK, SLOPE TO DRAIN AWAY FROM BUILDING. REFER TO CIVIL DRAWINGS.
2. CONCRETE FLOOR SLAB. REFER TO STRUCTURAL DRAWINGS.
3. SPLIT FACE CONCRETE MASONRY UNIT (CMU), (7 5/8" X 7 5/8" X 15 5/8") IN RUNNING BOND WITH HORIZONTAL REINFORCEMENT AT 16" O.C.. REFER TO STRUCTURAL DRAWINGS FOR VERTICAL REINFORCEMENT REQUIREMENTS.
4. SMOOTH FACE CONCRETE MASONRY UNIT (CMU), (7 5/8" X 7 5/8" X 15 5/8") IN RUNNING BOND WITH HORIZONTAL REINFORCEMENT AT 16" O.C.. REFER TO STRUCTURAL DRAWINGS FOR VERTICAL REINFORCEMENT REQUIREMENTS.
5. CONCRETE MASONRY UNIT (CMU) BOND BEAM, REFER TO STRUCTURAL DRAWING FOR REINFORCEMENT REQUIREMENTS.
6. 8" COLD FORM METAL FRAMING, REFER TO STRUCTURAL DRAWINGS.
7. 6" COLD FORM METAL FRAMING, REFER TO STRUCTURAL DRAWINGS.
8. 600S162-43 COLD FORM METAL STUD FRAMING AT 24" O.C. ATTACHED TO PRE - ENGINEERED METAL BUILDING STRUCTURAL FRAMING SYSTEM.
9. COLD FORM METAL STUD FRAMING CLIP, REFER TO STRUCTURAL DRAWINGS.
10. 150ZF125-18 COLD FORM METAL Z-FURRING FRAMING AT 24" O.C. AND POLYISOCYANURATE (R-9 MIN.) RIGID INSULATION BOARD WITH FOIL FACE VAPOR BARRIER.
11. FIRE TREATED 2X NAILER(S) CONTINUOUS. CUT TO FIT WALL WIDTH. ATTACHED TO METAL STUD FRAMING WITH #12 SCREWS AT 24" O.C. STAGGERED. ATTACHED TO CMU BOND BEAM WITH 1/2" DIA. ANCHORS AT 32" O.C..
12. FIRE TREATED 2X NAILER OR BLOCKING.
13. EXTERIOR PORTLAND CEMENT PLASTER (STUCCO) OVER SELF-FURRING METAL LATH. REFER TO FINISH SCHEDULE.
14. STUCCO EXPANSION JOINT. REFER TO DETAIL 4/A3.1.
15. PRE-ENGINEERED METAL BUILDING ROOF INSULATION (R-36) LINER SYSTEM, (REFER TO SCOPE OF WORK SCHEDULE), VAPOR BARRIER OVER HIGH STRENGTH STEEL SUSPENSION STRAPS ATTACHED TO BOTTOM OF PRE-ENGINEERED METAL BUILDING ROOF PURLINS WITH (1) LAYER 8" (R-25) UN-FACED BATT INSULATION PARALLEL WITH ROOF PURLIN CAVITY AND (1) LAYER 3 1/2" (R-11) UN-FACED BATT INSULATION PERPENDICULAR OVER TOP OF ROOF PURLINS.
16. 6" (R-19) BATT INSULATION WITH FOIL FACE VAPOR BARRIER.
17. FLEXIBLE FLASHING CONTINUOUS TO LAP OVER NAILERS AND DOWN BEHIND CONTINUOUS CLEATS ON BOTH SIDES. LAP JOINTS 8" MINIMUM AND MASTIC.
18. MANUFACTURED STONE VENEER AND SILL: INSTALL PER MANUFACTURERS RECOMMENDATIONS. REFER TO EXTERIOR ELEVATIONS AND EXTERIOR FINISH SCHEDULE FOR MORE INFORMATION.
19. 5/8" EXTERIOR FIBERGLASS REINFORCED SHEATHING WITH CONTINUOUS WEATHER BARRIER. REFER TO STRUCTURAL DRAWINGS FOR ATTACHMENT REQUIREMENTS.
20. 5/8" TYPE "X" GYPSUM BOARD. REFER TO INTERIOR WALL TYPES FOR ADDITIONAL REQUIREMENTS.
21. SUSPENDED ACOUSTICAL LAY - IN CEILING SYSTEM. REFER TO INTERIOR FINISH SCHEDULE FOR TYPES AND LOCATIONS.
22. FLOORING AND BASE. REFER TO INTERIOR FINISH SCHEDULE FOR TYPES AND LOCATIONS.
23. SEALANT WITH BACKER ROD.
24. ALUMINUM WINDOW SYSTEM. REFER TO FLOOR PLAN AND WINDOW SCHEDULES FOR TYPES.
25. DOOR AND FRAME SYSTEM, REFER TO FLOOR PLAN AND SCHEDULES FOR TYPES.
26. PRE-ENGINEERED METAL BUILDING PRIMARY AND SECONDARY STRUCTURAL FRAMING SYSTEMS.
27. PRE-ENGINEERED METAL BUILDING TRANSITION SUPPORT PLATE.
28. PRE-ENGINEERED METAL BUILDING ROOF PANEL SYSTEM WITH THERMAL SPACER BLOCKS (R-5 MIN.).
29. PRE-ENGINEERED METAL BUILDING SHEET METAL FLASHING, COUNTER - FLASHING, CONTINUOUS CLEATS, DRIPS CLOSURES, TRANSITIONS, COPINGS AND ACCESSORIES AS REQUIRED.
30. PRE-ENGINEERED METAL BUILDING GUTTER AND DOWNSPOUT SYSTEM. REFER TO EXTERIOR ELEVATIONS FOR LOCATIONS. REFER TO P.E.M.B. SHOP DRAWINGS FOR SIZES.
31. SURFACE MOUNTED WALL SIGN, OWNER FURNISHED AND INSTALLED, (REFER TO SCOPE OF WORK SCHEDULE), PROVIDE BACKING AND ELECTRICAL ROUGH-IN, REFER TO ELECTRICAL DRAWINGS.
32. RECESSED LIGHTING FIXTURE, REFER TO ELECTRICAL DRAWINGS.
33. 087F125-33 DOUBLE LEG COLD FORM METAL RESILIENT CHANNEL FRAMING AT 24" O.C. HORIZONTAL.
34. 5/8" EXTERIOR FIRE TREATED PLYWOOD SHEATHING WITH CONTINUOUS WEATHER BARRIER. REFER TO STRUCTURAL DRAWINGS FOR ATTACHMENT REQUIREMENTS.
35. 1/4" GYPSUM BOARD.
36. RIGID INSULATION BOARD (R-10 MIN.)
37. ROOF ACCESS LADDER. REFER TO EXTERIOR FINISH SCHEDULE.

STATE OF COLORADO TIMOTHY MICHAEL GUILLOT 406712 LICENSED ARCHITECT 4-18-25

TIMOTHY M. GUILLOT
ARCHITECT
1736 East Sunshine, Suite 417
Springfield, Missouri 65804
417.862.0558
Fax: 417.862.3265
e-mail: architect@esterlyschneider.com

PROJECT:
NEW O'REILLY AUTO PARTS STORE
23RD AVE.
EVANS, CO #1


WALL SECTIONS

O'Reilly AUTO PARTS


CORPORATE OFFICES
233 SOUTH PATTERSON
SPRINGFIELD, MISSOURI 65802
(417) 862-2674 TELEPHONE

COMM #	4838
DATE:	7-19-24
REVISION DATE:	4-18-25

A3.1

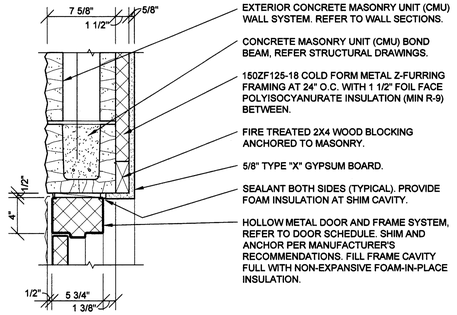


1 HEAD DETAIL
A5.1 SCALE: 1 1/2" = 1'-0"

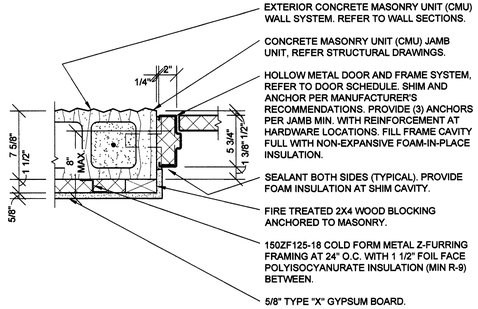


2 JAMB DETAIL
A5.1 SCALE: 1 1/2" = 1'-0"

NOTE:
FOR TYPICAL EXTERIOR WALL DETAIL, REFER TO (1) A5.1

NOTE:
FOR TYPICAL EXTERIOR WALL DETAIL, REFER TO (2) A5.1

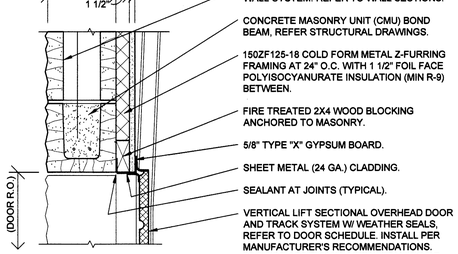


3 HEAD DETAIL
A5.1 SCALE: 1 1/2" = 1'-0"

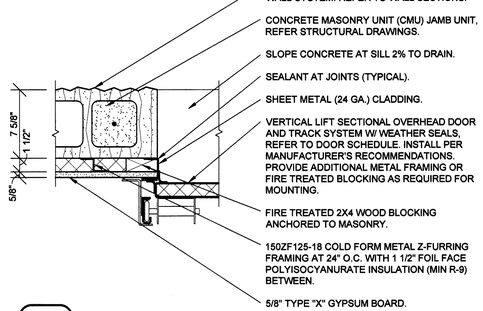


4 JAMB DETAIL
A5.1 SCALE: 1 1/2" = 1'-0"

5 HEAD DETAIL
A5.1 SCALE: 1 1/2" = 1'-0"

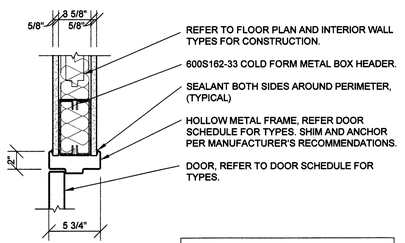

SPECIAL NOTE:
UNLESS OTHERWISE INDICATED, KNOCK DOWN (KD) TYPE DOOR FRAMES ARE NOT PERMITTED.

6 JAMB DETAIL
A5.1 SCALE: 1 1/2" = 1'-0"

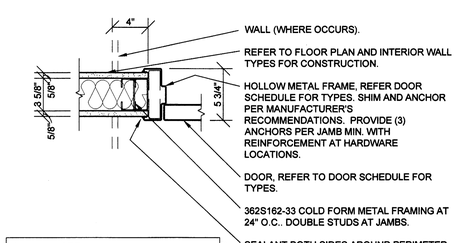

SPECIAL NOTE:
UNLESS OTHERWISE INDICATED, KNOCK DOWN (KD) TYPE DOOR FRAMES ARE NOT PERMITTED.

7 HEAD DETAIL
A5.1 SCALE: 1 1/2" = 1'-0"

8 JAMB DETAIL
A5.1 SCALE: 1 1/2" = 1'-0"

DOOR SCHEDULE

MK	DOOR #9	H x D)	TYPE	SWING	MATERIAL	GLAZ. TYPE	DOOR HARDWARE SET #	DOOR HARDWARE KEYED	FRAME TYPE	FRAME MATERIAL	FRAME HEAD WIDTH	DETAILS HEAD	DETAILS JAMB	DETAILS SILL	FIRE RATING	REMARKS (REFER NOTES)
1	#10	X 1-3/4"	A	REFER TO FLOOR PLAN	ALUMINUM	1	1	A	1	ALUMINUM		4/A5.2	4/A5.2	5/A5.2		1, 2, 5
2	#11	X 1-3/4	B	REFER TO FLOOR PLAN	INSULATED METAL		2	A	2	INSULATED METAL		1/A5.1	2/A5.1	5/A5.2 SIM.		1, 2, 3
3	#12	'-0"	D	SECTIONAL OVERHEAD	INSULATED METAL		3			MANUFACTURER'S STANDARDS		5/A5.1	6/A5.1			1
4	#13	X 1-3/4"	C	REFER TO FLOOR PLAN	SOLID WOOD		4		2	HOLLOW METAL		7/A5.1	8/A5.1			1, 4
5	#14	X 1-3/4"	C	REFER TO FLOOR PLAN	SOLID WOOD		5		2	HOLLOW METAL		7/A5.1	8/A5.1			1, 4
6	#15	X 1-3/4"	C	REFER TO FLOOR PLAN	SOLID WOOD		5		2	HOLLOW METAL		7/A5.1	8/A5.1			1, 4
7	#16	X 1-3/4"	B	REFER TO FLOOR PLAN	INSULATED METAL		6		2	INSULATED METAL		3/A5.1	4/A5.1	5/A5.2 SIM.		1, 3
8		3'-0" X 7'-0" X 1-3/4"	A	REFER TO FLOOR PLAN	ALUMINUM	2	7		1	ALUMINUM		4/A5.2	4/A5.2	5/A5.2 SIM.		1


NOTES:
1. ALL DOORS SHALL BE SHOP PREPARED FOR HARDWARE.
2. ALL EXTERIOR DOORS TO BE KEYED ALIKE. CONTRACTOR TO FIELD VERIFY AND MATCH CORE OF DOOR MARKED "2".
3. EXTERIOR DOOR, FRAME AND HARDWARE OWNER FURNISHED AND CONTRACTOR INSTALLED, REFER TO SCOPE OF WORK SCHEDULE.
4. CONTRACTOR'S OPTION TO PURCHASE INTERIOR DOORS, FRAMES, AND HARDWARE THROUGH PREFERRED VENDOR. REFER TO SCOPE OF WORK SCHEDULE.
5. PROVIDE SIGN POSTED ON EGRESS SIDE ADJACENT TO DOOR STATING "THIS DOOR TO REMAIN UNLOCKED WHEN THIS SPACE IS OCCUPIED". SIGN CONSTRUCTION TO BE NON-GLARE 1" HIGH WHITE LETTERING ON CONTRASTING BLUE BACKGROUND. LOCATION TO COMPLY WITH ANSI A117.1. MOUNT 48" MINIMUM ABOVE FINISH FLOOR TO BOTTOM OF LOWEST CHARACTER AND 60" MAXIMUM ABOVE FINISH FLOOR TO BOTTOM OF HIGHEST CHARACTER.

LOCKNET
100 COURCHELLE DRIVE
NICHOLASVILLE, KY 40356
CONTACT: PAM PEEL
PHONE 800-887-4307 EXT 133
FAX 859-881-5499
EMAIL: construction@locknet.com

SPECIAL NOTE:
UNLESS OTHERWISE INDICATED, KNOCK DOWN (KD) TYPE DOOR FRAMES ARE NOT PERMITTED.


DOOR TYPES
(SCALE 1/4" = 1'-0")

NOTE:
DASHED IN DOOR AND DOUBLE LETTER INDICATE PAIRED DOOR LOCATIONS.




ALUMINUM ENTRANCE SWING DOOR WITH SAFETY GLASS (REFER TO SCHEDULES FOR FINISHES)

A Ⓐ




FLUSH METAL SWING DOOR (INSULATED) (REFER TO SCHEDULES FOR FINISHES)

B Ⓑ



FLUSH SOLID CORE WOOD SWING DOOR (REFER TO SCHEDULES FOR FINISHES)


C Ⓒ



SECTIONAL OVERHEAD DOOR (INSULATED) WITH LIFT CLEARANCE TRACK SYSTEM MOUNTED AT 11'-0" MAXIMUM A.F.F.. MANUAL OPERATION WITH PULL ROPE. (REFER TO SCHEDULES FOR FINISHES)

D


FRAME TYPES
(SCALE 3" = 1'-0")



ALUMINUM ENTRANCE AND STOREFRONT FRAMING SYSTEM (THERMALLY BROKEN) WITH 1" INSULATED GLAZING.

REFER TO EXTERIOR FINISH SCHEDULES FOR FRAME COLORS AND GLAZING SCHEDULE FOR GLAZING TYPES.

1



HOLLOW METAL FRAME (16 GA.) WITH (3) MIN. ANCHORS PER JAMB, (1) AT EACH JAMB SILL, AND ADDITIONAL ANCHORS AT HARDWARE LOCATIONS.

REFER EXTERIOR AND INTERIOR FINISH SCHEDULES FOR COLORS.

2

DOOR HARDWARE SCHEDULE

GENERAL HARDWARE NOTES:
1. ALL HINGED DOOR HARDWARE TO BE COMPLIANT WITH ADA STANDARDS AND GOVERNING ACCESSIBILITY CODES.

A. OPERATIONAL FORCE TO RETRACT LATCHES OR DISENGAGE DEVICES THAT HOLD DOORS IN CLOSED POSITION SHALL BE AS FOLLOWS:
(1). HARDWARE OPERATION BY A FORWARD, PUSHING, OR PULLING MOTION: 15 POUNDS MAXIMUM.
(2). HARDWARE OPERATION BY A ROTATIONAL MOTION: 28 INCH-POUNDS MAXIMUM.

B. HEIGHT OF OPERABLE PARTS SHALL BE 34 INCHES MINIMUM AND 48 INCHES MAXIMUM ABOVE FLOOR.

C. CLOSING SPEEDS SHALL BE ADJUSTED SO THAT FROM AN OPEN POSITION OF 90 DEGREES, THE TIME REQUIRED TO MOVE THE DOOR TO AN OPEN POSITION OF 12 DEGREES SHALL BE 5 SECONDS MINIMUM.

D. OPENING FORCE FOR FIRE DOORS, DOORS REQUIRED TO BE EQUIPPED WITH PANIC HARDWARE, BREAK AWAY FEATURES, OR OTHER FACTORS REQUIRING HIGHER OPENING FORCE FOR SAFETY REASONS SHALL HAVE THE MINIMUM OPENING FORCE ALLOWABLE BY AUTHORITIES HAVING JURISDICTION. FOR OTHER DOORS THE FORCE FOR PUSHING OR PULLING SHALL BE AS FOLLOWS:
(1). INTERIOR HINGED DOORS: 5.0 POUNDS MAXIMUM.

2. VERIFY COMPATIBILITY OF HARDWARE SPECIFIED. NOTIFY ARCHITECT OF INCOMPATIBILITY ISSUES PRIOR TO ORDERING AND INSTALLATION.

SET NO. 1 (DR. 1)
1 CYLINDER: 20-062 X 626 - "E" KEYWAY (REMOVABLE CORE)..... SCHLAGE

(FOLLOWING REQUIRED HARDWARE FURNISHED WITH WINDOW FRAMING DOOR SYSTEM)
1 PAIR OFFSET PIVOTS: 195/180 X 626..... RIXON
1 DEADLOCK: MS1850S X 628..... ADAMS RITE
1 DEADLOCK LEVER (WITH "LOCKED" AND "OPEN" INDICATOR): 4550MS X 628..... ADAMS RITE
1 STRIKE: MS4002 X 628..... ADAMS RITE
1 SET PUSH / OFFSET PULL: CO-12 X CP-II X 626..... KAWNEER
1 CLOSER: 4040XP-3077-18TJ-TB X 689..... LCN
1 SET PERIMETER GASKETS: 027078 (POLYMERIC BULB) X LENGTH REQUIRED..... KAWNEER
1 SWEEP: 200799 X 689 X LENGTH REQUIRED..... KAWNEER
1 THRESHOLD: 069139 X 689 X LENGTH REQUIRED (OFFSET PIVOT COMPATIBLE) (ANSI & ADA COMPLIANT)..... KAWNEER

SET NO. 2 (DR. 2)
1 CONTINUOUS HINGE: 780-112HD X 628 X LENGTH REQUIRED..... HAGER
1 CYLINDER: 20-057 X 626 - "E" KEYWAY (REMOVABLE CORE) PROVIDE (2) SECURITY KEYS, (1) CORE KEY, (1) BITTED..... SCHLAGE
1 EXIT PANIC LOCK: 9300B X 486 X 689 X PRT03 X 630 (THROUGH SEX BOLT MOUNTING)..... DORMAKABA
1 CLOSER: 8616DST X FC X SNB1 X 689 (THROUGH SEX BOLT MOUNTING)..... DORMAKABA
1 SET PERIMETER GASKETS: 12002 X 1116 X LENGTH REQUIRED..... SCHLEGEL
1 LATCH GUARD: LG100Z/SF X 663 (STRAIGHT W/ PIN AND SEX BOLTS)..... LATCHGUARD
1 DOOR VIEWER: 698-190 X 626..... IVES
1 KICK PLATE: 190S X 8" X 34" X 630..... HAGAR
1 DOOR BOTTOM SEAL: 31321 X 689 X LENGTH REQUIRED..... GLOBAL
1 THRESHOLD: 31206 X 689 X LENGTH REQUIRED..... GLOBAL

SET NO. 3 (DR. 3)
REQUIRED HARDWARE FURNISHED WITH OVERHEAD DOOR SYSTEM (LOCKING FROM INSIDE ONLY)

SET NO. 4 (DR. 4)
3 HINGES: BB1279 X 4 1/2" X 4 1/2" X 626..... HAGER
1 OFFICE LOCK (LEVER HANDLE): AU5307LN X 626..... YALE
1 WALL BUMPER: 409 X 626..... ROCKWOOD

SET NO. 5 (DR. 5, 6)
3 HINGES: BB1279 X 4 1/2" X 4 1/2" X 626..... HAGER
1 PRIVACY LOCK (LEVER HANDLE): AU5302LN X 626..... YALE
1 WALL BUMPER: 409 X 626..... ROCKWOOD

SET NO. 6 (DR. 7)
3 HINGES: ECBB1100 X 4 1/2" X 4 1/2" X 626 X NRP..... HAGER
1 EXIT ONLY PANIC LOCK: 8300B X 486 X 689..... DORMAKABA
1 CLOSER: 5300MLT X FC X SX2 X 689 (THROUGH SEX BOLT MOUNTING)..... HAGER
1 SET PERIMETER GASKETS: 12002 X 1116 X LENGTH REQUIRED..... SCHLEGEL
1 LATCH GUARD: LG100Z/SF X 663 (STRAIGHT W/ PIN AND SEX BOLTS)..... LATCHGUARD
1 DOOR BOTTOM SEAL: 31321 X 689 X LENGTH REQUIRED..... GLOBAL
1 THRESHOLD: 31206 X 689 X LENGTH REQUIRED..... GLOBAL

SET NO. 7 (DR. 8)
(FOLLOWING REQUIRED HARDWARE FURNISHED WITH WINDOW FRAMING DOOR SYSTEM)
1 PAIR OFFSET PIVOTS: 195/188 X 626..... RIXON
1 SET PUSH / OFFSET PULL: CO-12 X CP-II X 626..... KAWNEER
1 CLOSER: 4040XP-3077-18TJ-TB X 689..... LCN
1 SET PERIMETER GASKETS: 027078 (POLYMERIC BULB) X LENGTH REQUIRED..... KAWNEER

GENERAL NOTES

(A) REFER TO PROJECT MANUAL FOR ADDITIONAL REQUIREMENTS.

(B) REFER TO BUILDING CODE SUMMARY FOR PROJECT STRUCTURAL DESIGN CRITERIA. DOOR FRAMING AND ANCHORING SYSTEMS SHALL BE DESIGNED BY MANUFACTURER TO CONFORM TO PERFORMANCE AND TESTING REQUIREMENTS SPECIFIED.

(C) REFER TO FLOOR PLAN, ELEVATIONS, AND SECTIONS FOR ADDITIONAL REQUIREMENTS.

(D) REFER TO EXTERIOR AND INTERIOR FINISH SCHEDULES FOR COLORS. PERIMETER SEALANT COLOR TO MATCH FRAME COLOR UNLESS OTHERWISE INDICATED.

STATE OF COLORADO
TIMOTHY M. GUILLOT
ARCHITECT
LICENSED ARCHITECT
7-19-24

TIMOTHY M. GUILLOT
ARCHITECT
1736 East Sunshine, Suite 417
Springfield, Missouri 65804
417.862.9558
Fax: 417.862.3265
e-mail: architect@estlerlyschaeller.com

PROJECT:
NEW O'REILLY AUTO PARTS STORE
23RD AVE.
EVANS, CO #1


DOOR SCHEDULE

O'Reilly AUTO PARTS
CORPORATE OFFICES
233 SOUTH PATTERSON
SPRINGFIELD, MISSOURI 65802
(417) 862-2674 TELEPHONE


COMM #	4838
DATE:	7-19-24
REVISION DATE:	

A5.1


WINDOW TYPES

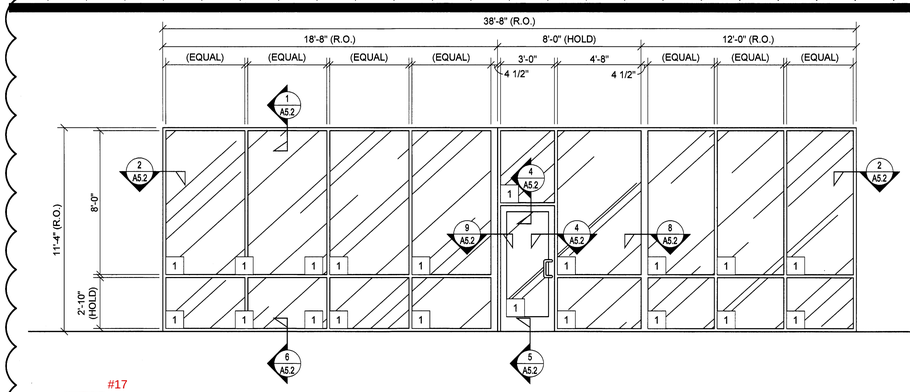


A — #17 — ALUMINUM STOREFRONT FRAMING (2" X 4 1/2") SYSTEM, THERMALLY BROKEN, FIXED UNIT.

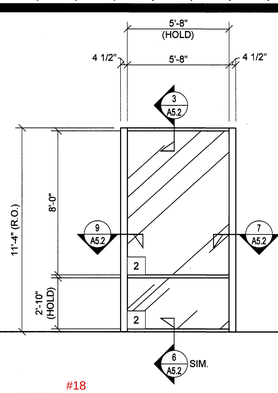


B1 — #18 — ALUMINUM STOREFRONT FRAMING (2" X 4 1/2") SYSTEM, THERMALLY BROKEN, FIXED UNIT.

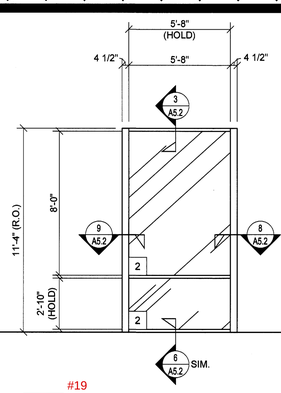


B2 — #19 — ALUMINUM STOREFRONT FRAMING (2" X 4 1/2") SYSTEM, THERMALLY BROKEN, FIXED UNIT.

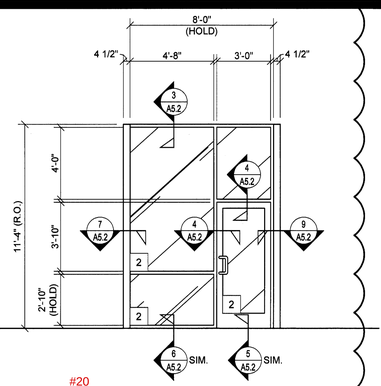


C — #20 — ALUMINUM STOREFRONT FRAMING (2" X 4 1/2") SYSTEM, THERMALLY BROKEN, FIXED UNIT.

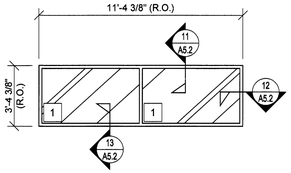


D1 AND D2 — #21 #22 — ALUMINUM STOREFRONT FRAMING (2" X 4 1/2") SYSTEM, THERMALLY BROKEN, FIXED UNIT.

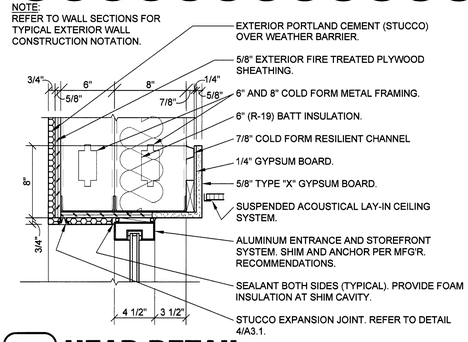


1 HEAD DETAIL
A5.2 SCALE: 1 1/2" = 1'-0"

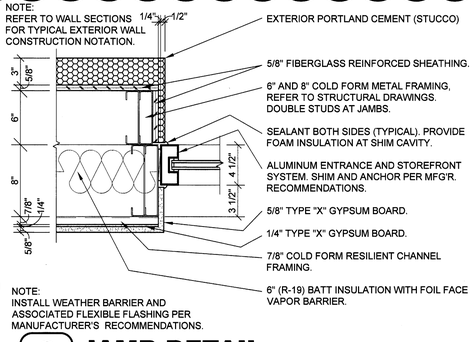


2 JAMB DETAIL
A5.2 SCALE: 1 1/2" = 1'-0"

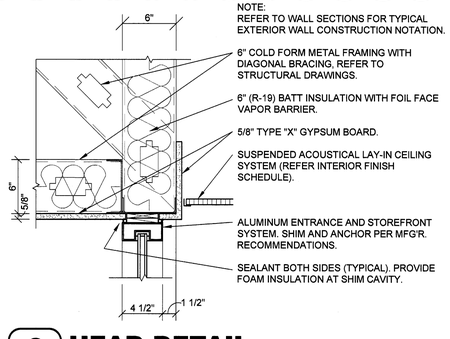


3 HEAD DETAIL
A5.2 SCALE: 1 1/2" = 1'-0"

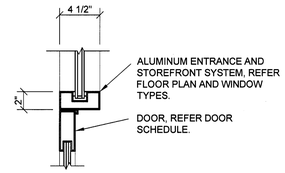


4 HEAD / JAMB DETAIL
A5.2 SCALE: 1 1/2" = 1'-0"

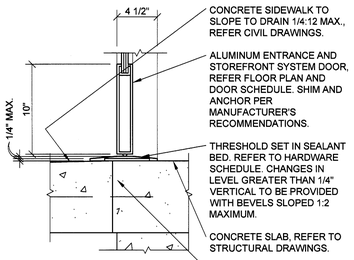


5 SILL DETAIL
A5.2 SCALE: 1 1/2" = 1'-0"

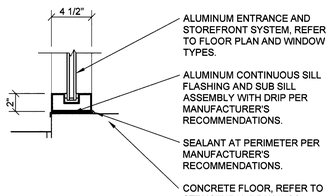


6 SILL DETAIL
A5.2 SCALE: 1 1/2" = 1'-0"



7 JAMB DETAIL
A5.2 SCALE: 1 1/2" = 1'-0"

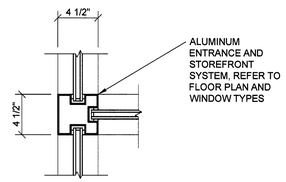

8 JAMB DETAIL
A5.2 SCALE: 1 1/2" = 1'-0"

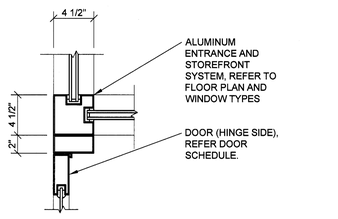

9 JAMB DETAIL
A5.2 SCALE: 1 1/2" = 1'-0"

10 VESTIBULE ENLARGE PLAN
A5.2 SCALE: 1/4" = 1'-0"

11 HEAD DETAIL
A5.2 SCALE: 1 1/2" = 1'-0"

12 JAMB DETAIL
A5.2 SCALE: 1 1/2" = 1'-0"

13 SILL DETAIL
A5.2 SCALE: 1 1/2" = 1'-0"

GENERAL NOTES

A. REFER TO PROJECT MANUAL FOR ADDITIONAL REQUIREMENTS.

B. REFER TO BUILDING CODE SUMMARY FOR PROJECT STRUCTURAL DESIGN CRITERIA. WINDOW FRAMING AND ANCHORING SYSTEMS SHALL BE DESIGNED BY MANUFACTURER TO CONFORM TO PERFORMANCE AND TESTING REQUIREMENTS SPECIFIED.

C. REFER TO FLOOR PLAN, ELEVATIONS, AND SECTIONS FOR ADDITIONAL REQUIREMENTS.

D. WINDOW TYPE ELEVATIONS SHOWN VIEWED FROM EXTERIOR SIDE.

E. REFER TO EXTERIOR FINISH SCHEDULES FOR ALUMINUM WINDOW FRAMING COLORS. PERIMETER SEALANT COLOR TO MATCH WINDOW FRAMING COLOR UNLESS OTHERWISE INDICATED.

F. ALL DIMENSIONS TO ROUGH FACE OF FRAMING UNLESS OTHERWISE INDICATED. FIELD VERIFY FINAL ROUGH OPENINGS PRIOR TO FABRICATION.

G. REFER TO DOOR AND HARDWARE SCHEDULES FOR ADDITIONAL REQUIREMENTS.

H. SECURITY SHUTTERS MAY BE REQUIRED. CONTACT PROJECT ADMINISTRATOR FOR VERIFICATION. (REFER TO SCOPE OF WORK SCHEDULE). PROVIDE ADDITIONAL SUPPORT FRAMING SYSTEM AS REQUIRED.

I. WHEN WIND SPEED IS EQUAL TO OR GREATER THAN 120 MPH AND THE STOREFRONT OR CURTAIN WALL SYSTEM IS NOT SPECIFIED TO BE IMPACT RESISTANT, A STORM PANEL SYSTEM SHALL BE OWNER FURNISHED AND INSTALLED. CONTACT PROJECT ADMINISTRATOR TO VERIFY AND COORDINATE WITH SYSTEM PROVIDED BY OTHERS. (REFER TO SCOPE OF WORK SCHEDULE). PROVIDE ADDITIONAL SUPPORT FRAMING SYSTEM AS REQUIRED.

J. CONTRACTOR'S OPTION TO DIRECT ORDER AND PURCHASE WINDOW FRAMING SYSTEM AND GLAZING FROM THE FOLLOWING SUPPLIER (REFER TO SCOPE OF WORK SCHEDULE):

COULTER & COMPANY
13711 E. 66TH ST. N.
OWASSO, OK 74055
PHONE: (918) 272-4494
FAX: (918) 272-7908
EMAIL: carl@coulterglass.com
CONTACT: Carl Yorman

GLAZING SCHEDULE

#23
1 — 1" INSULATED SAFETY GLAZING (1/4" VITRO "SOLAR-COOL (2) AZURIA" EXTERIOR PANE / 1/2" AIR SPACE / 1/4" CLEAR INTERIOR PANE)
#24 EFFICIENT 0.29

2 — 1/4" SAFETY GLAZING

TIMOTHY M. GUILLOT
ARCHITECT
1736 East Sunshine, Suite 417
Springfield, Missouri 65804
417.862.9558
Fax: 417.862.3265
e-mail: architect@estertyschmeler.com

STATE OF COLORADO — TIMOTHY MICHAEL GUILLOT — 45712 — REGISTERED ARCHITECT — 4-16-25

PROJECT:
NEW O'REILLY AUTO PARTS STORE
23RD AVE.
EVANS, CO #1

WINDOW SCHEDULE

O'Reilly AUTO PARTS

CORPORATE OFFICES
233 SOUTH PATTERSON
SPRINGFIELD, MISSOURI 65802
(417) 862-2674 TELEPHONE

COMM #	4838
DATE:	7-19-24
REVISION DATE:	4-18-25

A5.2