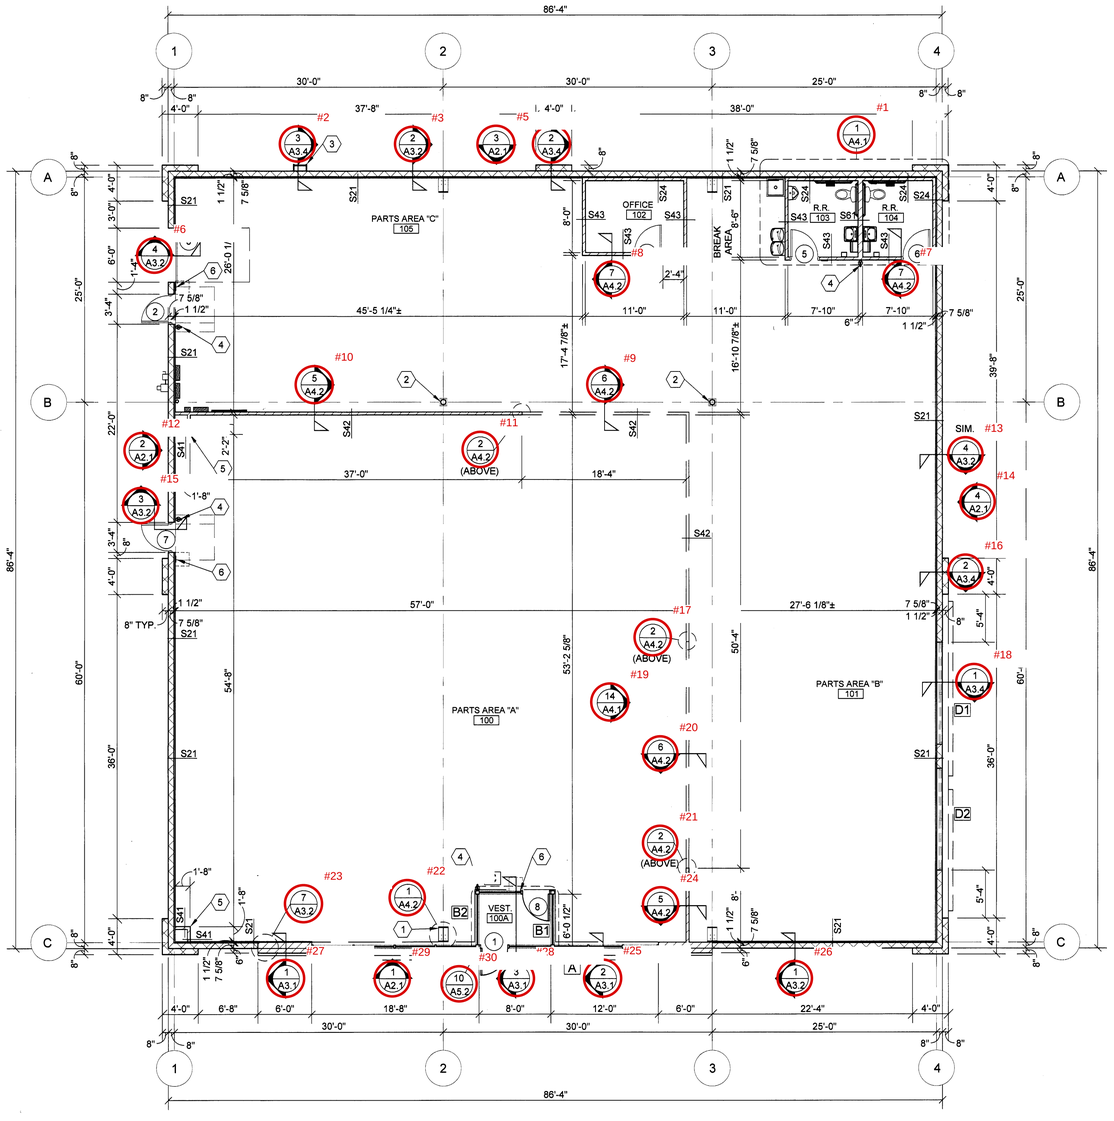


1 FLOOR PLAN (A1.1) SCALE: 1/8" = 1'-0"

GENERAL NOTES

A. REFER TO PROJECT MANUAL FOR ADDITIONAL REQUIREMENTS.

B. ALL DIMENSIONS TO ROUGH FACE OF ROUGH FRAMING, CONCRETE, MASONRY OR CENTERLINE OF STRUCTURE, UNLESS OTHERWISE NOTED. COLD FORM METAL STUD INTERIOR PARTITION DIMENSIONS 3-5/8" UNLESS OTHERWISE INDICATED AND NOT SHOWN FOR CLARITY.

C. REFER TO EXTERIOR AND INTERIOR FINISH SCHEDULES FOR ADDITIONAL REQUIREMENTS.

D. REFER TO PRE-ENGINEERED METAL BUILDING SHOP DRAWINGS FOR ADDITIONAL REQUIREMENTS. NOTIFY ARCHITECT IF FINAL DESIGN CONDITIONS DEVIATE SUBSTANTIALLY FROM THOSE INDICATED HEREIN.

KEY NOTES

1. CONCEALED STEEL COLUMN. REFER TO PRE-ENGINEERED METAL BUILDING SHOP DRAWINGS. PROVIDE SHEET METAL COVER WITH NO EXPOSED HORIZONTAL SEAMS. FINISH TO MATCH WINDOW FRAMING.
2. EXPOSED STEEL COLUMN, REFER TO PRE-ENGINEERED METAL BUILDING SHOP DRAWINGS, (PAINT W-3, REFER INTERIOR FINISH SCHEDULE).
3. ROOF ACCESS LADDER. REFER TO EXTERIOR FINISH SCHEDULE.
4. SURFACE MOUNTED PORTABLE FIRE EXTINGUISHER, REFER TO DETAIL 10/A4.2.
5. SHOWROOM CORNER WALL BOX OUT. INSTALL 5/8" FIRE TREATED PLYWOOD BACKING TO BACK SIDE OF STUD INTERIOR FLANGE ON EACH EXPOSED WALL FACE FROM 8'-0" TO 10'-0" A.F.F. FOR INSTALLATION OF SECURITY MIRRORS. REFER TO 4/A4.2 (TYPICAL).
6. TACTILE EXIT SIGN AT EXIT DISCHARGE DOOR STATING "EXIT" WITH BRAILLE (GRADE 2 CONTRACTED) LETTERING. SIGN CONSTRUCTION AND LOCATION TO COMPLY WITH ANSI A117.1. MOUNT 48" MINIMUM ABOVE FINISH FLOOR TO BOTTOM OF LOWEST TACTILE CHARACTER AND 80" MAXIMUM ABOVE FINISH FLOOR TO BOTTOM OF HIGHEST TACTILE CHARACTER.

INTERIOR WALL & CEILING NOTES

1. GENERAL:
A. REFER TO FINISH SCHEDULES FOR ADDITIONAL WALL FINISH MATERIAL APPLICATIONS.

B. REFER TO WALL SECTIONS AND DETAILS FOR ADDITIONAL CONDITIONS.

2. FRAMING:
A. PROVIDE FIRE TREATED 2X BLOCKING AS REQUIRED FOR INSTALLATION OF ACCESSORIES PER MANUFACTURER'S RECOMMENDATIONS.

B. PROVIDE DIAGONAL WALL BRACING (3" X 16 GA. FLAT STRIP) AT CORNER FACES OF FREE STANDING PARTITION SYSTEMS.

C. WHERE WALL FRAMING EXTENDS TO BOTTOM OF ROOF DECK OR STRUCTURE, PROVIDE DEFLECTION CHANNELS AT TOP TRACK FOR 1 1/2" MINIMUM DEFLECTION.

D. REFER TO STRUCTURAL DRAWINGS FOR STRUCTURAL STUD REQUIREMENTS.

E. REFER TO WINDOW AND DOOR HEAD, JAMB AND SILL DETAILS FOR ADDITIONAL FRAMING REQUIREMENTS.

F. PROVIDE HORIZONTAL STUD BRIDGING AT 4'-0" O.C. VERTICAL.

3. GYPSUM AND BACKING BOARD:
A. EXPANSION/CONTROL JOINTS: INSTALL EXPANSION/CONTROL JOINTS IN CEILINGS EXCEEDING 2500 SQ. FT. IN AREA AND IN PARTITION WALL LENGTHS EXCEEDING 30 FEET. LOCATE JOINTS AT LOCATIONS OF MASONRY CONTROL JOINTS SHOWN ON EXTERIOR ELEVATIONS. DO NOT EXCEED A DISTANCE OF 50 FEET IN ANY DIRECTION BETWEEN CEILING JOINTS. INSTALL CONTROL JOINTS WHERE FRAMING OR FURRING CHANGES DIRECTION.

B. PROVIDE MOISTURE RESISTANT TYPE "X" GYPSUM BOARD AT ALL WET LOCATIONS (RESTROOMS, WET WALLS, AND JANITOR'S SINK AREAS).


C. PROVIDE "J" MOLDING, REGLETS, OR CORNER BEAD AT GYPSUM BOARD PERIMETER CONDITIONS TRANSITIONING TO DISSIMILAR EXPOSED FINISH MATERIALS.

4. INSULATION:
A. INSULATION SHALL HAVE A FLAME SPREAD RATING OF 0-25 AND A SMOKE DEVELOPMENT RATING OF 0- 450.

B. PROVIDE SEALANT ON BOTH SIDES OF STUD BOTTOM TRACKS AT ACOUSTICAL INSULATED WALL LOCATIONS.

INTERIOR WALL TYPES

(SCALE 1 1/2" = 1'-0")

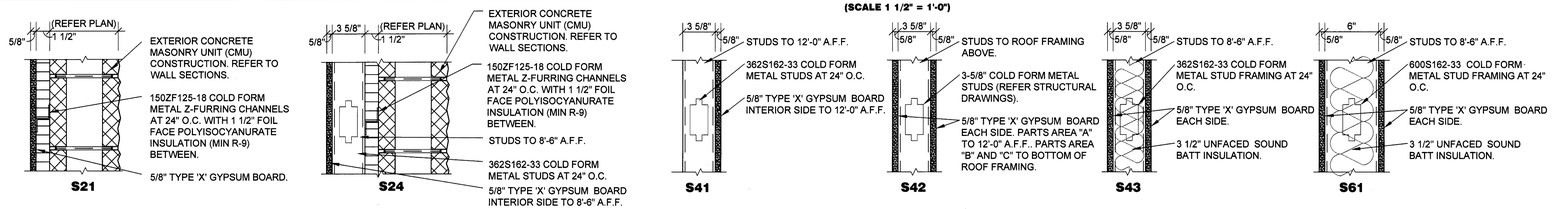

TIMOTHY M. GUILLOT
ARCHITECT
1736 East Sunshine, Suite 417
Springfield, Missouri 65804
417.862.9558
Fax: 417.862.3265
e-mail: architect@estherlyschneider.com

STATE OF COLORADO — TIMOTHY M. GUILLOT — 40872 — REGISTERED ARCHITECT — 4-18-25


PROJECT:
NEW O'REILLY AUTO PARTS STORE
23RD AVE.
EVANS, CO #1

FLOOR PLAN

O'Reilly AUTO PARTS
CORPORATE OFFICES
233 SOUTH PATTERSON
SPRINGFIELD, MISSOURI 65802
(417) 862-2674 TELEPHONE


COMM #	4838
DATE:	7-19-24
REVISION DATE:	4-18-25

A1.1

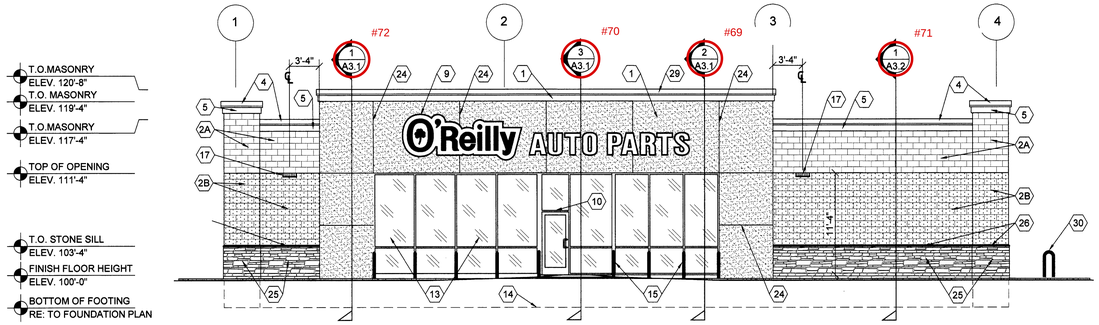

1 WEST EXTERIOR ELEVATION


A2.1 SCALE: 1/8" = 1'-0"

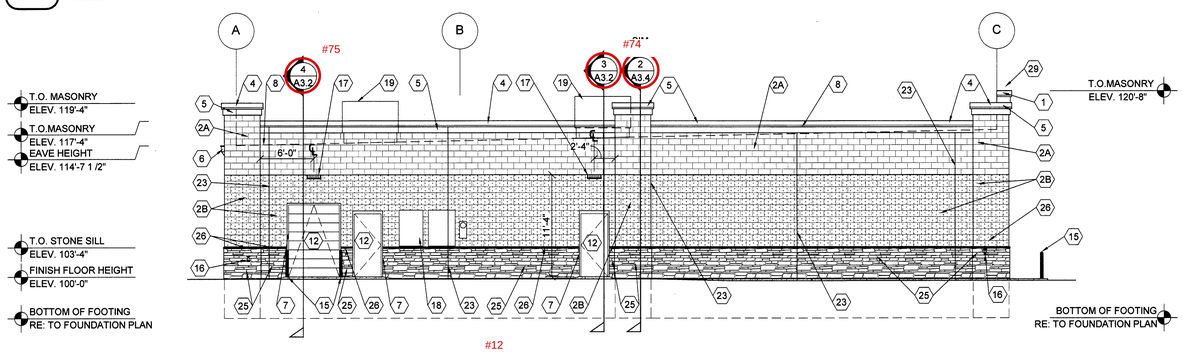

2 NORTH EXTERIOR ELEVATION

A2.1 SCALE: 1/8" = 1'-0"


#12

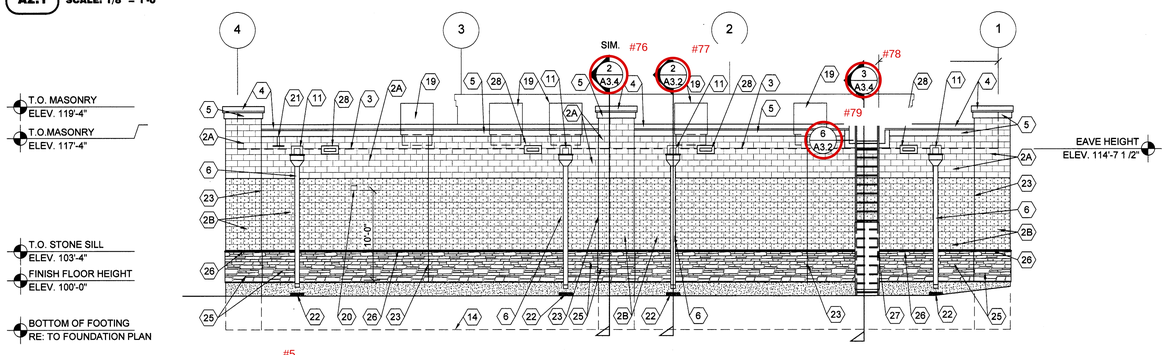

3 EAST EXTERIOR ELEVATION

A2.1 SCALE: 1/8" = 1'-0"

#5

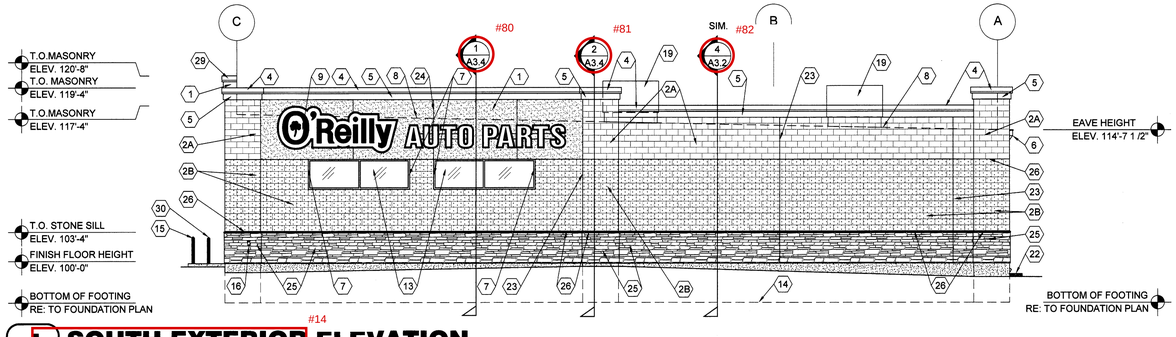

4 SOUTH EXTERIOR ELEVATION

A2.1 SCALE: 1/8" = 1'-0"

#14

EXTERIOR FINISH SCHEDULE

PORTLAND CEMENT STUCCO
KEY NOTE NO. 1:
MFG: STO SPECIFIED. EQUAL BY DRYVIT OR MASTER BUILDERS (NO SUBSTITUTES)
SERIES: STOPOWERWALL
TEXTURE: MEDIUM SAND
COLOR: EQUAL TO DRYVIT "ORAP011030S" STRATOTONE HIGH PERFORMANCE
COLOR STANDARD: SHERWIN WILLIAMS "POSITIVE RED" SW6871 (SHER-CRYL) GLOSS

KEY NOTE NO. 5:
MFG: STO SPECIFIED. EQUAL BY DRYVIT OR MASTER BUILDERS (NO SUBSTITUTES)
SERIES: STOPOWERWALL
TEXTURE: MEDIUM SAND
COLOR: SHERWIN WILLIAMS "DORIAN GRAY" SW7017 (SHER-CRYL) GLOSS (COLOR TO BE INTEGRAL IN THE TOP COAT OF PLASTER)

UNIT MASONRY
KEY NOTE NO. 2A:
TYPE: CONCRETE MASONRY UNIT (CMU)
MFG: (REFER TO PROJECT MANUAL)
SIZE: 8"X8"X16" (NOM.)
TEXTURE: SPLIT FACE
COURSING: RUNNING BOND
FINISH: FIELD PAINT (ACCENT COLOR)
COLOR: SHERWIN WILLIAMS "DORIAN GRAY" SW7017 (SHER-CRYL) GLOSS (COLOR TO BE INTEGRAL IN THE TOP COAT OF PLASTER)
NOTE: REFER TO "CONCRETE MASONRY UNIT SPECIAL SCHEDULE OF TREATMENTS" FOR ADDITIONAL REQUIREMENTS.

KEY NOTE NO. 2B:
TYPE: CONCRETE MASONRY UNIT (CMU)
MFG: (REFER TO PROJECT MANUAL)
SIZE: 8"X8"X16" (NOM.)
TEXTURE: SPLIT FACE
COURSING: RUNNING BOND
FINISH: FIELD PAINT (FIELD COLOR)
COLOR: SHERWIN WILLIAMS "SHOJI WHITE" SW7042 (SHER-CRYL) GLOSS (COLOR TO BE INTEGRAL IN THE TOP COAT OF PLASTER)
NOTE: REFER TO "CONCRETE MASONRY UNIT SPECIAL SCHEDULE OF TREATMENTS" FOR ADDITIONAL REQUIREMENTS.

FLASHING AND SHEET METAL
KEY NOTE NO. 3:
TYPE: STANDING SEAM ROOFING SYSTEM
MFG: (REFER TO PRE-ENGINEERED METAL BUILDING SHOP DRAWINGS)
COLOR: GALVALUME

KEY NOTE NO. 4:
TYPE: CAP FLASHING
MFG: (REFER TO PRE-ENGINEERED METAL BUILDING SHOP DRAWINGS)
FINISH: PREFINISHED
COLOR: SHERWIN WILLIAMS "DORIAN GRAY" SW7017

KEY NOTE NO. 29:
TYPE: CAP FLASHING AT STUCCO
MFG: (REFER TO PRE-ENGINEERED METAL BUILDING SHOP DRAWINGS)
FINISH: FACTORY PRIMED AND FIELD PAINT
COLOR: SHERWIN WILLIAMS "POSITIVE RED" SW6871 (SHER-CRYL) GLOSS
WITH SHERWIN WILLIAMS THREE COMPONENT (B65T105 / B65V105 / B65C105) CLEAR URETHANE

KEY NOTE NO. 6:
TYPE: PRE-ENGINEERED METAL BUILDING CONDUCTOR HEAD AND DOWNSPOUTS
MFG: (OWNER FURNISHED / CONTRACTOR INSTALLED)
FINISH: FACTORY PRIMED AND FIELD PAINTED
COLOR: SHERWIN WILLIAMS (MATCH ADJACENT MASONRY FIELD COLOR) (SEMI-GLOSS)

DOORS AND WINDOWS
KEY NOTE NO. 12:
TYPE: STEEL DOORS AND FRAMES (DOORS NO. 2 AND 7)
MFG: (OWNER FURNISHED / CONTRACTOR INSTALLED)
FINISH: FACTORY PRIMED AND FIELD PAINTED
COLOR: SHERWIN WILLIAMS (MATCH ADJACENT MASONRY COLOR) (SEMI-GLOSS)

KEY NOTE NO. 12:
TYPE: STEEL DOORS AND FRAMES (DOORS NO. 3)
MFG: (REFER PROJECT MANUAL)
FINISH: FACTORY PRIMED AND FIELD PAINTED
COLOR: SHERWIN WILLIAMS (MATCH ADJACENT MASONRY COLOR) (SEMI-GLOSS)

KEY NOTE NO. 13:
TYPE: (REFER TO WINDOW SCHEDULE)
MFG: EFCO, KAWNEER, OR OLD CASTLE (VISTA WALL). (NO SUBSTITUTES)
COLOR: EFCO "IVY", KAWNEER "DARK IVY", VISTA WALL "INTERSTATE GREEN"

PAINTING
KEY NOTE NO. 15:
TYPE: STEEL BOLLARDS (REFER TO CIVIL DRAWINGS)
FINISH: FIELD PRIMED AND PAINTED
COLOR: SHERWIN WILLIAMS "HUNT CLUB" SW6468 (SEMI-GLOSS)

KEY NOTE NO. 30:
TYPE: BICYCLE RACK (REFER TO CIVIL DRAWINGS)
FINISH: FIELD PRIMED AND PAINTED
COLOR: SHERWIN WILLIAMS "HUNT CLUB" SW6468 (SEMI-GLOSS)

STONE VENEER
TYPE: STONE VENEER
MFG: ELDORADO STONE
FINISH: CLIFFSTONE
COLOR: WHITEBARK
**FIELD PAINT EXPOSED BLOCK BELOW TO MATCH STONE COLOR.
(SEE CONCRETE MASONRY UNIT SPECIAL SCHEDULE OF TREATMENTS)

KEY NOTE 26:
TYPE: STONE VENEER
MFG: ELDORADO STONE
FINISH: SPLITSTONE SILL
COLOR: WHITE CLOUD

ROOF ACCESS LADDER:
KEY NOTE NO. 27
TYPE: PRE-FABRICATED ROOF ACCESS LADDER
MFG.: LOCAL SUPPLIER
FINISH: FACTORY PRIME, FIELD PAINT
COLOR: (MATCH FIELD MASONRY COLOR)

GENERAL NOTES

(A) REFER TO PROJECT MANUAL FOR ADDITIONAL REQUIREMENTS.
(B) REFER TO CIVIL DRAWINGS FOR ADDITIONAL REQUIREMENTS.
(C) REFER TO PLUMBING, MECHANICAL, AND ELECTRICAL DRAWINGS FOR SYSTEM TYPES AND ADDITIONAL REQUIREMENTS.
(D) REFER TO EXTERIOR FINISH SCHEDULE FOR MATERIAL TYPES.
(E) REFER TO PRE-ENGINEERED METAL BUILDING SHOP DRAWINGS FOR ADDITIONAL REQUIREMENTS.
(F) REFER TO SCOPE OF WORK SCHEDULE FOR ADDITIONAL REQUIREMENTS.

KEY NOTES

#29

1 PORTLAND CEMENT (STUCCO). REFER TO EXTERIOR FINISH SCHEDULE.
2A CONCRETE MASONRY UNIT (CMU) EXTERIOR WALL CONSTRUCTION (ACCENT COLOR). REFER TO PLANS, SECTIONS, AND DETAILS FOR ADDITIONAL REQUIREMENTS.
2B CONCRETE MASONRY UNIT (CMU) EXTERIOR WALL CONSTRUCTION (FIELD COLOR). REFER TO PLANS, SECTIONS, AND DETAILS FOR ADDITIONAL REQUIREMENTS.
3 PRE-ENGINEERED METAL BUILDING SHEET METAL ROOFING SYSTEM.
4 PRE-ENGINEERED METAL BUILDING SHEET METAL FLASHING.
5 EXTERIOR PORTLAND CEMENT (STUCCO) CORNICE.
6 PRE-ENGINEERED METAL BUILDING SHEET METAL CONDUCTOR HEAD AND DOWNSPOUT SYSTEM.
7 CONCRETE MASONRY UNIT (CMU) CORNER FINISHED JAMB UNIT.
8 LINE OF ROOF BEYOND WITH 1/4":12" SLOPE MINIMUM.
9 SURFACE MOUNTED SIGN OWNER FURNISHED AND INSTALLED. PROVIDE BACKING FOR MOUNTING AND ROUGH-IN ELECTRICAL. COORDINATE REQUIREMENTS WITH OWNER. REFER TO SHEET SG2.1.
10 BUILDING ADDRESS NUMBERS IN 6" HIGH HELVETICA WHITE VINYL ADHERED TO EXTERIOR FACE OF GLAZING.
11 PRE-ENGINEERED METAL BUILDING SHEET METAL GUTTER (BEYOND) AND THRU WALL SCUPPER SYSTEM. REFER TO SHEET A3.3.
12 EXTERIOR DOOR AND FRAME SYSTEM. REFER TO FLOOR PLAN AND DOOR SCHEDULE FOR TYPES.
13 EXTERIOR WINDOW SYSTEM. REFER TO FLOOR PLAN AND WINDOW SCHEDULE FOR TYPES.
14 APPROXIMATE LINE OF FOUNDATION, REFER TO STRUCTURAL DRAWINGS.
15 STEEL BOLLARDS, REFER TO CIVIL AND STRUCTURAL DRAWINGS.
16 HOSE BIB, REFER TO PLUMBING DRAWINGS.
17 LIGHT FIXTURE, REFER TO ELECTRICAL DRAWINGS.
18 ELECTRIC METER AND BOX. REFER TO ELECTRICAL PLANS.
19 MECHANICAL ROOF TOP UNIT, REFER TO MECHANICAL DRAWINGS.
20 MECHANICAL WALL PENETRATIONS, REFER TO MECHANICAL DRAWINGS. PROVIDE FRAMING, FLASHING, AND SEALANT AS REQUIRED. INSTALL RESTROOM EXHAUST FANS 12" MINIMUM ABOVE INTERIOR CEILING FRAMING.
21 PLUMBING ROOF VENT (BEYOND). REFER TO PLUMBING DRAWINGS AND DETAIL 11/A4.2.
22 CONCRETE SPLASH BLOCK INSTALL AT EACH DOWNSPOUT.
23 MASONRY CONTROL JOINT, REFER TO STRUCTURAL DRAWINGS. PROVIDE SEALANT OVER 1/2" DIAMETER FOAM BACKER ROD.
24 STUCCO EXPANSION JOINT, REFER TO DETAIL 4/A3.1.
25 MANUFACTURED STONE VENEER. REFER TO EXTERIOR FINISH SCHEDULE.
26 MANUFACTURED STONE VENEER SILL. REFER TO EXTERIOR FINISH SCHEDULE.
27 ROOF ACCESS LADDER. REFER TO EXTERIOR FINISH SCHEDULE.
28 PRE-ENGINEERED METAL BUILDING THRU WALL OVERFLOW SCUPPER SYSTEM. REFER TO DETAILS 2/A3.3 AND 5/A3.3.
29 PRE-ENGINEERED METAL BUILDING SHEET METAL FLASHING (ABOVE STOREFRONT). FIELD BREAK FROM PRIME PAINTED FLAT STOCK AS REQUIRED.
30 BICYCLE RACK. REFER TO DETAIL 11/C2.2.

CONCRETE MASONRY UNIT SPECIAL SCHEDULE OF TREATMENTS

GENERAL
1. REFER TO PROJECT MANUAL FOR ADDITIONAL REQUIREMENTS.

2. MANUFACTURER: SHERWIN WILLIAMS SPECIFIED. EQUAL PRODUCTS BY PPG INDUSTRIES ACCEPTABLE (NO SUBSTITUTES).

3. APPLICATION: INSTALL PER MANUFACTURER'S RECOMMENDATIONS FOR PROJECT CONDITIONS. EACH COAT SPECIFIED SHALL BE SPRAY APPLIED AND BACK ROLLED. COVERAGE THICKNESS INDICATED IN WET MIL UNITS, UNLESS OTHERWISE INDICATED.

4. QUALITY CONTROL: SUBMIT INSTALLER AND MANUFACTURER WARRANTIES SPECIFIED.

CONCRETE MASONRY UNIT (CMU) EXTERIOR SURFACE COATINGS:
1. FINISH COLORS: (REFER TO EXTERIOR FINISH SCHEDULE).

2. PRIMER: "LOXON" ACRYLIC BLOCK SURFACER "LX01W0200-LXN BLOCK SURF WHT" (NO LESS THAN 16 MILS). TWO COATS MAY BE REQUIRED TO ACHIEVE PINHOLE FREE SURFACE. (REFER TO EXTERIOR FINISH SCHEDULE).

3. COAT 1: "LOXON" SELF-CLEANING ACRYLIC COATING "LX13W0051-LXN SELF-CLEAN EW" (NO LESS THAN 6 MILS). (REFER TO EXTERIOR FINISH SCHEDULE).

4. COAT 2: "LOXON" SELF-CLEANING ACRYLIC COATING "LX13W0051-LXN SELF-CLEAN EW" (NO LESS THAN 6 MILS). (REFER TO EXTERIOR FINISH SCHEDULE).

CONCRETE MASONRY UNIT (CMU) INTERIOR SURFACE COATINGS:
1. APPLY PRIOR TO INSTALLATION OF INTERIOR SURFACE FURRING, INSULATION, AND GYPSUM BOARD ASSEMBLIES.

2. FINISH COLOR: MATCH "W-2" (REFER TO INTERIOR FINISH TYPES).

3. PRIMER: "LOXON" WATER BLOCKING PRIMER "LX12W0050-LXN WTR BLCK PR WH" (NO LESS THAN 6 MILS). APPLICATION WITH OVERNIGHT DRYING BETWEEN COAT 1. MATCH "W-2" (REFER TO INTERIOR FINISH TYPES).

4. COAT 1: "LOXON" WATER BLOCKING PRIMER "LX12W0050-LXN WTR BLCK PR WH" (NO LESS THAN 6 MILS). MATCH "W-2" (REFER TO INTERIOR FINISH TYPES).

TIMOTHY M. GUILLOT
ARCHITECT
1736 East Sunshine, Suite 417
Springfield, Missouri 65804
417.862.0558
Fax: 417.862.3265
e-mail: architect@estierlyschneider.com


PROJECT:
NEW O'REILLY AUTO PARTS STORE
23RD AVE.
EVANS, CO #1

EXTERIOR ELEVATIONS

O'Reilly AUTO PARTS
CORPORATE OFFICES
233 SOUTH PATTERSON
SPRINGFIELD, MISSOURI 65802
(417) 862-2674 TELEPHONE

COMM #	4838
DATE:	7-19-24
REVISION DATE:	4-18-25
	9-9-25


A2.1

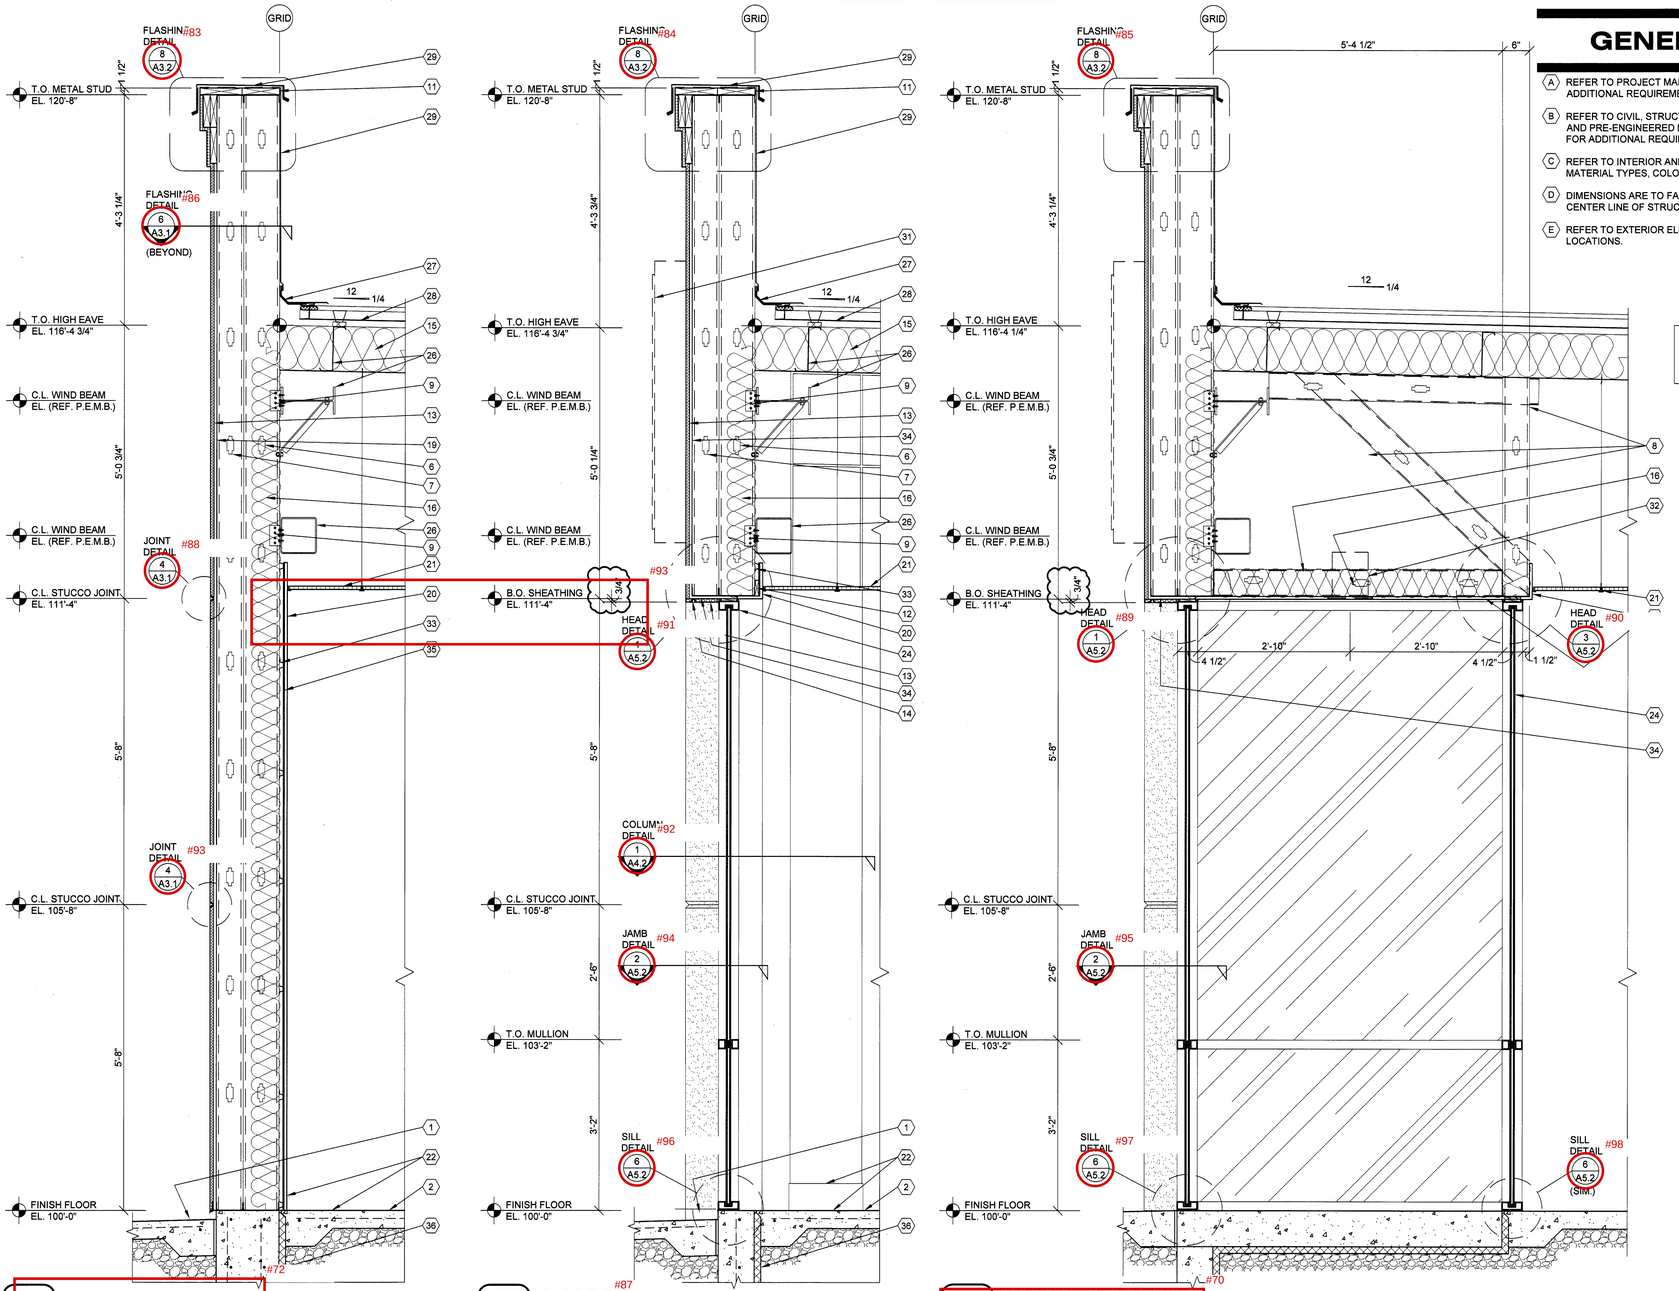


1 WALL SECTION
A3.1 SCALE: 3/4" = 1'-0"

2 WALL SECTION
A3.1 SCALE: 3/4" = 1'-0"

3 WALL SECTION
A3.1 SCALE: 3/4" = 1'-0"




4 SECTION
A3.1 SCALE: 1 1/2" = 1'-0"



#53

5 SECTION
A3.1 SCALE: 1 1/2" = 1'-0"

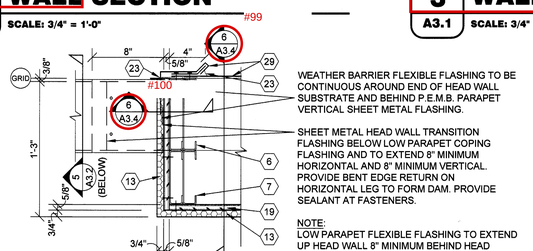

WEATHER BARRIER FLEXIBLE FLASHING TO BE CONTINUOUS AROUND END OF HEAD WALL SUBSTRATE AND BEHIND P.E.M.B. PARAPET VERTICAL SHEET METAL FLASHING.

SHEET METAL HEAD WALL TRANSITION FLASHING BELOW LOW PARAPET COPING FLASHING AND TO EXTEND 8" MINIMUM HORIZONTAL AND 8" MINIMUM VERTICAL. PROVIDE BENT EDGE RETURN ON HORIZONTAL LEG TO FORM DAM. PROVIDE SEALANT AT FASTENERS.

NOTE:
LOW PARAPET FLEXIBLE FLASHING TO EXTEND UP HEAD WALL 8" MINIMUM BEHIND HEAD METAL TRANSITION FLASHING.

#86

6 PLAN SECTION
A3.1 SCALE: 1 1/2" = 1'-0"

GENERAL NOTES

A. REFER TO PROJECT MANUAL AND SCOPE OF WORK SCHEDULE FOR ADDITIONAL REQUIREMENTS.

B. REFER TO CIVIL, STRUCTURAL, MECHANICAL, ELECTRICAL, PLUMBING, AND PRE-ENGINEERED METAL BUILDING (P.E.M.B.) SHOP DRAWINGS FOR ADDITIONAL REQUIREMENTS.

C. REFER TO INTERIOR AND EXTERIOR FINISH SCHEDULES FOR MATERIAL TYPES, COLORS AND FINISHES.

D. DIMENSIONS ARE TO FACE OF CONCRETE, MASONRY, FRAMING, OR CENTER LINE OF STRUCTURE UNLESS OTHERWISE INDICATED.

E. REFER TO EXTERIOR ELEVATIONS FOR MASONRY CONTROL JOINT LOCATIONS.

KEY NOTES

1. FINISH LAWN, PAVEMENT OR SIDEWALK, SLOPE TO DRAIN AWAY FROM BUILDING. REFER TO CIVIL DRAWINGS.
2. CONCRETE FLOOR SLAB. REFER TO STRUCTURAL DRAWINGS.
3. SPLIT FACE CONCRETE MASONRY UNIT (CMU), (7 5/8" X 7 5/8" X 15 5/8") IN RUNNING BOND WITH HORIZONTAL REINFORCEMENT AT 16" O.C.. REFER TO STRUCTURAL DRAWINGS FOR VERTICAL REINFORCEMENT REQUIREMENTS.
4. SMOOTH FACE CONCRETE MASONRY UNIT (CMU), (7 5/8" X 7 5/8" X 15 5/8") IN RUNNING BOND WITH HORIZONTAL REINFORCEMENT AT 16" O.C.. REFER TO STRUCTURAL DRAWINGS FOR VERTICAL REINFORCEMENT REQUIREMENTS.
5. CONCRETE MASONRY UNIT (CMU) BOND BEAM, REFER TO STRUCTURAL DRAWING FOR REINFORCEMENT REQUIREMENTS.
6. 8" COLD FORM METAL FRAMING, REFER TO STRUCTURAL DRAWINGS.
7. 6" COLD FORM METAL FRAMING, REFER TO STRUCTURAL DRAWINGS.
8. 600S162-43 COLD FORM METAL STUD FRAMING AT 24" O.C. ATTACHED TO PRE - ENGINEERED METAL BUILDING STRUCTURAL FRAMING SYSTEM.
9. COLD FORM METAL STUD FRAMING CLIP, REFER TO STRUCTURAL DRAWINGS.
10. 150ZF125-18 COLD FORM METAL Z-FURRING FRAMING AT 24" O.C. AND POLYISOCYANURATE (R-9 MIN.) RIGID INSULATION BOARD WITH FOIL FACE VAPOR BARRIER.
11. FIRE TREATED 2X NAILER(S) CONTINUOUS. CUT TO FIT WALL WIDTH. ATTACHED TO METAL STUD FRAMING WITH #12 SCREWS AT 24" O.C. STAGGERED. ATTACHED TO CMU BOND BEAM WITH 1/2" DIA. ANCHORS AT 32" O.C..
12. FIRE TREATED 2X NAILER OR BLOCKING.
13. EXTERIOR PORTLAND CEMENT PLASTER (STUCCO) OVER SELF-FURRING METAL LATH. REFER TO FINISH SCHEDULE.
14. STUCCO EXPANSION JOINT. REFER TO DETAIL 4/A3.1.
15. PRE-ENGINEERED METAL BUILDING ROOF INSULATION (R-36) LINER SYSTEM, (REFER TO SCOPE OF WORK SCHEDULE), VAPOR BARRIER OVER HIGH STRENGTH STEEL SUSPENSION STRAPS ATTACHED TO BOTTOM OF PRE-ENGINEERED METAL BUILDING ROOF PURLINS WITH (1) LAYER 8" (R-25) UN-FACED BATT INSULATION PARALLEL WITH ROOF PURLIN CAVITY AND (1) LAYER 3 1/2" (R-11) UN-FACED BATT INSULATION PERPENDICULAR OVER TOP OF ROOF PURLINS.
16. 6" (R-19) BATT INSULATION WITH FOIL FACE VAPOR BARRIER.
17. FLEXIBLE FLASHING CONTINUOUS TO LAP OVER NAILERS AND DOWN BEHIND CONTINUOUS CLEATS ON BOTH SIDES. LAP JOINTS 8" MINIMUM AND MASTIC.
18. MANUFACTURED STONE VENEER AND SILL: INSTALL PER MANUFACTURERS RECOMMENDATIONS. REFER TO EXTERIOR ELEVATIONS AND EXTERIOR FINISH SCHEDULE FOR MORE INFORMATION.
19. 5/8" EXTERIOR FIBERGLASS REINFORCED SHEATHING WITH CONTINUOUS WEATHER BARRIER. REFER TO STRUCTURAL DRAWINGS FOR ATTACHMENT REQUIREMENTS.
20. 5/8" TYPE "X" GYPSUM BOARD. REFER TO INTERIOR WALL TYPES FOR ADDITIONAL REQUIREMENTS.
21. SUSPENDED ACOUSTICAL LAY - IN CEILING SYSTEM. REFER TO INTERIOR FINISH SCHEDULE FOR TYPES AND LOCATIONS.
22. FLOORING AND BASE. REFER TO INTERIOR FINISH SCHEDULE FOR TYPES AND LOCATIONS.
23. SEALANT WITH BACKER ROD.
24. ALUMINUM WINDOW SYSTEM. REFER TO FLOOR PLAN AND WINDOW SCHEDULES FOR TYPES.
25. DOOR AND FRAME SYSTEM, REFER TO FLOOR PLAN AND SCHEDULES FOR TYPES.
26. PRE-ENGINEERED METAL BUILDING PRIMARY AND SECONDARY STRUCTURAL FRAMING SYSTEMS.
27. PRE-ENGINEERED METAL BUILDING TRANSITION SUPPORT PLATE.
28. PRE-ENGINEERED METAL BUILDING ROOF PANEL SYSTEM WITH THERMAL SPACER BLOCKS (R-5 MIN.).
29. PRE-ENGINEERED METAL BUILDING SHEET METAL FLASHING, COUNTER - FLASHING, CONTINUOUS CLEATS, DRIPS CLOSURES, TRANSITIONS, COPINGS AND ACCESSORIES AS REQUIRED.
30. PRE-ENGINEERED METAL BUILDING GUTTER AND DOWNSPOUT SYSTEM. REFER TO EXTERIOR ELEVATIONS FOR LOCATIONS. REFER TO P.E.M.B. SHOP DRAWINGS FOR SIZES.
31. SURFACE MOUNTED WALL SIGN, OWNER FURNISHED AND INSTALLED, (REFER TO SCOPE OF WORK SCHEDULE), PROVIDE BACKING AND ELECTRICAL ROUGH-IN, REFER TO ELECTRICAL DRAWINGS.
32. RECESSED LIGHTING FIXTURE, REFER TO ELECTRICAL DRAWINGS.
33. 087F125-33 DOUBLE LEG COLD FORM METAL RESILIENT CHANNEL FRAMING AT 24" O.C. HORIZONTAL.
34. 5/8" EXTERIOR FIRE TREATED PLYWOOD SHEATHING WITH CONTINUOUS WEATHER BARRIER. REFER TO STRUCTURAL DRAWINGS FOR ATTACHMENT REQUIREMENTS.
35. 1/4" GYPSUM BOARD.
36. RIGID INSULATION BOARD (R-10 MIN.)
37. ROOF ACCESS LADDER. REFER TO EXTERIOR FINISH SCHEDULE.

STATE OF COLORADO TIMOTHY MICHAEL GUILLOT 406712 LICENSED ARCHITECT 4-18-25

TIMOTHY M. GUILLOT
ARCHITECT
1736 East Sunshine, Suite 417
Springfield, Missouri 65804
417.862.0558
Fax: 417.862.3265
e-mail: architect@esterlyschneider.com

PROJECT:
NEW O'REILLY AUTO PARTS STORE
23RD AVE.
EVANS, CO #1


WALL SECTIONS

O'Reilly AUTO PARTS

CORPORATE OFFICES
233 SOUTH PATTERSON
SPRINGFIELD, MISSOURI 65802
(417) 862-2674 TELEPHONE

COMM #	4838
DATE:	7-19-24
REVISION DATE:	4-18-25


A3.1

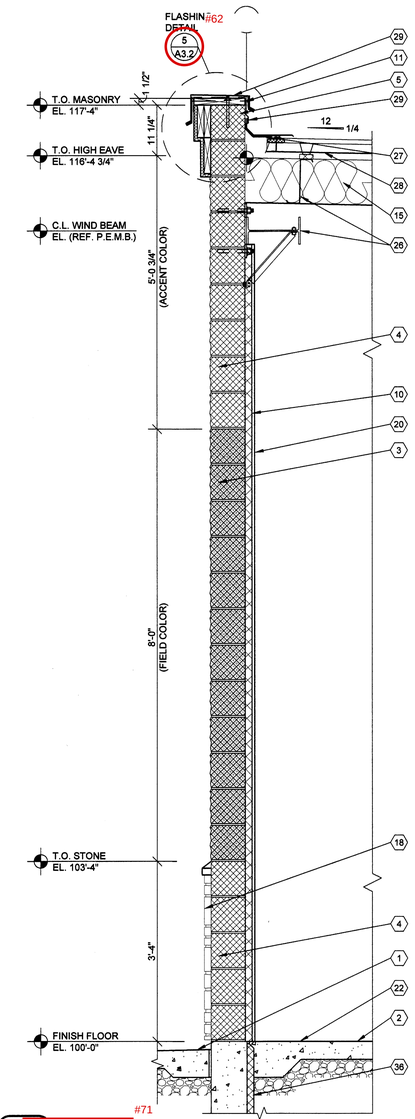

#71

1 WALL SECTION


A3.2 SCALE: 3/4" = 1'-0"

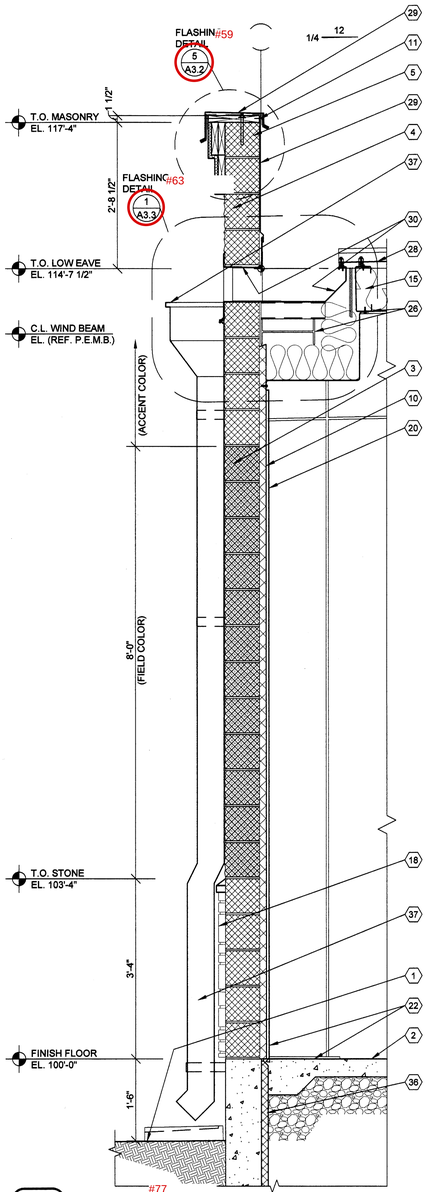

#77

2 WALL SECTION


A3.2 SCALE: 3/4" = 1'-0"

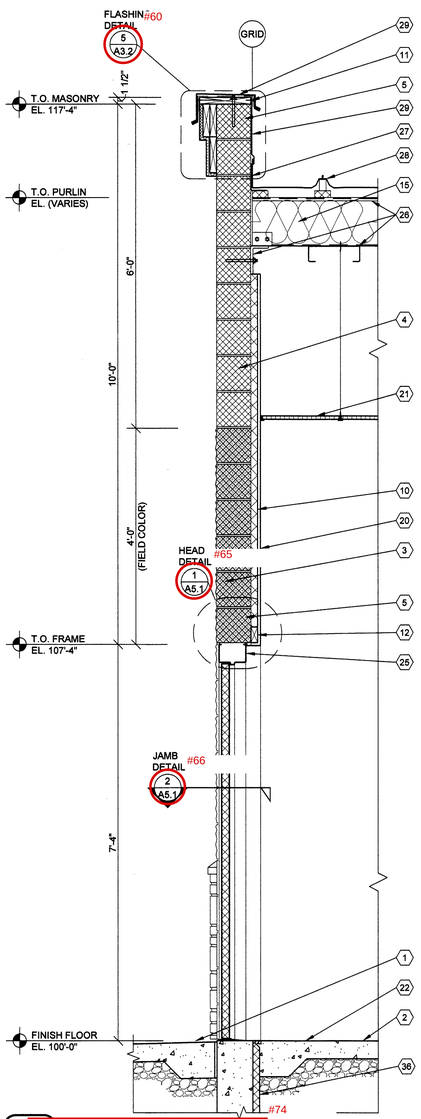

#74

3 WALL SECTION

A3.2 SCALE: 3/4" = 1'-0"

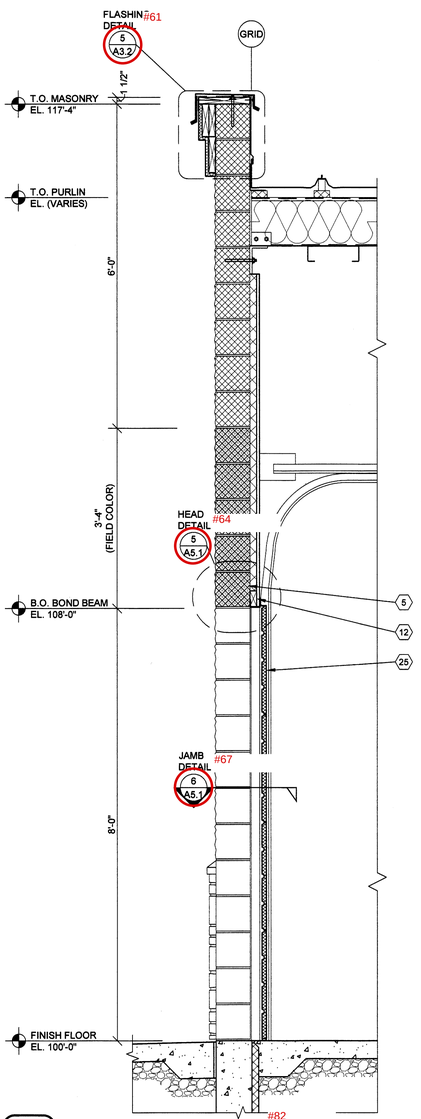

#82


4 WALL SECTION

A3.2 SCALE: 3/4" = 1'-0"

NOTE:
FOR TYPICAL EXTERIOR WALL CONSTRUCTION NOTATION, REFER TO DETAIL 3 A3.2 #58

KEY NOTES


1. FINISH LAWN, PAVEMENT OR SIDEWALK, SLOPE TO DRAIN AWAY FROM BUILDING. REFER TO CIVIL DRAWINGS.
2. CONCRETE FLOOR SLAB. REFER TO STRUCTURAL DRAWINGS.
3. SPLIT FACE CONCRETE MASONRY UNIT (CMU), (7 5/8" X 7 5/8" X 15 5/8") IN RUNNING BOND WITH HORIZONTAL REINFORCEMENT AT 16" O.C.. REFER TO STRUCTURAL DRAWINGS FOR VERTICAL REINFORCEMENT REQUIREMENTS.
4. SMOOTH FACE CONCRETE MASONRY UNIT (CMU), (7 5/8" X 7 5/8" X 15 5/8") IN RUNNING BOND WITH HORIZONTAL REINFORCEMENT AT 16" O.C.. REFER TO STRUCTURAL DRAWINGS FOR VERTICAL REINFORCEMENT REQUIREMENTS.
5. CONCRETE MASONRY UNIT (CMU) BOND BEAM, REFER TO STRUCTURAL DRAWING FOR REINFORCEMENT REQUIREMENTS.
6. 8" COLD FORM METAL FRAMING, REFER TO STRUCTURAL DRAWINGS.
7. 6" COLD FORM METAL FRAMING, REFER TO STRUCTURAL DRAWINGS.
8. 600S162-43 COLD FORM METAL STUD FRAMING AT 24" O.C. ATTACHED TO PRE - ENGINEERED METAL BUILDING STRUCTURAL FRAMING SYSTEM.
9. COLD FORM METAL STUD FRAMING CLIP, REFER TO STRUCTURAL DRAWINGS.
10. 150ZF125-18 COLD FORM METAL Z-FURRING FRAMING AT 24" O.C. AND POLYISOCYANURATE (R-9 MIN.) RIGID INSULATION BOARD WITH FOIL FACE VAPOR BARRIER.
11. FIRE TREATED 2X NAILER(S) CONTINUOUS. CUT TO FIT WALL WIDTH. ATTACHED TO METAL STUD FRAMING WITH #12 SCREWS AT 24" O.C. STAGGERED. ATTACHED TO CMU BOND BEAM WITH 1/2" DIA. ANCHORS AT 32" O.C..
12. FIRE TREATED 2X NAILER OR BLOCKING.
13. STUCCO OVER CONTINUOUS INSULATION DRAINAGE BOARD IN THICKNESS INDICATED.
14. STUCCO EXPANSION JOINT. REFER TO DETAIL 4/A3.1.
15. PRE-ENGINEERED METAL BUILDING ROOF INSULATION (R-36) LINER SYSTEM, (REFER TO SCOPE OF WORK SCHEDULE). VAPOR BARRIER OVER HIGH STRENGTH STEEL SUSPENSION STRAPS ATTACHED TO BOTTOM OF PRE-ENGINEERED METAL BUILDING ROOF PURLINS WITH (1) LAYER 8" (R-25) UN-FACED BATT INSULATION PARALLEL WITH ROOF PURLIN CAVITY AND (1) LAYER 3 1/2" (R-11) UN-FACED BATT INSULATION PERPENDICULAR OVER TOP OF ROOF PURLINS.
16. 6" (R-19) BATT INSULATION WITH FOIL FACE VAPOR BARRIER.
17. FLEXIBLE FLASHING CONTINUOUS TO LAP OVER NAILERS AND DOWN BEHIND CONTINUOUS CLEATS ON BOTH SIDES. LAP JOINTS 8" MINIMUM AND MASTIC.
18. MANUFACTURED STONE VENEER AND SILL: INSTALL PER MANUFACTURERS RECOMMENDATIONS. REFER TO EXTERIOR ELEVATIONS AND EXTERIOR FINISH SCHEDULE FOR MORE INFORMATION.
19. 5/8" EXTERIOR FIBERGLASS REINFORCED SHEATHING WITH CONTINUOUS WEATHER BARRIER. REFER TO STRUCTURAL DRAWINGS FOR ATTACHMENT REQUIREMENTS.
20. 5/8" TYPE "X" GYPSUM BOARD. REFER TO INTERIOR WALL TYPES FOR ADDITIONAL REQUIREMENTS.
21. SUSPENDED ACOUSTICAL LAY - IN CEILING SYSTEM. REFER TO INTERIOR FINISH SCHEDULE FOR TYPES AND LOCATIONS.
22. FLOORING AND BASE, REFER TO INTERIOR FINISH SCHEDULE FOR TYPES AND LOCATIONS.
23. SEALANT WITH BACKER ROD.
24. ALUMINUM WINDOW SYSTEM. REFER TO FLOOR PLAN AND WINDOW SCHEDULES FOR TYPES.
25. DOOR AND FRAME SYSTEM, REFER TO FLOOR PLAN AND SCHEDULES FOR TYPES.
26. PRE-ENGINEERED METAL BUILDING PRIMARY AND SECONDARY STRUCTURAL FRAMING SYSTEMS.
27. PRE-ENGINEERED METAL BUILDING TRANSITION SUPPORT PLATE.
28. PRE-ENGINEERED METAL BUILDING ROOF PANEL SYSTEM WITH THERMAL SPACER BLOCKS (R-5 MIN.).
29. PRE-ENGINEERED METAL BUILDING SHEET METAL FLASHING, COUNTER - FLASHING, CONTINUOUS CLEATS, DRIPS CLOSURES, TRANSITIONS, COPINGS AND ACCESSORIES AS REQUIRED.
30. PRE-ENGINEERED METAL BUILDING GUTTER AND DOWNSPOUT SYSTEM. REFER TO EXTERIOR ELEVATIONS FOR LOCATIONS. REFER TO P.E.M.B. SHOP DRAWINGS FOR SIZES.
31. SURFACE MOUNTED WALL SIGN, OWNER FURNISHED AND INSTALLED, (REFER TO SCOPE OF WORK SCHEDULE), PROVIDE BACKING AND ELECTRICAL ROUGH-IN, REFER TO ELECTRICAL DRAWINGS.
32. RECESSED LIGHTING FIXTURE, REFER TO ELECTRICAL DRAWINGS.
33. 087F125-33 DOUBLE LEG COLD FORM METAL RESILIENT CHANNEL FRAMING AT 24" O.C. HORIZONTAL.
34. 5/8" EXTERIOR FIRE TREATED PLYWOOD SHEATHING WITH CONTINUOUS WEATHER BARRIER. REFER TO STRUCTURAL DRAWINGS FOR ATTACHMENT REQUIREMENTS.
35. 1/4" GYPSUM BOARD.
36. RIGID INSULATION BOARD (R-10 MIN.)
37. ROOF ACCESS LADDER. REFER TO EXTERIOR FINISH SCHEDULE.

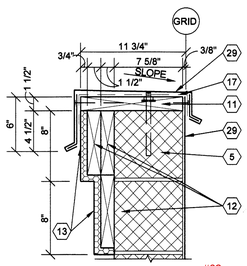

#62


5 SECTION

A3.2 SCALE: 1 1/2" = 1'-0"



6 SECTION

A3.2 SCALE: 1 1/2" = 1'-0"

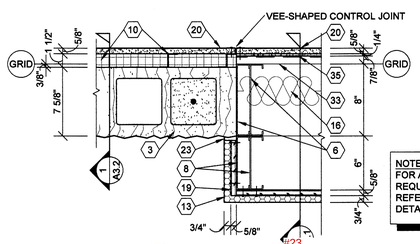


NOTE:
FOR ADDITIONAL REQUIREMENTS, REFER TO DETAIL 5 A6.1 #68

#79

7 PLAN SECTION

A3.2 SCALE: 1 1/2" = 1'-0"

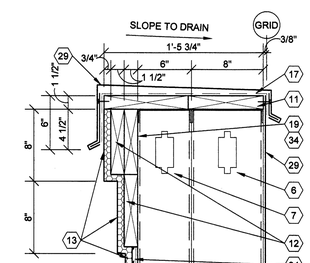

#85

8 FLASHING DETAIL

A3.2 SCALE: 1 1/2" = 1'-0"

GENERAL NOTES

A. REFER TO PROJECT MANUAL AND SCOPE OF WORK SCHEDULE FOR ADDITIONAL REQUIREMENTS.

B. REFER TO CIVIL, STRUCTURAL, MECHANICAL, ELECTRICAL, PLUMBING, AND PRE-ENGINEERED METAL BUILDING (P.E.M.B.) SHOP DRAWINGS FOR ADDITIONAL REQUIREMENTS.

C. REFER TO INTERIOR AND EXTERIOR FINISH SCHEDULES FOR MATERIAL TYPES, COLORS AND FINISHES.

D. DIMENSIONS ARE TO FACE OF CONCRETE, MASONRY, FRAMING, OR CENTER LINE OF STRUCTURE UNLESS OTHERWISE INDICATED.

E. REFER TO EXTERIOR ELEVATIONS FOR MASONRY CONTROL JOINT LOCATIONS.

STATE OF COLORADO — TIMOTHY M. GUILLOT — ARCHITECT — 37868 — LICENSED — 7-19-24

TIMOTHY M. GUILLOT
ARCHITECT
1736 East Sunshine, Suite 417
Springfield, Missouri 65804
417.862.9558
Fax: 417.862.3265
e-mail: architect@estetjschneider.com


PROJECT:
NEW O'REILLY AUTO PARTS STORE
23RD AVE.
EVANS, CO #1

WALL SECTIONS

O'Reilly AUTO PARTS
CORPORATE OFFICES
233 SOUTH PATTERSON
SPRINGFIELD, MISSOURI 65802
(417) 862-2674 TELEPHONE


COMM #	4838
DATE:	7-19-24
REVISION DATE:	

A3.2

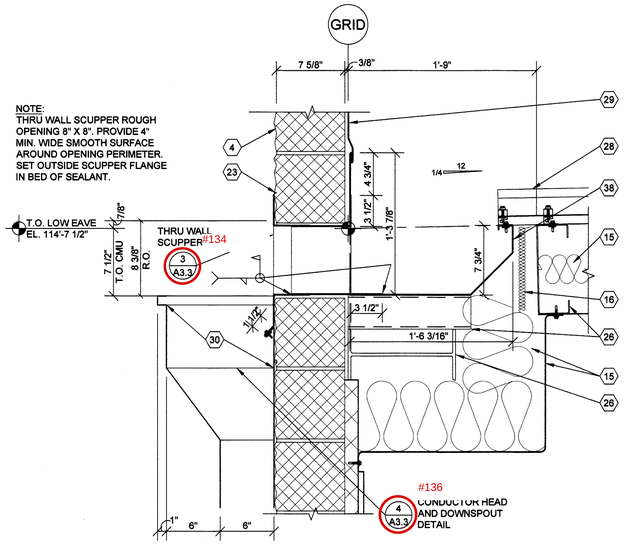

1 THRU WALL SCUPPER DETAIL-PRIMARY

A3.3 SCALE: 1 1/2" = 1'-0"

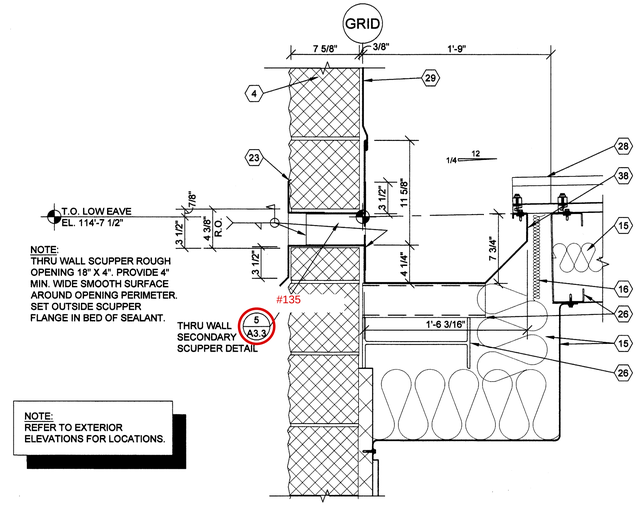

NOTE:
REFER TO EXTERIOR ELEVATIONS FOR LOCATIONS.


2 THRU WALL SCUPPER DETAIL-SECONDARY

A3.3 SCALE: 1 1/2" = 1'-0"

NOTE:
REFER TO PRE-ENGINEERED METAL BUILDING SHOP DRAWINGS FOR ADDITIONAL REQUIREMENTS.

NOTES
1. STAINLESS STEEL (16 GA. OR 18 GA.) FABRICATED WELDED CONSTRUCTION SUPPLIED BY P.E.M.B. MANUFACTURER AND CONTRACTOR INSTALLED.

2. THRU WALL SCUPPER ROUGH OPENING 8" X 8". PROVIDE 1/8" MINIMUM CLEARANCE AROUND SLEEVE PERIMETER FOR FIELD INSTALLATION. REFER TO P.E.M.B. SHOP DRAWINGS FOR FINISH ASSEMBLY DIMENSIONS.

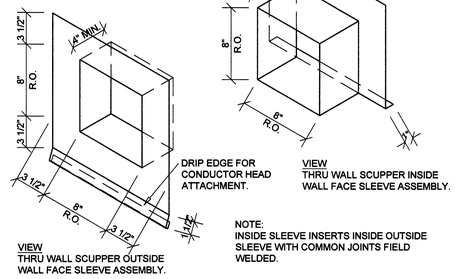

NOTE:
INSIDE SLEEVE INSERTS INSIDE OUTSIDE SLEEVE WITH COMMON JOINTS FIELD WELDED.

3 THRU WALL SCUPPER DETAIL

#134

A3.3 SCALE: NOT TO SCALE

NOTES
1. SHEET METAL (26 GA.) FABRICATED ASSEMBLY PER S.M.C.N.A. STANDARDS FURNISHED AND INSTALLED BY CONTRACTOR. REFER TO EXTERIOR FINISH SCHEDULE FOR COLORS. COORDINATE WITH P.E.M.B. THRU WALL SCUPPER ASSEMBLY.

2. REFER TO THE ARCHITECTURAL SHEET METAL SECTION OF THE NRCA ROOFING AND WATERPROOFING MANUAL FOR JOINERY AND SECUREMENT OPTIONS FOR SHEET METAL.


4 CONDUCTOR HEAD & DOWNSPOUT DETAIL

#136

A3.3 SCALE: 1 1/2" = 1'-0"

NOTES
1. STAINLESS STEEL (16 GA. OR 18 GA.) FABRICATED WELDED CONSTRUCTION SUPPLIED BY P.E.M.B. MANUFACTURER AND CONTRACTOR INSTALLED.

2. THRU WALL SCUPPER ROUGH OPENING 4" X 16". PROVIDE 1/8" MINIMUM CLEARANCE AROUND SLEEVE PERIMETER FOR FIELD INSTALLATION. REFER TO P.E.M.B. SHOP DRAWINGS FOR FINISH ASSEMBLY DIMENSIONS.

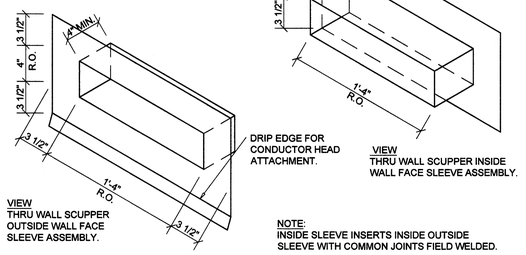

NOTE:
INSIDE SLEEVE INSERTS INSIDE OUTSIDE SLEEVE WITH COMMON JOINTS FIELD WELDED.

5 THRU WALL SECONDARY SCUPPER DETAIL

#135

A3.3 SCALE: NOT TO SCALE

GENERAL NOTES

(A) REFER TO PROJECT MANUAL AND SCOPE OF WORK SCHEDULE FOR ADDITIONAL REQUIREMENTS.

(B) REFER TO CIVIL, STRUCTURAL, MECHANICAL, ELECTRICAL, PLUMBING, AND PRE-ENGINEERED METAL BUILDING (P.E.M.B.) SHOP DRAWINGS FOR ADDITIONAL REQUIREMENTS.

(C) REFER TO INTERIOR AND EXTERIOR FINISH SCHEDULES FOR MATERIAL TYPES, COLORS AND FINISHES.

(D) DIMENSIONS ARE TO FACE OF CONCRETE, MASONRY, FRAMING, OR CENTER LINE OF STRUCTURE UNLESS OTHERWISE INDICATED.

(E) REFER TO EXTERIOR ELEVATIONS FOR MASONRY CONTROL JOINT LOCATIONS.

KEY NOTES

1. FINISH LAWN, PAVEMENT OR SIDEWALK, SLOPE TO DRAIN AWAY FROM BUILDING. REFER TO CIVIL DRAWINGS.
2. CONCRETE FLOOR SLAB. REFER TO STRUCTURAL DRAWINGS.
3. SPLIT FACE CONCRETE MASONRY UNIT (CMU), (7 5/8" X 7 5/8" X 15 5/8") IN RUNNING BOND WITH HORIZONTAL REINFORCEMENT AT 16" O.C.. REFER TO STRUCTURAL DRAWINGS FOR VERTICAL REINFORCEMENT REQUIREMENTS.
4. SMOOTH FACE CONCRETE MASONRY UNIT (CMU), (7 5/8" X 7 5/8" X 15 5/8") IN RUNNING BOND WITH HORIZONTAL REINFORCEMENT AT 16" O.C.. REFER TO STRUCTURAL DRAWINGS FOR VERTICAL REINFORCEMENT REQUIREMENTS.
5. CONCRETE MASONRY UNIT (CMU) BOND BEAM, REFER TO STRUCTURAL DRAWING FOR REINFORCEMENT REQUIREMENTS.
6. 8" COLD FORM METAL FRAMING, REFER TO STRUCTURAL DRAWINGS.
7. 6" COLD FORM METAL FRAMING, REFER TO STRUCTURAL DRAWINGS.
8. 600S162-43 COLD FORM METAL STUD FRAMING AT 24" O.C. ATTACHED TO PRE - ENGINEERED METAL BUILDING STRUCTURAL FRAMING SYSTEM.
9. COLD FORM METAL STUD FRAMING CLIP, REFER TO STRUCTURAL DRAWINGS.
10. 150ZF125-18 COLD FORM METAL Z-FURRING FRAMING AT 24" O.C. AND POLYISOCYANURATE (R-9 MIN.) RIGID INSULATION BOARD WITH FOIL FACE VAPOR BARRIER.
11. FIRE TREATED 2X NAILER(S) CONTINUOUS. CUT TO FIT WALL WIDTH. ATTACHED TO METAL STUD FRAMING WITH #12 SCREWS AT 24" O.C. STAGGERED. ATTACHED TO CMU BOND BEAM WITH 1/2" DIA. ANCHORS AT 32" O.C..
12. FIRE TREATED 2X NAILER OR BLOCKING.
13. STUCCO OVER CONTINUOUS INSULATION DRAINAGE BOARD IN THICKNESS INDICATED.
14. STUCCO EXPANSION JOINT. REFER TO DETAIL 4/A3.1.
15. PRE-ENGINEERED METAL BUILDING ROOF INSULATION (R-36) LINER SYSTEM. (REFER TO SCOPE OF WORK SCHEDULE). VAPOR BARRIER OVER HIGH STRENGTH STEEL SUSPENSION STRAPS ATTACHED TO BOTTOM OF PRE-ENGINEERED METAL BUILDING ROOF PURLINS WITH (1) LAYER 8" (R-25) UN-FACED BATT INSULATION PARALLEL WITH ROOF PURLIN CAVITY AND (1) LAYER 3 1/2" (R-11) UN-FACED BATT INSULATION PERPENDICULAR OVER TOP OF ROOF PURLINS.
16. 6" (R-19) BATT INSULATION WITH FOIL FACE VAPOR BARRIER.
17. FLEXIBLE FLASHING CONTINUOUS TO LAP OVER NAILERS AND DOWN BEHIND CONTINUOUS CLEATS ON BOTH SIDES. LAP JOINTS 8" MINIMUM AND MASTIC.
18. MANUFACTURED STONE VENEER AND SILL: INSTALL PER MANUFACTURERS RECOMMENDATIONS. REFER TO EXTERIOR ELEVATIONS AND EXTERIOR FINISH SCHEDULE FOR MORE INFORMATION.
19. 5/8" EXTERIOR FIBERGLASS REINFORCED SHEATHING WITH CONTINUOUS WEATHER BARRIER. REFER TO STRUCTURAL DRAWINGS FOR ATTACHMENT REQUIREMENTS.
20. 5/8" TYPE "X" GYPSUM BOARD. REFER TO INTERIOR WALL TYPES FOR ADDITIONAL REQUIREMENTS.
21. SUSPENDED ACOUSTICAL LAY - IN CEILING SYSTEM. REFER TO INTERIOR FINISH SCHEDULE FOR TYPES AND LOCATIONS.
22. FLOORING AND BASE, REFER TO INTERIOR FINISH SCHEDULE FOR TYPES AND LOCATIONS.
23. SEALANT WITH BACKER ROD.
24. ALUMINUM WINDOW SYSTEM. REFER TO FLOOR PLAN AND WINDOW SCHEDULES FOR TYPES.
25. DOOR AND FRAME SYSTEM, REFER TO FLOOR PLAN AND SCHEDULES FOR TYPES.
26. PRE-ENGINEERED METAL BUILDING PRIMARY AND SECONDARY STRUCTURAL FRAMING SYSTEMS.
27. PRE-ENGINEERED METAL BUILDING TRANSITION SUPPORT PLATE.
28. PRE-ENGINEERED METAL BUILDING ROOF PANEL SYSTEM WITH THERMAL SPACER BLOCKS (R-5 MIN.).
29. PRE-ENGINEERED METAL BUILDING SHEET METAL FLASHING, COUNTER - FLASHING, CONTINUOUS CLEATS, DRIPS CLOSURES, TRANSITIONS, COPINGS AND ACCESSORIES AS REQUIRED.
30. PRE-ENGINEERED METAL BUILDING GUTTER AND DOWNSPOUT SYSTEM. REFER TO EXTERIOR ELEVATIONS FOR LOCATIONS. REFER TO P.E.M.B. SHOP DRAWINGS FOR SIZES.
31. SURFACE MOUNTED WALL SIGN, OWNER FURNISHED AND INSTALLED, (REFER TO SCOPE OF WORK SCHEDULE). PROVIDE BACKING AND ELECTRICAL ROUGH-IN, REFER TO ELECTRICAL DRAWINGS.
32. RECESSED LIGHTING FIXTURE, REFER TO ELECTRICAL DRAWINGS.
33. 087F125-33 DOUBLE LEG COLD FORM METAL RESILIENT CHANNEL FRAMING AT 24" O.C. HORIZONTAL.
34. 5/8" EXTERIOR FIRE TREATED PLYWOOD SHEATHING WITH CONTINUOUS WEATHER BARRIER. REFER TO STRUCTURAL DRAWINGS FOR ATTACHMENT REQUIREMENTS.
35. 1/4" GYPSUM BOARD.
36. RIGID INSULATION BOARD (R-10 MIN.)
37. ROOF ACCESS LADDER. REFER TO EXTERIOR FINISH SCHEDULE.

STATE OF COLORADO — TIMOTHY M. GUILLOT — ARCHITECT — 46712 — LICENSED ARCHITECT
7-19-24

TIMOTHY M. GUILLOT
ARCHITECT
1736 East Sunshine, Suite 417
Springfield, Missouri 65804
417.862.9558
Fax: 417.862.3265
e-mail: architect@estherlyschneider.com


PROJECT:
NEW O'REILLY AUTO PARTS STORE
23RD AVE.
EVANS, CO #1

WALL SECTIONS


O'Reilly AUTO PARTS
CORPORATE OFFICES
233 SOUTH PATTERSON
SPRINGFIELD, MISSOURI 65802
(417) 862-2674 TELEPHONE

COMM #	4838
DATE:	7-19-24
REVISION DATE:	

A3.3

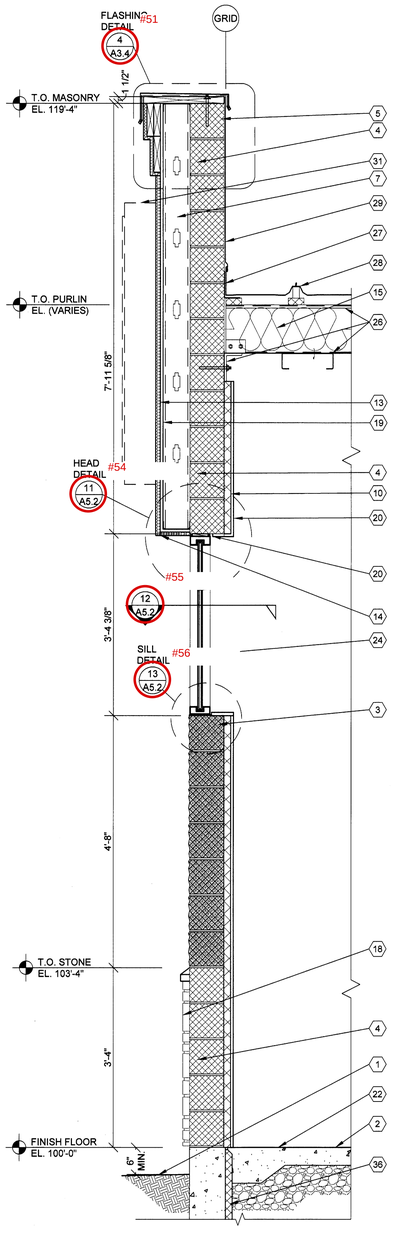


1 **WALL SECTION**
A3.4 SCALE: 3/4" = 1'-0"

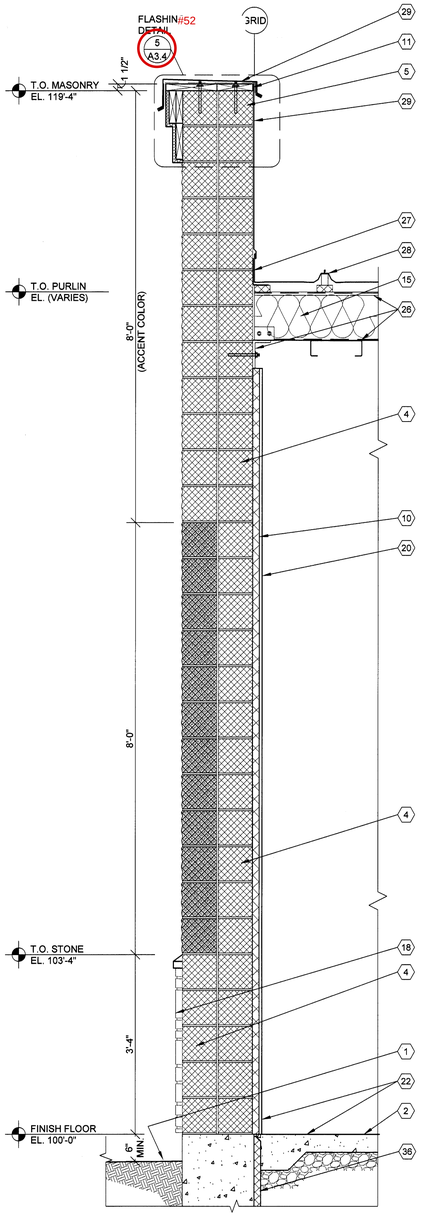

2 **WALL SECTION** #81
A3.4 SCALE: 3/4" = 1'-0"


NOTE:
FOR TYPICAL EXTERIOR WALL CONSTRUCTION NOTATION, REFER 2 A3.2 #50

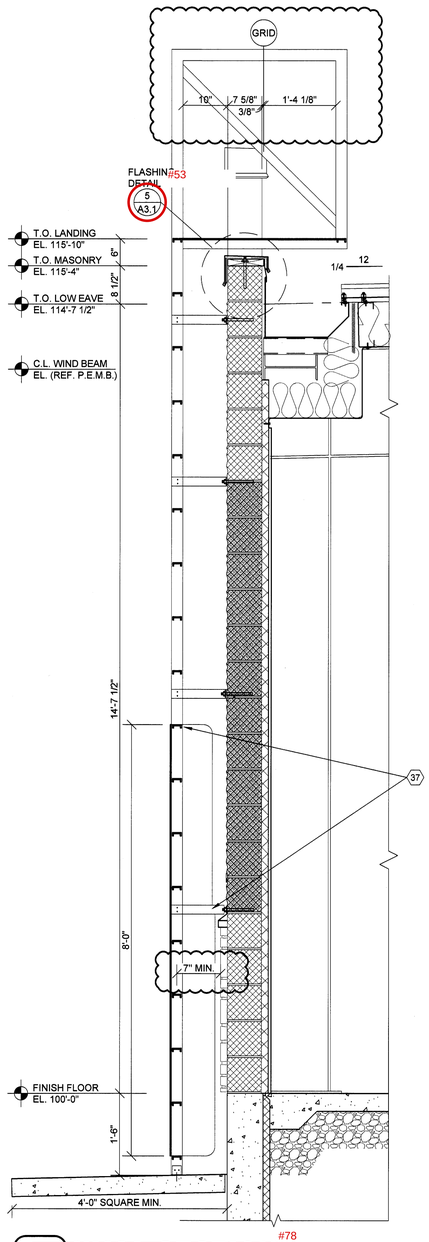


3 **WALL SECTION** #78
A3.4 SCALE: 3/4" = 1'-0"

GENERAL NOTES


- (A) REFER TO PROJECT MANUAL AND SCOPE OF WORK SCHEDULE FOR ADDITIONAL REQUIREMENTS.
- (B) REFER TO CIVIL, STRUCTURAL, MECHANICAL, ELECTRICAL, PLUMBING, AND PRE-ENGINEERED METAL BUILDING (P.E.M.B.) SHOP DRAWINGS FOR ADDITIONAL REQUIREMENTS.
- (C) REFER TO INTERIOR AND EXTERIOR FINISH SCHEDULES FOR MATERIAL TYPES, COLORS AND FINISHES.
- (D) DIMENSIONS ARE TO FACE OF CONCRETE, MASONRY, FRAMING, OR CENTER LINE OF STRUCTURE UNLESS OTHERWISE INDICATED.
- (E) REFER TO EXTERIOR ELEVATIONS FOR MASONRY CONTROL JOINT LOCATIONS.

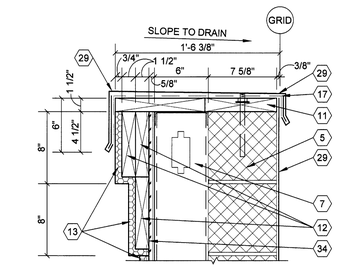

4 **FLASHING DETAIL** #51
A3.4 SCALE: 1 1/2" = 1'-0"

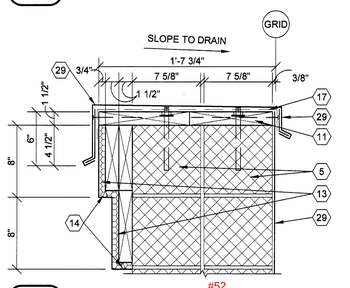

5 **FLASHING DETAIL** #52
A3.4 SCALE: 1 1/2" = 1'-0"

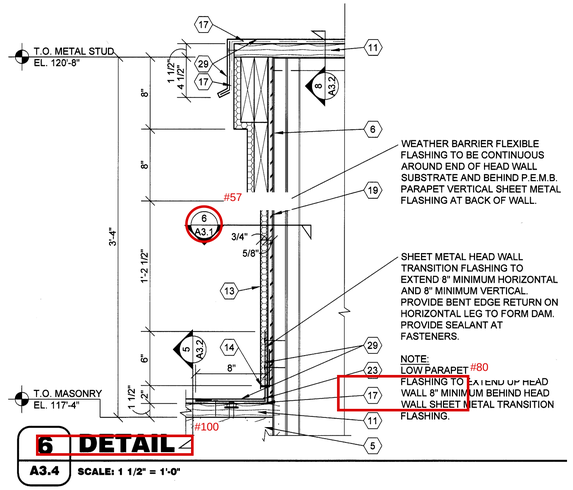

6 **DETAIL**
A3.4 SCALE: 1 1/2" = 1'-0"

KEY NOTES

1. FINISH LAWN, PAVEMENT OR SIDEWALK, SLOPE TO DRAIN AWAY FROM BUILDING. REFER TO CIVIL DRAWINGS.
2. CONCRETE FLOOR SLAB. REFER TO STRUCTURAL DRAWINGS.
3. SPLIT FACE CONCRETE MASONRY UNIT (CMU), (7 5/8" X 7 5/8" X 15 5/8") IN RUNNING BOND WITH HORIZONTAL REINFORCEMENT AT 16" O.C.. REFER TO STRUCTURAL DRAWINGS FOR VERTICAL REINFORCEMENT REQUIREMENTS.
4. SMOOTH FACE CONCRETE MASONRY UNIT (CMU), (7 5/8" X 7 5/8" X 15 5/8") IN RUNNING BOND WITH HORIZONTAL REINFORCEMENT AT 16" O.C.. REFER TO STRUCTURAL DRAWINGS FOR VERTICAL REINFORCEMENT REQUIREMENTS.
5. CONCRETE MASONRY UNIT (CMU) BOND BEAM, REFER TO STRUCTURAL DRAWING FOR REINFORCEMENT REQUIREMENTS.
6. 8" COLD FORM METAL FRAMING, REFER TO STRUCTURAL DRAWINGS.
7. 6" COLD FORM METAL FRAMING, REFER TO STRUCTURAL DRAWINGS.
8. 600S162-43 COLD FORM METAL STUD FRAMING AT 24" O.C. ATTACHED TO PRE - ENGINEERED METAL BUILDING STRUCTURAL FRAMING SYSTEM.
9. COLD FORM METAL STUD FRAMING CLIP, REFER TO STRUCTURAL DRAWINGS.
10. 150ZF125-18 COLD FORM METAL Z-FURRING FRAMING AT 24" O.C. AND POLYISOCYANURATE (R-9 MIN.) RIGID INSULATION BOARD WITH FOIL FACE VAPOR BARRIER.
11. FIRE TREATED 2X NAILER(S) CONTINUOUS. CUT TO FIT WALL WIDTH. ATTACHED TO METAL STUD FRAMING WITH #12 SCREWS AT 24" O.C. STAGGERED. ATTACHED TO CMU BOND BEAM WITH 1/2" DIA. ANCHORS AT 32" O.C..
12. FIRE TREATED 2X NAILER OR BLOCKING.
13. EXTERIOR PORTLAND CEMENT PLASTER (STUCCO) OVER SELF-FURRING METAL LATH. REFER TO FINISH SCHEDULE.
14. STUCCO EXPANSION JOINT. REFER TO DETAIL 4/A3.1.
15. PRE-ENGINEERED METAL BUILDING ROOF INSULATION (R-36) LINER SYSTEM. (REFER TO SCOPE OF WORK SCHEDULE). VAPOR BARRIER OVER HIGH STRENGTH STEEL SUSPENSION STRAPS ATTACHED TO BOTTOM OF PRE-ENGINEERED METAL BUILDING ROOF PURLINS WITH (1) LAYER 8" (R-25) UN-FACED BATT INSULATION PARALLEL WITH ROOF PURLIN CAVITY AND (1) LAYER 3 1/2" (R-11) UN-FACED BATT INSULATION PERPENDICULAR OVER TOP OF ROOF PURLINS.
16. 6" (R-19) BATT INSULATION WITH FOIL FACE VAPOR BARRIER.
17. FLEXIBLE FLASHING CONTINUOUS TO LAP OVER NAILERS AND DOWN BEHIND CONTINUOUS CLEATS ON BOTH SIDES. LAP JOINTS 8" MINIMUM AND MASTIC.
18. MANUFACTURED STONE VENEER AND SILL; INSTALL PER MANUFACTURERS RECOMMENDATIONS. REFER TO EXTERIOR ELEVATIONS AND EXTERIOR FINISH SCHEDULE FOR MORE INFORMATION.
19. 5/8" EXTERIOR FIBERGLASS REINFORCED SHEATHING WITH CONTINUOUS WEATHER BARRIER. REFER TO STRUCTURAL DRAWINGS FOR ATTACHMENT REQUIREMENTS.
20. 5/8" TYPE "X" GYPSUM BOARD. REFER TO INTERIOR WALL TYPES FOR ADDITIONAL REQUIREMENTS.
21. SUSPENDED ACOUSTICAL LAY - IN CEILING SYSTEM. REFER TO INTERIOR FINISH SCHEDULE FOR TYPES AND LOCATIONS.
22. FLOORING AND BASE, REFER TO INTERIOR FINISH SCHEDULE FOR TYPES AND LOCATIONS.
23. SEALANT WITH BACKER ROD.
24. ALUMINUM WINDOW SYSTEM. REFER TO FLOOR PLAN AND WINDOW SCHEDULES FOR TYPES.
25. DOOR AND FRAME SYSTEM, REFER TO FLOOR PLAN AND SCHEDULES FOR TYPES.
26. PRE-ENGINEERED METAL BUILDING PRIMARY AND SECONDARY STRUCTURAL FRAMING SYSTEMS.
27. PRE-ENGINEERED METAL BUILDING TRANSITION SUPPORT PLATE.
28. PRE-ENGINEERED METAL BUILDING ROOF PANEL SYSTEM WITH THERMAL SPACER BLOCKS (R-5 MIN.).
29. PRE-ENGINEERED METAL BUILDING SHEET METAL FLASHING, COUNTER - FLASHING, CONTINUOUS CLEATS, DRIPS CLOSURES, TRANSITIONS, COPINGS AND ACCESSORIES AS REQUIRED.
30. PRE-ENGINEERED METAL BUILDING GUTTER AND DOWNSPOUT SYSTEM. REFER TO EXTERIOR ELEVATIONS FOR LOCATIONS. REFER TO P.E.M.B. SHOP DRAWINGS FOR SIZES.
31. SURFACE MOUNTED WALL SIGN, OWNER FURNISHED AND INSTALLED, (REFER TO SCOPE OF WORK SCHEDULE), PROVIDE BACKING AND ELECTRICAL ROUGH-IN, REFER TO ELECTRICAL DRAWINGS.
32. RECESSED LIGHTING FIXTURE, REFER TO ELECTRICAL DRAWINGS.
33. 087F125-33 DOUBLE LEG COLD FORM METAL RESILIENT CHANNEL FRAMING AT 24" O.C. HORIZONTAL.
34. 5/8" EXTERIOR FIRE TREATED PLYWOOD SHEATHING WITH CONTINUOUS WEATHER BARRIER. REFER TO STRUCTURAL DRAWINGS FOR ATTACHMENT REQUIREMENTS.
35. 1/4" GYPSUM BOARD.
36. RIGID INSULATION BOARD (R-10 MIN.)
37. ROOF ACCESS LADDER. REFER TO EXTERIOR FINISH SCHEDULE.

STATE OF COLORADO
TIMOTHY M. GUILLOT
ARCHITECT
LICENSED ARCHITECT
4-18-25

TIMOTHY M. GUILLOT
ARCHITECT
1736 East Sunshine, Suite 417
Springfield, Missouri 65804
417.862.9558
Fax: 417.862.3265
e-mail: architect@estetlyschmeiler.com


PROJECT:
NEW O'REILLY AUTO PARTS STORE
23RD AVE.
EVANS, CO #1

WALL SECTIONS

O'Reilly AUTO PARTS
CORPORATE OFFICES
233 SOUTH PATTERSON
SPRINGFIELD, MISSOURI 65802
(417) 862-2674 TELEPHONE


COMM #	4838
DATE:	7-19-24
REVISION DATE:	4-18-25

A3.4

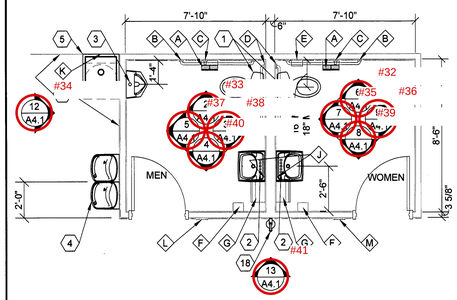


NOTE:
REFER TO OVERALL FLOOR PLAN FOR RESTROOM ORIENTATION AND LAYOUT OF ADJACENT WALLS.

1A ENLARGED PLAN
A4.1 SCALE: 1/4" = 1'-0"

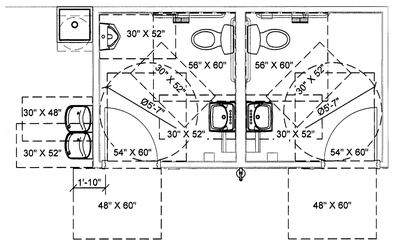

#1

1B ENLARGED PLAN (ACCESSIBILITY CLEARANCE DIAGRAMS)
A4.1 SCALE: 1/4" = 1'-0"

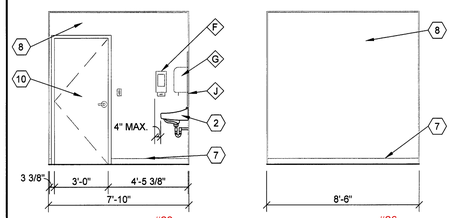


8 ELEVATION
A4.1 SCALE: 1/4" = 1'-0"


#39

9 ELEVATION
A4.1 SCALE: 1/4" = 1'-0"

#36




10 ELEVATION
A4.1 SCALE: 1 1/2" = 1'-0"



#42


11 LAVATORY CLEARANCES
A4.1 SCALE: 1/2" = 1'-0"



#43


12 ELEVATION
A4.1 SCALE: 1/4" = 1'-0"

#34

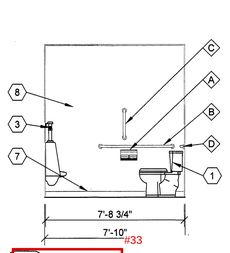


2 ELEVATION
A4.1 SCALE: 1/4" = 1'-0"

#33

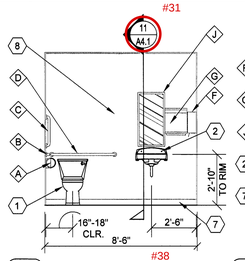


3 ELEVATION
A4.1 SCALE: 1/4" = 1'-0"

#31 #38

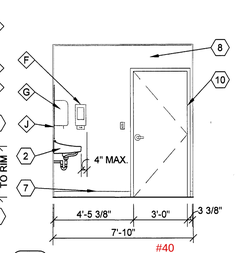


4 ELEVATION
A4.1 SCALE: 1/4" = 1'-0"

#40




5 ELEVATION
A4.1 SCALE: 1/4" = 1'-0"

#37

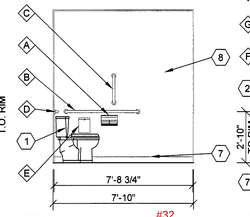


6 ELEVATION
A4.1 SCALE: 1/4" = 1'-0"

#32

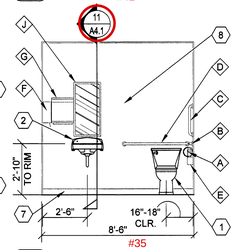


7 ELEVATION
A4.1 SCALE: 1/4" = 1'-0"

#42 #35

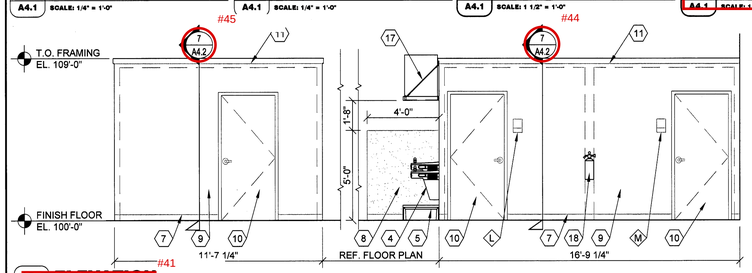

13 ELEVATION
A4.1 SCALE: 1/4" = 1'-0"

#41

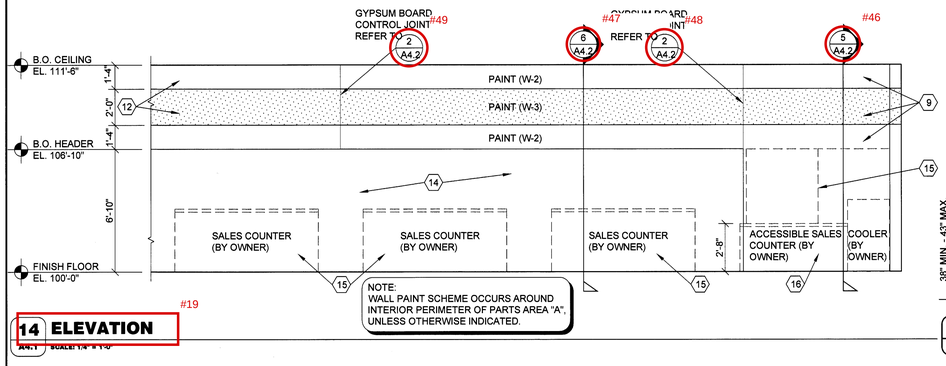


NOTE:
WALL PAINT SCHEME OCCURS AROUND INTERIOR PERIMETER OF PARTS AREA "A", UNLESS OTHERWISE INDICATED.

14 ELEVATION
A4.1 SCALE: 1/4" = 1'-0"

#19

SPECIAL NOTE:
DRINKING FOUNTAIN UNIT TO BE PROVIDED WITH CANE GUARD. REFER TO PLUMBING DRAWINGS. REFER TO ELEVATIONS FOR REQUIRED LEVEL CONFIGURATIONS.



15 DRINKING FOUNTAIN CLEARANCES
A4.1 SCALE: 1/2" = 1'-0"

SHEET HAS BEEN REVISED IN ITS ENTIRETY.

GENERAL NOTES

- (A) REFER TO PROJECT MANUAL FOR ADDITIONAL REQUIREMENTS.
- (B) LAYOUT DIMENSIONS OF PLUMBING FIXTURES AND ACCESSORIES TO FACE OF GYPSUM BOARD OR CENTER LINE OF FIXTURE. LAYOUT DIMENSIONS OF WALLS AND CEILINGS TO ROUGH FACE OF FRAMING, MASONRY, OR CENTER LINE OF STRUCTURE. ALL GYPSUM BOARD 5/8" THICK UNLESS OTHERWISE INDICATED AND DIMENSIONS NOT SHOWN FOR CLARITY.
- (C) REFER TO PLUMBING DRAWINGS FOR FIXTURE TYPES AND ADDITIONAL REQUIREMENTS. PROVIDE ADDITIONAL COLD FORM METAL FRAMING OR FIRE TREATED BLOCKING AS REQUIRED FOR PROPER SUPPORT.
- (D) REFER TO INTERIOR FINISH SCHEDULES FOR MATERIAL FINISH TYPES AND LOCATIONS.
- (E) ALL EXPOSED PIPING BELOW SINKS TO BE COVERED WITH INSULATION.

KEY NOTES

1. WATER CLOSET. ACCESSIBLE FIXTURE HEIGHT TO TOP OF SEAT TO BE 17" MINIMUM AND 19" MAXIMUM A.F.F.. ACCESSIBLE FIXTURE FLUSH CONTROLS TO BE ON WIDE SIDE OF TOILET.
2. WALL HUNG LAVATORY.
3. WALL HUNG URINAL. MOUNT RIM 1'-5" MAXIMUM ABOVE FINISH FLOOR.
4. HIGH / LOW DRINKING FOUNTAIN. REFER TO DETAIL 15/A4.1.
5. FLOOR MOUNTED JANITOR SINK.

KEY NOTES

6. EYE WASH STATION. INSTALL WITH TOP AT 45" (MAX.) ABOVE FINISH FLOOR.
7. BASE, REFER TO FINISH SCHEDULE.
8. SANITARY WALL PANEL SYSTEM, REFER TO FINISH SCHEDULE. PROVIDE TRIM AND EDGE MOLDING AROUND PERIMETER. ATTACH TO SUBSTRATE AS REQUIRED.
9. PAINT, REFER TO FINISH SCHEDULE.
10. DOOR, REFER TO DOOR AND FINISH SCHEDULES.
11. WOOD TRIM, PAINT.
12. WALL CONSTRUCTION, REFER TO FLOOR PLAN FOR TYPES.
13. FIRE TREATED 2X WOOD BLOCKING.
14. WALL OPENING TO BEYOND, REFER TO FLOOR PLAN.
15. OWNER FURNISHED AND INSTALLED FURNISHING, SHELVING, OR FIXTURE. FOR REFERENCE ONLY (N.I.C.)
16. OWNER FURNISHED AND INSTALLED ACCESSIBLE CUSTOMER SERVICE COUNTER TO COMPLY WITH ACCESSIBILITY REQUIREMENTS. FOR REFERENCE ONLY (N.I.C.)
17. WALL MOUNTED WATER HEATER AND SUPPORT PLATFORM, REFER TO PLUMBING DRAWINGS. PROVIDE FIRE TREATED BLOCKING OR ADDITIONAL COLD FORM FRAMING AS REQUIRED FOR INSTALLATION.
18. WALL MOUNTED FIRE EXTINGUISHER. REFER TO DETAIL 10/A4.2.

ACCESSORY SCHEDULE


MK	DESCRIPTION	MANUFACTURER	SERIES / MODEL	MOUNTING LOCATION	ACCESSORY NOTES
A	TISSUE PAPER DISPENSER	GEORGIA PACIFIC	56783A	REFER TO PLANS, ELEVATIONS, LEGEND	NOTE 2
B	GRAB BAR	BOBRICK	B6806 x 48"	REFER TO PLANS, ELEVATIONS, LEGEND	
C	GRAB BAR	BOBRICK	B6806 x 18"	REFER TO PLANS, ELEVATIONS, LEGEND	
D	GRAB BAR	BOBRICK	B6806 x 42"	REFER TO PLANS, ELEVATIONS, LEGEND	
E	SANITARY NAPKIN RECEPTACLE	BOBRICK	B-270	REFER TO PLANS, ELEVATIONS, LEGEND	WOMEN'S RESTROOM ONLY
F	SOAP DISPENSER	GOJO	PRO 2000	REFER TO PLANS, ELEVATIONS, LEGEND	NOTE 2
G	PAPER TOWEL DISPENSER	GEORGIA PACIFIC	59460A	REFER TO PLANS, ELEVATIONS, LEGEND	NOTE 2
H	(NOT USED)				
J	MIRROR	BOBRICK	B-165-1836 18" W X 36" H	REFER TO PLANS, ELEVATIONS, LEGEND	
K	MOP HANGER	REFER TO PLUMBING DRAWINGS	REFER TO PLUMBING DRAWINGS	48" A.F.F. TO CENTER	
L	DOOR SIGN (MEN)	ROCKWOOD	BFM687	REFER TO PLANS, ELEVATIONS, LEGEND	NOTE 3
M	DOOR SIGN (WOMEN)	ROCKWOOD	BFM688	REFER TO PLANS, ELEVATIONS, LEGEND	NOTE 3

ACCESSORY GENERAL NOTES:
1. CONTRACTOR TO PROVIDE FIRE TREATED WOOD BLOCKING FOR INSTALLATION OF TOILET ACCESSORIES, INCLUDING OWNER FURNISHED AND CONTRACTOR INSTALLED ACCESSORIES. COORDINATE REQUIREMENTS WITH OWNER.

2. ACCESSORY OWNER FURNISHED AND CONTRACTOR INSTALLED. REFER TO SCOPE OF WORK SCHEDULE.

3. TACTILE (BRAILLE GRADE 2 CONTRACTED) SIGN WITH PICTOGRAMS IN COMPLIANCE WITH ADA STANDARDS AND GOVERNING ACCESSIBILITY CODE (REFER TO SHEET G1.1). COLORS WHITE TEXT AND SYMBOLS ON BLUE (NO. 15090 IN FEDERAL STANDARD 595B) BACKGROUND.

ACCESSORY MOUNTING LEGEND

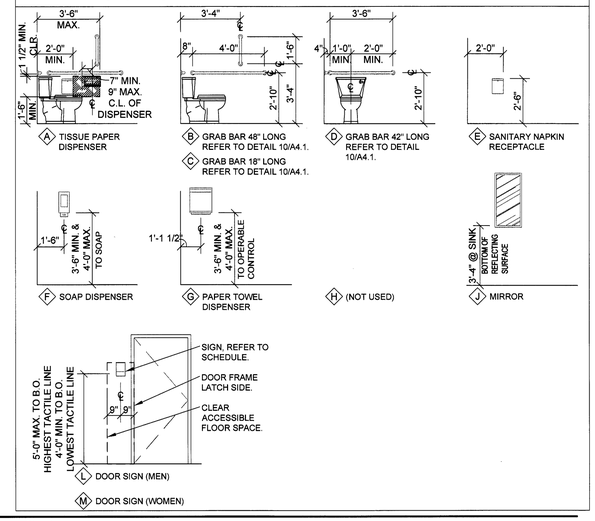

(A) TISSUE PAPER DISPENSER
(B) GRAB BAR 48" LONG REFER TO DETAIL 10/A4.1.
(C) GRAB BAR 18" LONG REFER TO DETAIL 10/A4.1.
(D) GRAB BAR 42" LONG REFER TO DETAIL 10/A4.1.
(E) SANITARY NAPKIN RECEPTACLE
(F) SOAP DISPENSER
(G) PAPER TOWEL DISPENSER
(H) (NOT USED)
(J) MIRROR
(L) DOOR SIGN (MEN)
(M) DOOR SIGN (WOMEN)

TIMOTHY M. GUILLOT
ARCHITECT
1736 East Sunshine, Suite 417
Springfield, Missouri 65804
417.862.0558
Fax: 417.862.3265
e-mail: architect@estherlyscheider.com

STATE OF COLORADO — TIMOTHY MICHAEL GUILLOT — 40514 — LICENSED ARCHITECT — 4-18-25

PROJECT:
NEW O'REILLY AUTO PARTS STORE
23RD AVE.
EVANS, CO #1


INTERIOR ELEVATIONS

O'Reilly AUTO PARTS

CORPORATE OFFICES
233 SOUTH PATTERSON
SPRINGFIELD, MISSOURI 65802
(417) 862-2674 TELEPHONE

COMM #	4838
DATE:	7-19-24
REVISION DATE:	4-18-25


A4.1

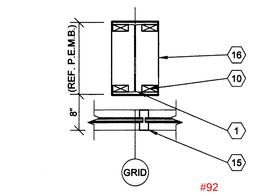

1 COLUMN DETAIL

A4.2 SCALE: 3/4" = 1'-0"

#92

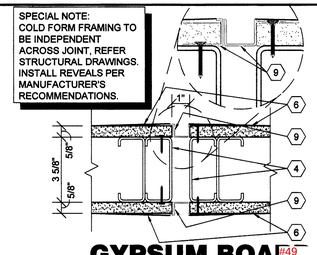


2 GYPSUM BOARD JOINT DETAIL

A4.2 SCALE: 3" = 1'-0"

#49


3 NOT USED

A4.2 SCALE: NTS

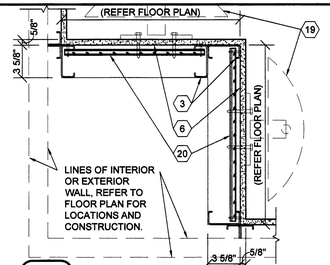

4 FRAMING DETAIL


A4.2 SCALE: 1 1/2" = 1'-0"

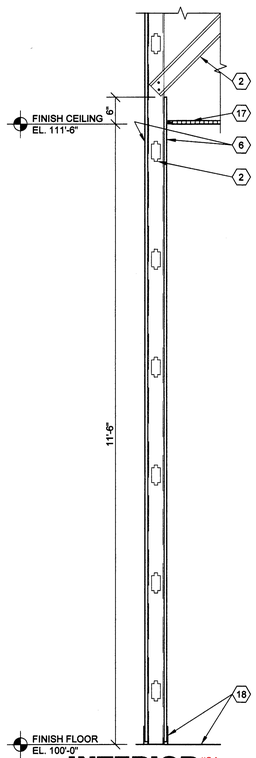

5 INTERIOR WALL SECTION

A4.2 SCALE: 3/4" = 1'-0"


#24

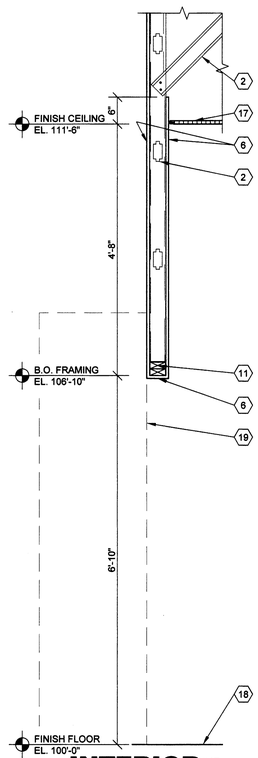

6 INTERIOR WALL SECTION

A4.2 SCALE: 3/4" = 1'-0"

#47

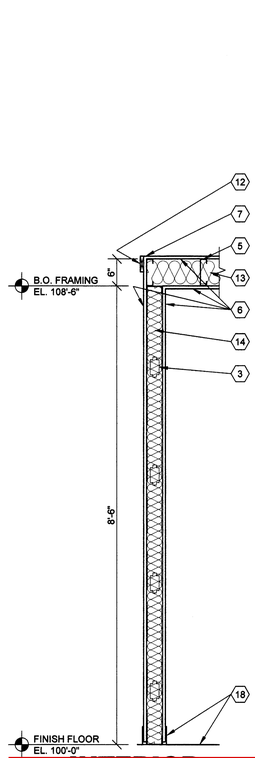


7 INTERIOR WALL SECTION

A4.2 SCALE: 3/4" = 1'-0"

#45


8 NOT USED

A4.2 SCALE: NOT TO SCALE

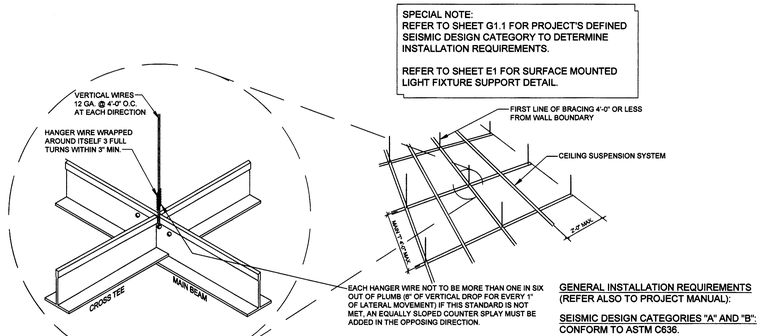

9 SUSPENDED CEILING SEISMIC BRACING

A4.2 NOT TO SCALE

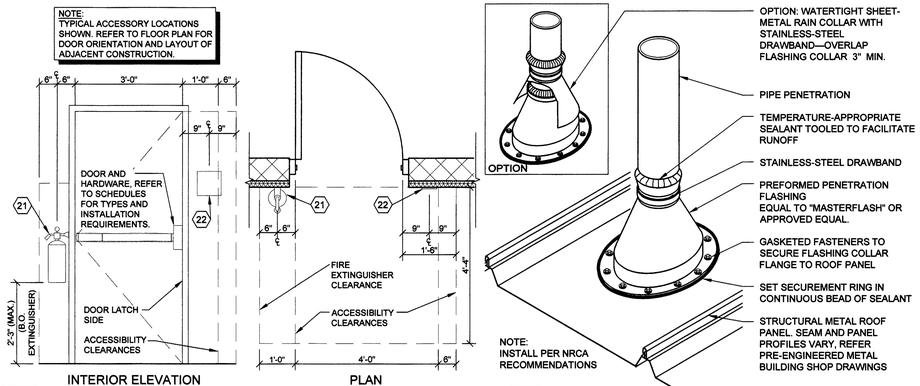

10 FIRE EXTINGUISHER DETAIL

A4.2 SCALE: 1/2" = 1'-0"

11 VENT THRU ROOF DETAIL

A4.2 NOT TO SCALE

GENERAL NOTES

- (A) REFER TO PROJECT MANUAL FOR ADDITIONAL REQUIREMENTS.
- (B) DIMENSIONS ARE TO ROUGH FACE OF CONCRETE, MASONRY, FRAMING, OR CENTER LINE OF STRUCTURE UNLESS OTHERWISE INDICATED.
- (C) REFER TO INTERIOR FINISH SCHEDULES FOR MATERIAL TYPES, COLORS AND FINISHES.

KEY NOTES

1. PRE-ENGINEERED METAL BUILDING STRUCTURAL STEEL COLUMN, REFER TO P.E.M.B. SHOP DRAWINGS FOR ADDITIONAL REQUIREMENTS. PAINT (WHERE INDICATED).
2. 362S162-33 COLD FORM METAL FRAMING ATTACHED TO ROOF STRUCTURE, REFER TO STRUCTURAL DRAWINGS FOR FRAMING REQUIREMENTS.
3. 362S162-33 COLD FORM METAL FRAMING AT 24" O.C., REFER TO INTERIOR WALL TYPES FOR ADDITIONAL REQUIREMENTS.
4. 362S162-33 COLD FORM METAL STUDS DOUBLED AT CONTROL JOINT.
5. 600S162-54 COLD FORM METAL CEILING JOIST FRAMING AT 24" O.C.
6. 5/8" TYPE "X" GYPSUM BOARD. REFER TO INTERIOR WALL TYPES FOR ADDITIONAL REQUIREMENTS.
7. GYPSUM BOARD CORNER BEAD CONTINUOUS.
8. NOT USED.
9. GYPSUM BOARD CONTINUES EXPANSION JOINT. PROVIDE FRY REGLET "DRMF-625-75" AND "JDM-625" AT JOINT ON BOTH SIDES OF WALL AND BOTTOM.
10. FIRE TREATED 2X NAILERS OR BLOCKING.
11. (2) FIRE TREATED 2X NAILERS.
12. 1X4 WOOD TRIM (PAINT GRADE PINE) ATTACHED TO METAL STUD FRAMING WITH TECH 12 SCREWS AT 24" O.C. SET FLUSH. PAINT EXPOSED SURFACES TO MATCH WALL FINISH.
13. 6" UNFACED SOUND BATT INSULATION.
14. 3 1/2" UNFACED SOUND BATT INSULATION.
15. ALUMINUM WINDOW SYSTEM, REFER TO FLOOR PLAN AND WINDOW SCHEDULE FOR TYPES.
16. PRE-FINISHED SHEET METAL (24 GA.) COLUMN ENCLOSURE TO EXTEND THRU FINISH CEILING SYSTEM. COLOR TO MATCH WINDOW FRAMING FINISH. NO EXPOSED HORIZONTAL SEAMS PERMITTED.
17. SUSPENDED ACOUSTICAL CEILING SYSTEM, REFER TO INTERIOR FINISH SCHEDULE FOR TYPES AND LOCATIONS.
18. FINISH FLOORING AND BASE, REFER TO INTERIOR FINISH SCHEDULE FOR TYPES AND LOCATIONS.
19. OWNER FURNISHED AND INSTALLED FIXTURE, REFER TO INTERIOR FINISH PLAN FOR LAYOUT. (REFER TO SCOPE OF WORK SCHEDULE.)
20. 5/8" FIRE TREATED PLYWOOD BACKING TO BACK SIDE OF STUD INTERIOR FLANGE ON EACH EXPOSED WALL FACE FROM 8'-0" TO 10'-0" A.F.F. FOR INSTALLATION OF SECURITY MIRRORS (OWNER FURNISHED AND INSTALLED).
21. SURFACE MOUNTED PORTABLE FIRE EXTINGUISHER. FIRE EXTINGUISHERS SHALL BE UL LISTED ABC TYPE WITH 10 LBS. CAPACITY. SURFACE MOUNTING BRACKET QUICK RELEASE TYPE. REFER TO FLOOR PLAN FOR LOCATIONS. PROVIDE BLOCKING AS REQUIRED FOR MOUNTING.
22. TACTILE EXIT SIGN AT EXIT DISCHARGE DOOR STATING "EXIT" WITH BRAILLE (GRADE 2 CONTRACTED) LETTERING. SIGN CONSTRUCTION AND LOCATION TO COMPLY WITH ACCESSIBILITY CODE. MOUNT 48" MINIMUM ABOVE FINISH FLOOR TO BOTTOM OF LOWEST TACTILE CHARACTER AND 60" MAXIMUM ABOVE FINISH FLOOR TO BOTTOM OF HIGHEST TACTILE CHARACTER. REFER TO FLOOR PLAN FOR ADDITIONAL REQUIREMENTS.

STATE OF COLORADO — TIMOTHY M. GUILLOT — 40512 — REGISTERED ARCHITECT — 7-19-14

TIMOTHY M. GUILLOT
ARCHITECT
1736 East Sunshine, Suite 417
Springfield, Missouri 65804
417.862.9558
Fax: 417.862.3265
e-mail: architect@estellyschneider.com

PROJECT:
NEW O'REILLY AUTO PARTS STORE
23RD AVE.
EVANS, CO #1


INTERIOR SECTIONS & DETAILS

O'Reilly AUTO PARTS

CORPORATE OFFICES
233 SOUTH PATTERSON
SPRINGFIELD, MISSOURI 65802
(417) 862-2674 TELEPHONE


COMM #	4838
DATE:	7-19-24
REVISION DATE:	

A4.2

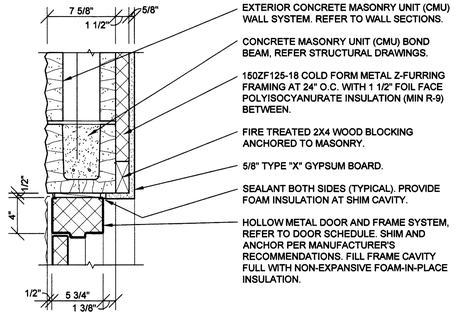

1 HEAD DETAIL

A5.1 SCALE: 1 1/2" = 1'-0"

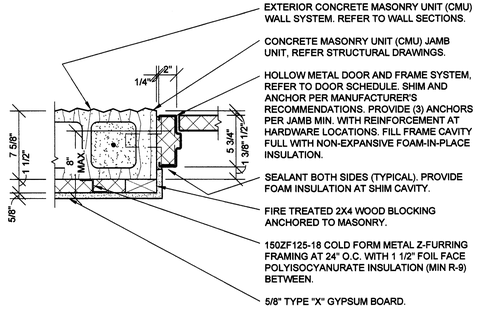

2 JAMB DETAIL


A5.1 SCALE: 1 1/2" = 1'-0"

NOTE:
FOR TYPICAL EXTERIOR WALL DETAIL, REFER TO 1/A5.1

NOTE:
FOR TYPICAL EXTERIOR WALL DETAIL, REFER TO 2/A5.1


3 HEAD DETAIL

A5.1 SCALE: 1 1/2" = 1'-0"

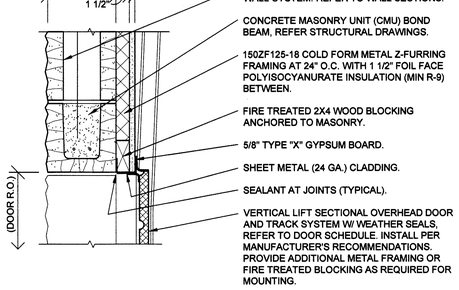

4 JAMB DETAIL

A5.1 SCALE: 1 1/2" = 1'-0"

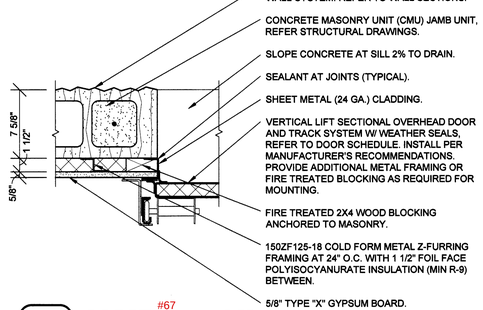


5 HEAD DETAIL

A5.1 SCALE: 1 1/2" = 1'-0"

6 JAMB DETAIL


A5.1 SCALE: 1 1/2" = 1'-0"

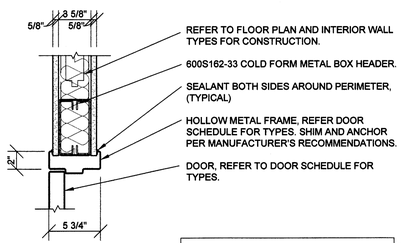

SPECIAL NOTE:
UNLESS OTHERWISE INDICATED, KNOCK DOWN (KD) TYPE DOOR FRAMES ARE NOT PERMITTED.

7 HEAD DETAIL

A5.1 SCALE: 1 1/2" = 1'-0"

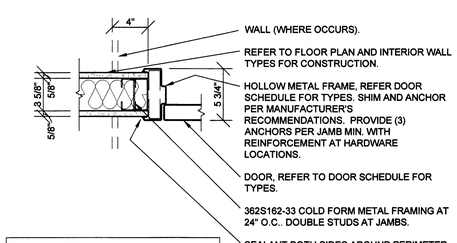

SPECIAL NOTE:
UNLESS OTHERWISE INDICATED, KNOCK DOWN (KD) TYPE DOOR FRAMES ARE NOT PERMITTED.

8 JAMB DETAIL

A5.1 SCALE: 1 1/2" = 1'-0"

DOOR SCHEDULE

MK	DOOR SIZE (W x H x D)	DOOR TYPE	DOOR SWING	DOOR MATERIAL	DOOR GLAZ. TYPE	HARDWARE SET #	HARDWARE KEYED	FRAME TYPE	FRAME MATERIAL	FRAME HEAD WIDTH	DETAILS HEAD	DETAILS JAMB	DETAILS SILL	FIRE RATING	REMARKS (REFER NOTES)
1	3'-0" X 7'-0" X 1-3/4"	A	REFER TO FLOOR PLAN	ALUMINUM	1	1	A	1	ALUMINUM		4/A5.2	4/A5.2	5/A5.2		1, 2, 5
2	3'-0" X 7'-0" X 1-3/4	B	REFER TO FLOOR PLAN	INSULATED METAL		2	A	2	INSULATED METAL		1/A5.1	2/A5.1	5/A5.2 SIM.		1, 2, 3
3	6'-0" X 8'-0"	D	SECTIONAL OVERHEAD	INSULATED METAL		3		MANUFACTURER'S STANDARDS			5/A5.1	6/A5.1			1
4	3'-0" X 7'-0" X 1-3/4"	C	REFER TO FLOOR PLAN	SOLID WOOD		4		2	HOLLOW METAL		7/A5.1	8/A5.1			1, 4
5	3'-0" X 7'-0" X 1-3/4"	C	REFER TO FLOOR PLAN	SOLID WOOD		5		2	HOLLOW METAL		7/A5.1	8/A5.1			1, 4
6	3'-0" X 7'-0" X 1-3/4"	C	REFER TO FLOOR PLAN	SOLID WOOD		5		2	HOLLOW METAL		7/A5.1	8/A5.1			1, 4
7	3'-0" X 7'-0" X 1-3/4"	B	REFER TO FLOOR PLAN	INSULATED METAL		6		2	INSULATED METAL		3/A5.1	4/A5.1	5/A5.2 SIM.		1, 3
8	3'-0" X 7'-0" X 1-3/4"	A	REFER TO FLOOR PLAN	ALUMINUM	2	7		1	ALUMINUM		4/A5.2	4/A5.2	5/A5.2 SIM.		1

NOTES:
1. ALL DOORS SHALL BE SHOP PREPARED FOR HARDWARE.
2. ALL EXTERIOR DOORS TO BE KEYED ALIKE. CONTRACTOR TO FIELD VERIFY AND MATCH CORE OF DOOR MARKED "2".
3. EXTERIOR DOOR, FRAME AND HARDWARE OWNER FURNISHED AND CONTRACTOR INSTALLED, REFER TO SCOPE OF WORK SCHEDULE.
4. CONTRACTOR'S OPTION TO PURCHASE INTERIOR DOORS, FRAMES, AND HARDWARE THROUGH PREFERRED VENDOR. REFER TO SCOPE OF WORK SCHEDULE.
5. PROVIDE SIGN POSTED ON EGRESS SIDE ADJACENT TO DOOR STATING "THIS DOOR TO REMAIN UNLOCKED WHEN THIS SPACE IS OCCUPIED". SIGN CONSTRUCTION TO BE NON-GLARE 1" HIGH WHITE LETTERING ON CONTRASTING BLUE BACKGROUND. LOCATION TO COMPLY WITH ANSI A117.1. MOUNT 48" MINIMUM ABOVE FINISH FLOOR TO BOTTOM OF LOWEST CHARACTER AND 60" MAXIMUM ABOVE FINISH FLOOR TO BOTTOM OF HIGHEST CHARACTER.


LOCKNET
100 COURCHELLE DRIVE
NICHOLASVILLE, KY 40356
CONTACT: PAM PEEL
PHONE 800-887-4307 EXT 133
FAX 859-881-5499
EMAIL: construction@locknet.com

SPECIAL NOTE:
UNLESS OTHERWISE INDICATED, KNOCK DOWN (KD) TYPE DOOR FRAMES ARE NOT PERMITTED.

DOOR TYPES


(SCALE 1/4" = 1'-0")

NOTE:
DASHED IN DOOR AND DOUBLE LETTER INDICATE PAIRED DOOR LOCATIONS.




ALUMINUM ENTRANCE SWING DOOR WITH SAFETY GLASS (REFER TO SCHEDULES FOR FINISHES)

A Ⓐ




FLUSH METAL SWING DOOR (INSULATED) (REFER TO SCHEDULES FOR FINISHES)

B Ⓑ



FLUSH SOLID CORE WOOD SWING DOOR (REFER TO SCHEDULES FOR FINISHES)

C Ⓒ




SECTIONAL OVERHEAD DOOR (INSULATED) WITH LIFT CLEARANCE TRACK SYSTEM MOUNTED AT 11'-0" MAXIMUM A.F.F.. MANUAL OPERATION WITH PULL ROPE. (REFER TO SCHEDULES FOR FINISHES)

D

FRAME TYPES


(SCALE 3" = 1'-0")



ALUMINUM ENTRANCE AND STOREFRONT FRAMING SYSTEM (THERMALLY BROKEN) WITH 1" INSULATED GLAZING.

REFER TO EXTERIOR FINISH SCHEDULES FOR FRAME COLORS AND GLAZING SCHEDULE FOR GLAZING TYPES.

1



HOLLOW METAL FRAME (16 GA.) WITH (3) MIN. ANCHORS PER JAMB, (1) AT EACH JAMB SILL, AND ADDITIONAL ANCHORS AT HARDWARE LOCATIONS.

REFER EXTERIOR AND INTERIOR FINISH SCHEDULES FOR COLORS.

2

DOOR HARDWARE SCHEDULE

GENERAL HARDWARE NOTES:
1. ALL HINGED DOOR HARDWARE TO BE COMPLIANT WITH ADA STANDARDS AND GOVERNING ACCESSIBILITY CODES.

A. OPERATIONAL FORCE TO RETRACT LATCHES OR DISENGAGE DEVICES THAT HOLD DOORS IN CLOSED POSITION SHALL BE AS FOLLOWS:
(1). HARDWARE OPERATION BY A FORWARD, PUSHING, OR PULLING MOTION: 15 POUNDS MAXIMUM.
(2). HARDWARE OPERATION BY A ROTATIONAL MOTION: 28 INCH-POUNDS MAXIMUM.

B. HEIGHT OF OPERABLE PARTS SHALL BE 34 INCHES MINIMUM AND 48 INCHES MAXIMUM ABOVE FLOOR.

C. CLOSING SPEEDS SHALL BE ADJUSTED SO THAT FROM AN OPEN POSITION OF 90 DEGREES, THE TIME REQUIRED TO MOVE THE DOOR TO AN OPEN POSITION OF 12 DEGREES SHALL BE 5 SECONDS MINIMUM.

D. OPENING FORCE FOR FIRE DOORS, DOORS REQUIRED TO BE EQUIPPED WITH PANIC HARDWARE, BREAK AWAY FEATURES, OR OTHER FACTORS REQUIRING HIGHER OPENING FORCE FOR SAFETY REASONS SHALL HAVE THE MINIMUM OPENING FORCE ALLOWABLE BY AUTHORITIES HAVING JURISDICTION. FOR OTHER DOORS THE FORCE FOR PUSHING OR PULLING SHALL BE AS FOLLOWS:
(1). INTERIOR HINGED DOORS: 5.0 POUNDS MAXIMUM.

2. VERIFY COMPATIBILITY OF HARDWARE SPECIFIED. NOTIFY ARCHITECT OF INCOMPATIBILITY ISSUES PRIOR TO ORDERING AND INSTALLATION.

SET NO. 1 (DR. 1)
1 CYLINDER: 20-062 X 626 - "E" KEYWAY (REMOVABLE CORE)..... SCHLAGE

(FOLLOWING REQUIRED HARDWARE FURNISHED WITH WINDOW FRAMING DOOR SYSTEM)
1 PAIR OFFSET PIVOTS: 195/180 X 626..... RIXON
1 DEADLOCK: MS1850S X 628..... ADAMS RITE
1 DEADLOCK LEVER (WITH "LOCKED" AND "OPEN" INDICATOR): 4550MS X 628..... ADAMS RITE
1 STRIKE: MS4002 X 628..... ADAMS RITE
1 SET PUSH / OFFSET PULL: CO-12 X CP-II X 626..... KAWNEER
1 CLOSER: 4040XP-3077-18TJ-TB X 689..... LCN
1 SET PERIMETER GASKETS: 027078 (POLYMERIC BULB) X LENGTH REQUIRED..... KAWNEER
1 SWEEP: 200799 X 689 X LENGTH REQUIRED..... KAWNEER
1 THRESHOLD: 069139 X 689 X LENGTH REQUIRED (OFFSET PIVOT COMPATIBLE) (ANSI & ADA COMPLIANT)..... KAWNEER

SET NO. 2 (DR. 2)
1 CONTINUOUS HINGE: 780-112HD X 628 X LENGTH REQUIRED..... HAGER
1 CYLINDER: 20-057 X 626 - "E" KEYWAY (REMOVABLE CORE) PROVIDE (2) SECURITY KEYS, (1) CORE KEY, (1) BITTED..... SCHLAGE
1 EXIT PANIC LOCK: 9300B X 486 X 689 X PRT03 X 630 (THROUGH SEX BOLT MOUNTING)..... DORMAKABA
1 CLOSER: 8616DST X FC X SNB1 X 689 (THROUGH SEX BOLT MOUNTING)..... DORMAKABA
1 SET PERIMETER GASKETS: 12002 X 1116 X LENGTH REQUIRED..... SCHLEGEL
1 LATCH GUARD: LG100Z/SF X 663 (STRAIGHT W/ PIN AND SEX BOLTS)..... LATCHGUARD
1 DOOR VIEWER: 698-190 X 626..... IVES
1 KICK PLATE: 190S X 8" X 34" X 630..... HAGAR
1 DOOR BOTTOM SEAL: 31321 X 689 X LENGTH REQUIRED..... GLOBAL
1 THRESHOLD: 31206 X 689 X LENGTH REQUIRED..... GLOBAL

SET NO. 3 (DR. 3)
REQUIRED HARDWARE FURNISHED WITH OVERHEAD DOOR SYSTEM (LOCKING FROM INSIDE ONLY)

SET NO. 4 (DR. 4)
3 HINGES: BB1279 X 4 1/2" X 4 1/2" X 626..... HAGER
1 OFFICE LOCK (LEVER HANDLE): AU5307LN X 626..... YALE
1 WALL BUMPER: 409 X 626..... ROCKWOOD

SET NO. 5 (DR. 5, 6)
3 HINGES: BB1279 X 4 1/2" X 4 1/2" X 626..... HAGER
1 PRIVACY LOCK (LEVER HANDLE): AU5302LN X 626..... YALE
1 WALL BUMPER: 409 X 626..... ROCKWOOD

SET NO. 6 (DR. 7)
3 HINGES: ECBB1100 X 4 1/2" X 4 1/2" X 626 X NRP..... HAGER
1 EXIT ONLY PANIC LOCK: 8300B X 486 X 689..... DORMAKABA
1 CLOSER: 5300MLT X FC X SX2 X 689 (THROUGH SEX BOLT MOUNTING)..... HAGER
1 SET PERIMETER GASKETS: 12002 X 1116 X LENGTH REQUIRED..... SCHLEGEL
1 LATCH GUARD: LG100Z/SF X 663 (STRAIGHT W/ PIN AND SEX BOLTS)..... LATCHGUARD
1 DOOR BOTTOM SEAL: 31321 X 689 X LENGTH REQUIRED..... GLOBAL
1 THRESHOLD: 31206 X 689 X LENGTH REQUIRED..... GLOBAL

SET NO. 7 (DR. 8)
(FOLLOWING REQUIRED HARDWARE FURNISHED WITH WINDOW FRAMING DOOR SYSTEM)
1 PAIR OFFSET PIVOTS: 195/188 X 626..... RIXON
1 SET PUSH / OFFSET PULL: CO-12 X CP-II X 626..... KAWNEER
1 CLOSER: 4040XP-3077-18TJ-TB X 689..... LCN
1 SET PERIMETER GASKETS: 027078 (POLYMERIC BULB) X LENGTH REQUIRED..... KAWNEER

GENERAL NOTES

(A) REFER TO PROJECT MANUAL FOR ADDITIONAL REQUIREMENTS.

(B) REFER TO BUILDING CODE SUMMARY FOR PROJECT STRUCTURAL DESIGN CRITERIA. DOOR FRAMING AND ANCHORING SYSTEMS SHALL BE DESIGNED BY MANUFACTURER TO CONFORM TO PERFORMANCE AND TESTING REQUIREMENTS SPECIFIED.

(C) REFER TO FLOOR PLAN, ELEVATIONS, AND SECTIONS FOR ADDITIONAL REQUIREMENTS.

(D) REFER TO EXTERIOR AND INTERIOR FINISH SCHEDULES FOR COLORS. PERIMETER SEALANT COLOR TO MATCH FRAME COLOR UNLESS OTHERWISE INDICATED.

STATE OF COLORADO
TIMOTHY M. GUILLOT
ARCHITECT
LICENSED ARCHITECT
7-19-24

TIMOTHY M. GUILLOT
ARCHITECT
1736 East Sunshine, Suite 417
Springfield, Missouri 65804
417.862.9558
Fax: 417.862.3265
e-mail: architect@estierlyschaeller.com

PROJECT:
NEW O'REILLY AUTO PARTS STORE
23RD AVE.
EVANS, CO #1


DOOR SCHEDULE

O'Reilly AUTO PARTS
CORPORATE OFFICES
233 SOUTH PATTERSON
SPRINGFIELD, MISSOURI 65802
(417) 862-2674 TELEPHONE


COMM #	4838
DATE:	7-19-24
REVISION DATE:	

A5.1


WINDOW TYPES

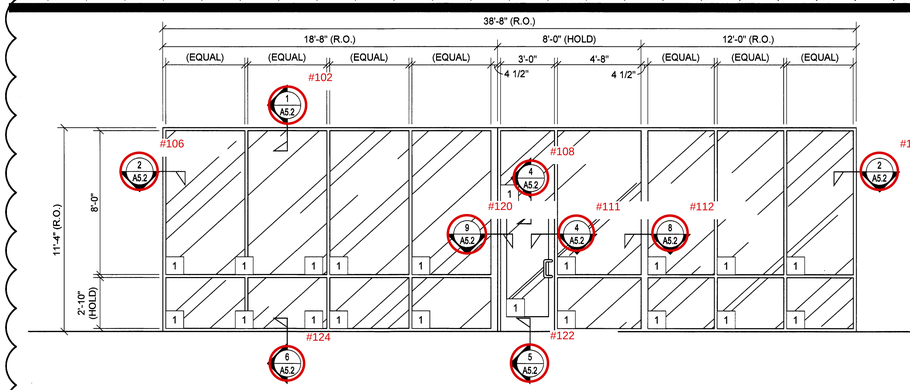

A — ALUMINUM STOREFRONT FRAMING (2" X 4 1/2") SYSTEM, THERMALLY BROKEN, FIXED UNIT.

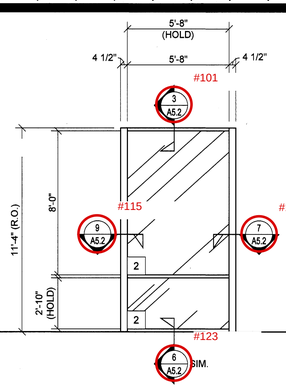


B1 — ALUMINUM STOREFRONT FRAMING (2" X 4 1/2") SYSTEM, THERMALLY BROKEN, FIXED UNIT.

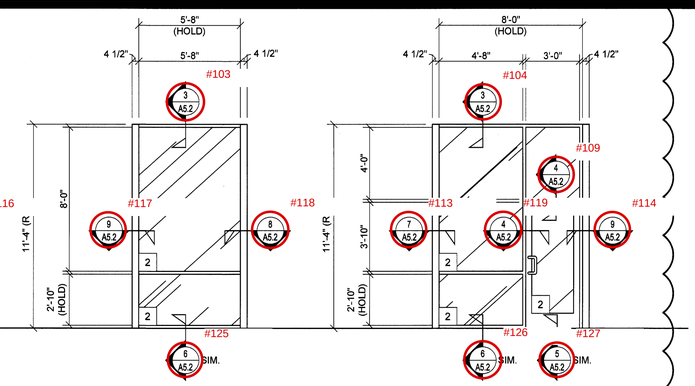


B2 — ALUMINUM STOREFRONT FRAMING (2" X 4 1/2") SYSTEM, THERMALLY BROKEN, FIXED UNIT.


C — ALUMINUM STOREFRONT FRAMING (2" X 4 1/2") SYSTEM, THERMALLY BROKEN, FIXED UNIT.

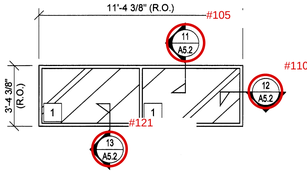


D1 AND D2 — ALUMINUM STOREFRONT FRAMING (2" X 4 1/2") SYSTEM, THERMALLY BROKEN, FIXED UNIT.

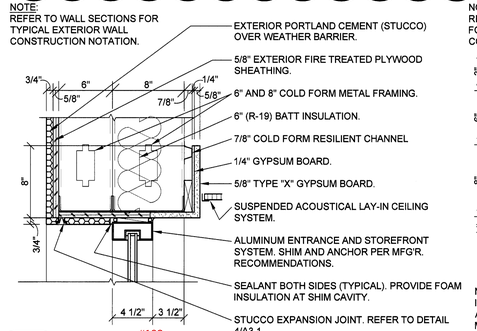


1 HEAD DETAIL
A5.2 SCALE: 1 1/2" = 1'-0"

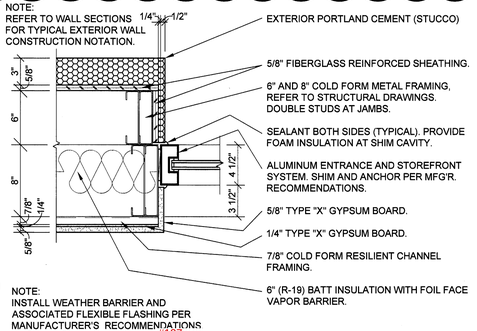


2 JAMB DETAIL
A5.2 SCALE: 1 1/2" = 1'-0"

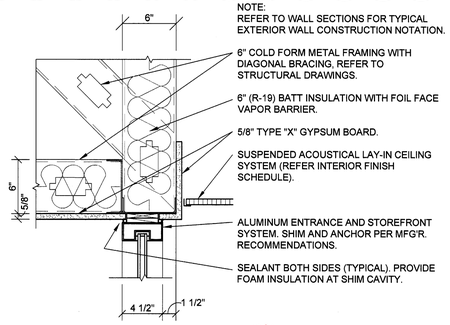


3 HEAD DETAIL
A5.2 SCALE: 1 1/2" = 1'-0"

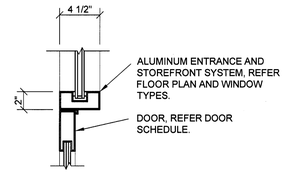


4 HEAD DETAIL
A5.2 SCALE: 1 1/2" = 1'-0"

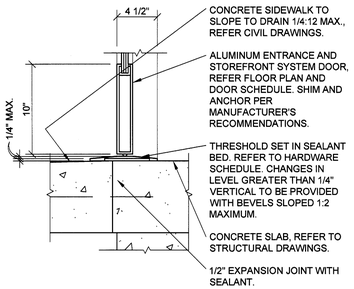


5 SILL DETAIL
A5.2 SCALE: 1 1/2" = 1'-0"
#127

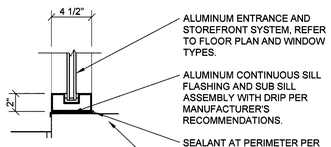


6 SILL DETAIL
A5.2 SCALE: 1 1/2" = 1'-0"
#126




7 JAMB DETAIL
A5.2 SCALE: 1 1/2" = 1'-0"
#129

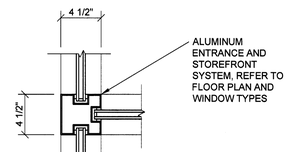


8 JAMB DETAIL
A5.2 SCALE: 1 1/2" = 1'-0"
#132

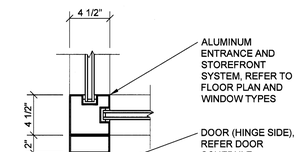


9 JAMB DETAIL
A5.2 SCALE: 1 1/2" = 1'-0"
#133

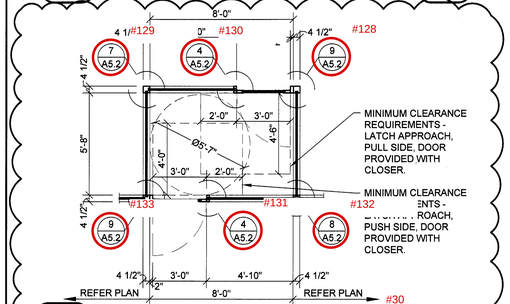


10 VESTIBULE ENLARGE PLAN
A5.2 SCALE: 1/4" = 1'-0"

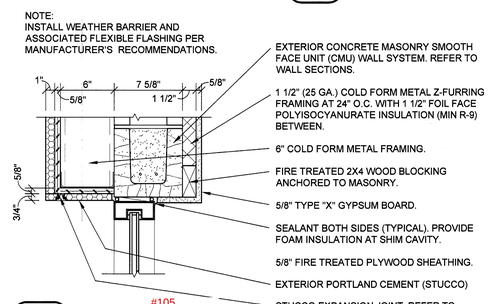

11 HEAD DETAIL
A5.2 SCALE: 1 1/2" = 1'-0"

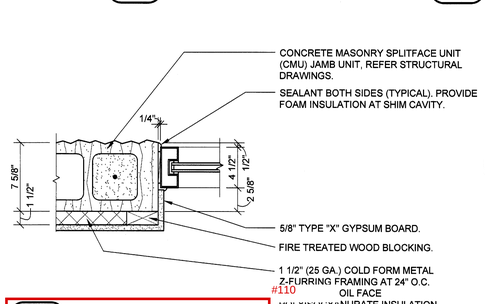

12 JAMB DETAIL
A5.2 SCALE: 1 1/2" = 1'-0"

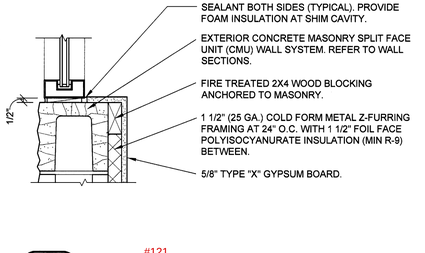

13 SILL DETAIL
A5.2 SCALE: 1 1/2" = 1'-0"
#121

GENERAL NOTES

A. REFER TO PROJECT MANUAL FOR ADDITIONAL REQUIREMENTS.

B. REFER TO BUILDING CODE SUMMARY FOR PROJECT STRUCTURAL DESIGN CRITERIA. WINDOW FRAMING AND ANCHORING SYSTEMS SHALL BE DESIGNED BY MANUFACTURER TO CONFORM TO PERFORMANCE AND TESTING REQUIREMENTS SPECIFIED.

C. REFER TO FLOOR PLAN, ELEVATIONS, AND SECTIONS FOR ADDITIONAL REQUIREMENTS.

D. WINDOW TYPE ELEVATIONS SHOWN VIEWED FROM EXTERIOR SIDE.

E. REFER TO EXTERIOR FINISH SCHEDULES FOR ALUMINUM WINDOW FRAMING COLORS. PERIMETER SEALANT COLOR TO MATCH WINDOW FRAMING COLOR UNLESS OTHERWISE INDICATED.

F. ALL DIMENSIONS TO ROUGH FACE OF FRAMING UNLESS OTHERWISE INDICATED. FIELD VERIFY FINAL ROUGH OPENINGS PRIOR TO FABRICATION.

G. REFER TO DOOR AND HARDWARE SCHEDULES FOR ADDITIONAL REQUIREMENTS.

H. SECURITY SHUTTERS MAY BE REQUIRED. CONTACT PROJECT ADMINISTRATOR FOR VERIFICATION. (REFER TO SCOPE OF WORK SCHEDULE). PROVIDE ADDITIONAL SUPPORT FRAMING SYSTEM AS REQUIRED.

I. WHEN WIND SPEED IS EQUAL TO OR GREATER THAN 120 MPH AND THE STOREFRONT OR CURTAIN WALL SYSTEM IS NOT SPECIFIED TO BE IMPACT RESISTANT, A STORM PANEL SYSTEM SHALL BE OWNER FURNISHED AND INSTALLED. CONTACT PROJECT ADMINISTRATOR TO VERIFY AND COORDINATE WITH SYSTEM PROVIDED BY OTHERS. (REFER TO SCOPE OF WORK SCHEDULE). PROVIDE ADDITIONAL SUPPORT FRAMING SYSTEM AS REQUIRED.

J. CONTRACTOR'S OPTION TO DIRECT ORDER AND PURCHASE WINDOW FRAMING SYSTEM AND GLAZING FROM THE FOLLOWING SUPPLIER (REFER TO SCOPE OF WORK SCHEDULE):

COULTER & COMPANY
13711 E. 66TH ST. N.
OWASSO, OK 74055
PHONE: (918) 272-4494
FAX: (918) 272-7908
EMAIL: carl@coulterglass.com
CONTACT: Carl Yorman

GLAZING SCHEDULE

1 — 1" INSULATED SAFETY GLAZING (1/4" VITRO "SOLAR-COOL (2) AZURIA" EXTERIOR PANE / 1/2" AIR SPACE / 1/4" CLEAR INTERIOR PANE) SHADING COEFFICIENT 0.29

2 — 1/4" SAFETY GLAZING

TIMOTHY M. GUILLOT
ARCHITECT
1736 East Sunshine, Suite 417
Springfield, Missouri 65804
417.862.9558
Fax: 417.862.3265
e-mail: architect@esterlyschneider.com

STATE OF COLORADO — TIMOTHY MICHAEL GUILLOT — 45712 — REGISTERED ARCHITECT — 4-18-25

PROJECT:
NEW O'REILLY AUTO PARTS STORE
23RD AVE.
EVANS, CO #1

WINDOW SCHEDULE

O'Reilly AUTO PARTS
CORPORATE OFFICES
233 SOUTH PATTERSON
SPRINGFIELD, MISSOURI 65802
(417) 862-2674 TELEPHONE

COMM #	4838
DATE:	7-19-24
REVISION DATE:	4-18-25


A5.2

GENERAL NOTES

A. REFER TO PROJECT MANUAL AND SCOPE OF WORK SCHEDULE FOR ADDITIONAL REQUIREMENTS.


B. SHEET METAL AND ROOFING CONSTRUCTION SHALL COMPLY WITH NATIONAL ROOFING CONTRACTORS ASSOCIATION (NRCA) AND SHEET METAL AND AIR CONDITIONING CONTRACTORS NATIONAL ASSOCIATION (SMACNA) DESIGN STANDARDS AND RECOMMENDATIONS.

1 (NOT USED)
A6.1 SCALE: N.T.S.

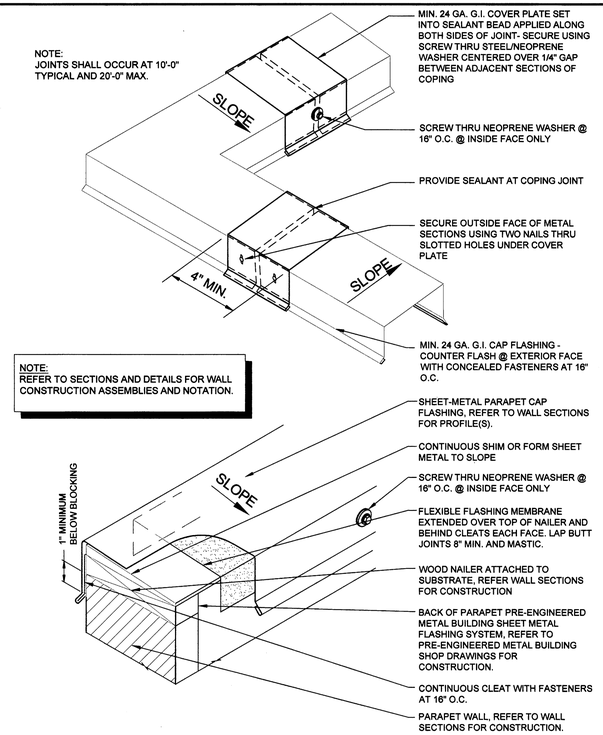


2 TYPICAL COPING FLASHING DETAIL
A6.1 SCALE: N.T.S.

3 NOT USED
A6.1 SCALE: N.T.S.

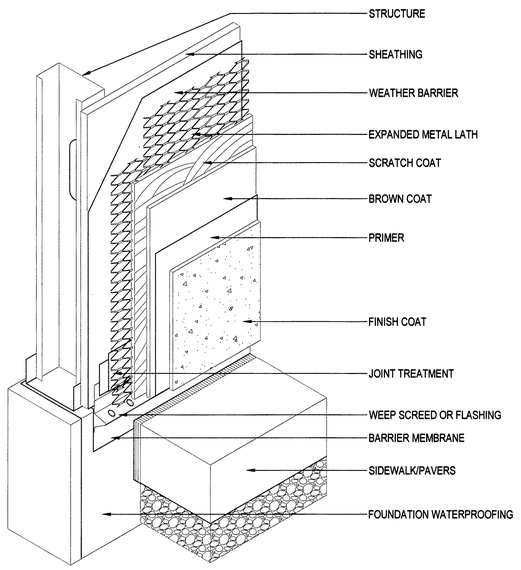

NOTES:
1. INSTALLATION TO BE COMPLETED IN ACCORDANCE WITH MANUFACTURER'S SPECIFICATIONS.

4 STUCCO TERMINATION DETAIL
A6.1 SCALE: N.T.S.

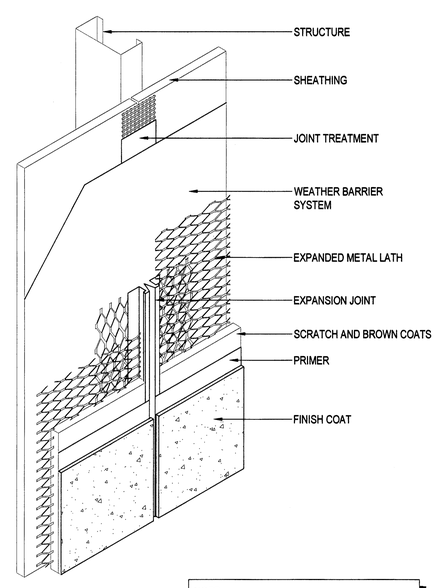

NOTES:
1. INSTALLATION TO BE COMPLETED IN ACCORDANCE WITH MANUFACTURER'S SPECIFICATIONS.

#68

5 STUCCO JOINT DETAIL
A6.1 SCALE: N.T.S.

TIMOTHY M. GUILLOT
ARCHITECT
1736 East Sunshine, Suite 417
Springfield, Missouri 65804
417.862.9558
Fax: 417.862.3265
e-mail: architect@estellyschneider.com

STATE OF COLORADO — TIMOTHY MICHAEL GUILLOT — 40512 — LICENSED ARCHITECT — 7-19-24

PROJECT:
NEW O'REILLY AUTO PARTS STORE
23RD AVE.
EVANS, CO #1

EXTERIOR DETAILS

O'Reilly AUTO PARTS
CORPORATE OFFICES
233 SOUTH PATTERSON
SPRINGFIELD, MISSOURI 65802
(417) 862-2674 TELEPHONE

COMM #	4838
DATE:	7-19-24
REVISION DATE:	

A6.1