HEIGHTS (U-176) - board / wall height per markup

🟦 H 2.000 ft

TAKE-OFF LEGEND - A111 (gypsum board ceilings / soffits)

blue area = gyp bd ceiling (ceilings), green area / line = gyp bd ceiling / soffit of the misc rows (CLG / SOF / RS / CAN / BW): 7 items, 1,533.14 SF (Contents: board · ceiling tag · room · SF · ceiling height · detail · id)

measure: /Measure at the printed scale of the sheet; SF = Excel row (ceiling id)

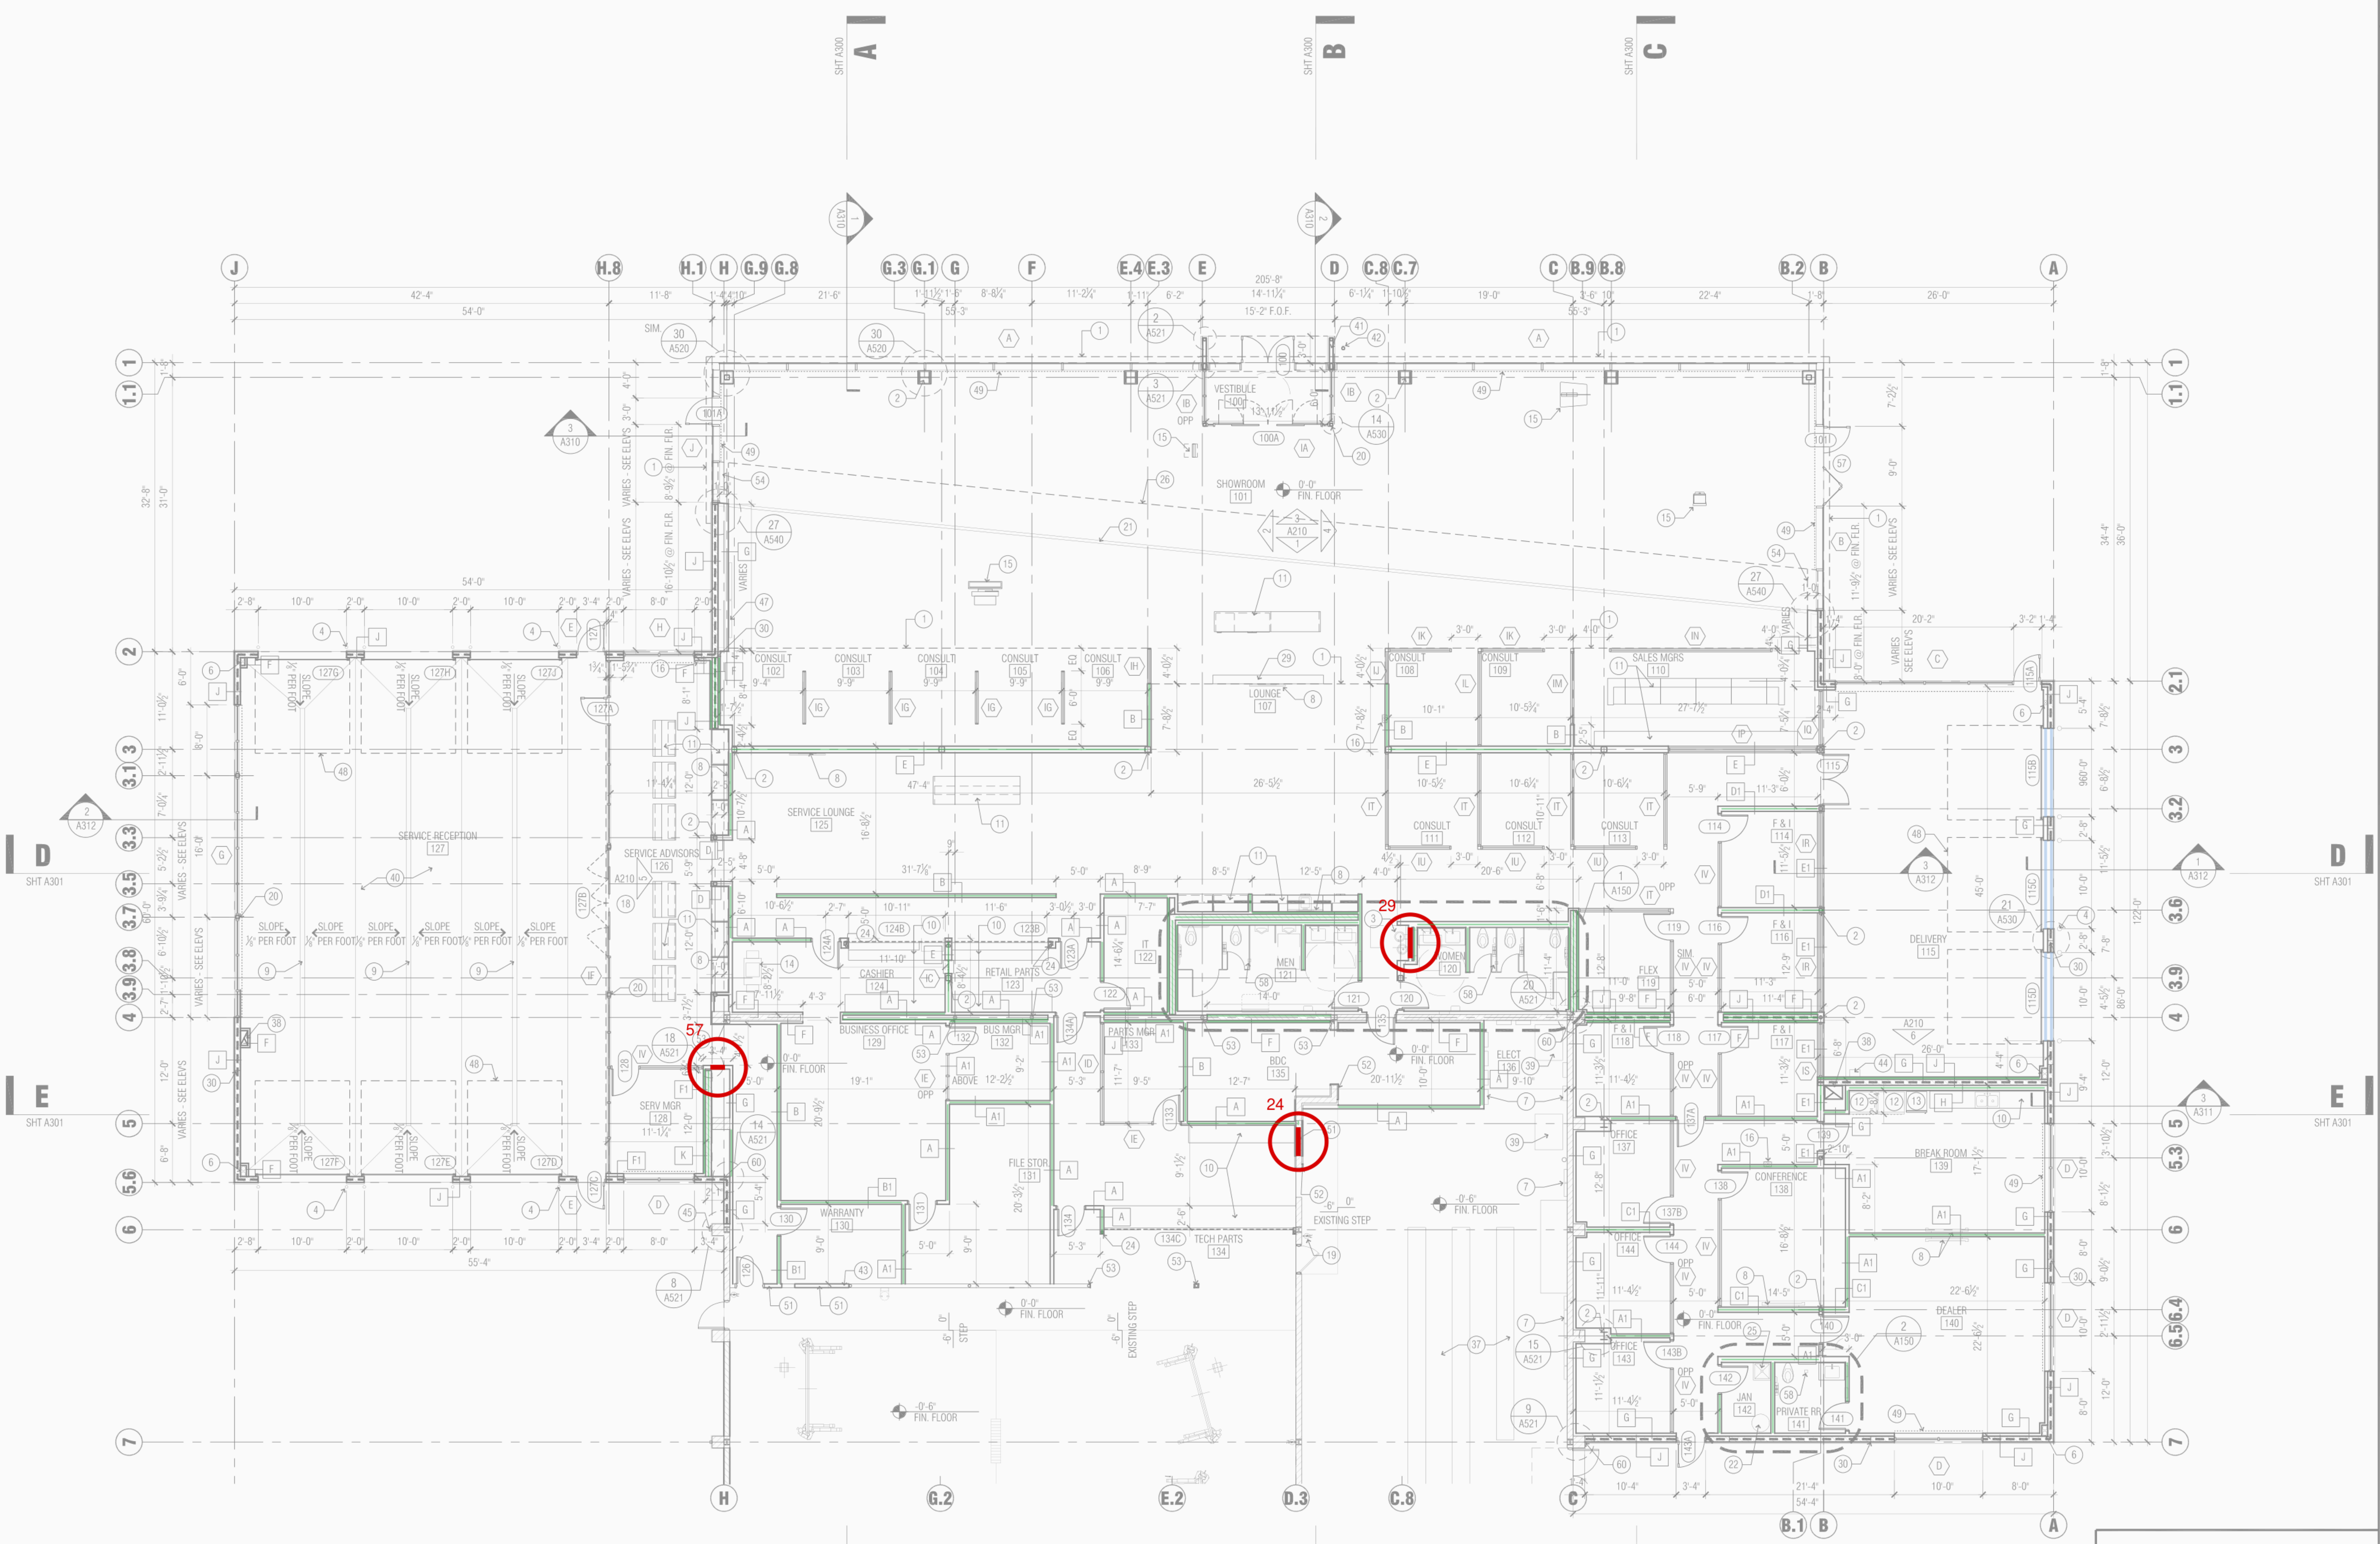

PARTIAL GROUND FLOOR PLAN

1/4" = 1'-0"

GENERAL NOTES

1. DIMENSIONS ARE TO FACE OF CMU OR FACE OF SHEATHING UNLESS NOTED OTHERWISE.
2. PROVIDE WALL CONTROL JOINTS IN ALL INTERIOR FRAMED WALL / GYP. BD. WALLS PER DETAIL 7/A540

KEYNOTES

① FACE OF FASCIA/SOFFIT ABOVE
② STEEL COLUMN - SEE STRUCT.
③ DUAL HEIGHT DRINKING FOUNTAIN - SEE PLUMBING
④ TYPICAL BOLLARD W/ COVER - SEE 5/A510
⑤ EXISTING STAIR - NO CHANGES
⑥ ROOF & OVERFLOW DRAIN TO NOZZLE - SEE 1/A520
⑦ ELEC. PANELS
⑧ TV / MEDIA DISPLAY - COORD UTILITIES
⑨ TRENCH DRAIN - SEE PLUMBING
⑩ CASEWORK BY GC - COORD ELEC & PLUMB REQ'MTS SEE A230
⑪ CASEWORK PROVIDED BY DCI MARKETING (OWNER'S VENDOR) - NO TRANSACTIONS THIS LOCATION
⑫ VENDING MACHINE BY OWNER
⑬ REFRIGERATOR BY OWNER
⑭ COPIER BY OWNER
⑮ FIXTURE BY DCI MARKETING (OWNER'S VENDOR)
⑯ 2-A:20-B:C FIRE EXT CAB MTD PER 11/A540. SEMI-RECESSED COSMOPOLITAN 1032 JL INDUSTRIES OR EQUAL
⑰ 4-A:60-B:C WALL MTD PORTABLE FIRE EXT MTD PER 11/A540
⑱ AUTOMATIC SLIDING DOOR
⑲ EXISTING RELOCATED FIRE EXTINGUISHER
⑳ CLEAR ANOD BRAKE METAL COLUMN ENCL. PER 7/A530
㉑ FLOORING TRANSITION - SEE FINISH PLAN
㉒ WATER HEATER - SEE PLUMB
㉓ ELECTRICAL SERVICE ENTRANCE SECTION - SEE ELEC
㉔ STEEL POST - SEE STRUCT.
㉕ SERVICE SINK
㉖ STEP IN CEILING HEIGHT ABOVE
㉗ ALIGNMENT RACK (NO PIT)
㉘ EMERGENCY EYEWASH / SHOWER
㉙ BRAND WALL BY OWNER'S VENDOR
㉚ MASONRY CONTROL JOINT - SEE STRUCT
㉛ AIR COMPRESSOR BY OWNER
㉜ VEHICLE LIFT BY OWNER
㉝ WORKBENCH BY OWNER
㉞ BRAKE LATHE BY OWNER
㉟ TIRE MACHINE BY OWNER
㊱ TIRE BALANCER BY OWNER
㊲ PARTS SHELVING - PRODUCT NOT TO EXCEED 12'-0" A.F.F.
㊳ VEHICLE EXHAUST DUCT - PROVIDE INTAKE GRILLES ON WALL - SEE MECH
㊴ ELECTRICAL TRANSFORMER - SEE ELEC
㊵ SLOPE FLOOR TO DRAIN
㊶ ENTRY PORTAL BY GC & ACM CLADDING BY PATTISON SIGN GROUP (OWNER'S VENDOR)
㊷ KNOX BOX PER FIRE DEPARTMENT REQUIREMENTS
㊸ ACOUSTICALLY INSULATE WALL OF THIS ROOM WITH 3 1/2" SOUND ATTENUATION BATTS
㊹ EV CHARGER - SEE ELEC
㊺ EXTEND DOWNSPOUT TO GRADE TO MATCH EXISTING
㊻ LOUVER - SEE MECH
㊼ DIGITAL SIGNAGE STORY BY OWNER'S VENDOR
㊽ OVERHEAD DOOR IN OPEN POSITION ABOVE
㊾ WINDOW SHADE - SEE RCP
㊿ EXISTING RELOCATED EV CHARGER - SEE ELEC
(51) INFILL WALL OPENING TO MATCH ADJACENT CONSTRUCTION
(52) PATCH ADJACENT WALL FURRING THIS AREA TO MATCH EXISTING
(53) EXISTING STEEL COLUMN
(54) SLOPED WALL ABOVE
(55) EXISTING VEHICLE LIFT
(56) FIRE SPRINKLER RISER PER GOVERNING AGENCY REQ'S
(57) VEHICLE LOADING DOORS
(58) FLOOR DRAIN - SEE PLUMB
(59) FIRE DEPARTMENT CONNECTION
(60) 1" BUILDING EXPANSION JOINT, SEISMIC COLORSEAL EXPANSION JOINT MANUFACTURED BY SIKA - SEE STRUCT.

SYMBOLS

XXX	DOOR NUMBER - SEE SHEET A400
X	WINDOW FRAME NUMBER - SEE SHEET A220 & A221
X	WALL CONSTRUCTION TYPE - SEE SHEET A550
XX SHEET NO.	INTERIOR ELEVATION / CASEWORK ELEVATION
▨	CMU WALL
═	METAL STUD WALL
- - -	RATED WALL CONSTRUCTION - SEE A002 & A551
X SHEET NO.	WALL SECTION

TAKE-OFF LEGEND - A111 (partition schedule order)

🟥	A - 21 wall(s) - 206.94 LF
🟦	A1 - 16 wall(s) - 203.50 LF
🟩	B - 8 wall(s) - 90.22 LF
🟧	B1 - 2 wall(s) - 26.41 LF
🟦	C1 - 4 wall(s) - 56.57 LF
🟪	D - 2 wall(s) - 4.82 LF
🟫	D1 - 2 wall(s) - 22.50 LF
🟩	E - 3 wall(s) - 104.59 LF
🟦	E1 - 3 wall(s) - 51.77 LF
🟨	F - 29 wall(s) - 179.93 LF
🟥	F1 - 5 wall(s) - 35.46 LF
🟩	G - 23 wall(s) - 226.89 LF
🟥	H - 1 wall(s) - 22.12 LF
🟫	H1 - 1 wall(s) - 20.42 LF

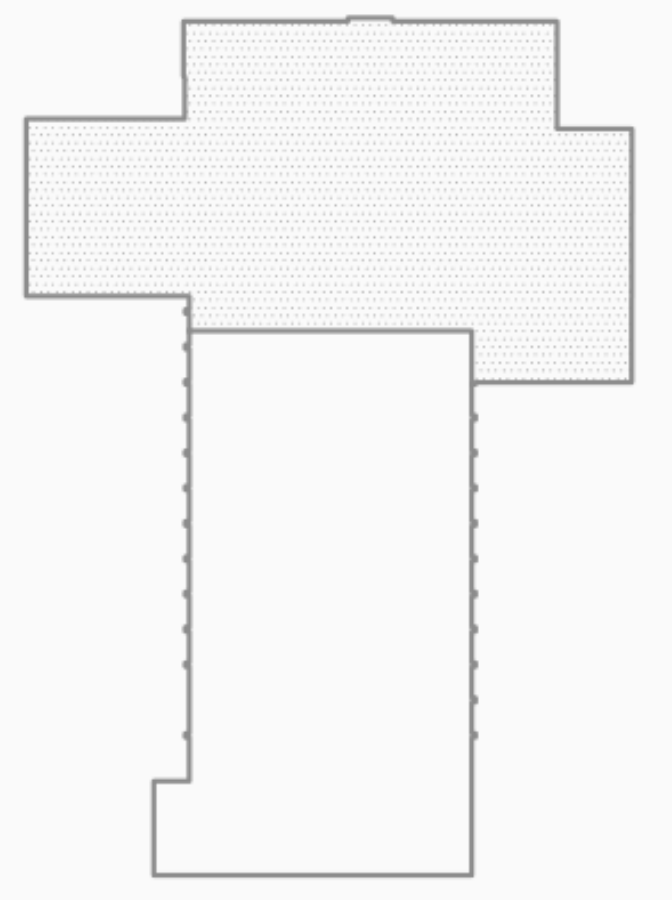

KEY PLAN

JOHN MAHONEY
ARCHITECT
850 W. ELLIOT ROAD #108
TEMPE, ARIZONA 85284
P 480.345.8457 www.mahoneyarch.com

JOHN HARTLEY MAHONEY
00305504
7-23-26

GRAND KIA
2040 W. 104TH AVENUE
THORNTON, COLORADO

PROJECT NO.: 2412
ISSUE DATE: 7/23/26

PARTIAL GROUND FLOOR PLAN

A111

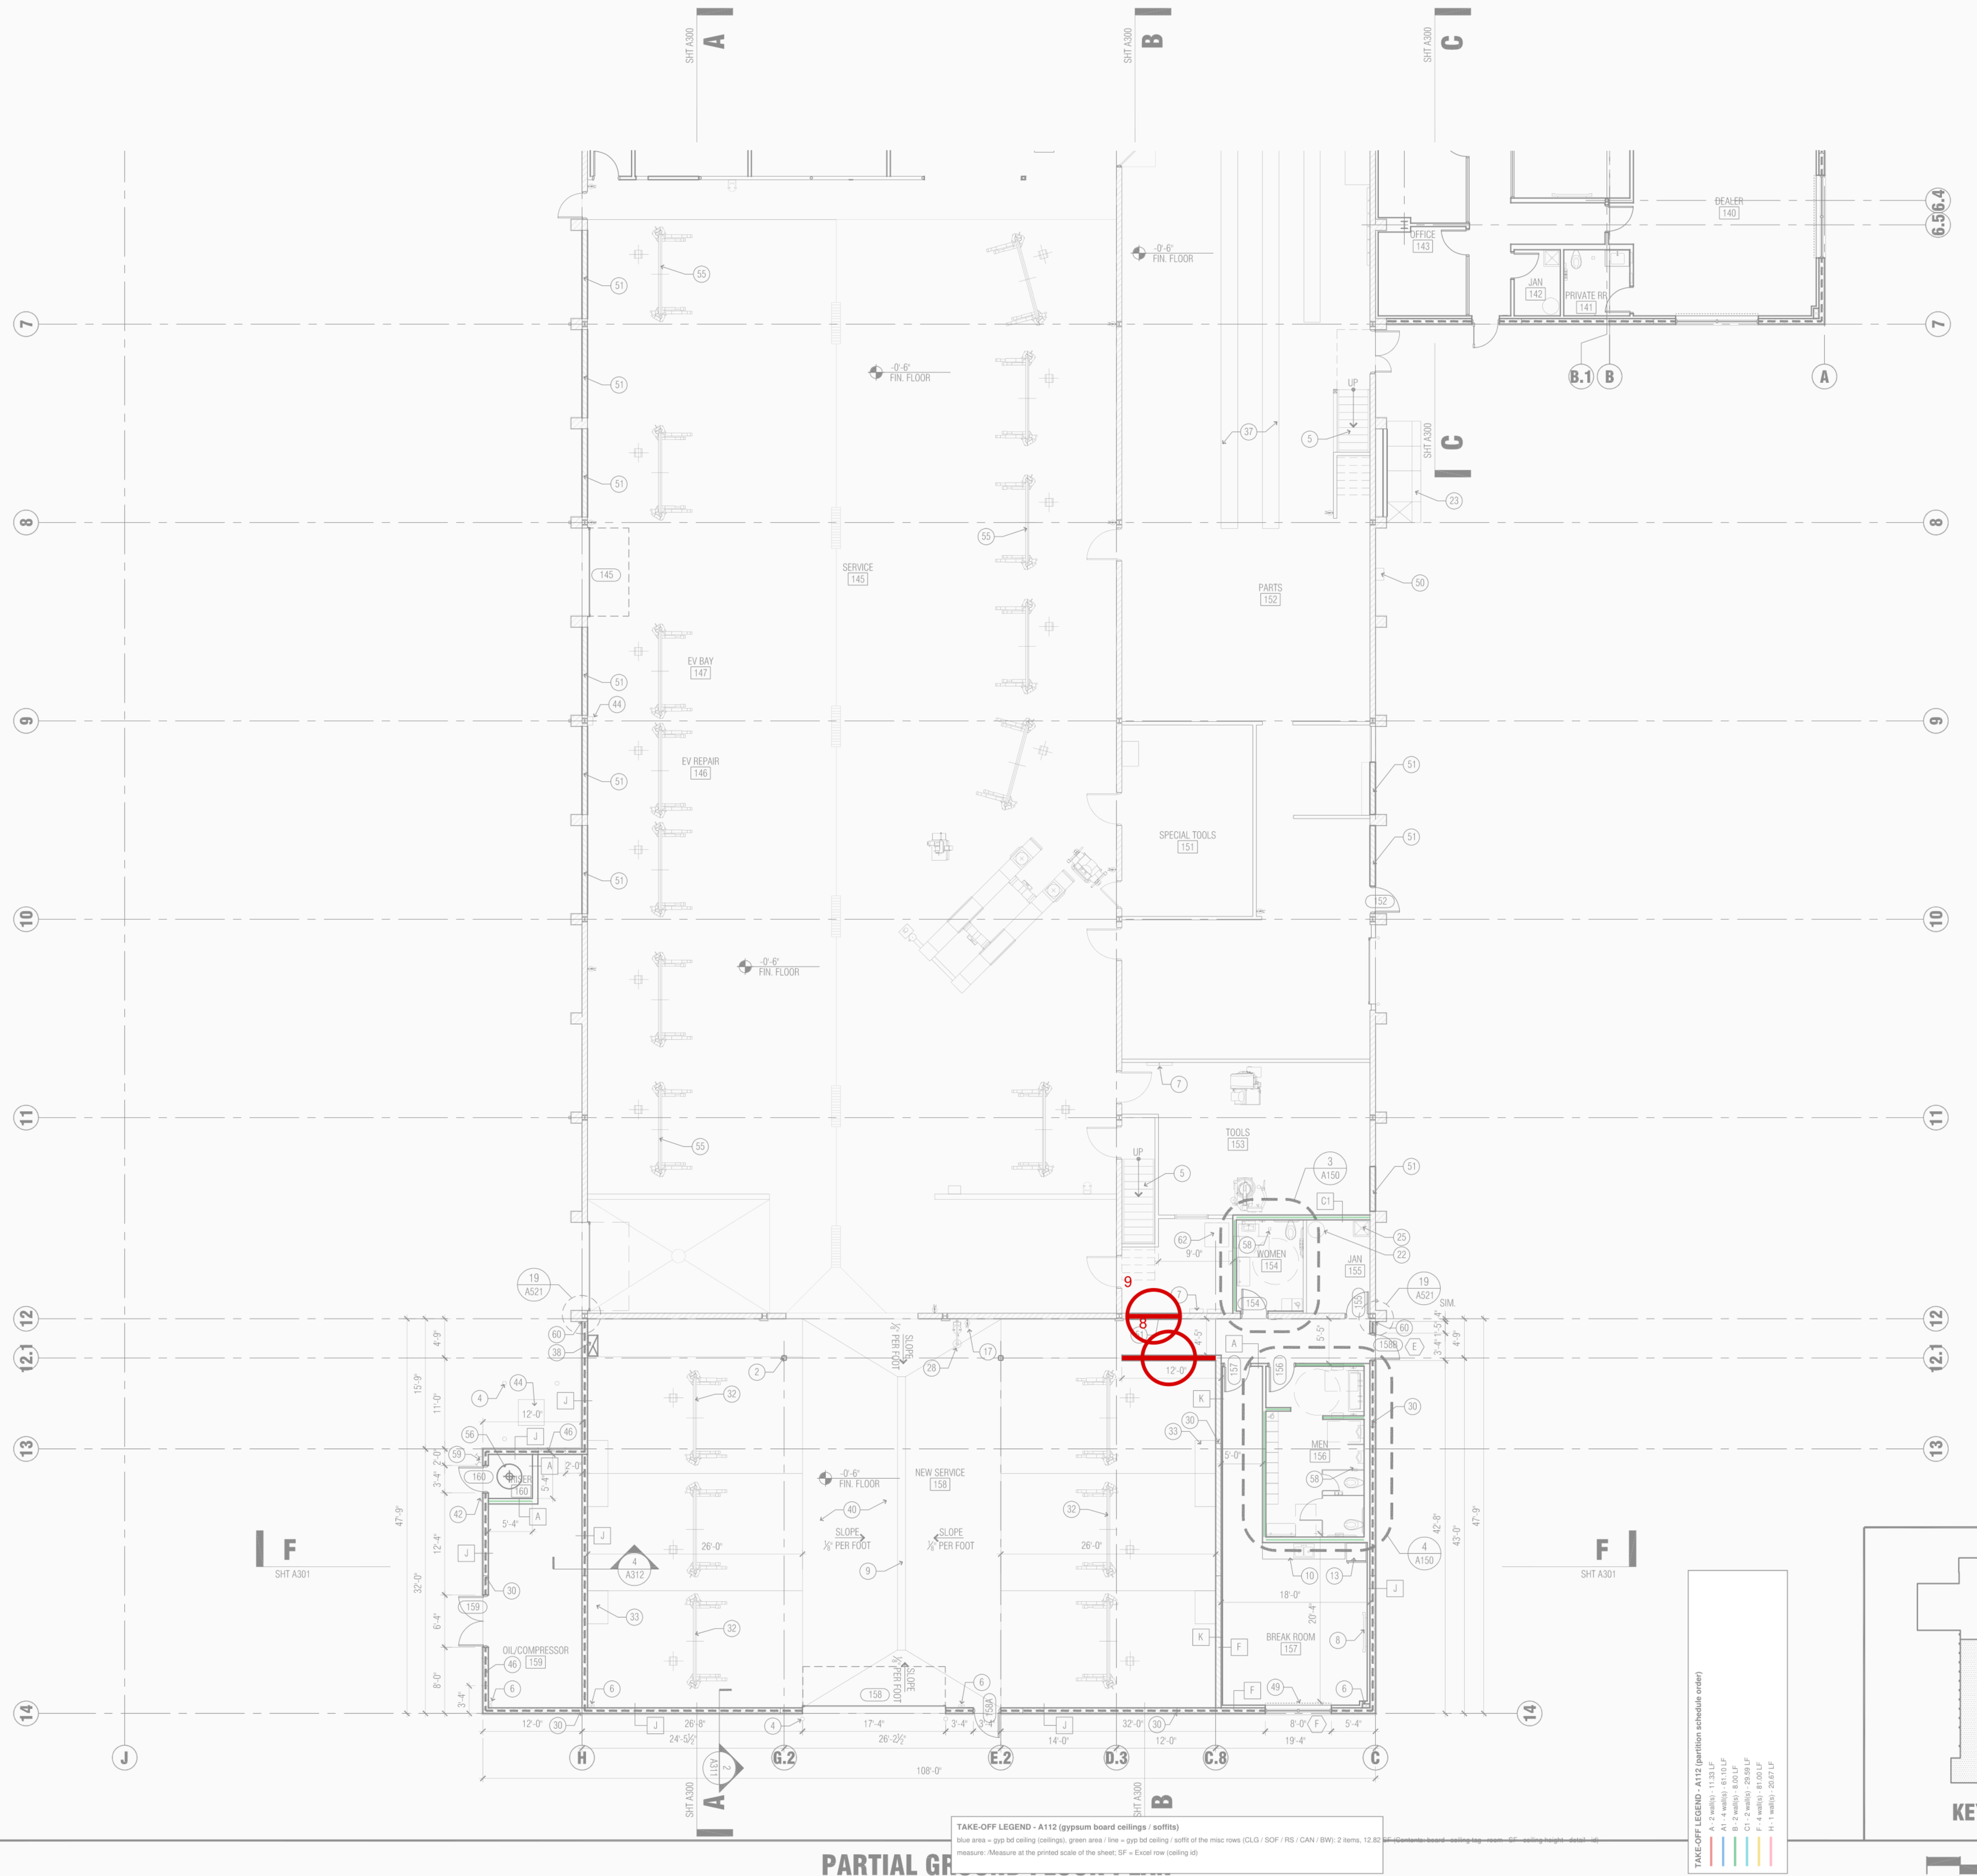

GENERAL NOTES

1. DIMENSIONS ARE TO FACE OF CMU OR FACE OF SHEATHING UNLESS NOTED OTHERWISE.
2. PROVIDE WALL CONTROL JOINTS IN ALL INTERIOR FRAMED WALL / GYP. BD. WALLS PER DETAIL 7/A540

KEYNOTES

(1) FACE OF FASCIA/SOFFIT ABOVE
(2) STEEL COLUMN - SEE STRUCT.
(3) DUAL HEIGHT DRINKING FOUNTAIN - SEE PLUMBING
(4) TYPICAL BOLLARD W/ COVER - SEE 5/A510
(5) EXISTING STAIR - NO CHANGES
(6) ROOF & OVERFLOW DRAIN TO NOZZLE - SEE 1/A520
(7) ELEC. PANELS
(8) TV / MEDIA DISPLAY - COORD UTILITIES
(9) TRENCH DRAIN - SEE PLUMBING
(10) CASEWORK BY GC - COORD ELEC & PLUMB REQ'MTS SEE A230
(11) CASEWORK PROVIDED BY DCI MARKETING (OWNER'S VENDOR) - NO TRANSACTIONS THIS LOCATION
(12) VENDING MACHINE BY OWNER
(13) REFRIGERATOR BY OWNER
(14) COPIER BY OWNER
(15) FIXTURE BY DCI MARKETING (OWNER'S VENDOR)
(16) 2-A:20-B:C FIRE EXT CAB MTD PER 11/A540. SEMI-RECESSED COSMOPOLITAN 1032 JL INDUSTRIES OR EQUAL
(17) 4-A:60-B:C WALL MTD PORTABLE FIRE EXT MTD PER 11/A540
(18) AUTOMATIC SLIDING DOOR
(19) EXISTING RELOCATED FIRE EXTINGUISHER
(20) CLEAR ANOD BRAKE METAL COLUMN ENCL. PER 7/A530
(21) FLOORING TRANSITION - SEE FINISH PLAN
(22) WATER HEATER - SEE PLUMB
(23) ELECTRICAL SERVICE ENTRANCE SECTION - SEE ELEC
(24) STEEL POST - SEE STRUCT.
(25) SERVICE SINK
(26) STEP IN CEILING HEIGHT ABOVE
(27) ALIGNMENT RACK (NO PIT)
(28) EMERGENCY EYEWASH / SHOWER
(29) BRAND WALL BY OWNER'S VENDOR
(30) MASONRY CONTROL JOINT - SEE STRUCT
(31) AIR COMPRESSOR BY OWNER
(32) VEHICLE LIFT BY OWNER
(33) WORKBENCH BY OWNER
(34) BRAKE LATHE BY OWNER
(35) TIRE MACHINE BY OWNER
(36) TIRE BALANCER BY OWNER
(37) PARTS SHELVING - PRODUCT NOT TO EXCEED 12'-0" A.F.F.
(38) VEHICLE EXHAUST DUCT - PROVIDE INTAKE GRILLES ON WALL - SEE MECH
(39) ELECTRICAL TRANSFORMER - SEE ELEC
(40) SLOPE FLOOR TO DRAIN
(41) ENTRY PORTAL BY GC & ACM CLADDING BY PATTISON SIGN GROUP (OWNER'S VENDOR)
(42) KNOX BOX PER FIRE DEPARTMENT REQUIREMENTS
(43) ACOUSTICALLY INSULATE WALL OF THIS ROOM WITH 3 1/2" SOUND ATTENUATION BATTS
(44) EV CHARGER - SEE ELEC
(45) EXTEND DOWNSPOUT TO GRADE TO MATCH EXISTING
(46) LOUVER - SEE MECH
(47) DIGITAL SIGNAGE STORY BY OWNER'S VENDOR
(48) OVERHEAD DOOR IN OPEN POSITION ABOVE
(49) WINDOW SHADE - SEE RCP
(50) EXISTING RELOCATED EV CHARGER - SEE ELEC
(51) INFILL WALL OPENING TO MATCH ADJACENT CONSTRUCTION
(52) PATCH ADJACENT WALL FURRING THIS AREA TO MATCH EXISTING
(53) EXISTING STEEL COLUMN
(54) SLOPED WALL ABOVE
(55) EXISTING VEHICLE LIFT
(56) FIRE SPRINKLER RISER PER GOVERNING AGENCY REQ'S
(57) VEHICLE LOADING DOORS
(58) FLOOR DRAIN - SEE PLUMB
(59) FIRE DEPARTMENT CONNECTION
(60) 1" BUILDING EXPANSION JOINT, SEISMIC COLORSEAL EXPANSION JOINT MANUFACTURED BY SIKA - SEE STRUCT.

SYMBOLS

XXX	DOOR NUMBER - SEE SHEET A400
X	WINDOW FRAME NUMBER - SEE SHEET A220 & A221
X	WALL CONSTRUCTION TYPE - SEE SHEET A550
XX SHEET NO.	INTERIOR ELEVATION / CASEWORK ELEVATION
▨	CMU WALL
═	METAL STUD WALL
- - -	RATED WALL CONSTRUCTION - SEE A002 & A551
X SHEET NO.	WALL SECTION

TAKE-OFF LEGEND - A112 (partition schedule order)

🟥 A - 2 wall(s) - 11.33 LF
🟦 A1 - 4 wall(s) - 61.10 LF
🟩 B - 2 wall(s) - 8.00 LF
🟦 C1 - 2 wall(s) - 29.59 LF
🟨 F - 4 wall(s) - 81.00 LF
🟥 H - 1 wall(s) - 20.67 LF

TAKE-OFF LEGEND - A112 (gypsum board ceilings / soffits)

blue area = gyp bd ceiling (ceilings), green area / line = gyp bd ceiling / soffit of the misc rows (CLG / SOF / RS / CAN / BW): 2 items, 12.82 SF ~~(Contents: board - ceiling tag - room - SF - ceiling height - detail - id)~~

measure: /Measure at the printed scale of the sheet; SF = Excel row (ceiling id)

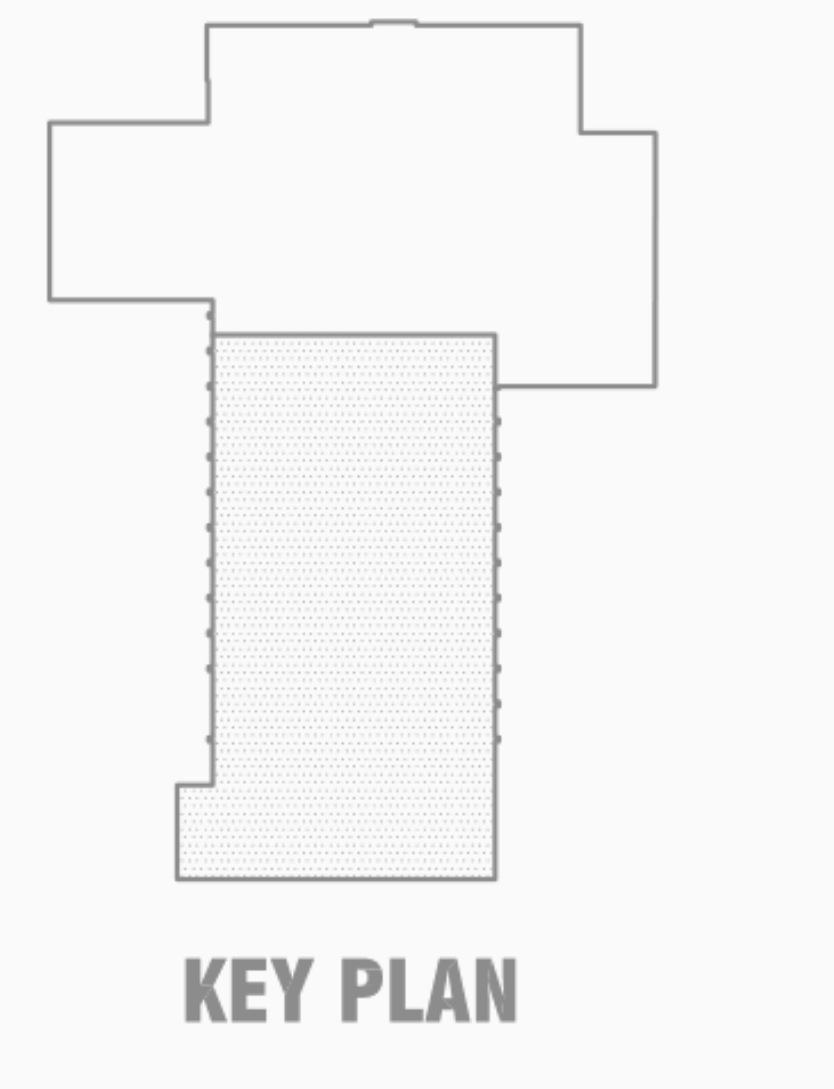

KEY PLAN

1/4" = 1'-0"

PARTIAL GR

JOHN MAHONEY
ARCHITECT
850 W. ELLIOT ROAD #108
TEMPE, ARIZONA 85284
P 480.345.8457 www.mahoneyarch.com

JOHN HARTLEY MAHONEY
00305504
7-23-26

GRAND KIA
2040 W. 104TH AVENUE
THORNTON, COLORADO

PROJECT NO.: 2412
ISSUE DATE: 7/23/26

PARTIAL GROUND FLOOR PLAN

A112

TAKE-OFF LEGEND - A113 (partition schedule order)
🟥 A - 7 wall(s) - 55.93 LF
🟪 C - 2 wall(s) - 21.34 LF

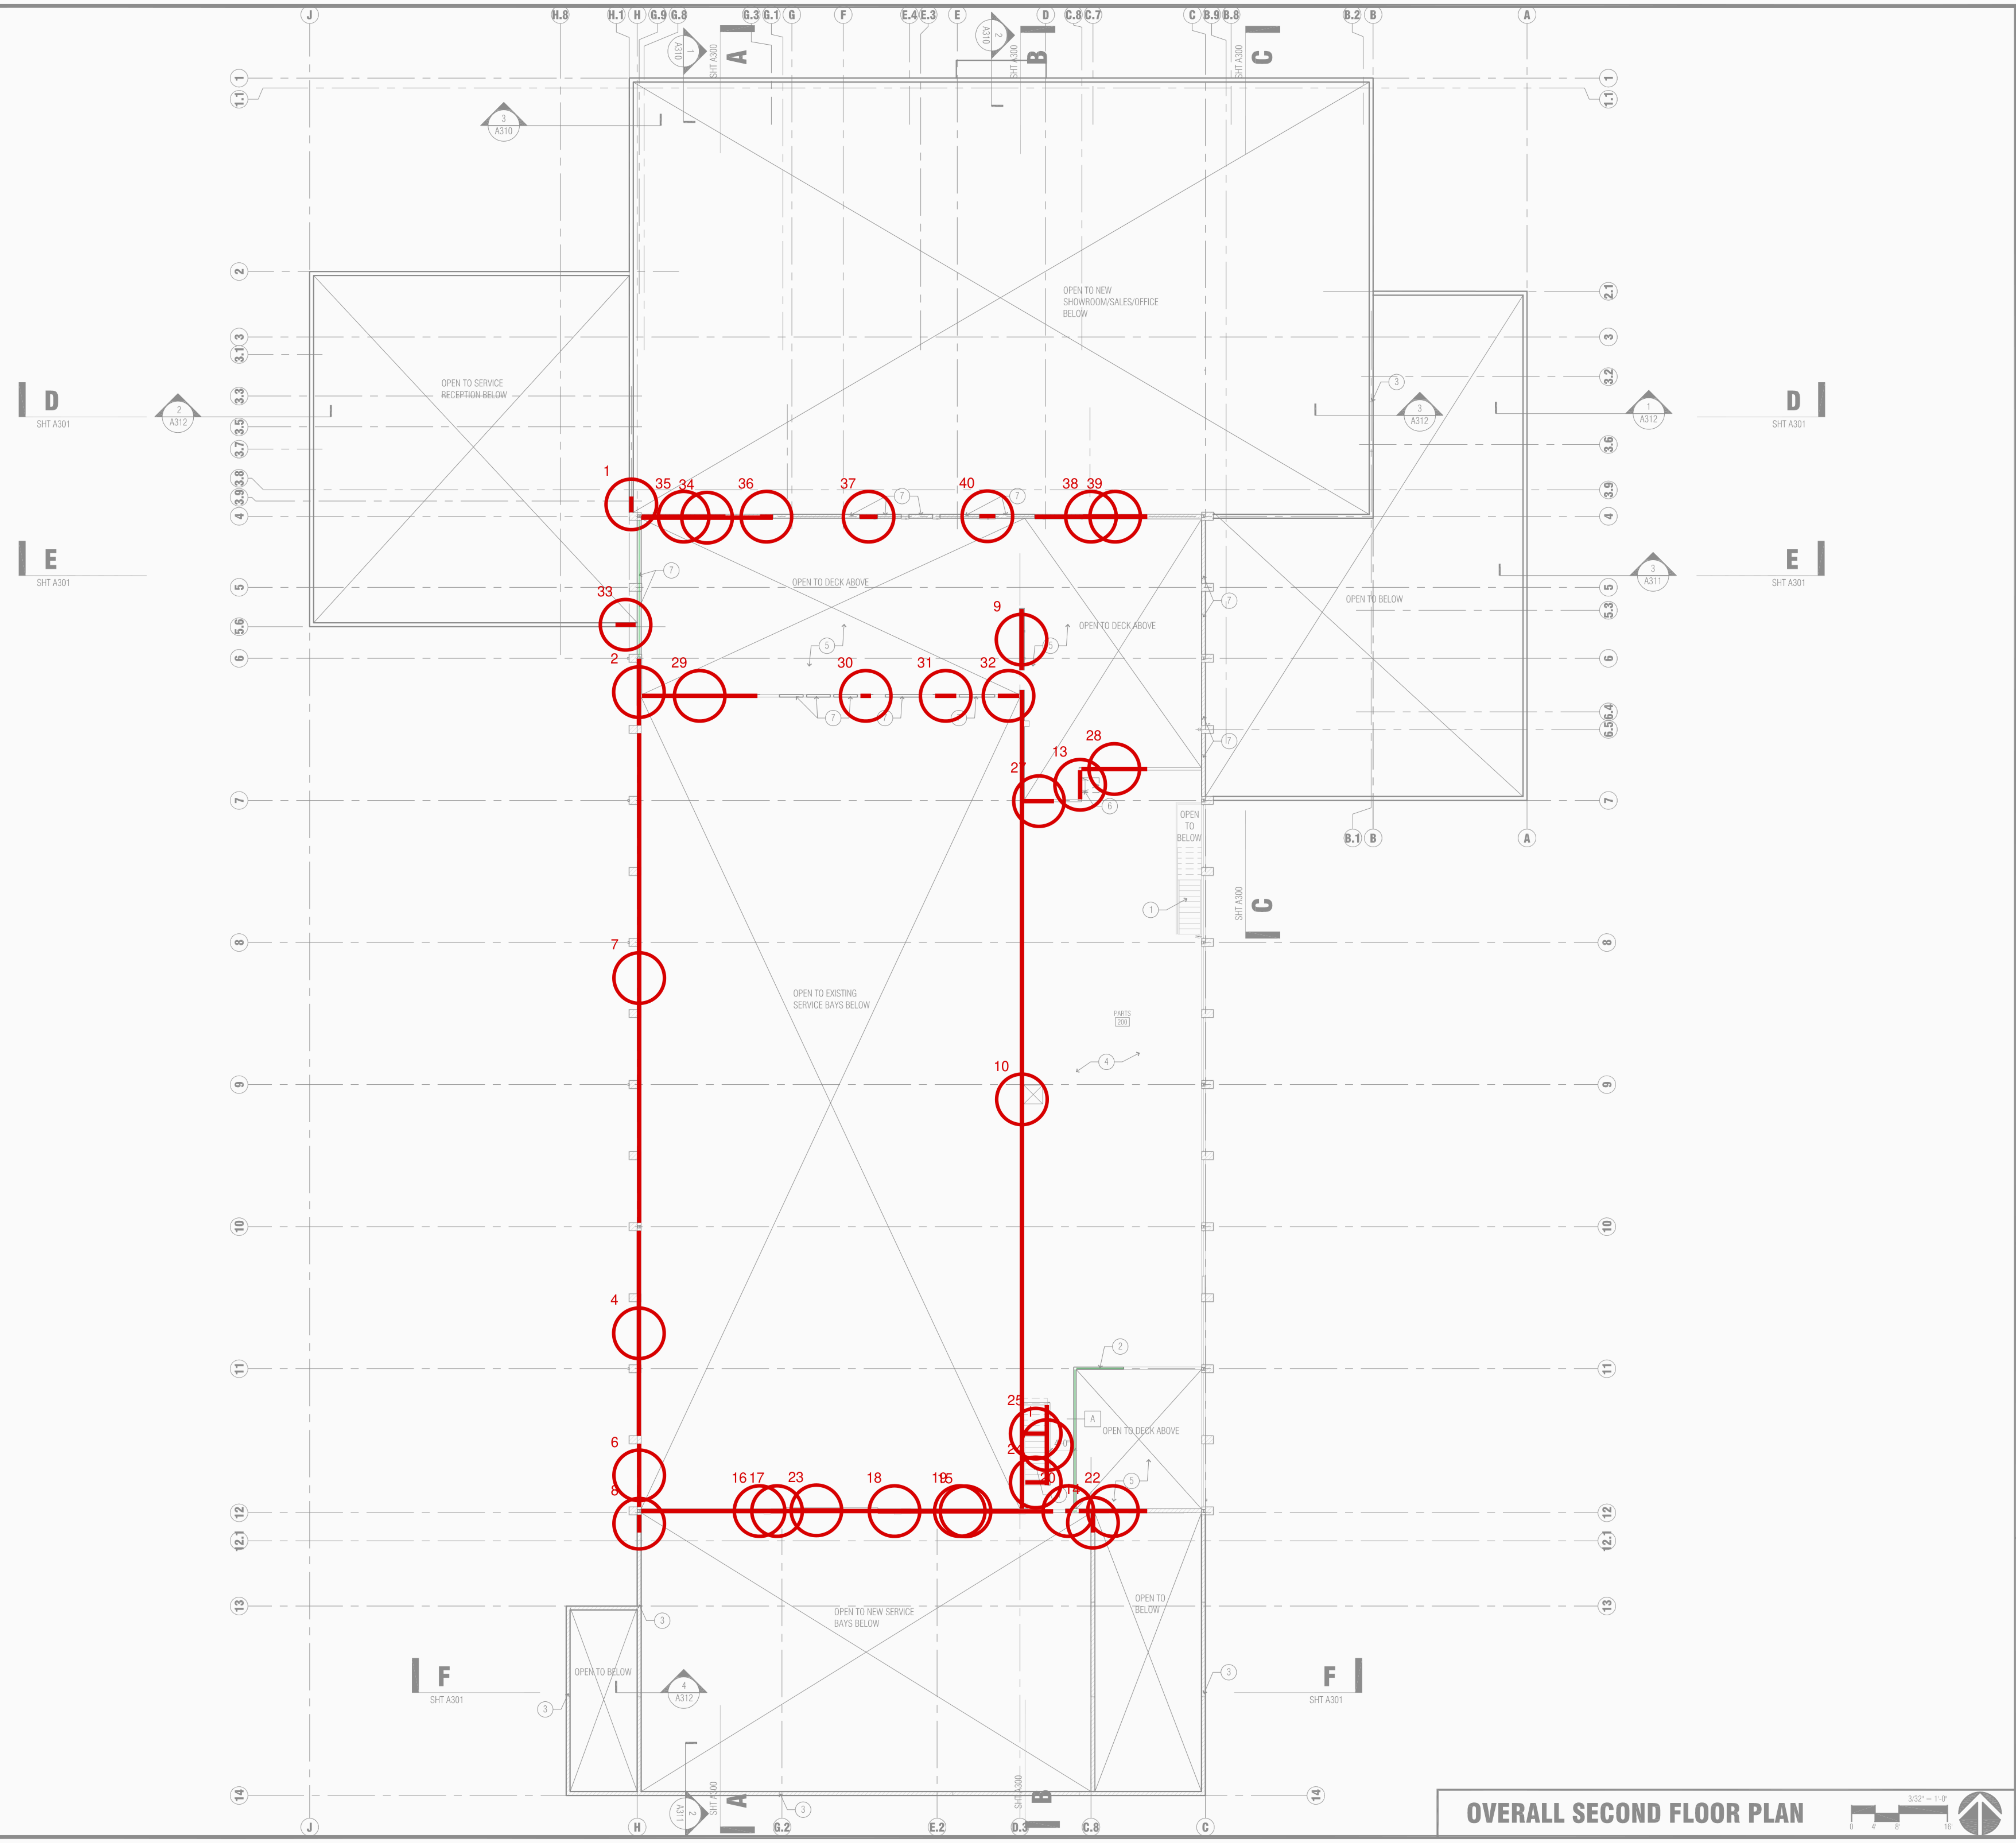

OVERALL SECOND FLOOR PLAN

KEYNOTES

1. EXISTING STAIR - NO CHANGES
2. EXTEND EXISTING WALL TO MATCH ADJ. WALL CONSTRUCTION
3. MASONRY CONTROL JOINT - SEE STRUCT
4. PARTS SHELVING - PRODUCT NOT TO EXCEED 12'-0" A.F.F.
5. EXISTING FLOOR FRAMING/DECK TO REMAIN THIS AREA
6. ROOF ACCESS LADDER & HATCH - SEE 14/A520
7. INFILL WALL OPENING TO MATCH ADJ. WALL CONSTRUCTION

SYMBOLS

X WALL CONSTRUCTION TYPE - SEE SHEET A550
▨ CMU WALL
= METAL STUD WALL
X SHEET NO. WALL SECTION

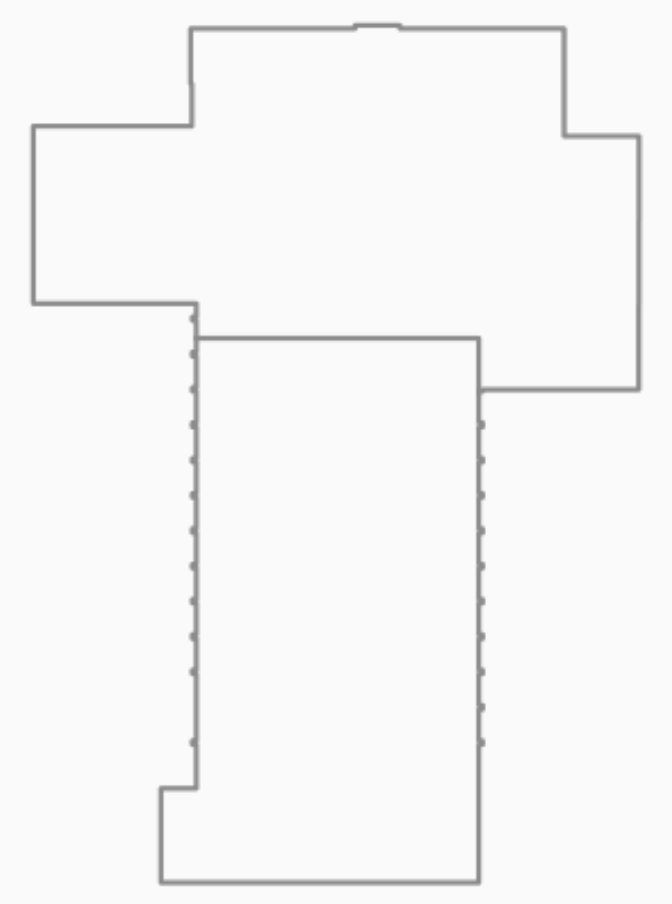

KEY PLAN

JOHN MAHONEY
ARCHITECT
850 W. ELLIOT ROAD #108
TEMPE, ARIZONA 85284
P 480.345.8457 www.mahoneyarch.com

STATE OF COLORADO
JOHN HARTLEY MAHONEY
00305504
7-23-26
LICENSED ARCHITECT

GRAND KIA
2040 W. 104TH AVENUE
THORNTON, COLORADO

PROJECT NO.: 2412
ISSUE DATE: 7/23/26

OVERALL SECOND FLOOR PLAN

A113

HEIGHTS (U-176) - board / wall height per markup

- 🟧 H 0.850 ft
- 🟪 H 1.020 ft
- 🟦 H 2.000 ft
- 🟧 H 3.750 ft
- 🟪 H 4.000 ft
- 🟥 H 4.420 ft
- 🟦 H 4.800 ft
- 🟩 H 5.130 ft
- 🟩 H 11.000 ft

TAKE-OFF LEGEND - A131 (gypsum board ceilings / soffits)

blue area = gyp bd ceiling (ceilings), green area / line = gyp bd ceiling / soffit of the misc rows (CLG / SOF / RS / CAN / BW): 49 items, 12,927.20 SF (Contents: board · ceiling tag · room · SF · ceiling height · detail · id)

measure: /Measure at the printed scale of the sheet; SF = Excel row (ceiling id)

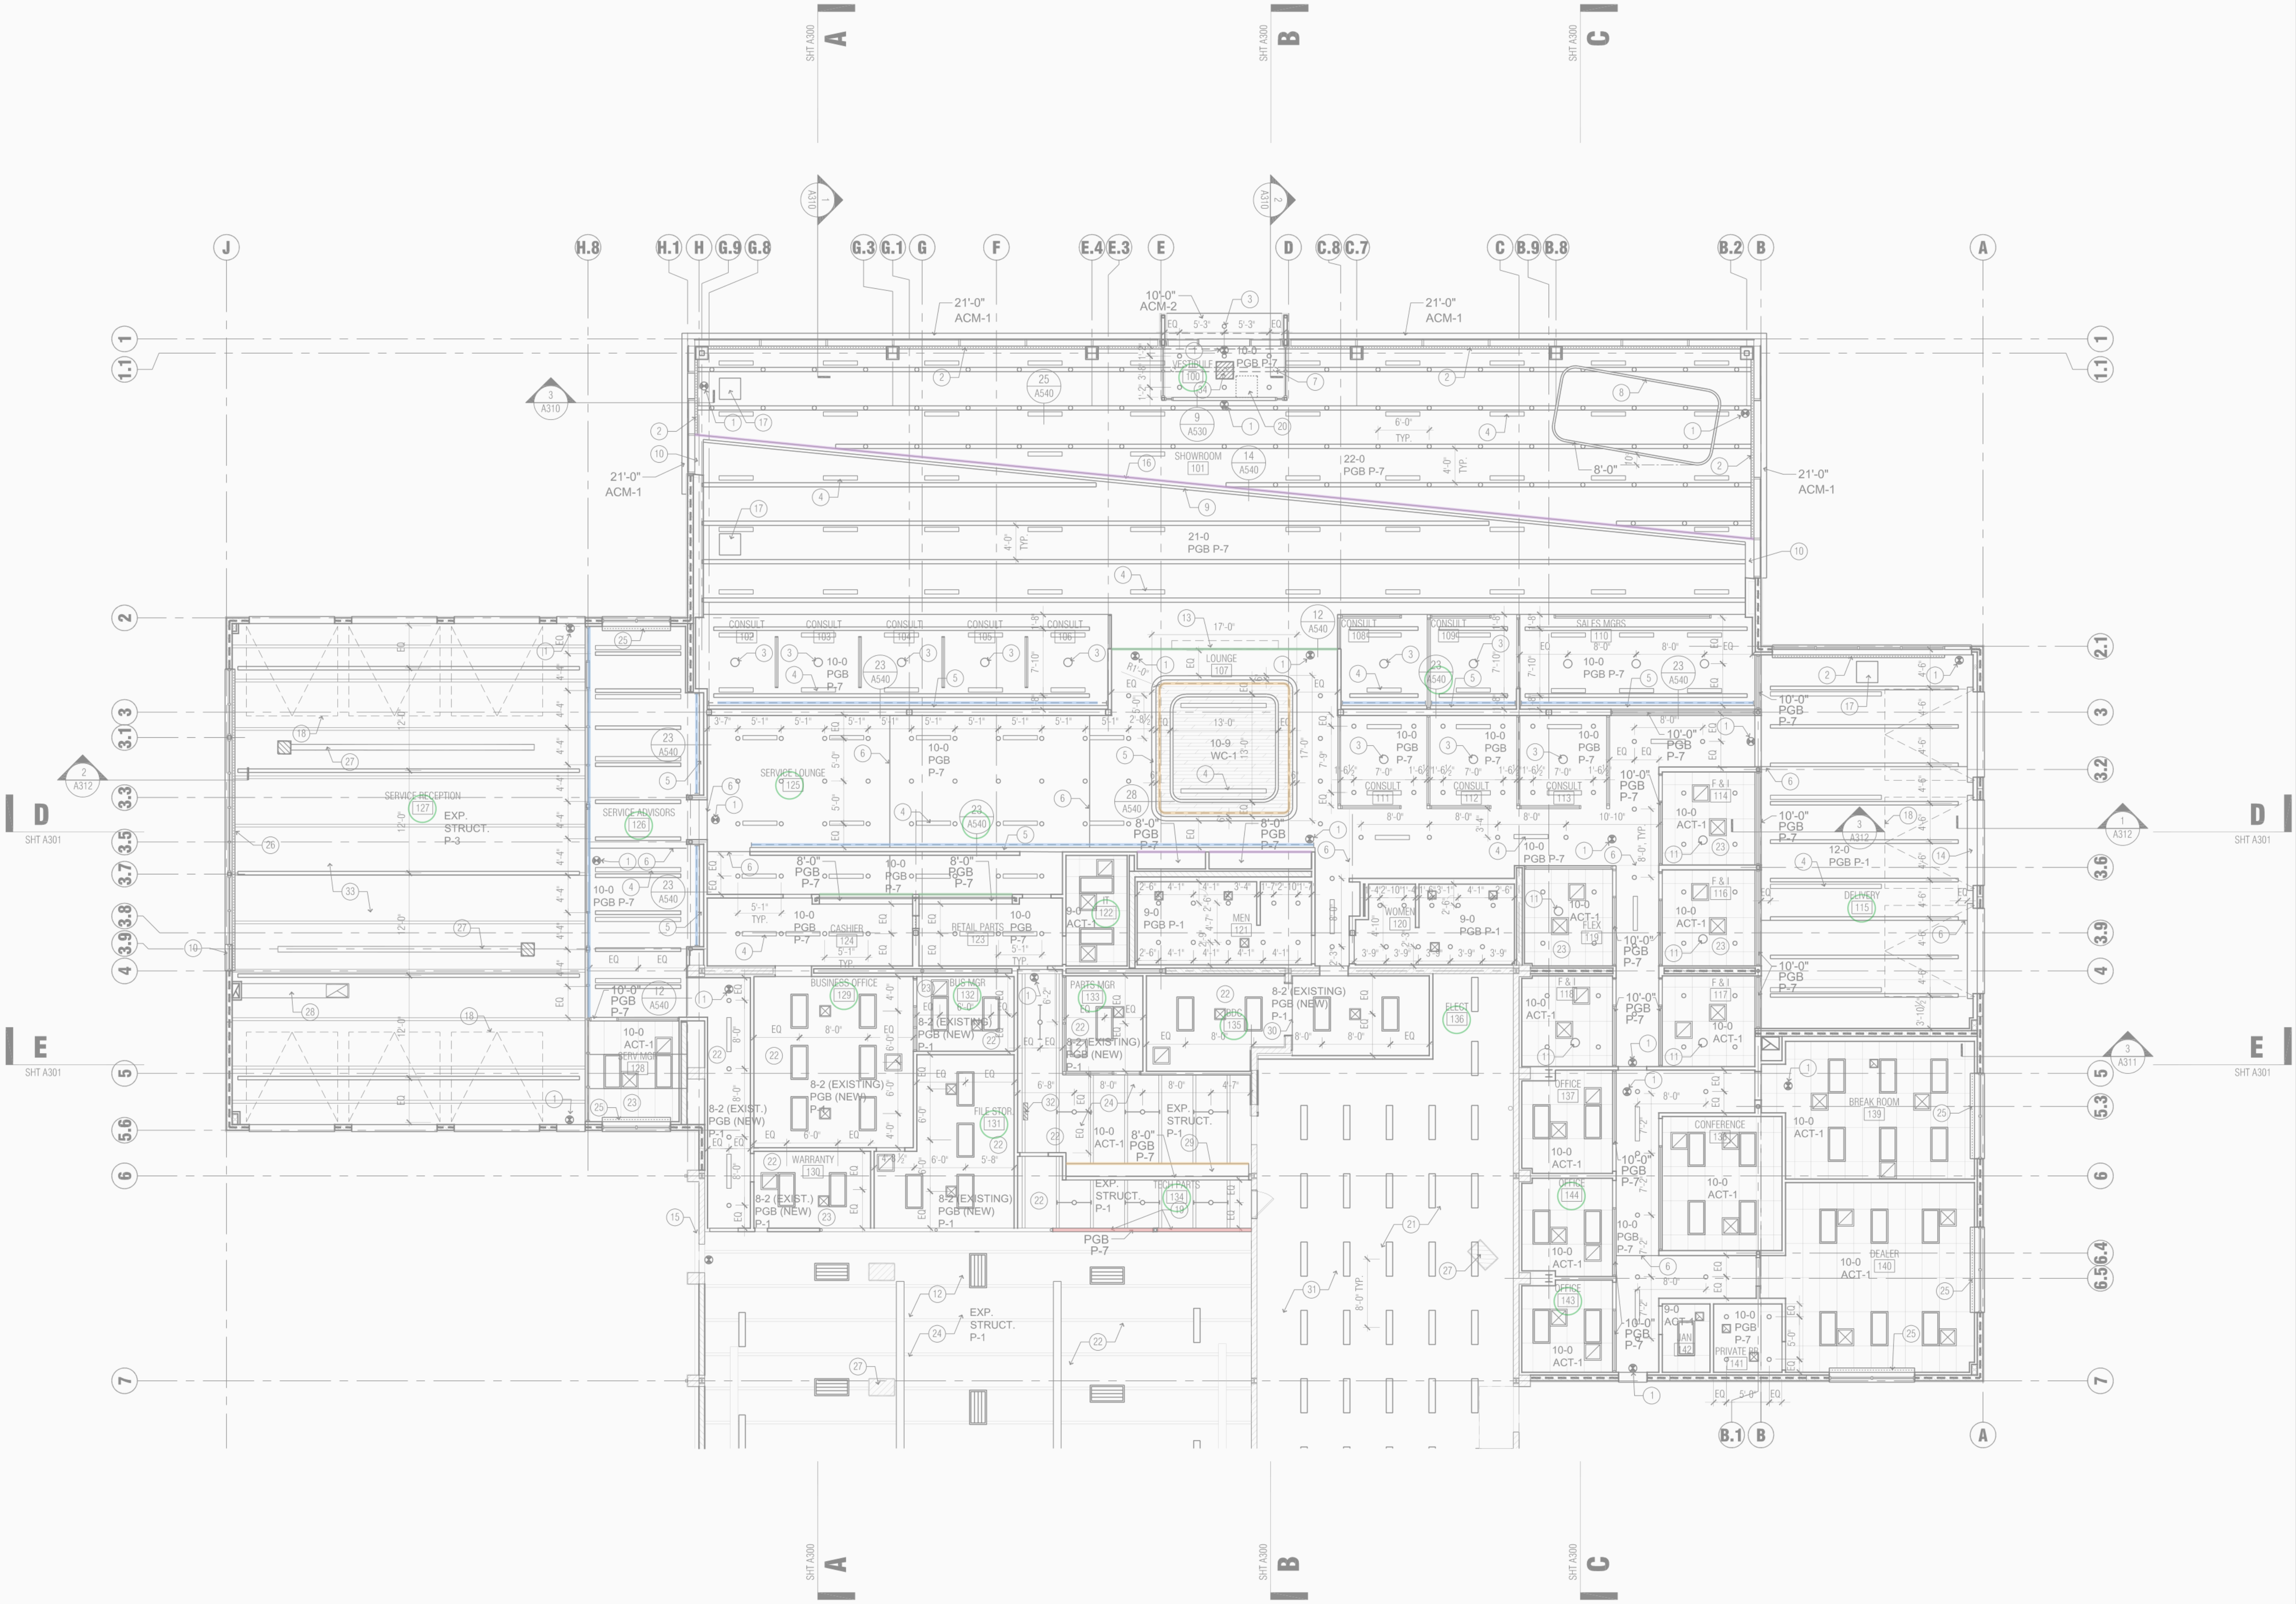

PARTIAL GROUND FLOOR REFLECTED CEILING PLAN

GENERAL NOTES

1. ALL EXPOSED STRUCTURE SHALL BE PAINTED, INCLUDING ROOF FRAMING, CONDUIT, SPRINKLER PIPING, DUCTWORK, ETC.
2. ALL FIRE SPRINKLER HEADS SHALL BE LOCATED WITHIN 1" OF CENTER OF CEILING TILE.
3. CEILING HEIGHTS ARE RELATIVE TO THE FINISH FLOOR HEIGHT OF THE REFERENCED ROOM.
4. ALL BATT INSULATION IN A PLENUM SPACE TO BE FACED AND HAVE A FIRE HAZARD CLASSIFICATION OF FLAME SPREAD 25 AND SMOKE DEVELOPED 50.
5. PROVIDE ADDITIONAL CONCEALED ACCESS PANELS IN HARD LID AREAS FOR ABOVE CEILING ACCESS AS REQ'D - PAINT TO MATCH EXISTING CEILING

KEYNOTES

① EXIT SIGN - SEE ELEC
② AUTOMATIC WINDOW SHADE - SEE DETAIL 11/A530
③ CENTER FIXTURE IN ROOM/AREA
④ LINEAR DIFFUSERS, SEE MECH
⑤ LIGHT COVE
⑥ CEILING CONTROL JOINT - SEE DETAIL 24/A540
⑦ LIGHT FIXTURE ABOVE
⑧ PENDANT MOUNTED LIGHT FIXTURE - SEE ELEC
⑨ INSERT METAL PC-3 OR ACR-1
⑩ SLOPED WALL
⑪ CENTER FIXTURE OVER DESK BELOW
⑫ REMOVE EXISTING ACT CEILING & GRID THIS ROOM
⑬ BRAND WALL - SEE FLOOR PLAN
⑭ OVERHEAD DOOR CEILING OPENING
⑮ EXISTING GUTTER - SEE ROOF PLAN
⑯ SLOPED SOFFIT
⑰ 30"X30" CEILING ACCESS PANEL, ARMSTRONG CASTWORKS CRG
⑱ OVERHEAD DOOR IN OPEN POSITION, ABOVE CEILING AS OCCURS
⑲ NEW HEADER HEIGHT TO MATCH EXISTING
⑳ 30"X30" CEILING ACCESS PANEL AT HIGH CEILING, ARMSTRONG CASTWORKS CRG
㉑ EXISTING GYP. BD. CEILING, PATCH WHERE DAMAGED
㉒ INSULATE BELOW EXISTING ROOF DECK OF THIS ROOM/AREA, R-49. PROVIDE WHITE SCRIM SHEET ON FACE OF BATT INSULATION AT UNDERSIDE OF ROOF DECK AT EXPOSED AREAS
㉓ ACOUSTICALLY INSULATE CEILING OF THIS ROOM WITH 3 1/2" SOUND ATTENUATION BATTS
㉔ EXISTING ROOF/FLOOR FRAMING ABOVE AS OCCURS
㉕ MANUAL WINDOW SHADE BY MECHOSHADE
㉖ SURFACE MOUNTED AUTOMATIC WINDOW SHADE
㉗ INFRARED HEATER - SEE MECH
㉘ DUCTWORK - SEE MECH
㉙ SECURITY GRILLE HOOD
㉚ LINE OF EXISTING GYP. BD. CEILING
㉛ CONFIRM FINAL RACKING LAYOUT PRIOR TO THE INSTALLATION OF LIGHT FIXTURES THIS AREA
㉜ UNIT HEATER - SEE MECH
㉝ STRUCTURE ABOVE - SEE STRUCTURAL PLANS
㉞ SPACE HEATER - SEE MECH

SYMBOLS & NOTES

☒	HVAC SUPPLY AIR DIFFUSER - SEE MECHANICAL
⧄	HVAC RETURN AIR GRILLE - SEE MECHANICAL
⊠	EXHAUST GRILLE - SEE MECHANICAL
▭	HVAC LINEAR AIR DIFFUSER - SEE MECHANICAL
⊗	EXIT SIGN - SEE ELECTRICAL
8-6	DENOTES HEIGHT ABOVE FINISH FLOOR OF ROOM
ACT-1	DENOTES CEILING MATERIAL
PGB	DENOTES PAINTED GYP BOARD
EXP STRUCT	DENOTES EXPOSED STRUCTURE

SEE SHEET A200 FOR DESCRIPTION OF EXTERIOR FINISHES
SEE SHEET A140 FOR DESCRIPTION OF INTERIOR FINISHES

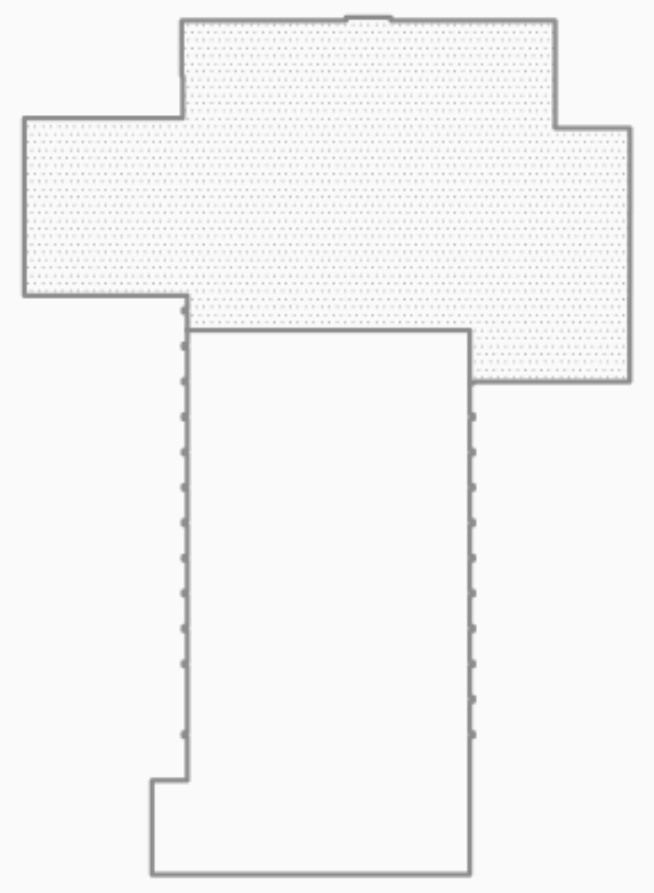

KEY PLAN

JOHN MAHONEY
ARCHITECT
850 W. ELLIOT ROAD #108
TEMPE, ARIZONA 85284
P 480.345.8457 www.mahoneyarch.com

STATE OF COLORADO
JOHN HARTLEY MAHONEY
00305504
7-23-26
LICENSED ARCHITECT

GRAND KIA
2040 W. 104TH AVENUE
THORNTON, COLORADO

PROJECT NO.: 2412
ISSUE DATE: 7/23/26

PARTIAL GROUND FLOOR RC PLAN

A131

HEIGHTS (U-176) - board / wall height per markup
H 0.671 ft

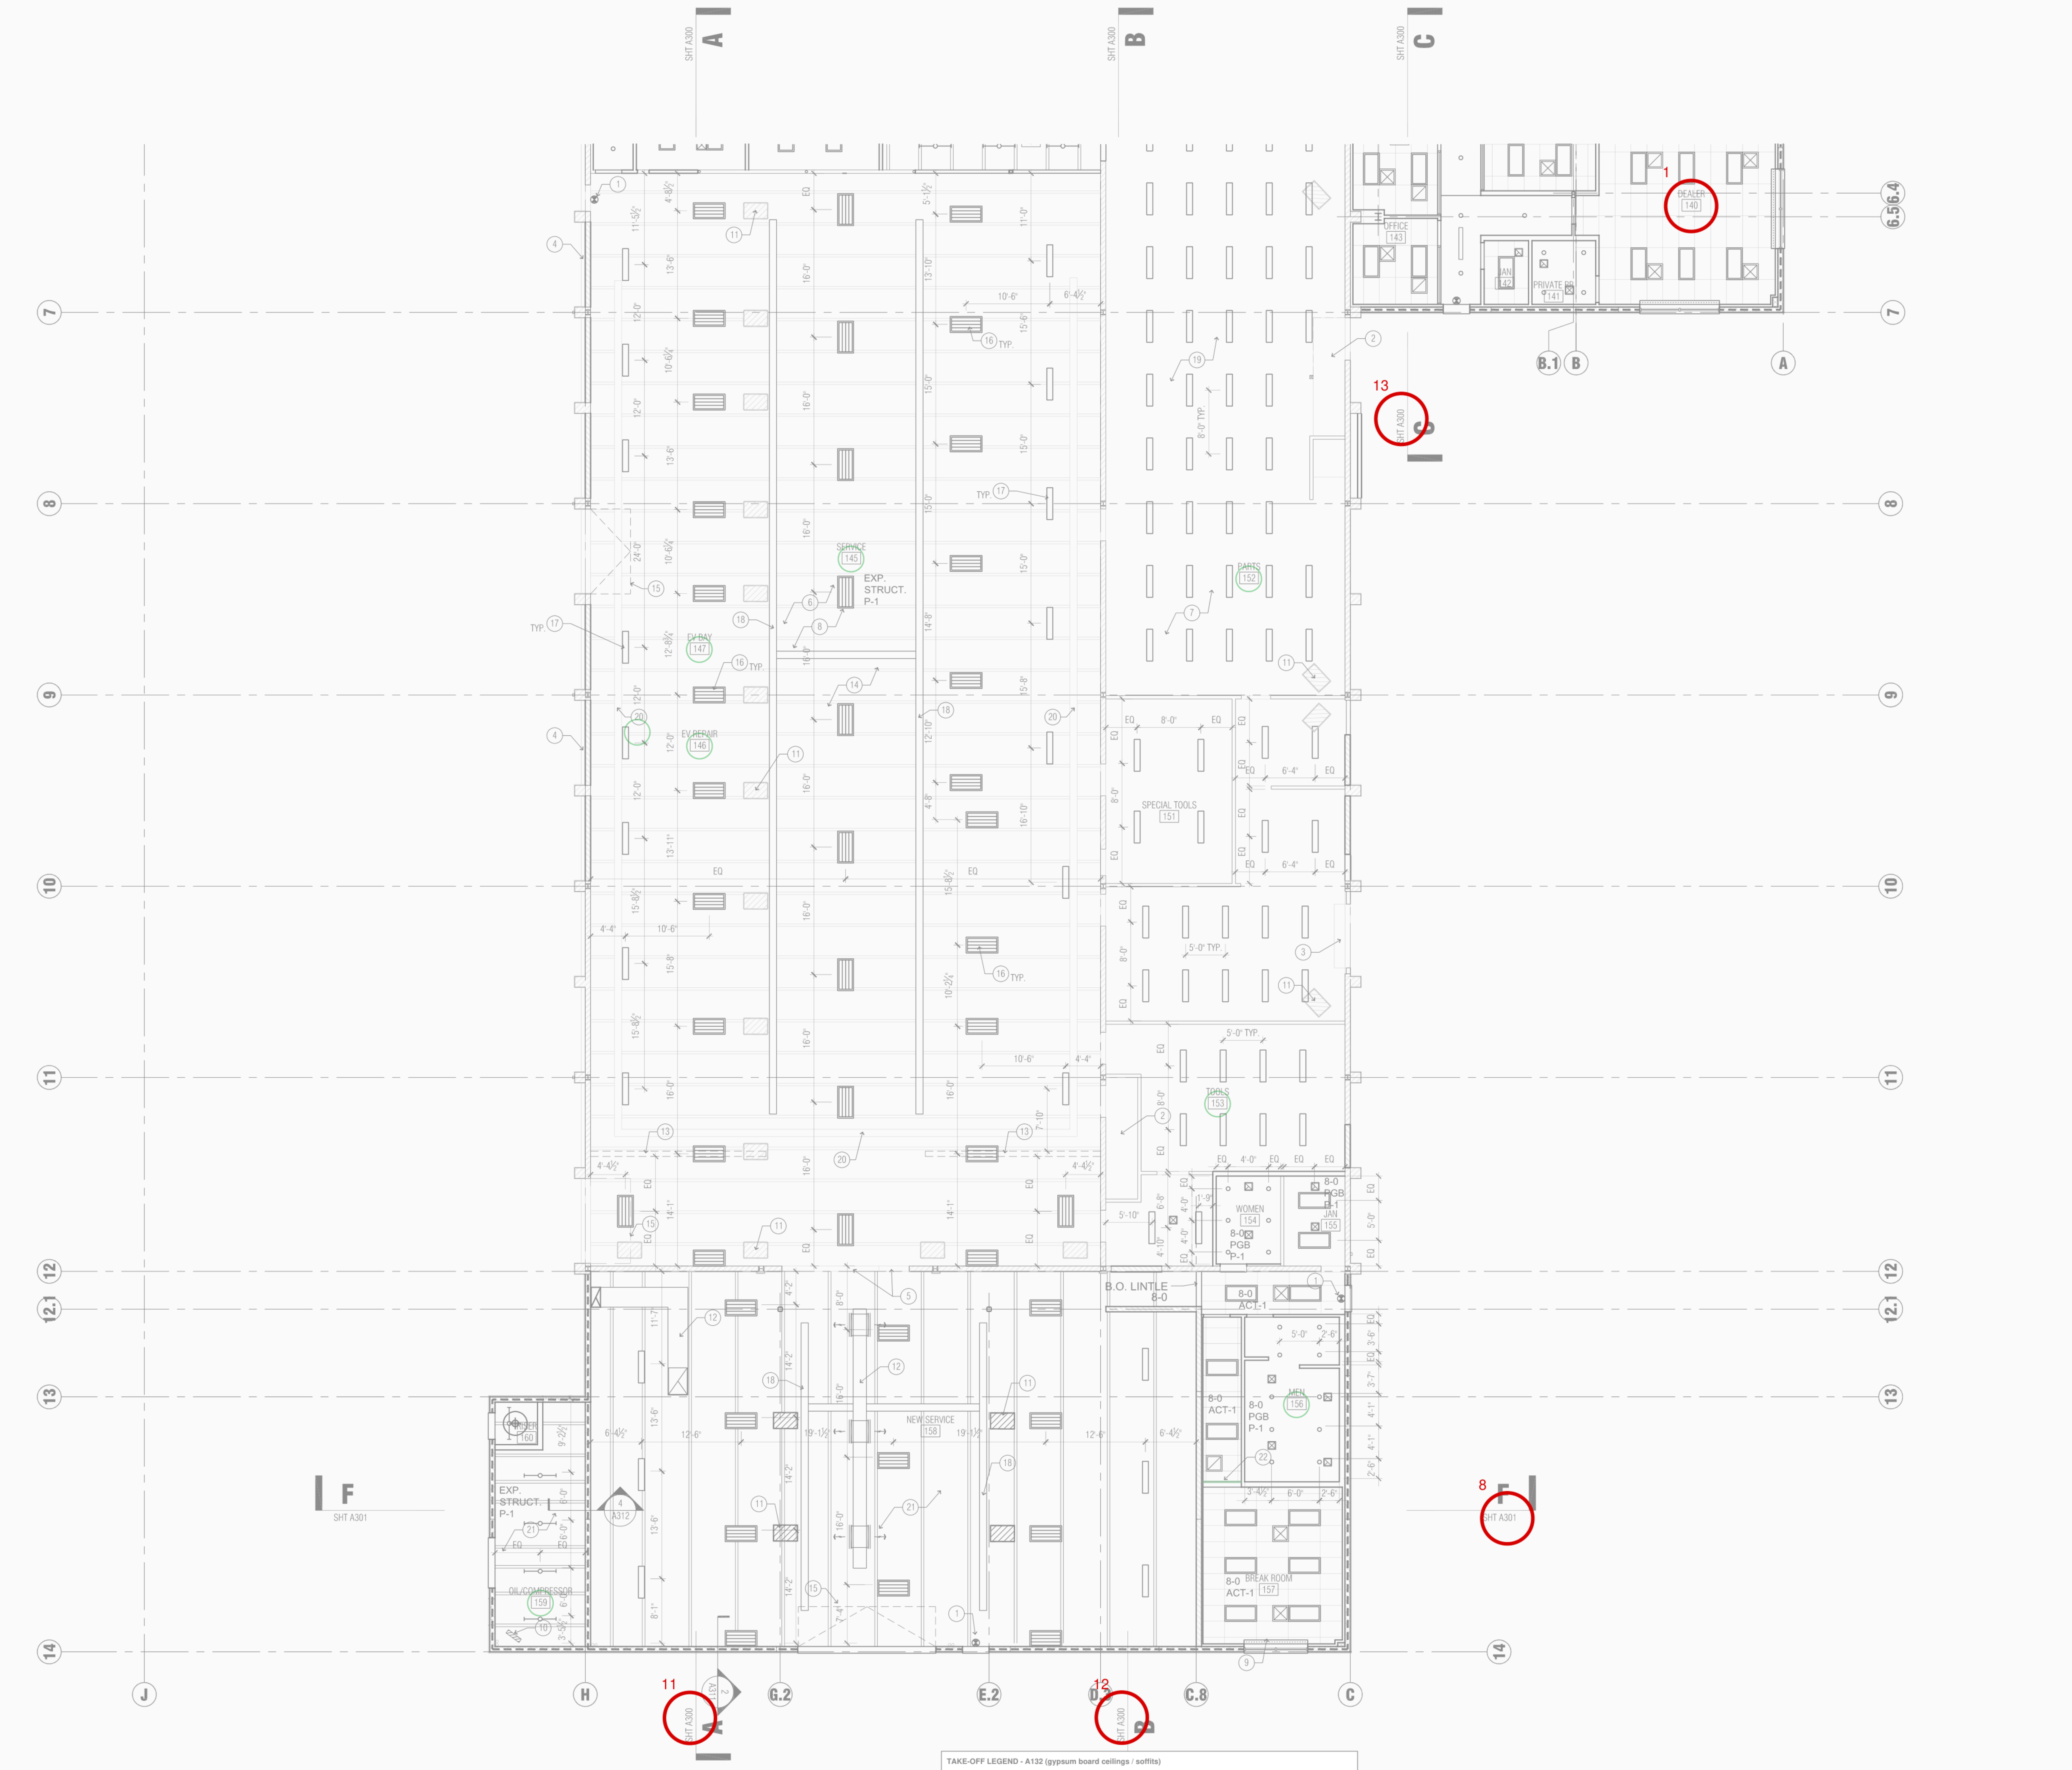

TAKE-OFF LEGEND - A132 (gypsum board ceilings / soffits)

blue area = gyp bd ceiling (ceilings), green area / line = gyp bd ceiling / soffit of the misc rows (CLG / SOF / RS / CAN / BW): 4 items, 413.34 SF (Contents: board - ceiling tag - room - SF - ceiling height - detail - id)

measure: /Measure at the printed scale of the sheet; SF = Excel row (ceiling id)

PARTIAL GROUND FLOOR

1/4" = 1'-0"
0 2' 4' 8'

GENERAL NOTES

1. ALL EXPOSED STRUCTURE SHALL BE PAINTED, INCLUDING ROOF FRAMING, CONDUIT, SPRINKLER PIPING, DUCTWORK, ETC.
2. ALL FIRE SPRINKLER HEADS SHALL BE LOCATED WITHIN 1" OF CENTER OF CEILING TILE.
3. CEILING HEIGHTS ARE RELATIVE TO THE FINISH FLOOR HEIGHT OF THE REFERENCED ROOM.
4. ALL BATT INSULATION IN A PLENUM SPACE TO BE FACED AND HAVE A FIRE HAZARD CLASSIFICATION OF FLAME SPREAD 25 AND SMOKE DEVELOPED 50.

KEYNOTES

①	EXIT SIGN - SEE ELEC
②	STAIRWAY OPENING
③	EXISTING OVERHEAD DOOR HOOD
④	GUTTER - SEE ROOF PLAN
⑤	CUT BACK WALL ABOVE DOOR TO BE REMOVED TO ROOF BEAM ABOVE - SEE STRUCT.
⑥	REMOVE EXISTING ACT CEILING & GRID THIS ROOM
⑦	EXISTING GYP. BD. CEILING, PATCH WHERE DAMAGED
⑧	EXISTING ROOF FRAMING ABOVE
⑨	MANUAL WINDOW SHADE BY MECHOSHADE
⑩	UNIT HEATER - SEE MECH
⑪	INFRARED HEATER - SEE MECH
⑫	EXPOSED DUCTWORK - SEE MECH
⑬	EXISTING PARTIAL HEIGHT WALL BELOW
⑭	INSULATE BELOW ROOF DECK OF THIS ROOM/AREA, R-49. PROVIDE WHITE SCRIM SHEET ON FACE OF BATT INSULATION AT UNDERSIDE OF ROOF DECK AT EXPOSED AREAS
⑮	OVERHEAD DOOR IN OPEN POSITION, ABOVE CEILING AS OCCURS
⑯	CENTER LIGHT FIXTURES BETWEEN SERVICE BAYS
⑰	CENTER LIGHT FIXTURE ON SERVICE BAY
⑱	TAILPIPE EXHAUST DUCT BY OWNER'S VENDOR
⑲	CONFIRM FINAL RACKING LAYOUT PRIOR TO THE INSTALLATION OF LIGHT FIXTURES THIS AREA
⑳	EXISTING DUCTWORK AS OCCURS
㉑	STRUCTURE ABOVE - SEE STRUCTURAL PLANS
㉒	PAINTED GYP. BD. HEADER (P-7) HEIGHT TO MATCH LOWEST ADJACENT CLG. - SEE STRUCTURAL PLANS FOR FRAMING

SYMBOLS & NOTES

☒	HVAC SUPPLY AIR DIFFUSER - SEE MECHANICAL
⧄	HVAC RETURN AIR GRILLE - SEE MECHANICAL
⊠	EXHAUST GRILLE - SEE MECHANICAL
▭	HVAC LINEAR AIR DIFFUSER - SEE MECHANICAL
⊗	EXIT SIGN - SEE ELECTRICAL
8-6	DENOTES HEIGHT ABOVE FINISH FLOOR OF ROOM
ACT-1	DENOTES CEILING MATERIAL
PGB	DENOTES PAINTED GYP BOARD
EXP STRUCT	DENOTES EXPOSED STRUCTURE

SEE SHEET A200 FOR DESCRIPTION OF EXTERIOR FINISHES
SEE SHEET A140 FOR DESCRIPTION OF INTERIOR FINISHES

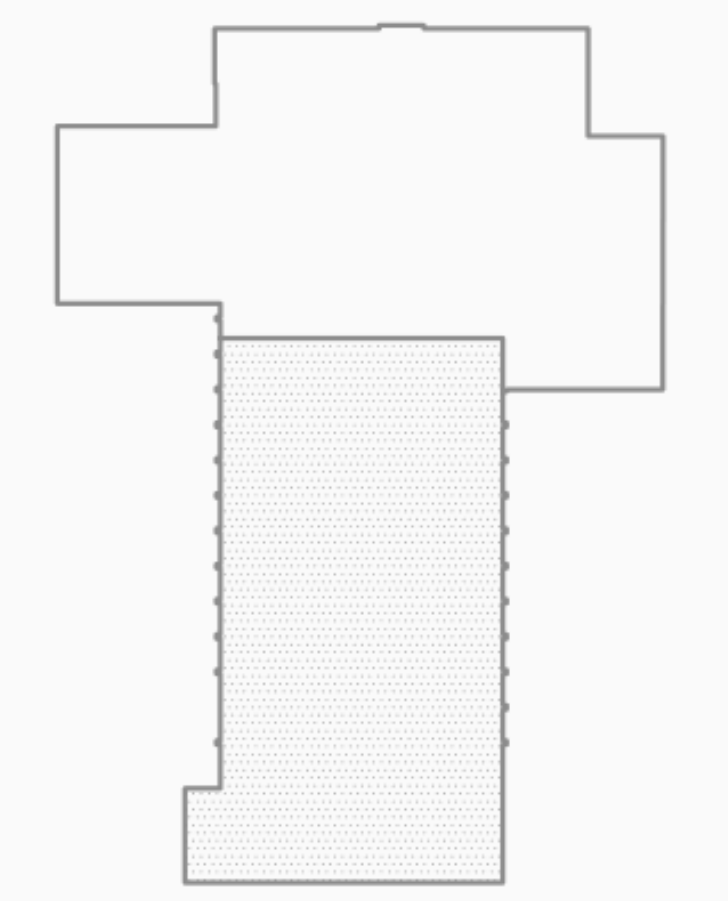

KEY PLAN

JOHN MAHONEY
ARCHITECT
850 W. ELLIOT ROAD #108
TEMPE, ARIZONA 85284
P 480.345.8457 www.mahoneyarch.com

STATE OF COLORADO
JOHN HARTLEY MAHONEY
00305504
7-23-26
LICENSED ARCHITECT

GRAND KIA
2040 W. 104TH AVENUE
THORNTON, COLORADO

PROJECT NO.: 2412
ISSUE DATE: 7/23/26

PARTIAL GROUND FLOOR RC PLAN

A132

TAKE-OFF LEGEND - A200 (gypsum board ceilings / soffits)

blue area = gyp bd ceiling (ceilings), green area / line = gyp bd ceiling / soffit of the misc rows (CLG / SOF / RS / CAN / BW): 2 items, 93.62 SF (Contents: board · ceiling tag · room · SF · ceiling height · detail · id)

measure: /Measure at the printed scale of the sheet; SF = Excel row (ceiling id)

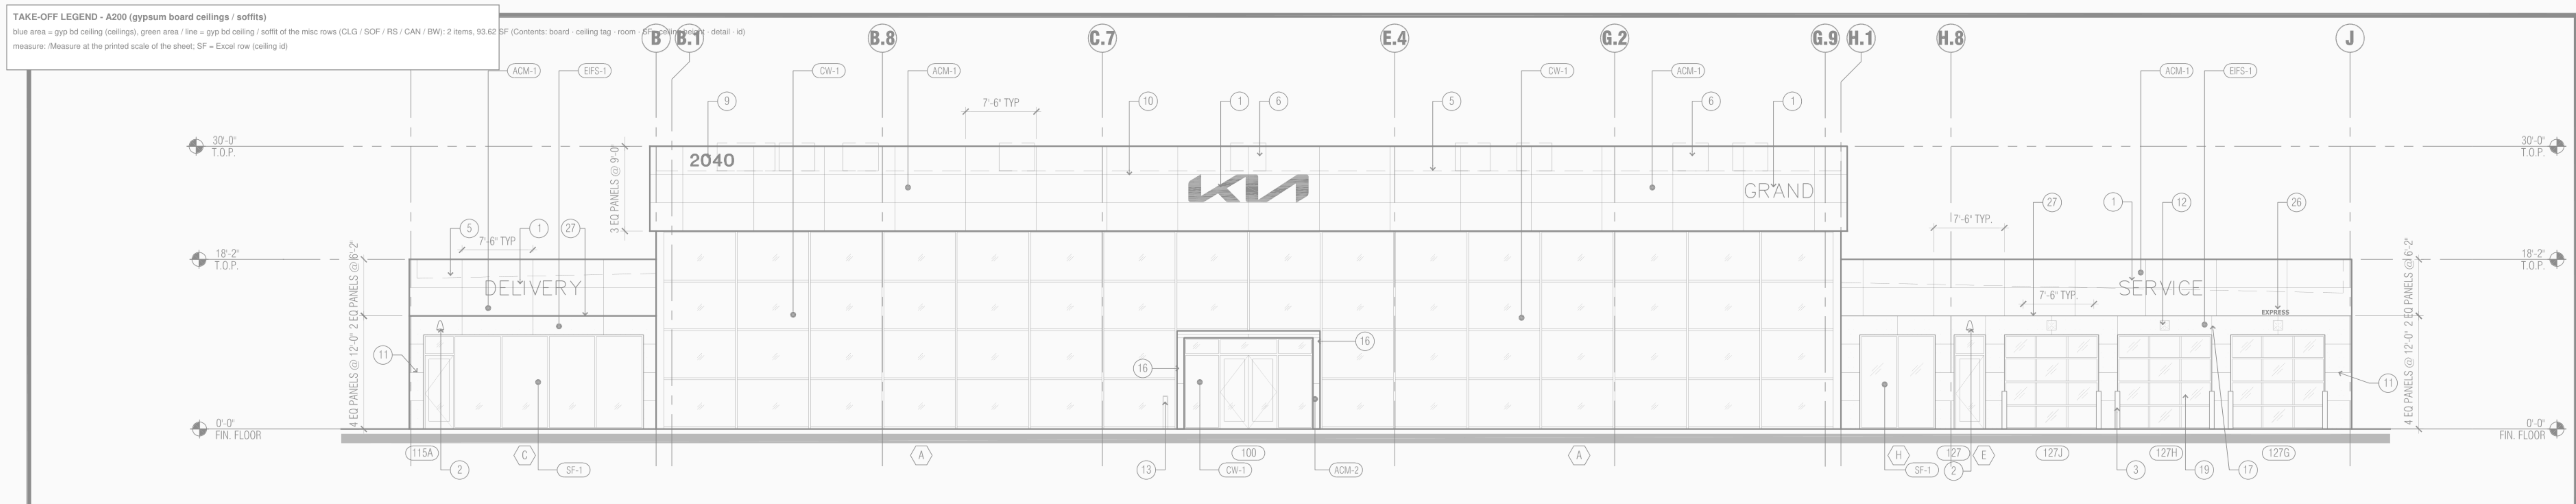

NORTH ELEVATION

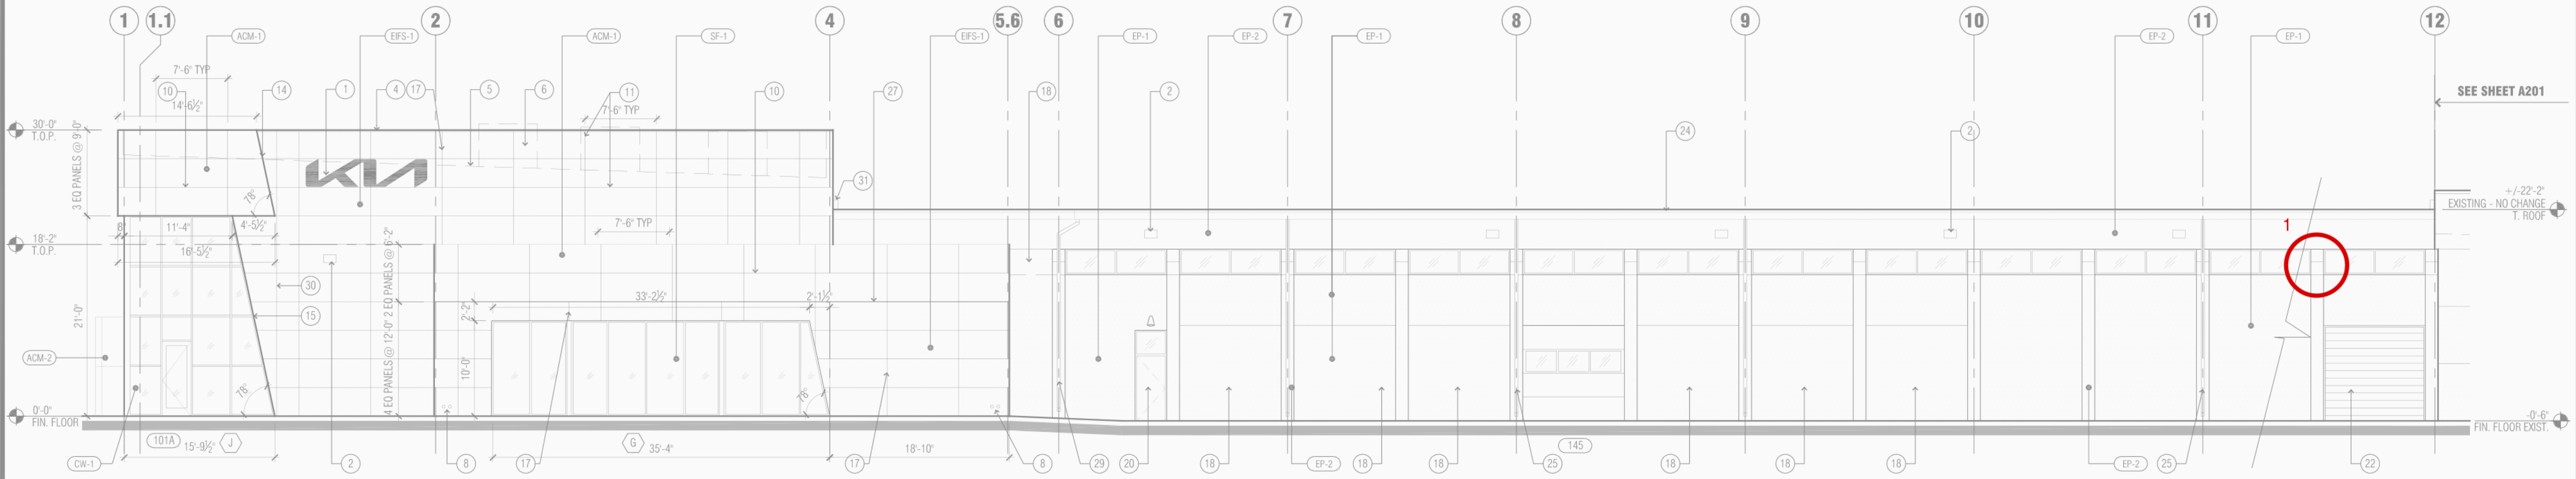

WEST ELEVATION (PARTIAL)

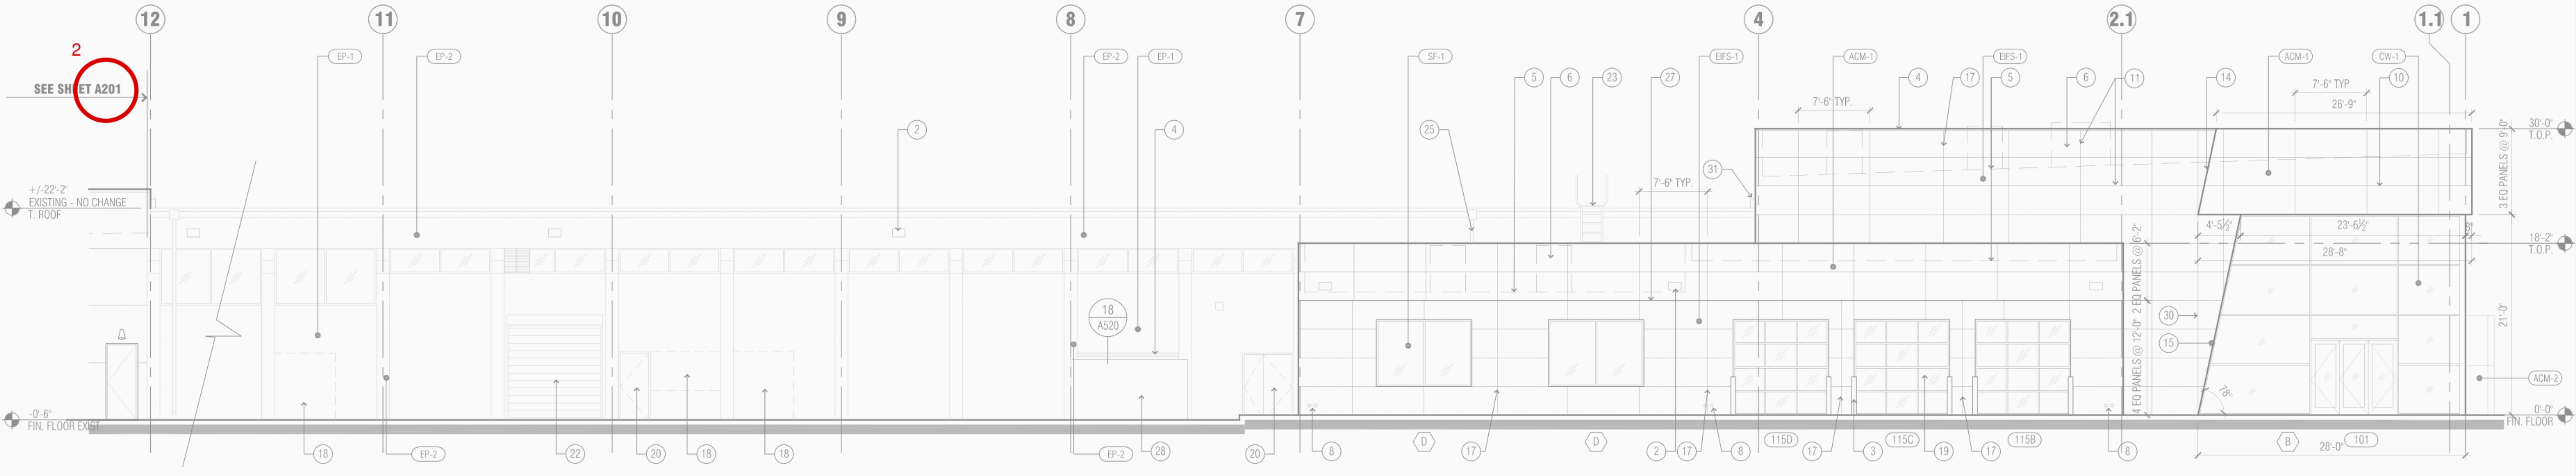

EAST ELEVATION (PARTIAL)

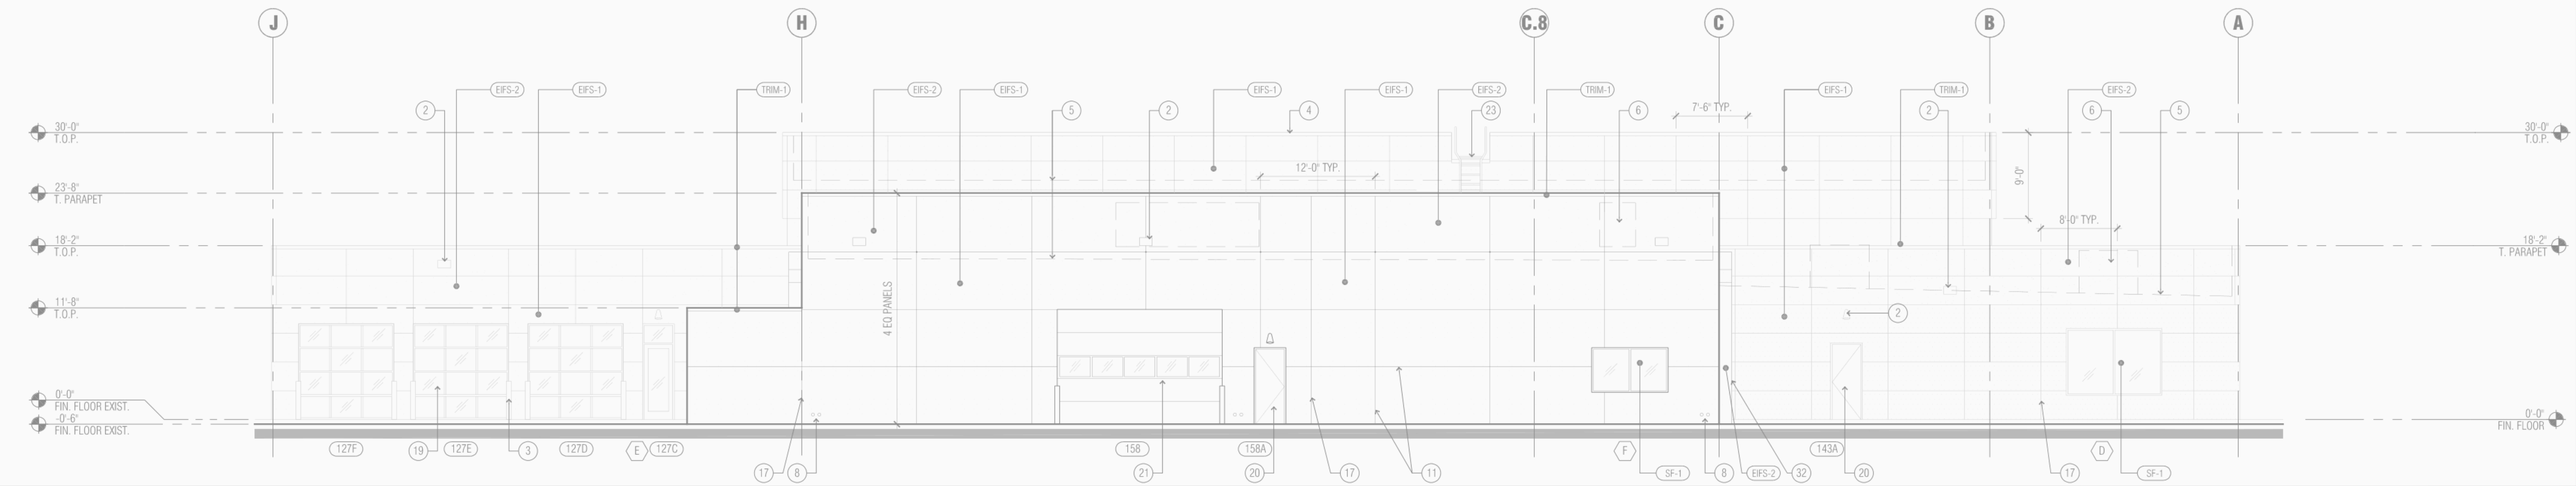

SOUTH ELEVATION

GENERAL NOTES

1. ALL SIGNAGE SHALL BE BY SEPARATE SUBMITTAL, REVIEW, APPROVAL AND PERMIT.
2. ALL HOLLOW METAL DOORS AND FRAMES TO BE PAINTED TO MATCH ADJACENT SURFACE, UNO.
3. SEE STRUCTURAL FOR MASONRY CONTROL JOINT LOCATIONS.
4. AIR AND WATER BARRIER TO BE PROVIDED AT ALL ACM AREAS. CARLISLE 705 HT
5. ROOF MOUNTED MECHANICAL AND OTHER EQUIPMENT SHALL BE SCREENED BY PARAPET WALLS.
6. APPLY HEAVY EIFS MESH UNDER STANDARD MESH AT ALL HIGH TRAFFIC AREAS TO A HEIGHT OF 8'-0" A.F.F. OR TO THE NEAREST HORIZONTAL ARCHITECTURAL JOINT / REVEAL

KEYNOTES

① INTERNALLY ILLUMINATED SIGNAGE UNDER SEPARATE SUBMITTAL & PERMIT
② NEW WALL MOUNTED LIGHT FIXTURE
③ TYPICAL BOLLARD W/ COVER - SEE 5/A510
④ PRE-FINISHED PARAPET CAP TO MATCH ADJ. WALL COLOR
⑤ LINE OF ROOF BEYOND
⑥ MECHANICAL UNIT BEHIND PARAPET WALL
⑦ MECHANICAL GRILLE - PAINTED TO MATCH ADJACENT SURFACE
⑧ ROOF DRAIN /OVERFLOW NOZZLE - SEE 1/A520
⑨ 8" H. WITH ¾" STROKE VINYL ADDRESS NUMERALS BY GC.
⑩ ACM JOINT - BY OWNER'S VENDOR
⑪ EIFS REVEAL - SEE DETAIL 24/A520
⑫ TRAFFIC CONTROL LIGHTS - SEE ELECTRICAL
⑬ KNOX LOCK BOX NEAR DOOR, MOUNT ON PAINTED STEEL POST
⑭ ACM ON INCLINED RETURN TO MATCH FASCIA
⑮ INCLINED WALL CMU TO FRAMING TRANSITION W/ EIFS CONTROL JOINT - SEE DETAIL 27/A540
⑯ ENTRY PORTAL BY GC, ACM BY OWNER'S VENDOR
⑰ MASONRY CONTROL JOINT - SEE STRUCT. & DETAIL 7/A520
⑱ INFILL EXISTING WALL OPENING TO MATCH ADJACENT CONSTRUCTION
⑲ OVERHEAD GLASS SECTIONAL DOOR
⑳ HOLLOW METAL DOOR - PAINT TO MATCH ADJ. WALL
㉑ NEW OVERHEAD SECTIONAL DOOR
㉒ OVERHEAD SECTIONAL DOOR - PAINT TO MATCH ADJ. WALL
㉓ ROOF TOP ACCESS LADDER - SEE DETAIL 27/A520
㉔ EXISTING ROOF GUTTER
㉕ EXISTING DOWNSPOUT LEADER
㉖ SIGNAGE UNDER SEPARATE SUBMITTAL & PERMIT
㉗ ACM TO EIFS TRANSITION - SEE DETAIL 28/A520
㉘ SERVICE ENTRANCE SECTION
㉙ EXTEND DOWNSPOUT TO GRADE TO MATCH EXISTING
㉚ MASONRY TO METAL STUD CONTROL JOINT
㉛ ROOF EXPANSION JOINT & CURB
㉜ EXPANSION JOINT - SEE FLOOR PLAN & STRUCT.

FINISH LEGEND

SYM.	MATERIAL DESCRIPTION
ACM-1	MATERIAL: ALUMINUM COMPOSITE PANEL MANUF: ALPOLIC SYSTEM: ALPOLIC FR RAINSCREEN SYSTM COLOR: TOB BLACK NOTE: FLASHINGS TO MATCH ADJACENT WALL PANELS
ACM-2	MATERIAL: ALUMINUM COMPOSITE PANEL MANUF: ALPOLIC SYSTEM: ALPOLIC FR RAINSCREEN SYSTM COLOR: BSX SILVER METALLIC NOTE: FLASHINGS TO MATCH ADJACENT WALL PANELS
EIFS-1	MATERIAL: EXTERIOR INSULATION AND FINISH SYSTEM MANUF: DRYVIT SYSTEM: DEMANDIT ADVANTAGE ARCH COATING KIAM 03 1413 S APPLIED OVER DRYVIT FINESSE SPECIALTY FINISH TEXTURE KIAM 03 1036 S INCORPORATING DRYVIT STATOTONE HIGH PERFORMANCE COLORANT (S) SYSTEM REFERENCE: DRYVIT OUTSULATION COLOR: PLUS MD EIFS WITH MOISTURE DRAINAGE TO MATCH BM HC-169 COVENTRY GRAY
EIFS-2	MATERIAL: EXTERIOR INSULATION AND FINISH SYSTEM MANUF: DRYVIT COLOR: BM 2129-10 MIDNIGHT DREAM
CW-1	MATERIAL: ALUMINUM CURTAIN WALL SYSTEM MANUF: KAWNEER SYSTEM: 1620 UT SIZE: 2 1/2" X 10" FINISH: CLEAR ANODIZED ALUMINUM
SF-1	MATERIAL: ALUMINUM STOREFRONT WINDOW MANUF: KAWNEER SYSTEM: TRI-FAB VERSGLAZE 451/451T SIZE: 2" X 4.5" FINISH: CLEAR ANODIZED ALUMINUM
EP-1	MATERIAL: EXTERIOR PAINT MANUF: BENJAMIN MOORE PRODUCT: REGAL SELECT EXTERIOR LATEX PAINT COLOR: BM HC 169 COVENTRY GRAY
EP-2	MATERIAL: EXTERIOR PAINT MANUF: BENJAMIN MOORE COLOR: BM 2129-10 MIDNIGHT DREAM
TRIM-1	MATERIAL: PRE-FINISHED SHEET METAL CAP MANUF: BERRIDGE COLOR: MATTE BLACK

*PATTISON SIGN GROUP TO BE SOLE PROVIDER/INSTALLER FOR ALL EXTERIOR SIGNS & ACM PANELS. GENERAL CONTRACTOR TO COORDINATE BUILDING REQUIRED SIGN INTERIOR SHOWROOM ACCESS PANEL(S) FOR ELECTRICAL ACCESS WITH A.O.R.

JOHN MAHONEY
ARCHITECT
850 W. ELLIOT ROAD #108
TEMPE, ARIZONA 85284
P 480.345.8457 www.mahoneyarch.com

JOHN HARTLEY MAHONEY
00305504
7-23-26

GRAND KIA
2040 W. 104TH AVENUE
THORNTON, COLORADO

PROJECT NO.: 2412
ISSUE DATE: 7/23/26

EXTERIOR ELEVATIONS

A200

HEIGHTS (U-176) - board / wall height per markup
H 0.430 ft

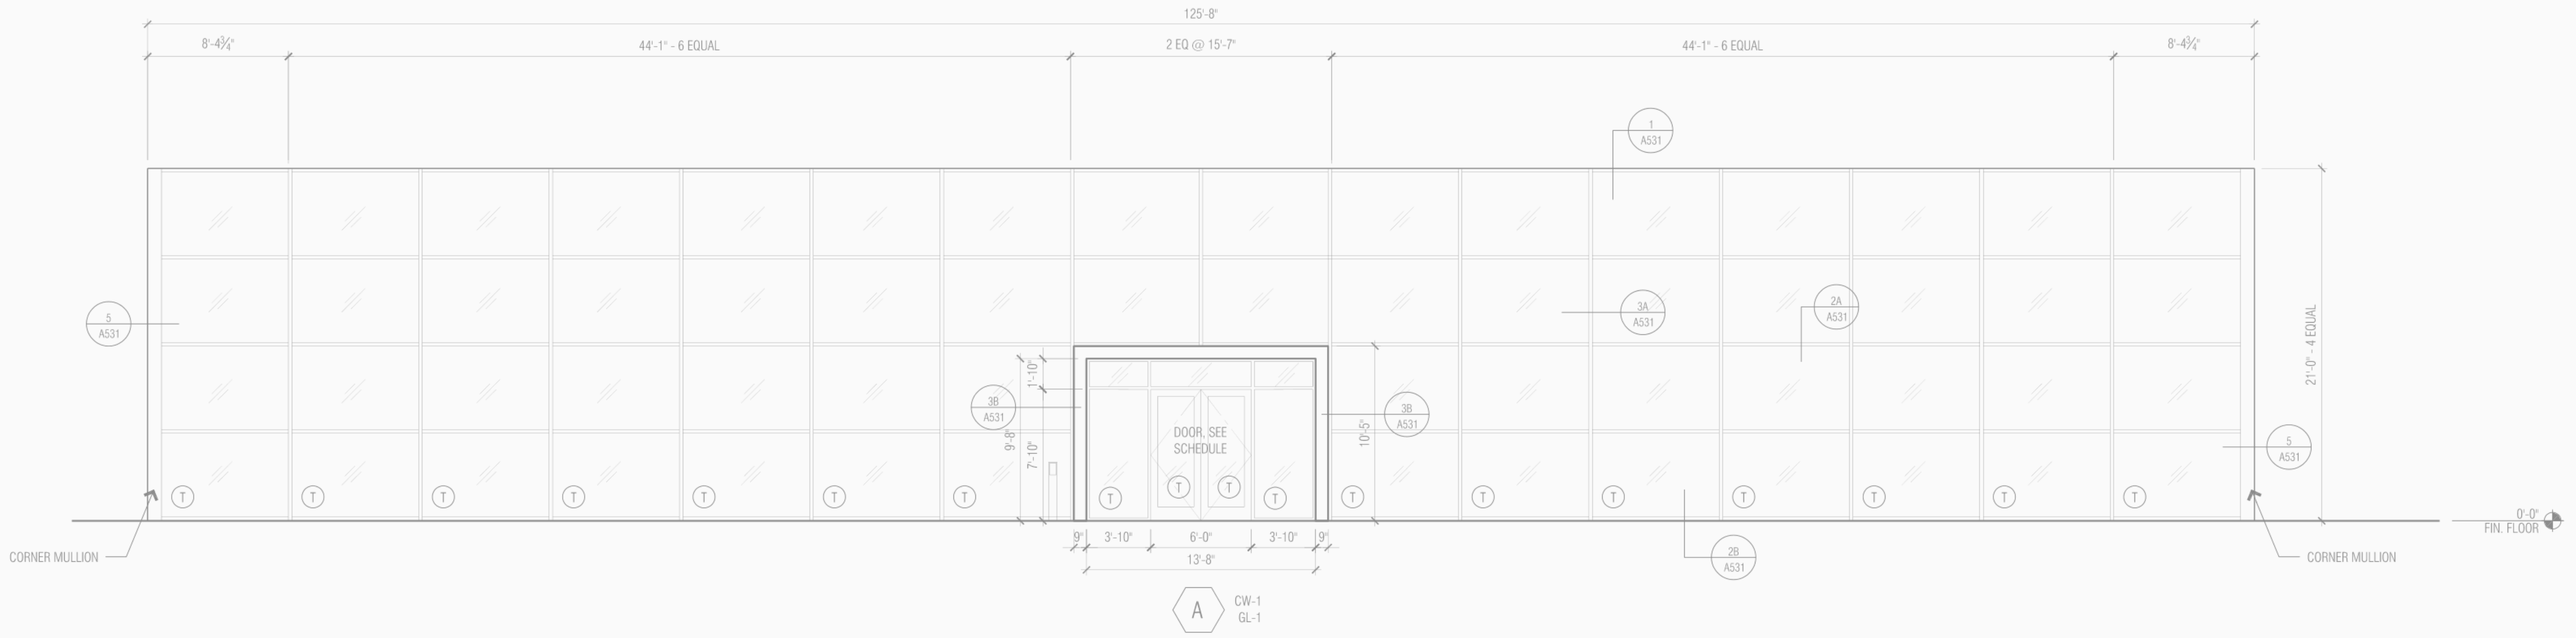

EXTERIOR WINDOW FRAME ELEVATIONS

3/16" = 1'-0"
0 2' 4' 8'

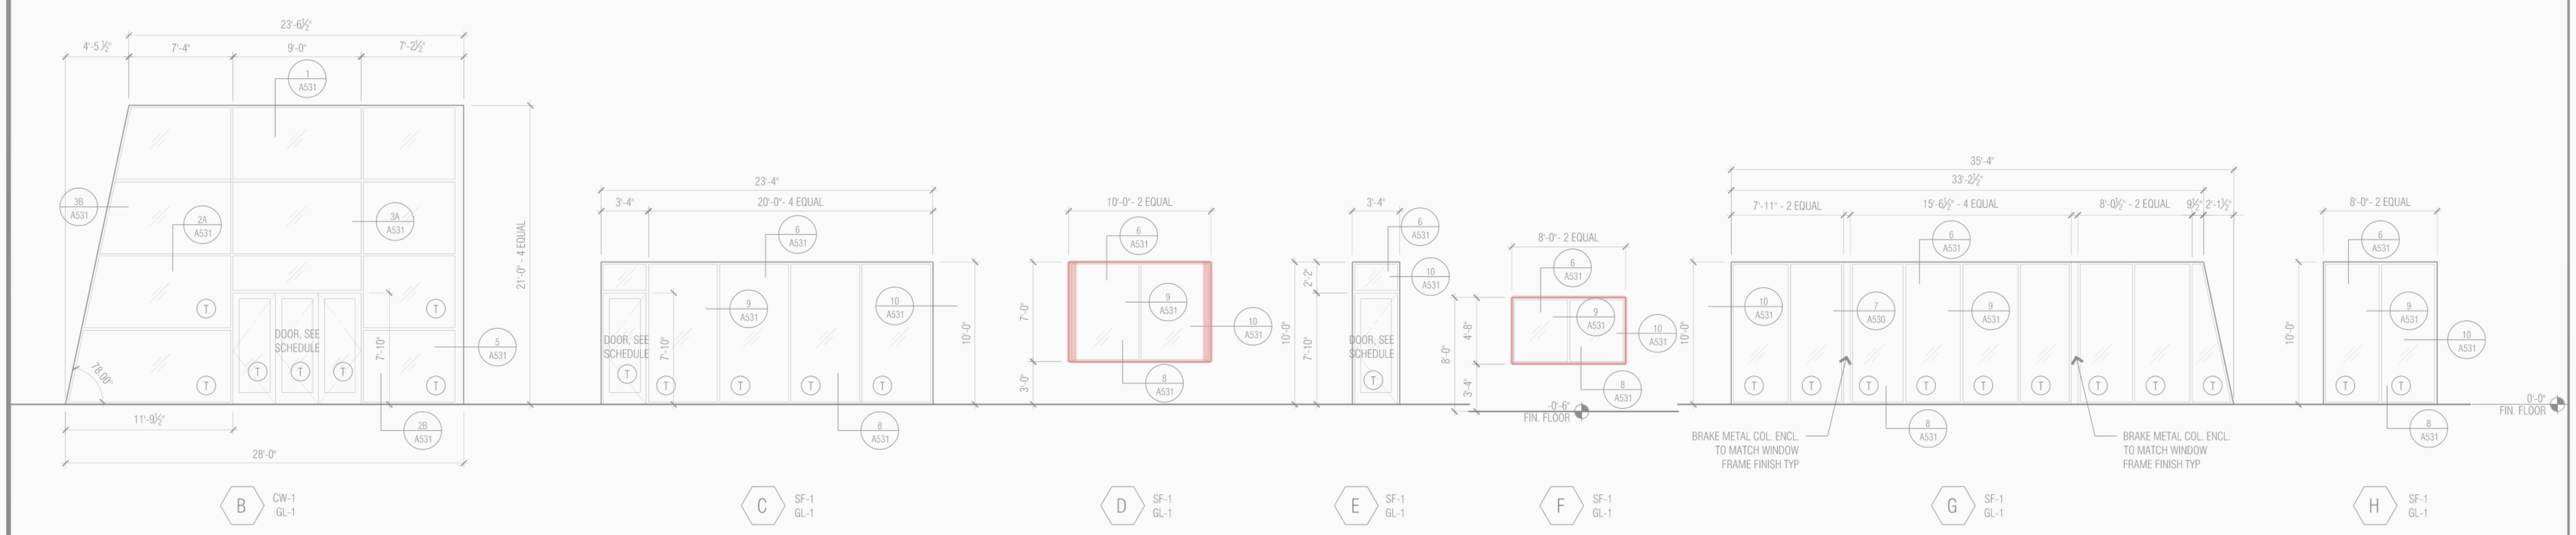

EXTERIOR WINDOW FRAME ELEVATIONS

3/16" = 1'-0"
0 2' 4' 8'

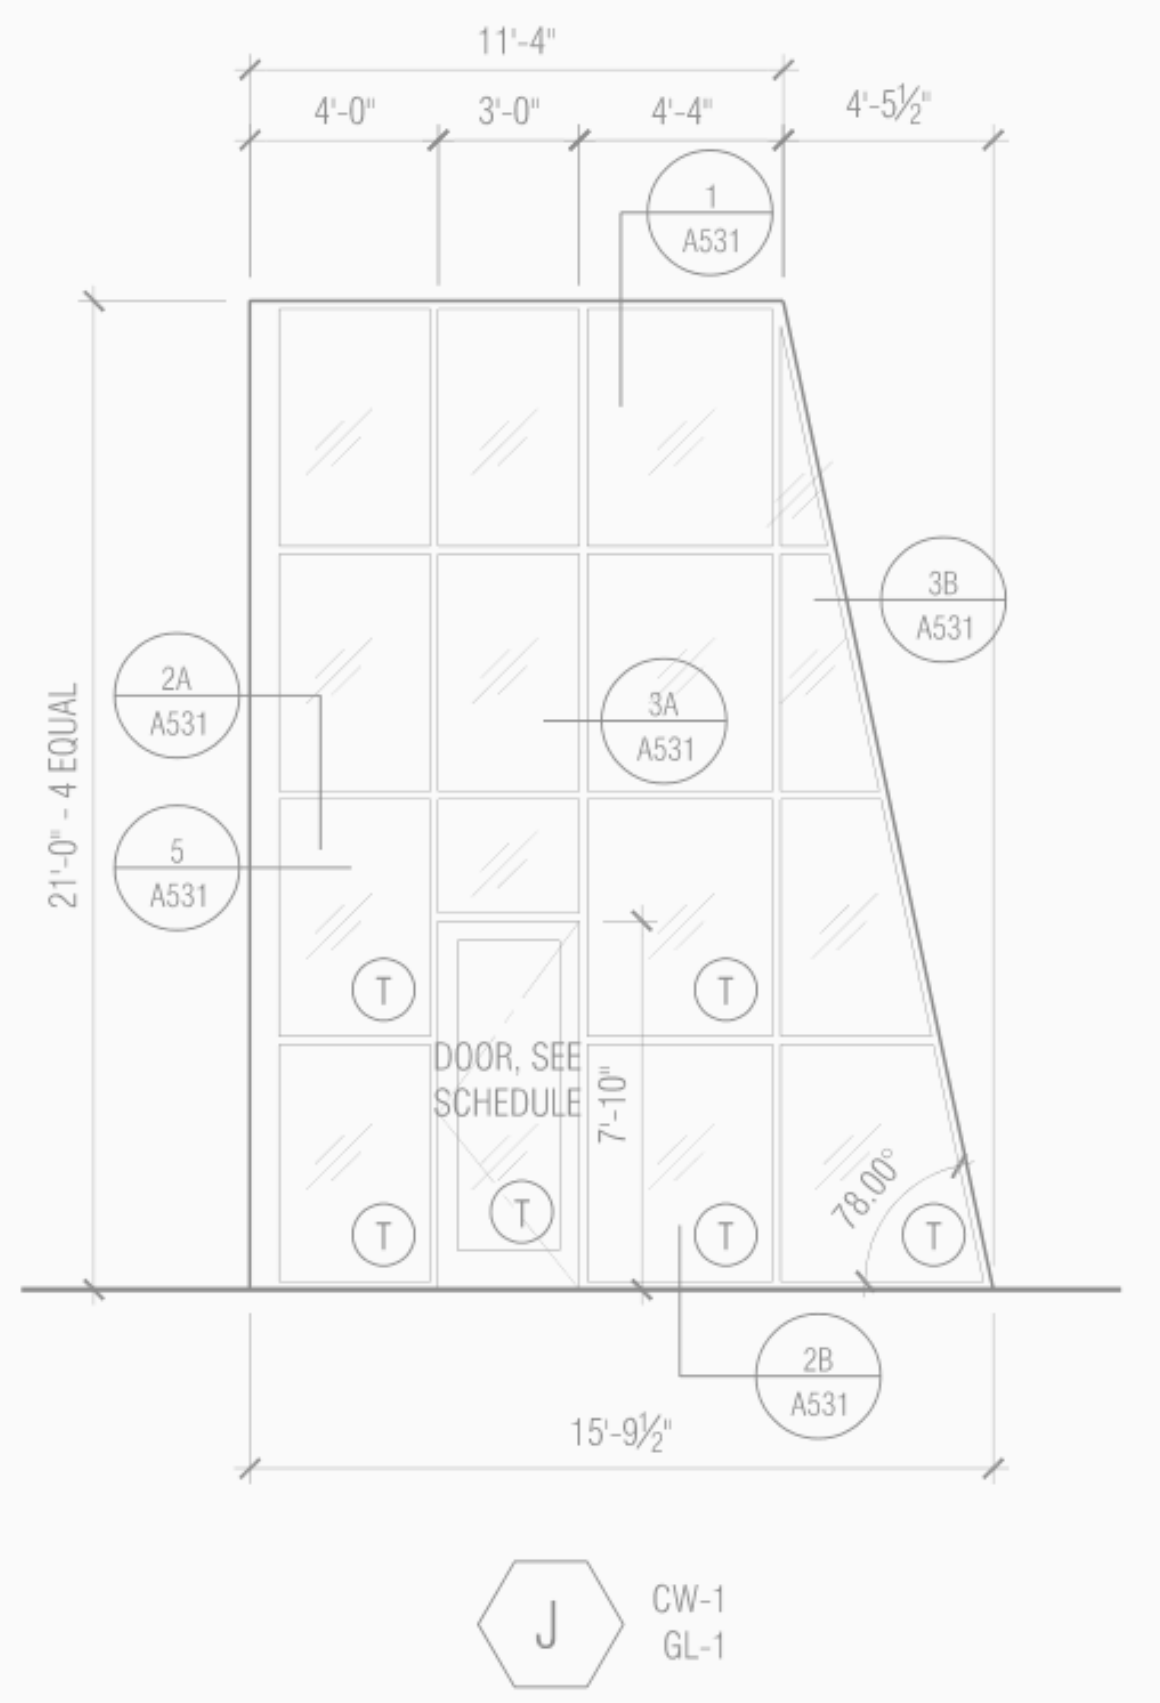

TAKE-OFF LEGEND - A220 (gypsum board ceilings / soffits)

blue area = gyp bd ceiling (ceilings), green area / line = gyp bd ceiling / soffit of the misc rows (CLG / SOF / RS / CAN / BW): 6 items, 68.22 SF (Contents: board · ceiling tag · room · SF · ceiling height · detail · id)

measure: /Measure at the printed scale of the sheet; SF = Excel row (ceiling id)

EXTERIOR WINDOW FRAME ELEVATIONS

3/16" = 1'-0"
0 2' 4' 8'

GENERAL NOTES

1. ALL GLASS & GLAZING SHALL CONFORM WITH IBC CHAPTER 24.
2. FURNISH & INSTALL ALL FRAMING, BLOCKING, AND REINFORCING AS REQUIRED BY BUILDING CODE AND WINDOW FRAMING MANUFACTURER.
3. PROVIDE TRIM AND BRAKE METAL CLOSURES TO MATCH WINDOW FRAMING.
4. VERIFY ALL FRAMING DIMENSIONS AND COORDINATE WITH FINISHES PRIOR TO CONSTRUCTION.
5. ALL DIMENSIONS ARE ROUGH OPENINGS.

Ⓣ DENOTES TEMPERED SAFETY GLAZING

SYM.	MATERIAL DESCRIPTION
CW-1	MATERIAL: ALUMINUM CURTAIN WALL SYSTEM MANUF: KAWNEER SYSTEM: 1620 UT SIZE: 2 1/2" X 10" FINISH: CLEAR ANODIZED ALUMINUM GLASS: 1" CLEAR LOW IRON
SF-1	MATERIAL: ALUMINUM STOREFRONT SYSTEM MANUF: KAWNEER OR EQUAL SYSTEM: TRIFAB VERSGLAZE 451/451T - CENTER CAPTURE SIZE: 2" x 4 ½" FINISH: ANODIZED ALUMINUM
SF-2	MATERIAL: ALUMINUM STOREFRONT SYSTEM MANUF: KAWNEER OR EQUAL SYSTEM: TRIFAB VERSGLAZE 450 - CENTER CAPTURE SIZE: 2" x 4 ½" FINISH: CLEAR ANODIZED ALUMINUM
GL-1	MATERIAL: INSULATED GLAZING MANUF: PPG OR EQUAL SPEC: 1" INSUL. LOW-E SOLARBAN 70 LOW-E #2 ON CLEAR
GL-2	MATERIAL: INTERIOR STOREFRONT GLAZING SPEC: CLEAR GLASS

ENERGY CODE GLAZING INFORMATION

FENESTRATION U-FACTOR		
	FIXED FENESTRATION	U-0.34
	ENTRANCE DOOR	U-0.63
	GLAZED SECTIONAL DOOR	U-0.34
SHGC		
	PROJECTION FACTOR	
	<0.2	0.38
	0.2 ≤PF <0.5	0.46
	PF ≥0.5	0.61

JOHN MAHONEY
ARCHITECT
850 W. ELLIOT ROAD #108
TEMPE, ARIZONA 85284
P 480.345.8457 www.mahoneyarch.com

JOHN HARTLEY MAHONEY
00305504
7-23-26

GRAND KIA
2040 W. 104TH AVENUE
THORNTON, COLORADO

PROJECT NO.: 2412
ISSUE DATE: 7/23/26

EXTERIOR WINDOW FRAME ELEV'S

A220