DOOR SCHEDULE

MARK	ROOM	COUNT	WIDTH	HEIGHT	THICKNESS	DOOR TYPE	DOOR MATERIAL	DOOR FINISH	FRAME TYPE	FRAME MATERIAL	FRAME FINISH	HARDWARE GROUP	FIRE RATING	COMMENTS
100	100	1	6' - 0"	7' - 0"	EXISTING	B EXISTING	ALUMINUM	EXISTING	EXISTING	ALUMINUM	EXISTING	A2	0	VERIFY HARDWARE REQUIREMENTS
101	101	1	3' - 0"	7' - 0"	1 3/4"	A	S.C. WOOD	PAINT	1	HOLLOW METAL	PAINT	B2	0	PAINT TO MATCH ADJACENT WALL. KEYPAD LOCK. VERIFY WITH OWNER.
102	103	1	3' - 0"	7' - 0"	EXISTING	A EXISTING	S.C. WOOD	PAINT	EXISTING	HOLLOW METAL	PAINT	B1	0	PAINT TO MATCH ADJACENT WALL
103	104	1	3' - 0"	7' - 0"	EXISTING	A EXISTING	S.C. WOOD	PAINT	EXISTING	HOLLOW METAL	PAINT	B1	0	PAINT TO MATCH ADJACENT WALL
104	101	1	3' - 0"	7' - 0"	EXISTING	C EXISTING	HOLLOW METAL	PAINT	EXISTING	HOLLOW METAL	PAINT	B5	0	PAINT TO MATCH ADJACENT WALL

HARDWARE GROUPS

SINGLE OR PAIR OF GLASS DOORS

A1 SINGLE STOREFRONT GLASS DOOR (S)

OPERATING HARDWARE	MS 1850S
CYLINDER GUARD	MS 4043
EXIT INDICATOR	4089
THRESHOLD	200D
PUSH / PULL HANDLE	P-751 A
PARALLEL ARM CLOSER	LCN P1460 SERIES

A2 PAIR OF STOREFRONT GLASS DOORS - ENTRY

(3 POINT LOCK)	
OPERATING HARDWARE	MS 1850S
THRESHOLD BOLT	4015
HEADER BOLT	4085
CYLINDER GUARD	MS 4043
EXIT INDICATOR	4089
THRESHOLD	200D
PUSH / PULL HANDLE	P-751 A
PARALLEL ARM CLOSER	LCN P1460 SERIES

A3 SINGLE STOREFRONT GLASS DOOR - EGRESS

HEADERS	DS-4022
CYLINDER GUARD	MS 4043
TAPERED RAIL	DS-00
CLOSER	RTS-85
PARALLEL ARM CLOSER	LCN P1460 SERIES
THRESHOLD	200D
PUSH PADDLE OPERATOR	ADAMS RITE 4590 02
LATCH	ADAMS RITE 4510 25
PULL	

A4 PAIR STOREFRONT GLASS DOORS - VEST INTERIOR

PUSH PULL	P-751 A

SINGLE WOOD OR HOLLOW METAL DOOR

B1 TOILET ROOM DOOR

BUTT HINGES	450 T88
STOP	W1276 CCS
CLOSER	8581 BF
BATH PRIVACY LATCH	ND 40 S SCHLAGE "ND" SERIES "SPARTA" - #626 SATIN CHROMIUM PLATTED

B2 INTERIOR DOOR WITH KEYPAD LOCK

BUTT HINGES	450 T88
STOP	W1276 CCS
CLOSER	8581 BF
KEYPAD LOCKSET	VERIFY SPEC WITH OWNER

B3 INTERIOR DOOR WITHOUT KEYPAD LOCK

BUTT HINGES	450 T88
STOP	W1276 CCS
CLOSER	8581 BF
PASSAGE LOCK	ND 10 S SCHLAGE "ND" SERIES "SPARTA" LATCH #626 SATIN CHROME

B4 STORAGE ROOM DOOR WITHOUT KEYPAD LOCK

BUTT HINGES	450 T88
STOP	W1276 CCS
CLOSER	8581 BF
STORAGE LOCK	ND 80 PD SCHLAGE "ND" SERIES "SPARTA" LATCH #626 SATIN CHROME

B5 EXTERIOR DOOR

BUTT HINGES	450 T88
STOP	W1276 CCS
CLOSER	8581 BF
SEALS	S88
LATCH GUARD	LP2
THRESHOLD	200D
DOOR SHOE	216DV
VIEWER	U698 BS6D
EXIT DEVICE	ADAMS RITE 8300 SERIES
LATCH	ADAMS RITE 4510 25

B6 REAR EXIT DOOR - INTERIOR


BUTT HINGES	450 T88
STOP	W1276 CCS
CLOSER	8581 BF
SEALS	S88
LATCH GUARD	LP2
VIEWER	U698 BS6D
EXIT DEVICE	ADAMS RITE 8300 SERIES
LATCH	ADAMS RITE 4510 25

DOOR CLEARANCES FOR ACCESSIBILITY:
THE DASHED RECTANGLES AT DOORS INDICATE CLEAR FLOOR SPACE NEEDED FOR A DISABLED PERSON TO MANEUVER. NO OBJECTS (WALLS, FIXTURES, ETC.) ARE TO BE PLACED WITHIN THE DASHED RECTANGLES. SEE SHEET A0.2 FOR ADDITIONAL INFORMATION.

CLEAR FLOOR SPACE:
CLEAR FLOOR SPACE DIMENSIONS ARE FROM FACE OF FINAL FINISH MATERIAL WHICH INCLUDES ANY PROJECTING FINISHES SUCH AS; CASING, FLOOR BASE MATERIAL, CORNER GUARDS, ETC. BEYOND THE FINISH WALL. VERIFY WALL TYPES AND WALL FINISHES TO MAINTAIN PROPER CLEARANCES.

DOOR & FRAME ELEVATIONS


MAY NEED TO ALTER THIS TO BE ONE DOOR

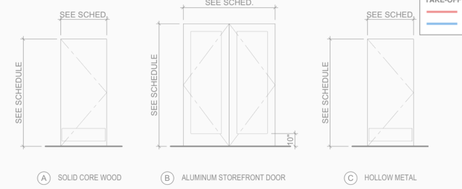

TAKE-OFF LEGEND - A2.0 (partition schedule order)
W2 - 2 wall(s) - 17.97 LF
CF - 2 wall(s) - 4.76 LF

DOOR NOTES


1. REFER TO THE PARTITION PLAN AND SPECIFICATIONS FOR ADDITIONAL INFORMATION.
2. ALL DOORS AND FRAMES TO BE PAINTED WITH SEMI-GLOSS PAINT TO MATCH ADJACENT WALL COLOR.
3. PROVIDE A SIGN ON OR NEAR THE MAIN EXIT DOOR READING: "THIS DOOR TO REMAIN UNLOCKED WHEN BUILDING IS OCCUPIED."
4. DOOR HANDLES, PULLS OR KNOBS SHALL BE INSTALLED AT 40" ABOVE FINISH FLOOR. ALL OTHER OPERABLE PARTS OF DOOR HARDWARE (SUCH AS DEADBOLTS, KEYHOLES, ETC.) ARE TO BE CENTERED BETWEEN 34" AND 44" ABOVE FINISH FLOOR. IF EXISTING BUILDING STANDARD EXISTS, MATCH BUILDING STANDARD AND CONFIRM COMPLIANCE WITH ACCESSIBILITY REQUIREMENTS.
5. MAXIMUM UNDERCUT OF ALL DOORS NOT IN A RATED CORRIDOR SHALL NOT EXCEED 1/2" ABOVE FINISH FLOOR SURFACE.
6. ALL REQUIRED FIRE DOORS SHALL BEAR A LABEL FROM A RECOGNIZED AGENCY SHOWING THE SPECIFIC RATING.
7. EXIT DOORS SHALL BE OPERABLE FROM THE INSIDE WITHOUT THE USE OF A KEY OR ANY SPECIAL KNOWLEDGE OR EFFORT.

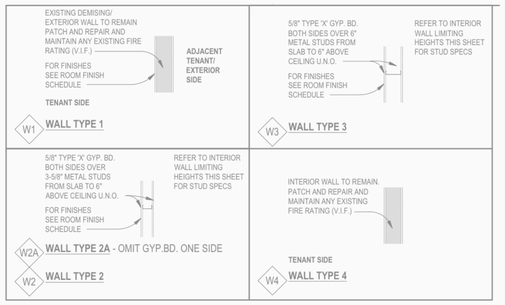


2 A2.0 WALL TYPES 1/2" = 1'-0"

WALL LEGEND


- EXISTING CONSTRUCTION TO REMAIN
- FULL HEIGHT PARTITION TO 6" ABOVE CEILING U.N.O.
- FULL HEIGHT PARTITION TO 6" ABOVE CEILING WITH SOUND BATT INSULATION U.N.O.

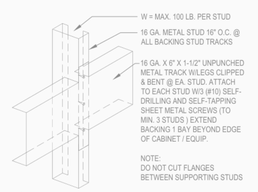


8 A2.0 BACKING DETAIL FOR MISC. EQUIP. 1 1/2" = 1'-0"

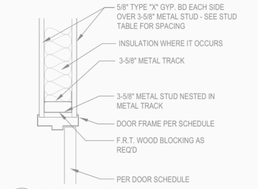


7 A2.0 TYPICAL HEAD DETAIL (JAMB SIM) 1 1/2" = 1'-0"

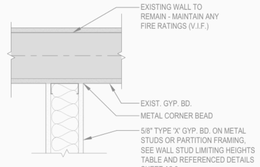


6 A2.0 WALL CONNECTION AT DEMISING 1 1/2" = 1'-0"

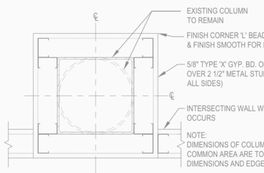


5 A2.0 NON-RATED COLUMN FURRING 1 1/2" = 1'-0"

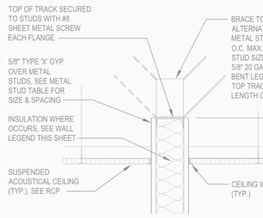

4 A2.0 TYPICAL WALL AND CEILING DETAIL 1 1/2" = 1'-0"

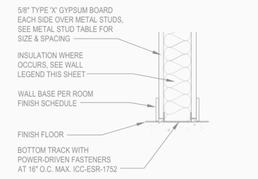

3 A2.0 TYPICAL WALL - BASE DETAIL 1 1/2" = 1'-0"

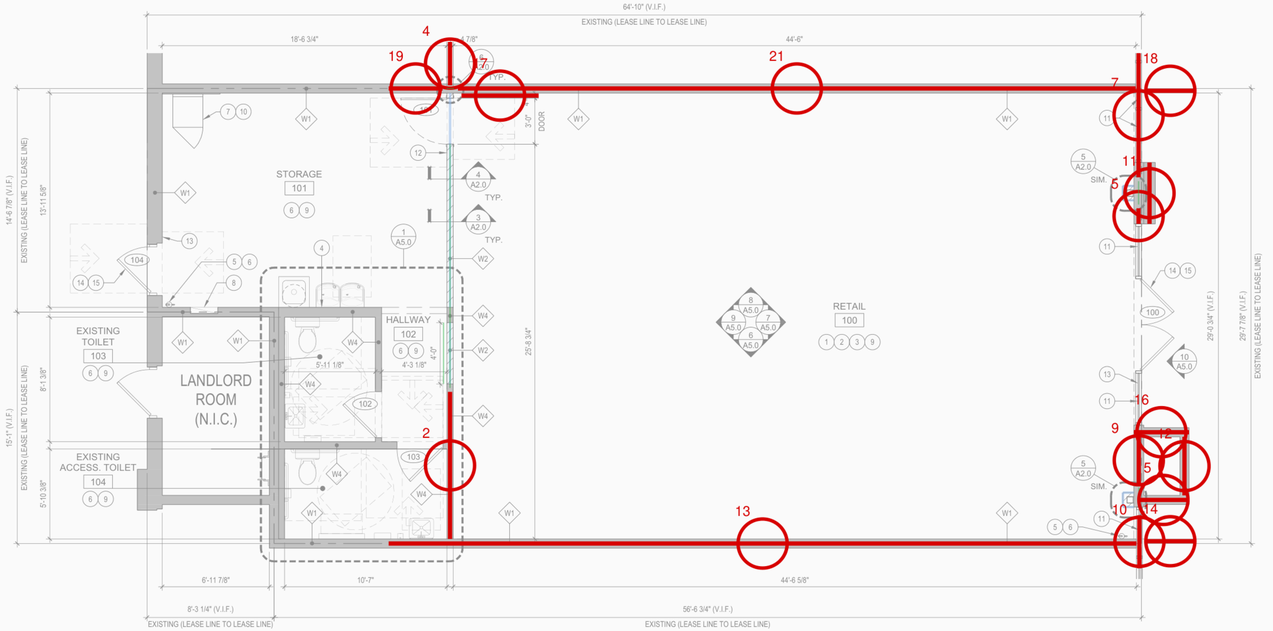

1 A2.0 PARTITION PLAN 1/4" = 1'-0"

INTERIOR WALL LIMITING HEIGHTS

NON-COMPOSITE-FULLY SHEATHED WITH GYPSUM BOARD OR PLYWOOD ON BOTH SIDES OF WALL. OPTION: CONTINUOUS BRIDGING/ BLOCKING AT 60" O.C. FULL HEIGHT OF WALL

(S) STUD MEMBER	Lu (IN.)	SPACING (IN.) O.C.	5 PSF L/240
162S125-18	29"	12	7'-8"
162S125-18		16	6'-11"
162S125-18		24	6'-1"
162S125-27	29"	12	8'-11"
162S125-27		16	8'-2"
162S125-27		24	7'-1"
162S125-30	29"	12	9'-3"
162S125-30		16	8'-5"
162S125-30		24	7'-4"
162S125-33	29"	12	9'-6"
162S125-33		16	8'-8"
162S125-33		24	7'-7"
250S125-18	29"	12	10'-6"
250S125-18		16	9'-7"
250S125-18		24	8'-3"
250S125-27	29"	12	12'-4"
250S125-27		16	11'-3"
250S125-27		24	9'-10"
250S125-30	29"	12	12'-9"
250S125-30		16	11'-7"
250S125-30		24	10'-2"
250S125-33	29"	12	13'-2"
250S125-33		16	12'-0"
250S125-33		24	10'-6"
250S125-43	29"	12	14'-4"
250S125-43		16	13'-0"
250S125-43		24	11'-5"
362S125-18	28"	12	14'-0"
362S125-18		16	12'-2"
362S125-27	28"	12	16'-6"
362S125-27		16	15'-0"
362S125-27		24	13'-1"
362S125-30	28"	12	17'-0"
362S125-30		16	15'-6"
362S125-30		24	13'-6"
362S125-33	28"	12	17'-7"
362S125-33		16	16'-0"
362S125-33		24	14'-0"
362S125-43	28"	12	19'-2"
362S125-43		16	17'-5"
362S125-43		24	15'-3"
362S125-54 (50 KSI)	22"	12	20'-6"
362S125-54 (50 KSI)		16	18'-7"
362S125-54 (50 KSI)		24	16'-3"
362S125-68 (50 KSI)	22"	12	21'-11"
362S125-68 (50 KSI)		16	19'-11"
362S125-68 (50 KSI)		24	17'-5"

(S) STUD MEMBER	Lu (IN.)	SPACING (IN.) O.C.	5 PSF L/240
400S125-27	28"	12	17'-10"
400S125-27		16	16'-2"
400S125-27		24	14'-1"
400S125-30	28"	12	18'-5"
400S125-30		16	16'-8"
400S125-30		24	14'-7"
400S125-33	28"	12	19'-0"
400S125-33		16	17'-3"
400S125-33		24	15'-1"
400S125-43	28"	12	20'-9"
400S125-43		16	18'-10"
400S125-43		24	16'-5"
400S125-54 (50 KSI)	22"	12	22'-2"
400S125-54 (50 KSI)		16	20'-2"
400S125-54 (50 KSI)		24	17'-7"
400S125-68 (50 KSI)	22"	12	23'-8"
400S125-68 (50 KSI)		16	21'-6"
400S125-68 (50 KSI)		24	18'-10"
600S125-30	27"	12	25'-2"
600S125-30		16	22'-11"
600S125-30		24	18'-11"
600S125-33	27"	12	26'-2"
600S125-33		16	23'-9"
600S125-33		24	20'-6"
600S125-43	27"	12	28'-9"
600S125-43		16	26'-1"
600S125-43		24	22'-10"
600S125-54 (50 KSI)	21"	12	30'-9"
600S125-54 (50 KSI)		16	27'-11"
600S125-54 (50 KSI)		24	24'-5"
600S125-68 (50 KSI)	21"	12	33'-0"
600S125-68 (50 KSI)		16	30'-0"
600S125-68 (50 KSI)		24	26'-2"
800S125-43	26"	12	36'-1"
800S125-43		16	32'-9"
800S125-43		24	28'-8"
800S125-54 (50 KSI)	21"	12	38'-9"
800S125-54 (50 KSI)		16	35'-2"
800S125-54 (50 KSI)		24	30'-9"
800S125-68 (50 KSI)	21"	12	41'-11"
800S125-68 (50 KSI)		16	36'-1"
800S125-68 (50 KSI)		24	33'-4"

NOTES:
1. FIVE POUNDS PER SQUARE FOOT (PSF), LOADS HAVE NOT BEEN REDUCED FOR STRENGTH OR DEFLECTION CHECKS; FULL LATERAL LOAD IS APPLIED
2. LIMITING HEIGHTS ARE BASED ON STEEL PROPERTIES ONLY (NON-COMPOSITE) WITHOUT THE CONTRIBUTION OF SHEATHING TO STRENGTH AND STIFFNESS OF THE ASSEMBLY. PROPERLY FASTENED SHEATHING IS STILL REQUIRED FOR MEMBERS TO BE CONSIDERED FULLY BRACED.
3. WEB CRIPPLING CHECK BASED ON 1" END BEARING
4. STUDS ARE ASSUMED TO BE ADEQUATELY BRACED AT MAXIMUM SPACING OF Lu TO DEVELOP FULL ALLOWABLE MOMENT (i.e. SCREW SPACING)

PARTITION PLAN GENERAL NOTES

1. VERIFY DIMENSION WITH MILLWORKER PRIOR TO FRAMING.
2. INSTALL KNOX BOX IF NOT ALREADY EXISTING, HEIGHT AND LOCATION AS REQUIRED BY FIRE DEPARTMENT.
3. UNLESS OTHERWISE NOTED, ALL GYPSUM BOARD SURFACES, WALLS, AND CEILINGS SHALL BE TAPED, SANDED SMOOTH TO A "LEVEL 4" FINISH, SO AS TO RECEIVE PAINT OR WALL COVERING MATERIAL
4. THE PROJECT ADDRESS SHALL BE PROVIDED FOR ALL NEW AND EXISTING BUILDINGS IN A POSITION AS TO BE PLAINLY VISIBLE AND LEGIBLE FROM THE STREET OR ROAD FRONTING THE PROPERTY PER LOCAL FIRE DEPARTMENT STANDARDS.

PARTITION PLAN KEY NOTES

1. IF EXISTING COLUMNS ARE LOCATED IN SALES AREA COLUMNS TO BE FURRED WITH METAL STUDS & (1) LAYER 5/8" GYP. BOARD TO 6" ABOVE CEILING. SIZE OF COLUMN FURRING TO BE CONSISTENT AND ALIGN WITH OTHERS. SEE DETAIL 5/A2.0
2. PROVIDE BACKING SUPPORT BEHIND WALL-MOUNTED EQUIPMENT AND FIXTURES. SEE SHEET A4.0 FOR FIXTURE LOCATIONS AND SHEET A5.0 FOR BLOCKING LEGEND.
3. PROVIDE LEVEL FLOOR FOR LEVEL INSTALLATION OF MILLWORK AND FLOOR FINISHES.
4. USE WATER RESISTANT GYPSUM BOARD/FIBER BOARD AT ALL AREAS SUBJECT TO MOISTURE OR WHERE TILE IS USED. PROVIDE WATERPROOF MEMBRANE AT ALL AREAS WHEN THEY ARE ABOVE OTHER SPACES.
5. PROVIDE FIRE EXTINGUISHER BY POTTER-ROEMER. EXTINGUISHER TO BE #3005, 2A:10B:C. LOCATIONS AND CLASSIFICATIONS OF FIRE EXTINGUISHERS SHALL BE IN ACCORDANCE WITH STATE & LOCAL FIRE CODES AND PLACEMENT IS SUBJECT TO THE APPROVAL OF THE FIRE INSPECTOR. VERIFY QUANTITY & EXACT LOCATION WITH FIRE DEPARTMENT PRIOR TO ORDERING.
6. PROVIDE AND INSTALL ALL NECESSARY WALL BACKING, STIFFENERS,BRACING, BACK-UP PLATES AND/OR SUPPORTING BRACKETS AS REQUIRED FOR THE INSTALLATION OF WALL-MOUNTED OR SUSPENDED EQUIPMENT OR BUILT-IN ITEMS. VERIFY REQUIREMENTS WITH MANUFACTURERS PRIOR TO INSTALLATION. SEE DETAIL 8/A2.0.
7. ELECTRONIC EQUIPMENT TO BE PROVIDED BY TENANT'S VENDORS.
8. ELECTRICAL EQUIPMENT. SEE ELECTRICAL.
9. PREPARE ALL FLOOR SURFACES AS REQUIRED TO RECEIVE FINISHES AS NOTED ON FINISH PLAN, ENLARGED FINISH PLANS & FINISH LEGEND.
10. (2) SERVER RACKS. MOUNT ONE ABOVE THE OTHER ON 3/4" FRT PLYWOOD PAINTED TO MATCH ADJACENT WALL.
11. EXISTING GLAZING AND STOREFRONT FRAME TO REMAIN - CLEAN TO "LIKE NEW" CONDITION.
12. "EXIT ROUTE" TACTILE SIGNAGE REQUIRED AT ALL EXIT ROUTES. SEE SHEET A0.2 FOR REQUIREMENTS.
13. "EXIT" TACTILE SIGNAGE REQUIRED AT ALL EXITS. SEE SHEET A0.2 FOR REQUIREMENTS.
14. EXIT DOORS - T.G.C. SHALL ENSURE STOOP, THRESHOLD AND ALL CODE REQUIRED ELEMENTS COMPLY WITH ADA REQUIREMENTS AND MEET ALL LOCAL, STATE, AND NATIONAL CODES FOR ACCESSIBILITY AND EGRESS.
15. GC TO VERIFY CONDITION OF EXISTING THRESHOLD AND EXTERIOR LANDING AND IF REQUIRED TO BRING EXISTING THRESHOLD AND LANDING AT SIDEWALK AND STORE SIDE INTO COMPLIANCE TO MEET ALL LOCAL AND NATIONAL CODES AND ADA STANDARDS FOR ACCESSIBILITY AND EGRESS

ROBERT F. VANNEY ARCHITECT
149 THOMPSON AVE, EAST, STE. 112
WEST SAINT PAUL, MINNESOTA 55118
651. 222. 4642 FAX. 651. 222. 3034

COLORADO LICENSED ROBERT F. VANNEY C-3845 10/08/2026 ARCHITECT

xfinity

BRANDED PARTNER
INTERQUEST COMMONS
1333 INTERQUEST PKWY.
LOT #11
COLORADO SPRINGS, CO 80921

No.	Description	Date
-	-	-

Preliminary Issue:	-
Bid Issue:	10/08/2026
Landlord Issue:	10/08/2026
Permit Issue:	10/08/2026
Construction Issue:	-

PARTITION PLAN

Comm. Number	81-2116
Date	10/08/2026
Drawn By	RFV
Checked By	RFV

A2.0


Copyright 2026 Robert F. Vanney Architect

TAKE-OFF LEGEND - A3.0 (gypsum board ceilings / soffits)

SOF-01 - gyp. bd. header 8'-6" AFF: 4.25 LF x 3.407 ft = 14.47 SF board

EXCLUDED - 6 room(s) not quantified: grey hatch = room, red text = reason + sheet


Measure at the printed scale (1/4" = 1'-0"); SF = Excel row

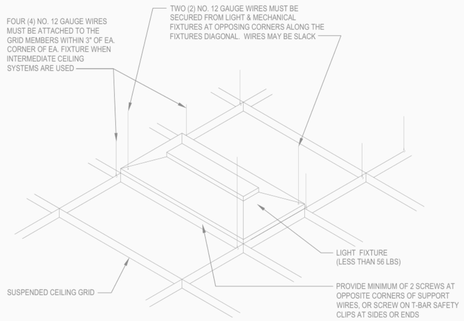

LATERAL FORCE BRACING MEMBERS MUST BE SPACED A MINIMUM OF 6" FROM ALL HORIZONTAL PIPING OR DUCT WORK THAT IS NOT PROVIDED WITH BRACING RESTRAINTS FOR HORIZ. FORCES. BRACING WIRES MUST BE ATTACHED TO THE GRID AND TO THE STRUCTURE IN SUCH A MANNER THAT THEY CAN SUPPORT A DESIGN LOAD OF NOT LESS THAT 200 LBS OR THE ACTUAL LOADS,. SAFETY FACTOR OF 2

4 A3.0 LIGHT FIXTURE AT SUSPENDED CEILING


6" = 1'-0"

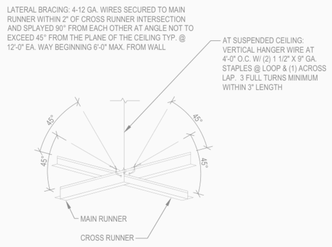

NOTES:
1. ALL WIRES 12 GA.
2. PROVIDE 6" CLEARANCE AT ALL PIPES AND DUCTS, ETC.
3. BRACING WIRES MUST BE ATTACHED TO THE GRID AND TO THE STRUCTURE IN SUCH A MANNER THAT THEY CAN SUPPORT A DESIGN LOAD OF NOT LESS THAN 200 LBS. OR THE ACTUAL LOADS, WHICHEVER IS GREATER, WITH A SAFETY FACTOR OF 2.

3 A3.0 SUSPENDED ACOUSTICAL CEILING

3" = 1'-0"

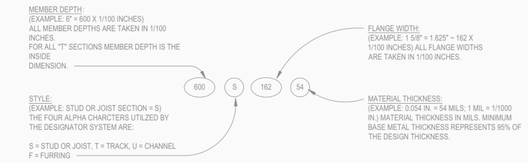

CEILING SPAN TABLE NOTES:
1. VALUES ARE FOR SINGLE SPANS.
2. ALLOWABLE CEILING SPANE CALCULATIONS BASED ON 33KSI YEILD STRENGTH STEEL.
3. FOR FULLY BRACED CEILINGS, USE MID-SPAN BRACED VALUES.
4. END BEARING LENGTH = 1" MINIMUM.


		4 PSF LATERAL SUPPORT OF COMPRESSION FLANGE UNSUPPORTED JOIST SPACING (IN.) O.C.			MID-SPAN JOIST SPACING (IN.) O.C.		
SECTION:	(MIL.)	12"	16"	24"	12"	16"	24"
250S137	33	11'-9"	10'-10"	9'-9"	14'-11"	13'-6"	11'-10"
250S137	43	13'-2"	12'-1"	10'-9"	16'-2"	14'-8"	12'-10"
250S162	33	13'-5"	12'-5"	11'-1"	15'-8"	14'-2"	12'-5"
250S162	43	14'-11"	13'-9"	12'-3"	17'-0"	15'-5"	13'-6"
350S137	33	12'-9"	11'-9"	10'-6"	18'-1"	16'-9"	15'-0"
350S137	43	14'-1"	13'-0"	11'-7"	19'-10"	18'-4"	16'-4"
350S162	33	14'-6"	13'-5"	12'-0"	20'-3"	18'-5"	16'-1"
350S162	43	16'-0"	14'-9"	13'-2"	22'-0"	20'-0"	17'-6"
362S137	33	12'-10"	11'-11"	10'-7"	18'-3"	16'-11"	15'-2"
362S137	43	14'-3"	13'-1"	11'-8"	20'-0"	18'-6"	16'-6"
362S162	33	14'-8"	13'-6"	12'-1"	20'-9"	18'-11"	16'-6"
362S162	43	16'-1"	14'-10"	13'-3"	22'-7"	20'-7"	17'-11"
400S137	33	13'-2"	12'-2"	10'-11"	18'-9"	17'-4"	15'-6"
400S137	43	14'-7"	13'-5"	12'-0"	20'-6"	18'-11"	17'-9"
400S162	33	15'-0"	13'-10"	12'-5"	21'-4"	19'-10"	16'-1"
400S162	43	16'-6"	15'-3"	13'-7"	23'-4"	21'-7"	19'-4"
550S137	33	14'-6"	13'-5"	12'-0"	20'-10"	19'-4"	17'-5"
550S137	43	15'-10"	14'-7"	13'-1"	20'-0"	18'-6"	16'-6"
550S162	33	16'-6"	15'-3"	13'-8"	23'-9"	22'-0"	19'-10"
550S162	43	17'-11"	16'-7"	14'-10"	25'-7"	23'-9"	21'-4"
600S137	33	14'-10"	13'-9"	12'-4"	21'-4"	19'-10"	17'-10"
600S137	43	16'-2"	14'-11"	13'-5"	23'-1"	21'-4"	19'-2"
600S162	33	16'-10"	15'-8"	14'-1"	23'-1"	22'-7"	20'-4"
600S162	43	18'-4"	17'-0"	15'-3"	26'-3"	24'-4"	21'-10"

NOTE: ALL STUD INFORMATION IS BASED ON CEMCO ICC ES ESR-3016

2 A3.0 ALLOWABLE CEILING SPANS - L/240

1/2" = 1'-0"

EXISTING CEILING NOTE:
G.C. SHALL INSPECT ALL EXISTING ACOUSTICAL CEILING TILE & CEILING GRID FOR DAMAGE, MARS, ETC. G.C. SHALL REPLACE ALL DAMAGED AC TILE & CEILING GRID TO MATCH EXISTING

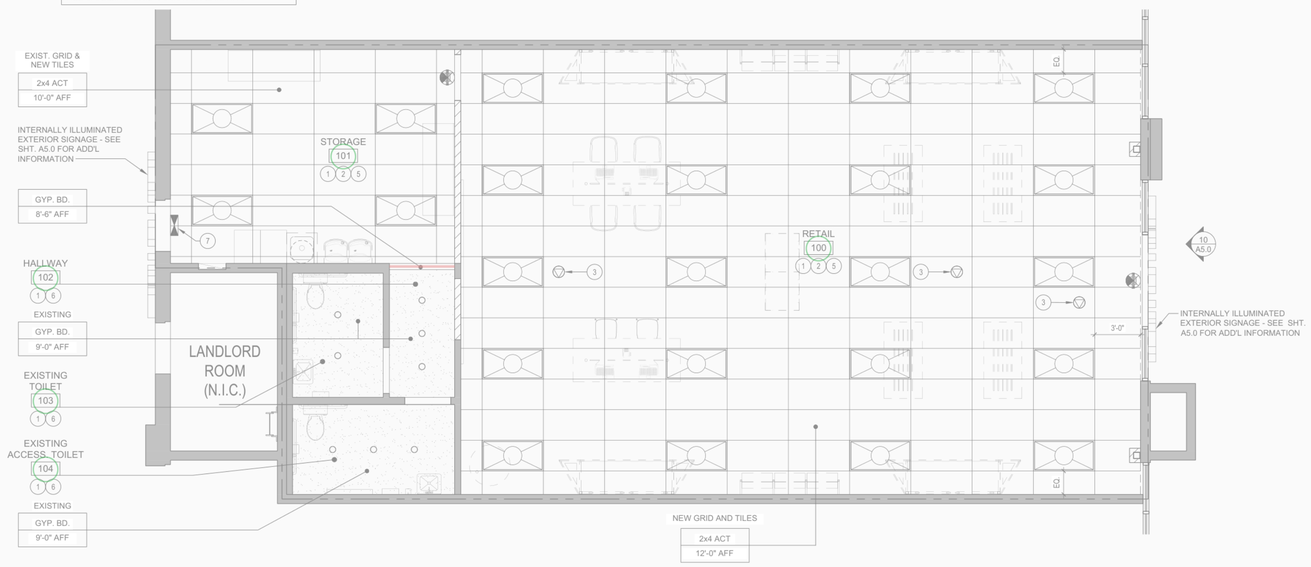

1 A3.0 REFLECTED CEILING PLAN

1/4" = 1'-0"

REFLECTED CEILING PLAN GENERAL NOTES

1. FIELD VERIFY CEILING GRID LOCATION AND NOTIFY ARCHITECT OF ANY DISCREPANCIES ON PLANS.
2. FIELD VERIFY ALL CLEARANCES OF DUCTS, PIPES, SPRINKLERS, ETC. AND NOTIFY ARCHITECT OF ANY CONFLICTS PRIOR TO INSTALLATION OF LIGHTS, ETC.
3. CONDUITS ABOVE CEILING MUST BE A MINIMUM OF 12" ABOVE THE CEILING GRID.
4. ALL JUNCTION BOXES AND MECHANICAL EQUIPMENT REQUIRING ACCESS FOR SERVICE SHALL BE LOCATED OVER ACOUSTICAL CEILINGS. NO ACCESS HATCHES SHALL BE INSTALLED IN GYPSUM BOARD CEILINGS WITHOUT PRIOR APPROVAL BY OWNER.
5. SPRINKLER HEADS ARE TO BE CENTERED BETWEEN LIGHTS IN A UNIFORM ARCHITECTURAL PATTERN.
6. LOCATE RECESSED DOWN LIGHTS, WALL WASHERS, SMOKE DETECTORS, EXIT SIGNS, SPEAKERS, FIRE SPRINKLERS, ETC. IN CENTER OF 24"X24" SECTION OF SECOND LOOK CEILING TILES.
7. PROVIDE BACK-UP POWER FOR EXIT SIGNS PER STATE & LOCAL CODES.
8. THE MEANS OF EGRESS, INCLUDING THE EXIT DISCHARGE, SHALL BE ILLUMINATED TO A LEVEL OF NOT LESS THAN ONE FOOT CANDLE AT THE WALKING SURFACE AT ALL TIMES THE BUILDING SPACE SERVED BY THE MEANS OF EGRESS IS OCCUPIED.
9. EMERGENCY LIGHTING SHALL HAVE (2) SEPARATE SOURCES OF POWER & SHALL COMPLY WITH THE NEC.
10. CONTRACTOR SHALL PROVIDE EMERGENCY LIGHTING, STROBE LIGHTS, AUDIO-VISUAL ALARMS & OCCUPANCY SENSORS TO MEET ALL APPLICABLE CODES.
11. CONTRACTOR SHALL PROVIDE LAMPS WITH TYPE IC RATED HOUSING WHERE FIXTURES COME IN DIRECT CONTACT WITH INSULATION.
12. EXIT SIGNS SHALL BE INTERNALLY OR EXTERNALLY ILLUMINATED AT ALL TIMES & SHALL BE CONNECTED TO AN EMERGENCY POWER SYSTEM (BATTERIES, UNIT EQUIPMENT OR AN ON-SITE GENERATOR) THAT WILL AUTOMATICALLY ILLUMINATE THE EXIT SIGNS FOR A DURATION OF NOT LESS THAN 90 MINS.
13. INSTALL SUSPENDED CEILING GRID PER DETAIL 3/A3.0, TYP.

REFLECTED CEILING PLAN KEYNOTES

1. ALL FIRE SPRINKLERS TO BE SEMI-RECCESSED. COLOR: WHITE - SPRINKLER HEADS TO BE WHITE. AVOID STROBES IN SOFFITS. CENTER SPRINKLER HEAD IN 24" X 24" SECTION OF SECOND LOOK CEILING TILE.
2. ALL LIGHT FIXTURES ATTACHED TO CEILING GRID MUST ALSO BE INDEPENDENTLY SUPPORTED. SEE DETAIL 4/A3.0
3. CEILING MOUNTED DATA - SEE ELECTRICAL
4. NOT USED
5. NEW LIGHT FIXTURE.
6. EXISTING LIGHT FIXTURE. VERIFY FUNCTIONALITY. REPLACE/REPAIR/RELAMP AS REQ'D.
7. EXISTING EXIT SIGN WITH EMERGENCY BACK UP. REPLACE AS REQ'D.

LIGHTING LEGEND

CEILING MOUNTED EXIT SIGN WITH RED LETTER IN CLEAR BACKGROUND - BEST LIGHTING PRODUCTS - REF. ELXTEU-1-R-C-A-EM - SEE ELECTRICAL DRAWINGS

2'X4' LAY-IN LED LIGHT FIXTURE MANF. - SEE ELECTRICAL DRAWINGS

2'X4' ARMSTRONG PRODUCT DUNE (ITEM 2712) ACOUSTICAL TILE WITH TEGULAR EDGE IN WHITE -SET WITHIN PRELUDE ML EXPOSED "T"-GRID

5/8" TYPE "X" GYPSUM BOARD CEILING

ROBERT F. VANNEY ARCHITECT
149 THOMPSON AVE. EAST, STE. 112
WEST SAINT PAUL, MINNESOTA 55118
651. 222. 4642 FAX. 651. 222. 3034

COLORADO LICENSED
ROBERT F. VANNEY
C-3845
10/08/2026
ARCHITECT

xfinity

BRANDED PARTNER
INTERQUEST COMMONS
1333 INTERQUEST PKWY.
LOT #11
COLORADO SPRINGS, CO 80921

No.	Description	Date
-	-	-

Preliminary Issue:	-
Bid Issue:	10/08/2026
Landlord Issue:	10/08/2026
Permit Issue:	10/08/2026
Construction Issue:	-

REFLECTED CEILING PLAN

Comm. Number	81-2116
Date	10/08/2026
Drawn By	RFV
Checked By	RFV

A3.0

Copyright 2026 Robert F. Vanney Architect